\$1.95



The Color Computer Monthly Magazine

THIS 'N THAT

CoCo 2 Disk Controller

When we made our "First Look" Report on the new Radio Shack Color Computer 2 last month, we discussed the fact that it has no +12 Volt DC Line, which would cause problems with the Disk Controllers, because they require the +12 Volts for the "Write Pulse Width" reference voltage and as a power source for the WD1793 Controller Chip. The information we had at that time indicated that a 5 Volt Disk Controller would not be available, so we speculated that the normal procedure would be to use a Radio Shack Multi-Pak for the Disk Controller with the Color Computer 2.

We are happy to say that there WILL be a 5 Volt ONLY Disk Controller available shortly; in fact, as soon as the 'in stock' Controllers are gone, that is the only one that will be sold by Radio Shack (it will work with ANY of the Color Computer Series, because they ALL have at least the +5 Volt Line going to the Cartridge Slot). Our information is that the 5 Volt Controllers will be in the 'off-white' cases that match the Color Computers now being sold. So, OFFICIALLY, there WILL be a Disk Controller from Radio Shack for the CoCo 2's.

While on the subject of Disk Controllers for the Color Computers, we have seen a few 'third party' units advertised, but have only seen one, so far, to report on. That is the RDC-1 from F & D Associates, 1210 Todd Road, New Plymouth, OH 45654. F & D has been supporting the SS-50 Bus community with PC Boards and, in a few cases, Kits, for a few years, and have

LINKING LOADER

for both RS DOS and RS FLEX

Copyright (c) 1983 by Roland Waggoner and Computer Publishing Inc. All rights reserved

INTRODUCTION

The scope of this article is to discuss programming in Assembly Language (or any language) using program modules, alternate ways of using program modules, and a description and listing of a Loader and a Linking Program.

There are at least three reasons for breaking a large program up into smaller modules. Small modules are easier to understand than a long program. It is usually easier and faster to break any complicated project up into smaller, simpler projects. You will save memory by putting repeated code into a subroutine. General purpose routines can be put into a library and used by many programs. You won't have to rewrite the routine for every new program.

There are a number of ways to use subroutines. BASIC programmers often have to include the code in the program. You can do that for other languages as well. This is OK for subroutines that are specific to the application, and all the source code is in one place for examination. However, if there are many subroutines, the

\$1.95 per issue Vol. 1, Issue 3 November 1983

MICROBOOKS

A SMALL BUT HARDWORKING BOOKKEEPER

16K, Ext. Basic

THE IDEA

I was a little amused, some time ago, when I saw a letter to a computer magazine editor asking for business programs for the 4K Color Computer. But, **MICROBOOKS** has become almost that. In its' shortest form the program could get about 100 entries into a 4K CoCo. At the same time it will do a pretty fair job with the books of a small business, given certain concessions.

Continued on page 9

| This Month |
|---|
| Editorial This 'N That 1 |
| Article Linking Loader for RS & CoCo FLEX (Pt. 1) - Waggoner 1 Some basic BASICS about Disk Systems - LaLone 27 |
| Programs MICROBOOKS; A Tape-Based BASIC Prog. for Small Business Use - LaLone |

Continued on page 22



source code could become quite large, especially for assembly language programs.

Continued on page 6

Price \$16.50 per year, \$1.95 per copy Color Micro Journal is published monthly by Computer Publishing Inc., 5900 Cassandra Smith Rd., Hixson, TN 37343. POSTMASTER: Send address changes to Color Micro Journal, 5900 Cassandra Smith Rd., Hixson, TN 37343. For change of address: Six weeks notice to Subscription Dept., 5900 Cassandra Smith Rd., Hixson, TN 37343. Give old and new address and zip code. If possible enclose address label from cover of previous issue.

THE PROGRAM JTORE

Take a Christmas vacation to the Arcade Isle ...

Joystick Adapter

from WICO

You can use any two, Atari compatible joysticks with your TRS Color Computer using the Wico Adapter. Can also be used with Joyboard or Joy Sensor. And if you need a longer cable, get either a six or twelve foot length extension cord.

#34243 CoCo Adapter \$17.95 #35223 Six Ft. Ext. \$4.95 #41296 Twelve Ft. Ext. \$7.95

The Joyboard



from Amiga

We sell over fifty types of joysticks but this is the most unusual. All of your OLD games become a new challenge when you use your whole body to play! Yes, your entire body is at the controls - you lean and tilt in 8 possible directions to glide, dive and zoom through the universe of computer games. Heavy duty for up to 250 lbs and the special base allows use on virtually all surfaces.

The joyboard will work with the Color Computer with the Wico Adapter (see above).

#43322 Joyboard \$49.95

Joy Sensor

from Suncom

No more blisters, no more sore hands. This is the stickless "joystick" which uses a touch sensitive panel. It also includes a rapid fire "button" and you can flip a switch to play in four directions, not the usual eight (great for games). It's brand new and will make a perfect gift.

#31059 Joy Sensor \$34.95

We are so sure that you will like the Joy Sensor, we will give a free 30 day trial in your home. If you decide you don't like it, then just return it in salable condition and we will give you a refund, no questions asked.

The Frog

from Tom Mix

Cross the frog across the busy highway to the safety of the median. The swollen river with hidden hazards is the next barrier in this arcade wonder.

#26132 16k Tape \$27.95 #26907 16k Disk \$30.95



9

YOUR COMPUTER JUST GOT A WHOLE LOT SMARTER...

Let's face it, your home computer is, only as smart as the software you use. Where do you find enough programs to make it more intelligent? At The Program Store! Nowhere else can you find more programs --- to communicate, to educate and entertain. This is just a sampling — call or come into one of our stores to find out how to make your computer smarter!



Zaxxon Official Arcade Version from

DataSoft

Now for your home, combines 3 dimensional effects, unique color graphics and realistic sound effects. Arcade action while you maneuver your ship through a battlefield of enemy missiles, guns and planes to meet your match in the deadly Zaxxon Robot armed with a lethal homing device.

#35963 32k Tape \$39.95 #30328 32k Disk \$39.95 NOW 20% OFF UNTIL NOV. 30 FOR \$31.96

The King

from Tom Mix

How high can you climb? Use the practice game to test Is. Become an expert at this arcade style game illed with exciting sound and realistic action. For 1 or 2 players. There are 4 screens; barrels, pins, jacks and conveyors. Reach the hammer if you're fast and strong.

#43029 32k Tape \$26.95



from Spectral Associates

Cubix

New full featured arcade quality game that has multiple mazes. Bounce your man through the cube maze avoiding the snake and tumbling balls. Joystick experience necessary for this Hi-Res, fast action arcade classic.

#32049 32k Tape \$24.95 #18537 32k Disk \$28.95

Buzzard Bait



You fly from cloud to cloud atop your bird defending yourself from savage buzzards. Sky high excitement in this high resolution arcade hit.

#29708 32k Tape \$27.95 #29854 32k Disk \$30.95

Lunar Rover Patrol



from Spectral Associates

Another arcade special where you bump along the moon's surface firing at a barage of obstacles. Machine language with sound, bombs, missiles, tanks and more.

#35468 32k Tape \$21.95





Fantastic, hi-res graphic flight simulator has 2 speeds, 4 difficulty levels, views from top and side, instrument panel and realistic joystick control. Don't crash or have to "go around!" Can you land on the runway to hear the synthesized voice say "perfect landing?" Requires Extended Ba-

#33556 32k Tape \$19.95 #30115 32k Disk \$24.95 NOW 20% OFF UNTIL NOV. 30 FOR \$15.96 AND \$19.96

Moon Shuttle

Official Arcade Version from DataSoft

Pilot your moon shuttle to meet your destiny - The Prince of Darkness. Out maneuver spinning rockets, dodge life threatening man-o-wars, meteors, bomb launchers and expandos. Suddenly your flight becomes more perilous as enemy forces multiply. Test the outer limits of your instinct for survival.

#27302 Tape & Disk \$29.95 Also available Dallas Quest #40352 Tape \$39.95

Over 2500 Programs for TRS-80, ATARI 400/800, APPLE, IBM, VIC 20 & C64

This is only a sampling of our sensational software! CALL 800-424-2738 FOR OUR NEWEST PRODUCTS

UNDECIDED? NEED TO BUY A GIFT? The Program Store gift certificate may be purchased in any amount over \$10.00. Give the perfect gift

VISIT OUR STORES

2

Willowbrook Mall, 1400 Willowbrook, Wayne, NJ

COMING SOON TO:



Build performance into your system

with OS-9[°] software tools

Unix*-based, multitasking, modular, and versatile: these key features are some of the reasons why more 6809 computer manufacturers have selected OS-9 as their standard operating system than any other. And OS-9 has been put to work by thousands of users in almost every conceivable computer application in business, science, industry, education, and government.

Your operating system should not be a barrier between you and your computer. OS-9 is very friendity and easy to use. Its modular structure makes it easy to customize, plus its comprehensive documentation shows you exactly how to interface it to just about any I/O device.

OS-9's advanced features unleash the performance potential of almost any 6809 computer - large or small. In many respects the OS-9/ 6809 combination is more powerful than many minicomputers!

There are two basic versions of OS-9. Both have the same basic features and capabilities. OS-9 Level One runs on small to medium sized systems having up to 64K memory. The Level Two version runs on medium to large size systems having memory management hardware and up to 1 megabyte of memory, and includes record and file locking for multiuser database applications. Here are just a few reasons why you should insist on OS-9 for your microcomputer system. Over 40 utility commands Friendly "Shell" command interpreter Tree-structured multilevel file directories

log-in and file security Fast, secure random and sequential access files Comprehensive English language error messages

Full timesharing support with

- Compact real-time multitasking executive
- Hardware or software memory management
- Device independent interruptdriven I/O
- Fully ROMable for small control systems
- Standard versions available from manufacturers of most popular 6809 computers

OS-9 PASCAL Language Compiler

- most complete and versatile
- PASCAL available for the 6809 capable of generating P-code tor interpretive execution while debugging OR
- highly optimized 6809 assembly language source code output for maximum speed
- "virtual memory" P-code interpreter lets you run large PASCAL programs

CIS COBOL * Compiler**

- ideal for most demanding business applications
- features ISAM, Debug, ACCEPT/ DISPLAY and Interprogram

BASIC09^{**} Structured Basic Interactive Compiler

- fastest and most comprehensive full Basic language available for the 6809
- combines standard Basic with the best features of PASCAL
- features compiler speed, interpreter triendliness and superlative debugging facilities
- option available: Run B...a ROMoble man-time system for compiled bo

C Language Compiler complete implementation of the UNIX version 7 C language includes INT, CHAR, SIGNED, UNSIGNED, FLOAT AND LO data types, structures, up standard C library and preprocessor with macre definitions generates fully reentrant 680 assembly language sou

code output

For more information contact your computer supplier or



Microware Systems Co 5835 Grand Aven

communications modules retains tull compatibility with CP/M software meets ANSI 1974 Level One COBOL standard and is GSA certified Also available-FORMS 2 automatic program generator for easy interative design of screen oriented applications.

lowa 50312 515-279 910-520-2535

Unix is a trademark of Bell Laboratories. *** CIS Cobol is a trademark of Micro Focus, Inc. OS-9" and Ba

trademarks of N Motorola, Inc.

COPYNEW

COPYNEW - A DISK COPY UTILITY

Peter A. Stark Star-Kits P. O. Box 209 Mt. Kisco, NY 10549

Although the Color Computer's disk system has all the commands needed for use with Basic, their command structure is sometimes a bit awkward.

Take, for example, the COPY command. To copy a file from one disk to another requires that you specify the full file name of both the source file and the destination file. Moreover, if a file with the same name already exists on the destination disk, you get an error message and must start all over again.

While this is not too bad if all you want to do is copy a single file, it is downright annoying if you want to copy several files at once. Which leads me to the reason for writing a (fairly) simple Basic program called **COPYNEW**.

COPYNEW requires that you have two disk drives. To copy a set of files from one disk, simply place the source and destination disks into two different drives, **RUN COPYNEW**, and enter the drive numbers of the source and destination drives when requested.

Given the drive numbers, **COPYNEW** reads the directory on track 17 of the destination disk and copies it into arrays in memory. In this way it determines which files are already on the destination disk.

Next, it reads the directory of the source disk. As each directory entry is scanned, COPYNEW checks to see whether a file by that name already exists on the destination disk. If the name is found in the destination directory, COPYNEW also checks a byte in the directory entry which indicates how many bytes there are in the last sector of the file, and compares it with the corresponding byte on the source disk.

There are now three possibilities:

1. The file name already exists on the destination disk, and the number of bytes is the same. In that case **COPYNEW** simply displays the file name on the screen and tells you that the file already exists, and then goes on to the next file.

2. The file name already exists on the destination disk, but the number of bytes is different. Now **COPYNEW** displays the file name, but points out that the files appear different and asks whether you want to delete the old file on the destination disk and substitute the one from the source disk. You need just answer Y or N, and **COPYNEW** takes over. in their last sector is the same. The only foolproof way to compare the two would be to read each one and do a byte-by-byte comparison; a process which would take quite a bit of time. I therefore settled on the above method, knowing full well that occasionally it might make a mistake. From the point of view of probability, there is one chance in 256 that two different files will have the same number of bytes in their last sector.

There is one rule I always follow to reduce this chance. Whenever I update any program, I always make sure to make it just a bit longer or shorter. In that way, if I ever use **COPYNEW** on two disks that have different versions of the same program, I will notice the difference and make a conscious effort to determine which is older and change it.

10 CLS: VERIFY ON 20 PRINT "COPYNEW - (C) 1982 BY PETER A. STARK." 30 CLEAR 2000 40 DIM DN\$(68), L(68) 'DEST FILE NAMES AND LENGTHS 50 INPUT "COPY FROM DRIVE NUMBER "; Dl 60 IF D1<0 OR D1>3 THEN 50 ELSE 7Ø 70 INPUT "COPY TO DRIVE NUMBER"; D2 80 IF D2<0 OR D2>3 THEN 70 ELSE 9Ø 90 IF D1=D2 THEN 50 100 DN=0 110 S1\$=":"+RIGHT\$(STR\$(D1),1) 12Ø S2\$=":"+RIGHT\$(STR\$(D2),1) 130 'FIRST, READ FILE NAMES ON D ESTINATION DISK 140 FOR SE=3 TO 11 150 DSKI\$ D2,17,SE,A\$,B\$ 'READ N EXT DIR SCTR 16Ø A\$=A\$+LEFT\$(B\$,127) 170 FOR J=1 TO 225 STEP 32 180 IF MID\$(A\$,J,1)=CHR\$(255) TH EN 240 'LAST ENTRY 190 IF MID\$(A\$, J, 1)=CHR\$(0) THEN 220 DELETED ENTRY 200 F\$=MID\$(A\$,J,8)+"/"+MID\$(A\$, J+8,3) 210 DN=DN+1 : DN\$(DN)=F\$ 215 L(DN)=ASC(MID\$(A\$,J+15,1)) ' LENGTH 220 NEXT J 230 NEXT SE 240 'NOW DO ACTUAL COPY 250 FOR SE=3 TO 11 260 DSKI\$ D1,17,SE,A\$,B\$ 'READ N EXT DIR SCTR 27Ø A\$=A\$+LEFT\$(B\$,127) 280 FOR J=1 TO 225 STEP 32 290 IF MID\$(A\$,J,1)=CHR\$(255) TH EN END 'LAST ENTRY 300 IF MID\$(A\$, J, 1)=CHR\$(0) THEN 600 DELETED ENTRY 310 F\$=MID\$(A\$,J,8)+"/"+MID\$(A\$, J+8,3) 320 L=ASC(MID\$(A\$, J+15, 1)) 'LENG TH 370 'REM SEARCH DEST DRIVE 380 IF DN=0 THEN 560 390 FOR K=1 TO DN 400 IF DN\$(K)=F\$ AND L(K)=L THEN PRINT F\$; " EXISTS" : GOTO 600 COPY EXISTS 405 IF DN\$(K)=F\$ THEN 440 'EXIST S BUT DIFFERENT 410 NEXT K 420 GOTO 560 430 'COPY EXISTS BUT HAS DIFFERE NT LENGTH 440 PRINT F\$: PRINT" EXISTS BUT IS DIFFERENT. 450 PRINT " -- COPY IT? "; 460 CS=INKEYS : IF CS="" THEN 46 470 PRINT C\$ 480 IF C\$="N" THEN 600 490 IF C\$ <> "Y" THEN 440 54Ø N2\$=F\$+S2\$ 550 KILL N2\$ 555 GOTO 57Ø 560 'NO COPY EXISTS 561 PRINT F\$; " DOES NOT EXIST." 562 PRINT " -- COPY IT? "; 563 C\$=INKEY\$: IF C\$="" THEN 56 3 564 PRINT C\$ 565 IF C\$="N" THEN 600 566 IF C\$ >> "Y" THEN 561 570 N1\$=F\$+S1\$ 580 N2\$=F\$+S2\$ 590 COPY N1\$ TO N2\$ 600 NEXT J 610 NEXT SE

COLOR MICRO JOURNAL

SEND ALL CORRESPONDENCE TO:

Computer Publishing Center COLOR MICRO JOURNAL 5900 Cassandra Smith Rd. P.O. Box 344 Hixson, TN 37343 (615) 842-4600

Entire contents Copyrighted by Computer Publishing Inc. (CPI) 1983

Editorial Staff

Don Williams Sr. Robert L. (Bob) Nay Thomas E. Williams Larry E. Williams Publisher Editor Production Editor Advertising Editor

Administrative Staff

| Mary Robertson | Office Manager |
|------------------|-----------------|
| Joyce Williams | Accounting |
| Carolyn Williams | Accounting |
| Penny Williams | Subscr 1ptions |
| Deborah K. Pike | File Management |

.

Items Submitted for Publication

COLOR MICRO JOURNAL is actively soliciting contributions for publication. We are looking for ANY type of material that will be useful to a Color Computer Owner; from hints to full Programs and Construction Articles. We will pay for submissions based on a number of criteria. If you wish payment for a contribution, be sure to state these requirements with your submission. ALL submissions must contain a statement that the material is not currently under consideration by another publication. For more detailed information, send a SASE to the Editor, COLOR MICRO JOURNAL, P.O. Box 344, Hixson, TN 37343.

Articles submitted for publication should be accompanied by the authors Full Name, Address, Date, and Telephone Number. It is preferred that articles be submitted as a .TXT File on a FLEX Formatted 5 or 8 inch Disk, or as an ASCII File on a Radio Shack Disk or Tape (a /DAT File). BASIC Programs should be submitted on Disk or Tape in the normal Binary Format.

If articles are submitted on paper, they should be either Typed or Printed Single Spaced with a NAXIMUM Line Length of 4" on normal 8 1/2" x 11" bond or better paper. A good BLACK Ribbon must be used because all paper submitted articles will be photo reproduced. NO hand written articles will be accepted (except required art work which goes with an article). Again, PLEASE use a DARK

3. The third possibility is that the file name does not exist on the destination disk, in which case **COPYNEW** tells you so, and asks whether you'd like to copy it. Simply answer Y or N.

It's a fairly simple and fast matter to go through the entire directory and just answer Y or N to have as many files copied as you'd like.


The test to compare whether two files are identical is only a rough one, and not very reliable. It is quite possible that two files are completely different, and yet the number of bytes

4

All letters to the editor should also comply with the above and MUST bear a signature. Letters of 'gripes' as well as 'praise' are solicited. We attempt to publish all letters to the editor verbatim; however, we reserve the right to reject any submission for lack of 'good taste'. We also reserve the right to define what constitutes 'good taste'.

Advertising: Commercial advertisers please contact the COLOR MICRO JOURNAL advertising department for current Rate Sheet and Requirements.

TRS-80C, Color Basic, Extended Color Basic, and Disk Color Basic are trademarks of the Tandy Corp. FLEX and UniFLEX are trademarks of Technical Systems Consultants, Inc. 0S-9 and BASIC09 are trademarks of Microware Systems Corp. UNIX is a trademark of Bell Laboratories.

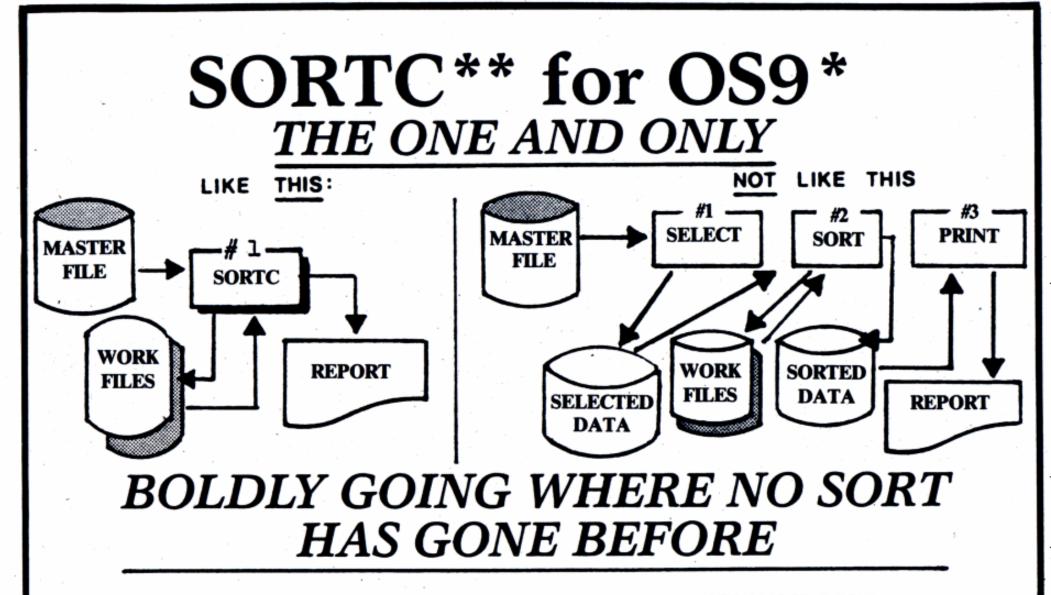

SORTC is a high speed, full-record compounding disk sort, which gives microcomputer users mainframe capabilities. It has been specifically designed to sort data efficiently while offering the user great flexibility in designing sort programs. It is written in BASICO9[•] for use under OS9.

COMPOUNDING FUNCTION

SORTC has the capability of summing userspecified numeric fields on equality of keys. This allows significant savings in memory, disk space, and program development time. A reduction in the number of disk accesses required when compared to other sorts is inherent in the design of SORTC.

DISK BASED

Specifically designed to sort large volumes of data, SORTC imposes no size restrictions on the amount of data to be sorted. It also places no limits on the number of sort keys which can be used or the order in which the keys are sorted. Furthermore, the sort procedure can be performed as many times as necessary within the same program. This feature allows the programmer to take advantage of any existing data bias, and possibly even reduce the size of the sort key.

ADVANCED DESIGN


While most disk sorts are partially based upon the Fibonacci series, **SORTC** is not. **SORTC** is a generation ahead of the normal sorts based upon the "Fib series". Its unique algorithm is automatically optimized at run time for a reduction in workspace, reduced # of disk accesses and shorter run times. Designed to be as "crash proof" as possible, the sort procedure will not abort if it is accidentally asked to sort zero items.

EASY TO USE

It is not difficult to design a program which will use **JBM's SORTC**. Since **SORTC** is a subroutine, the user may write any procedure he or she wants to format the data for sorting and then to process the sorted data. The sorted data need not be written back to disk, but instead is immediately available. The sort code is automatically inserted into the source procedure by a simple Sort Generator.

ORDERING INFORMATION

SORTC, from JBM's MIDWARE line of quality software, is available on either five and one-quarter or eight inch diskettes for a price of \$150.00. All of JBM's software packages come complete with comprehensive user's manuals.



JBM'S MIDWARE

- *OS9, BASIC09 are registered trademarks of Microware Corporation.
- **Uses the same algorithm as JBM's SORTC for Digital Equipment Corp. RSTS Systems.

Color Micro Journal

For more information, or to place an order, contact:

DEPT. FSEA The JBM Group, Inc. 332 West Church Road King of Prussia, PA 19406 TEL: 215-337-3138 TWX: 510-660-3999



VISA and MASTERCHARGE accepted.

LINKING LOADER

Continued from page 1

Many editors used on microprocessors are limited to the size of the files they can process. Large Assembly Language programs take a long time to assemble, and an excruciatingly long time to print on the printers available for home use at home budgets. You also have to code any general purpose routine into EACH program.

You could keep each general purpose subroutine (module) in its own file, and merge it with the mainline code at assembly time (either by insetting the code in the source with the editor, or including it during assembly with INCLUDE or LIB calls). Then the main program would fit editor buffers better. However, at assembly time you still have a long assembly to process with the same problems mentioned in the last paragraph, as well as some other problems. You would have to be careful of conflicts between label and variable names. I once tried to set up a system of BASIC subroutines by assigning blocks of variable names and line numbers to the subroutines, and not use those names or numbers in the main programs. It worked, but it was hard to manage.

The other problem with this method is that you have to merge the modules manually, remembering the modules that the subroutines need.

You could merge binary modules after assembling. There would be no conflict with variable names, but you would still have to remember to include the dependent modules. The big problem with this method is providing the entry points of the subroutines to the calling routines.

DESCRIPTION

This brings us to the main feature of this article, the description of a **Linking Loader**. A "Linking Loader" is a Program which merges a Main Program with subroutines that are **not** defined (included) within the Source Code of that Program. In addition to merging the modules, it provides a means for routines within the complete program to locate these added modules.

The Linking Loader described here consists of a Loader Program and a Linking Module that becomes part of the main program. The Loader merges the main program with the required subroutines, as well as any subroutines within these subroutines. It also loads the Linker Module and saves the whole program to disk. The modules are stored in individual files on a disk. I have not written a library editor for this system yet. The entry point of the Linker becomes the transfer address of the main program. At run time, the Linker copies the entry points of the subroutines into a Jump Table. The calls to the subroutines MUST be indirect calls to the jump table.

There are some programming conventions you will have the follow in designing each module that you want to link. You will have to code two new sections in each module, including the main program. Each section is simple, and in the final program does not use much memory. One section can be overlayed, so will not use any memory at all in the final product. You must assemble the subroutine modules at location zero and code them in position independent code. You can code the main program ANY WAY you like. The Loader appends the subroutines to the end of the main program.

Each module must have a program "preface" which must be at the very beginning of the module. The program preface is 9 bytes long, and contains the following 5 elements.

| name | size in byt | |
|---------------------------|----------------|-----------------------------|
| | | |
| module number | 1 | <pre>odule identifier</pre> |
| execution address pointer | 2 | pointer to entry point |
| next module pointer | 2 | pointer to next module |
| load list | 2 | pointer to load list |
| initialization | 2 | pointer to initialization |
| | | routine. |

The term 'pointer' means the value in the field is the **offset from the beginning of the module.** I will describe these terms in detail later.

The second section you must code is the list of external modules. This is the list of Filenames of the files which contain the subroutines: Since there is no library editor, each file must contain only ONE module. Each Filename must be in Radio Shack Format format followed by a one byte binary zero (\$00) for the Radio Shack DOS, or in FLEX format followed by a one byte binary 4 (\$04) for the FLEX DOS. The list MUST be terminated with a hex FF (-1). The offset to the list is in the preface.

When the Loader loads a module, it builds a table of external filenames. It then loads each module in the list and appends it to the end of the last module. The end of the module is pointed to by the next module pointer in the preface. If the modules have a load list, those names are added to the program load list if they are not already in the list.

You can code the list anywhere you like, but it is best to code it at the end of the program. The Loader needs the load list **only** while loading. If it is at the end of the program, it can be overlayed by the next module, saving a significant amount of memory. You can accomplish this by making the **next module pointer** and the **load list**

| TOUPER | EQU | \$8E84 ADDRESS LOADED INTO \$8E28 |
|--------|------|---------------------------------------|
| • | | BY THE LINKER |
| PREFAC | OR6 | \$8F80 |
| | FCB | MODULE NUMBER |
| | FDB | NAIN-PREFAC EXECUTION ADDRESS |
| | FDB | XTRN-PREFAC WEXT HODULE LOAD ADDRESS |
| | FDB | XTRN-PREFAC EXTERNAL SUBROUTINE TABLE |
| | FDB | INITIALIZATION ROUTINE |
| + END | OF I | PREFAC |
| MAIN | JSR | [\$ABBB] GET CHARACTER FROM KEYBOARD |
| | JSR | [TOUPPER] CONVERT TO UPPER CASE |
| | JSR | [\$A882] DISPLAY ON SCREEN |
| | RTS | RETURN TO RASIC |

XTRN FCC 'TOUPER.LIB',8

FCB \$FF

END PREFAC

The module number really isn't used in the Main Program, but it is needed to fulfill the requirements of the preface. Notice how the pointers in the preface are coded. The values in the pointer fields of the preface must be offsets from the beginning of the program, which is the beginning of the preface, to the code the field represents.

Notice that the next module pointer points to XTRN. Remember in a previous paragraph, I pointed out that the filename list is needed only by the Loader. It copies the filenames into a table **after** it loads the module. It can then overlay the filename list with the next module. A program which calls many subroutines could have a large filename list, requiring hundreds of bytes. You can save a lot of memory this way.

Also note that the initialization routine pointer is zero. That means there is no initialization routine. If there was an initialization routine, its pointer would be coded like the others. The initialization routines are called by the linker **before** passing control to the main program. If there were no external subroutines, that pointer would be zero also. There **must** be a pointer pointing to the entry point.

Now let's code TOUPER.

| PREFAC | FDB TOUPER FDB TERM | SUBROUTINES START AT B MODULE NUMBER ENTRY POINT NEXT MODULE |
|--------|------------------------|---|
| | FDB B | ND EXTERNALS |
| | FDB 8 | NO INITIALIZATION |
| TOUPER | EQU # | BEGIN CODE |
| | CMPA #'a | |
| | BLO EXIT | 60 IF NOT LOWER CASE ALHPA |
| | CNPA #'z | |
| | BHI EXIT | |
| | SUBA #\$28 | CONVERT TO UPPER CASE |
| EXIT | RTS | |
| TERM | EQU + | NEXT MODULE |
| | END PREFAC | |

Notice that the load address is This is mandatory for zero. subroutines, but the Main Program can load ANYWHERE in memory. It is not apparent from this example, but subroutine modules must be written in position independent code. This is because they may be loaded anywhere in memory. Main programs do not have to coded in position independent code. Compare the module number with the address of the jump table entry which is defined in the main program. Notice that the address of the module's jump table entry is \$0E04, or 4 bytes from the beginning of the jump table. That is twice the value of the module number. That is how the Linker determines where in the jump table the entry point of the module will be Color Micro Journal

There are assemblers available (that run under the FLEX Operating System) which can generate relocatable code and include a Linking Loader, and many compilers have the same facilities. The program I am proposing here will work with ANY assembler, but requires a little extra effort on the programmers part.

6

pointer point to the same address.

After loading all of the specified modules, the Loader loads the Linker and copies the program to disk. The program is now ready to execute.

EXAMPLE PROGRAM

As an example, let's code a program which gets a character from the terminal, calls a subroutine to convert the character to upper case if it is lower case, and display the character on the screen. The jump table has been located at \$0E00. stored. As a result, all modules which will be used in the same program must have unique module numbers.

Since this module doesn't call any external subroutines, or have an initialization routine, those pointers are \emptyset .

A listing of the Loader program is provided with this article. The program is available on disk from Southeast Media Supply, P.O. Box 794, Hixson, TN 37343, (615) 842-4601, on a Radio Shack Color Computer or FLEX formatted disk, for \$39.95. The Radio Shack Disk contains the Assembled File, "LOADER/BIN", and the Source Code for use with the Micro Works MACRO-80c Assembler. The FLEX Disk includes the Source only, so that it can be assembled either way, for the TSC Macro Assembler. The major differences are in the I/O routines. A description of the code follows.

The LINKING LOADER Programs

BASIC's stack is saved for return to BASIC. By setting the buffer end 50 bytes below the stack, the buffer size is automatically set according to the amount of memory (you may need to adjust this if your program will require more Stack space).

The user is prompted to enter the Input and Output Filenames. The input file is the binary main program. The output file will contain the merged main program and all the external subroutines. If the output file is not named, the output will overlay (REPLACE) the input file with the Radio Shack DOS; FLEX will assign the Input Filename with a CMD Extension. The default extension is BIN.

The filenames are broken into their constituent parts by calls to the operating system in the subroutine PARSFN. This will be described later.

In the routine labelled MAPDSP, the output device for the load map is specified. The map can be directed to the Screen or the Printer. The output device number is stored in DSPDVC. The default is the Screen.

The code at the label LOAD is where the load is initialized. The main program is loaded first. The flag MODCNT is reset to indicate that the main program is being loaded. Some of the buffer pointers are initialized. LDADD contains the address of the module currently being loaded. RECADD contains the address of the binary record currently being loaded. MODTAB points to the next entry to be read from the module name table. TABEND points to the last entry on the table.

The module name table, MODTAB, can contain 30 12 byte entries; an 8 byte filename, a 3 byte extension, and a binary drive number. Each field must be left justified and blank filled on the right. Each entry must be followed by a binary zero for Radio Shack, or a binary 4 for FLEX. The last entry must be a \$FF. After a module is loaded, the address of its external reference list is obtained from the preface. Each entry is converted into the form described in the previous paragraph, and compared with the entries already on the table. The compare is made on all 13 bytes. You might want to change this to compare on only the 8 byte filename. If the module is already in the table, it is not added. Otherwise, it is added to the end of the table. Color Micro Journal

At the label LOADL, the break key is checked and the program is stopped if the key is depressed in the Radio Shack version.

Before opening the file, the filename is displayed on the load map. If there is a file error, the filename tells the user which file is in error. The file is then opened. RECFLG is reset, indicating the first record of the file. RECFLG is used later, with the main program flag, to indicate that the record contains the load address of the program. All files use device number 1.

The code at the label LOAD2 starts the read file loop. The first byte of a binary record is the flag byte, or the record descriptor byte. As far as I can tell, the only record types are \emptyset for a data record and \$FF for an End Of File record in the Radio Shack system. The record length and the record load address are saved on the stack temporarily, and the next byte read will be the first data byte of the record.

If it is the first record of the main module, the offsets are calculated. OFFSET is used for calculating the load addresses in the buffer of the subsequent records as they are read in. OFFSTI is used for calculating the load address of each module as it will be loaded for execution. OFFSTI's only purpose is for displaying the address on the load map.

The code from LOAD4 to LOAD5 calculates the beginning and ending address of the current record. The code from LOAD5 to LOADF reads the record into the buffer.

The code at LOADF is the end of file processor. Here, if it is the main module, the Loader displays a message and pauses so the user can load a library disk if he wishes.

After loading each module, at the label LOADC the preface is checked for an external reference table. If there is one, the module names are loaded at the end of the Loader's table. The name of the next module is taken from the beginning of the table at LOADN. The name LINK.BIN is added to the end of the list so the linker can be added after the last user module. Control is passed back to LOAD1 and the next module is loaded.

After the last module is loaded, control is passed to BINOUT where the concatenated program is written to disk. Note that the program has not been linked. Linking occurs at **execution time**.

The offset from the Linker Module to the main module is saved in the linker's preface in the entry point field. The Linker's transfer address is used as the Program transfer address, where execution will begin. The transfer address and the end address is displayed on the load map.

Before copying the program to disk, the Loader program displays a message and pauses to allow the user to load an output disk. An EOF record, with the transfer address, is written at the end of the file.

Note that ROM Routines are called for disk and terminal I/O in the Radio Shack version. This program will work on the older Color Computers with Version 1.1/1.0/1.0 ROMs, but I don't know if it will work on the new Color Computer 2's, Dragons, or TDP's (the TDP's should be OK - Editor). All of the FLEX calls are standard, so there should be no problems with different FLEX Conversions.



SUBROUTINES

BINNHX CONVERT BINARY TO ASCII ENCODED HEX FOR DISPLAY

BRAK BREAK PROCESSOR - RETURN TO BASCIC

- COMPAR COMPARE TWO STRINGS
- DSPADD DISPLAY THE CONTENTS OF D IN HEX
- DSPNOD DISPLAY 8 CHR FILENAME
- GETADD EVALUATE ABSOLUTE ADDRESS OF DATA IN MODULE PREFACE
- INPUTP ISSUE MESSAGE TO TERMINAL AND WAIT FOR
- INICHR SCAN STRING FOR SPECIFIED CHARACTER
- LENSTR LENGTH OF STRING TERMINATED BY ZERO BYTE

NOMEN PRINT OUT OF MEMORY CONDITION

- NOTAB PRINT MODULE TABLE FULL
- DUT2 OUTPUT THE 2 ASCII CHARACTERS IN D
- PARSEN PARSE A FILE NAME FOR ITS COMPONENT PARTS. The filename is entered in RS standard format. A row routine is called which parses the string and stores it in an O/S buffer. If the caller specifies an output buffer, PARSEN copies it to the buffer
- SEARCH SEARCH A TABLE FOR A SPECIFIED STRING SOPEN OPEN A DISK FILE

VARIABLES

The comments on the variables in the Source Listing should be self explanatory. However the buffer pointers probably need more explanation.

The variables PGMADD, XADD, and

OFFST1 refer to the program as it will be loaded for execution. They are used for displaying the memory map, and for storing the load address and transfer address in the binary disk file. XADD is the entry point for the Linking Subroutine which is added to the end of the linked modules by the Loader. The Linker Subroutine gets the entry point of the User's Program from the main module's preface.

The variables LDADD, RECADD, ENDADD, PGMTOP and TABEND contain the addresses as the program is loaded into the Loader's buffer.

The Linker is appended to the end of the program as if it were a subroutine. The entry address of the Linker becomes the transfer address of the program. The Linker obtains the entry points of all the modules and stores them in the jump table, then passes control to the main program.

The address of the jump table of this Linker is at \$000, identified by the label BASE. The jump table can be anywhere in RAM. I chose \$000 because I write programs for computers with different memory sizes. I would think that a better choice for most people would be at the top of their RAM.

The code at the label START is where the Linker starts execution. This becomes the Transfer Address of the Program.

SPECIAL OFFERS From Star-Kits

Christmas Sale (Until December 24, 1983)

STAR-DOS 64

SPELL 'N FIX

HUMBUG-64

8

Reduced from \$74.90 to \$49.90 (\$52.90 for the AMDEK 3" disk.) Get the 64K and 16K/32K versions for the price of the 16K/32K versions alone. Here is your chance to get this extraordinary Disk Operating System for the Color Computer at a great price.

Reduced from \$69.29 to \$59.29 for the CoCo disk or cassette version, and from \$178.58 to \$125 for the Flex disk version. (Add \$3 for AMDEK 3" disks.)

Reduced from \$59.95 to \$49.95. This version is specially configured for 64K disk systems using either Flex or STAR-DOS. (Add \$3 for AMDEK 3" disks.)

REBATE

Buy your Star-Kits software from a dealer, and get an extra savings by sending us your registration form and a copy of your sales slip or invoice. The rebate is \$10 on software priced over \$50, and \$5 for software under \$50. The rebate is in effect until December 24, 1983.

ILLEGITIMACY PROGRAM

If you have an illegitimate (ahem . . . pirated) copy of a Star-Kits program, we offer you an amnesty as part of our Illegitimacy Program. Send us (a) a working copy of the program, (b) details on where and from whom you got it (with adequate identification of the source), and (c) 25% of the current list price, and we will send you (a) the latest up-to-date copy of the program, (b) a complete and up-to-date manual, and (c) a sales slip welcoming you to the world of happy Star-Kits customers. A small price to pay for a clear conscience? Remember that the Loader stored the value of the offset from the beginning of the Linker to the beginning of the Main Program in the entry point field of the Linker's preface. The Linker now uses that to calculate the address of the main program's preface and saves it on the stack.

The address of the end of the Linker Module is stored at location 254 of the jump table. This marks the end of the code for the program, and the beginning of free memory. You can use this for dynamic memory allocation, for scratch area, or anything you like. I haven't used it for anything yet.

The code at LINKI is where the linking is done. The address of the next module is calculated from the next module pointer. The module number is used to calculate the address in the jump table where the entry point of the module will be stored. The formula is **BASE + 2 x module**. The Entry Point is calculated and stored in the jump table. This code is executed for each module.

At LINK2 we start calling the initialization routines of the modules. The address of the Main Program is obtained from the stack, and control is transferred to LINK34. The offset to the initialization routine is obtained from the 'preface'. If it is not zero, the address of the initialization routine is calculated and the routine is called. Control is then passed back to LINK3, where the address of the next module is calculated. This loop is executed for all modules, until we reach module number zero in the Linker Module.

At LINK4 the address of Main is pulled from the stack, Main's Entry Point is calculated, and control is passed to it.

Roland Waggoner

Next Month we will cover the OPERATION of the Linking Loader with RS DOS and FLEX, and the provide the complete Assembly Language Listing.

Press Release



W PRODUCT RELEASE

MAGIORAPH

The Micro Morks is pleased to announce the release of a graphic development utility for the Radio Shack Color Computer. MagiGraph is for experienced Basic and assembly language programmers. The program simplifies the task of drawing highly detailed graphic characters, up to and including an entire high-resolution graphic screen. MagiGraph has a full set of logical operation and pixel earipulation functions that

MC-10 SPECIAL

To celebrate Star-Kits' being first with MC-10 software, here's our MC-10 Triple-Pak: MC-10 HUMBUG (normally \$29.95), MC-10 REMOTERM (normally \$19.95), and MC-10 COMMTERM (a brand new terminal communications program which sells separately for \$19.95), a total value of \$69.85, all for a special price of just \$55.

STAR-KITS

P.O. BOX 209 — J MT. KISCO, N.Y. 10549 (914) 241-0287 simplify the development of a character in all its different possible color and position combinations. The program offers nine animation buffers, which allow the various positions of an animated character to be tested and revised so that animation blends together smoothly. Finally, the pixel codes of a graphic character can be listed in heritecinal numbers to a printer, and the graphic screen can be saved on cassette tape or floppy disks to be used later by another program of revised with MagiGraph.

MagiGraph, written by Kevin Dooley, is available on cassette for \$34.95(lak requires); disk for \$39.95(32% Extended Color BASIC required); Andisk cartridge for \$44.95. Extensive documentation and plenty of sample programs are included in the package.

P.O. BOX 1110 DEL MAR, CA 92014 619-942-2400

MICROBOOKS

Continued from page 1

Actually, "very small business" is a better way of putting it. I used to call my one man repair operation a small business. But, I learned that Uncle Sam calls a business small if it is only worth a few million, so now I call the operation a micro business. Hence, the name of the bookkeeping program I wrote and use, MICROBOOKS.

The program is job oriented and small, just like my business. (More about this in the section on using the program.) It is well suited to someone who wants to find out if he wants to do this kind of thing on a computer without putting a lot of money into it.

THE PROBLEM

Finding a program that I could afford, which would give me quick and current information on how I'm doing on any particular job, seemed to be impossible. Having only a 16k Extended Basic CoCo, in addition to the family TV and cassette recorder, my aim was a small program with only essential features. Really, it is little more than a means of getting the data on tape. By omitting Printer routines and Statement and Balance Sheets, MICROBOOKS is small enough to fit into 16K and still accept well over 200 entries of expense and/or income, provided you use POKE25,6:NEW before loading. In this simple form you can put on tape only what you can fit into memory; but, if you make monthly tapes, you can put a lot of data through MICROBOOKS. If there is enough reader interest, we can publish Printer and Balance Sheet routines for MICROBOOKS in the future. These routines can be plugged into places provided in the program, or loaded separately, saving memory.

My own setup will squeeze a Quarter (3 months) of business into the 16K Extended CoCo. Of course, 32k would increase that to a Quarter for a bigger business, or 6 months of Books at my current rate. To do this with the program as it is, I write down the totals from each tape, but they could be carried forward to the next tape if desired.

THE PROGRAM

MICROBOOKS bears no resemblance to spreadsheet programs. I tried Radio Shack's "SPECTACULATOR", but it is really not a Ledger Program, and I found it to be rather slow to use and not especially "friendly". MICROBOOKS is menu driven, has fair error trapping, and takes data very quickly through screen prompts. Its main functions are to

compacting, so there are two listings for comparison. The first is the earlier, more easily read, version which uses about 4.5K of Memory. The other is a much later version with many multiple statement lines and other space saving features. It takes about 2.5K of Memory and does the same job. We'll talk about the job of making programs smaller as we go along. I'll assume that folks with a minimum memory computer are probably beginners like me, and write in considerable detail on most things.

THE ORGANIZATION

Listing 1

| | Parameters |
|-------|-----------------|
| 1000. | Main Menu |
| 2000. | Expense Entries |
| 3000. | Income Entries |
| 4000. | Totals Routines |
| 5000. | Expansion Space |
| 6000. | File Scan |
| | |

Listing 2

| ØØ1Ø. | Parameters |
|-------|-----------------|
| 1000. | Main Menu |
| 2000. | Ledger Routines |
| 3000. | Totals Routines |
| 4000. | File Scan |
| 5000. | Expansion Space |
| 6000. | Subroutines |

STAR - KIBBITS Welcome to the tenth of my monthly chats. Many of you have commented that you enjoy reading them, and they are

interesting to write too. So here goes for this month. In addition to having a Color Computer, do you also have a 6800 or 6809 system on the SS-50 bus? I do, and I suspect some of you do too. I often get a letter from a reader who either wants to buy or sell such a system or components (hardware or software) for it. Unfortunately, some of the older items are hard to get, yet some of you may have an unused one stashed away in the cellar. So why don't we set up an

SS-50 EXCHANGE

If you have some SS-50 item for sale, send me a selfaddressed stamped envelope with a description and price written on the back. If you want to buy an SS-50 item, send me a postcard with a note on what you want. I will try to match up a buyer and seller, put the buyer's postcard in the seller's envelope and mail it back out. From that point on, it's up to the seller to contact the buyer and make the deal.

I'm proposing this simply because I really like 6800 and 6809 systems, and hate the thought of something going to waste in someone's cellar, while someone else is desperately looking for it. (as an afterthought, let's extend it to anything that is 6800 or 6809 related.) But since this may potentially involve a lot of work for me, I insist that you follow the rules: postcards for buyers, stamped envelopes for sellers, only one item per card or envelope, clearly stated on postcard or back of envelope.

Now let's see whether we can rescue some of those gems. in the cellar or attic!

AMDEK TOO

Yes, we've gotten a pair of Amdek 3" drives, and now supply our software on Amdek disks too. Just specify on your order. There's a \$3 extra charge due to extra handling and higher media costs. By the way, those little 3" disks are neat.

SPEAKING OF NEAT THINGS

The little MC-10 computer is also quite neat. It uses a 6803 microprocessor, which is more like a 6800 than a 6809. I'm sure that it's used because it contains two input/output ports which save the expense of an external I/O chip. Interestingly enough, the 6803 has a built-in port for serial input and output, but the MC-10 doesn't use it because it doesn't support 600-baud operation, needed for compatibility with the larger Color Computer. Instead, serial output is handled the same way as on the Color

Listing 1 is included for those interested in how BASIC Programs can be made smaller. While some reference will be made to Listing 1, most of the following discussion concerns Listing which actually provides more functions.

THE DETAILS

Setting up the CLEAR and DIMension Statements involves a certain amount of trial and error. In my use of the program, I have decided to abbreviate Check entries as much as possible, to save space, since I would probably need to return to the originals for proof of records anyway. As long as I can recognize the information, I'll cut it as short as I can to save memory. By doing this, I have reduced the average entry size to about 20 bytes. You will probably use more at first, as I did. If you even use 25 bytes, you will get an unuseable clear size. As it stands, the CLEAR 5000 gives about 22 bytes for each of the 230 entries dimensioned.

Dimensioning is simple enough at first glance. You just type DIM(one less than the number of items in array). The problem is: how many can you get in after the dimension statement gobbles up memory? According to my experiments, you will

SPELL 'N FIX Regardless of whose text processor you use, let SPELL 'N FIX find and fix your spelling and typing mistakes. It reads text faster than you can, and spots and corrects errors even experienced proofreaders miss. It is compatible with all Color Computer text processors. \$69.29 in the Radio Shack disk or cassette versions; \$178.58 in the Flex version. (20,000 word dictionary is standard; optional 75,000 word Super Dictionary costs \$50 additional.)

HUMBUG - THE SUPER MONITOR

A complete monitor and debugging system which lets you input programs and data into memory, list memory contents, insert multiple breakpoints, single-step, test, checksum, and compare memory contents, find data in memory, start and stop programs, upload and download, save to tape, connect the Color Computer to a terminal, printer, or remote computer, and more. HUMBUG on disk or cassette costs just \$39.95, special 64K version for FLEX or STAR-DOS 64 costs \$59.95, MC-10 version \$29.95.

STAR-DOS

A Disk Operating System specially designed for the Color Computer, STAR-DOS is fully compatible with your present Color Computer disk format — it reads disks written by Extended Disk Basic and vice versa. STAR-DOS for 16K or 32K systems costs \$49.90; STAR-DOS 64 for 64K systems costs \$74.90.

STAR FLEX

The best implementation of FLEX for the Color Computer. Complete with all utilities, text editor, macro assembler, and HUMBUG debug monitor, \$225.00.

ALL IN ONE - Editor Etc.

Three programs in one — a full function Editor, a Text Processor and a Mailing List/Label program. All this for just \$50. Requires STAR-DOS and 32K, or STAR-DOS 64, or FLEX, specify which.

DBLS for Data Bases

DBLS stands for Data Base Lookup System. A super-fast system for searching for a selected record in a sequential disk file. Supplied with SPELL 'N FIX's 20,000 word dictionary as a sample data file lets you look up the spelling of any word in under FOUR seconds. Priced at \$29.95. Requires STAR DOS.

CHECK 'N TAX

Home accounting package combines checkbook maintenance and income tax data collection. Written in Basic for either RS Disk or Flex, \$50.

REMOTERM

REMOTERM - makes your CoCo or MC-10 into a host computer, operated from a remote terminal. \$19.95, disk or cassette. NEWTALK

NEWTALK - a memory examine utility for machine langua programmers which reads out memory contents through the TV set speaker. \$20, disk or cassette.

| Enter and store data Retrieve and display data Display sub-totals While entering data, several opportunities are given to correct entries. You can scroll your files at a controlled rate for general viewing and indirect editing. | Computer, with a software routine. Though the manual doesn't say so, you can change the output baud rate by an appropriate poke. For example POKE 16932,245 switches the output to 300 baud. You can try other values for other baud rates too. By the way, the MC-10 also has the CLOADM and EXEC commands, though the book doesn't mention them. We use those in our MC-10 software. Available so far are the HUMBUG monitor, REMOTERM remote terminal package, and COMMTERM communications program. A disassembler is coming too. | SHRINK SHRINK — our version of Eliza, in machine language and extremely fast. \$15, disk or cassette. EDUCATIONAL SOFTWARE Introduction to Numerical Methods — college level course on computer math, \$75.00, disk or casette. We accept cash, check, COD, Visa, or Master Card. NY State residents please add appropriate sales tax. Add \$3 to above price for AMDEK 3" disk versions. (FLEX is a trademark of Technical Systems Consultants, Inc. Everything else in this ad is a trademark of Star-Kits.) | |
|--|---|--|---|
| MAKING THE PROGRAM SMALLER | STAR-KITS | | ; |
| Since I first talked to Bob about publishing this program, I have worked on making it smaller and smaller by various means of rewriting and | | P.O. BOX 209 — J MT. KISCO, N.Y. 10549 (914) 241-0287 | |
| Color Micro Journal | | | 5 |

THE BEST OF DSL

Now you can get DSL'S best selling programs for less than \$2.00 each. 20 titles, such as Word CC7, Geo-Studies, Packmaze, as well as some completely new additions like Autoline, Hard Copy, and many more. Still the best just price makes them better.

\$39.95 TAPE \$49.95 DISK

As a special offer, receive a program package which includes 58 public domain (on tape) programs at no extra charge when ordered with THE BEST OF DSL. Offer expires 12/31/83.

JDBDOS Unleash the power of the CoCo

An enhancement of R/S disk basic. Some of the exclusive features include quick entry of commonly used commands. M/L monitor plus much more. 64K 1.0 Disk basic required.

\$49.95 DISK

SUPER CONTESTER I - 16K - \$14.95 SUPER CONTESTER II - 32K - \$24.95 Keep track of 1400 entries in 16K or 2700 in 32K, Sort, Print, Much More.

Country Locator - \$14.95 Enter Call Letters, Returns Beam Headings from any where in the USA. FAST

Electronic Calligrapher - The Hit of Rainbowfest. Old English or Chancery Cursive

type font. Works with LP VIII or EQUIV.

Version for Gemini 10 or 15 Version for Epson w/Graftrax

BOTH TYPE FONTS \$18.95 DISK ONLY!

Please specify printer version when ordering.

THE GENERAL

The "GENERAL" on disk. Over 400 accounts nearly 5,000 transactions per disc. Improved screen display.

> TAPE \$39.95 DISK \$49.95

10

HARDWARE FAVORITES

32/64K GRAND SLAM \$75.00 For E or F Board w/1.1 ROM (EXEC 41175) Add \$15.00 tool deposit (refundable) 16-32K RAM SLAM (Piggy Back) \$49.95 Both slam kits solderless.

ONE YEAR WARRANTY

RS-232 SWITCHER

Stop Straining Those Connectors. Stop Listing the Modem. Stop Trying to Log on the Printer Fast, Fast, Relief The RS-232 Switcher.

| 2 WAY | \$29.95 |
|-------|---------|
| 3 WAY | \$39.95 |

ATARI JOYSTICKS

No adapter required. GET THE REAL ARCADE FEEL 90 DAY WARRANTY \$14.95 EACH 2 for \$28.00



Color Mirro Iournal"

5900 Cassandra Smith Rd. ★

Hixson, TN. 37343

COLOR MICRO JOURNAL[™] Is A Monthly Tabloid Publication for Color Computer USERS!

$\star\star$

COLOR MICRO JOURNAL[™] is a Magazine FOR Color Computer Users BY Color Computer Users. Columns on various compatible Operating Systems, Languages, Uses (Bulletin Boards, Clubs, using the RS BASIC, and so on), etc.

$\star\star\star$

Programs - Games - Reviews - Education - Hardware -Software - New Product Announcements - Books

Get the MOST from your COLOR COMPUTER without being an Engineer. DON'T MISS A SINGLE ISSUE Subscription Rate of only \$16.50 a Year!!!

COLOR MICRO JOURNAL[™] published by the ONLY pure 68xx, INTERNATIONAL Computer Magazine. '68 Micro Journal has provided coverage for over FIVE Years. We KNOW the Color Computer, the Software (both FUN and WORK) that IS and CAN BE run on it. We KNOW the products that ARE, CAN BE, or WILL BE used on the Color Computer.



For Ordering Subscriptions By Phone Call 1-800-338-6800

| Color Micro Iournal | Yes! Start my copy of Color Micro Journal coming as soon as possible! |
|--|---|
| Limited Time Charter Rates | Name |
| USA - \$16.50 per year. Canada & Mexico - \$23.00 per year Surface Foreign - \$28.00 per year. Airmail Foreign - \$52.00 per year | Address |
| | Card # Exp/Date |
| Color Micro Journal | 1 |

lose about 7 bytes for each element in the dimension statement. If you have one DIM(230), you will lose about 1600 bytes of memory. If you have two DIM(230)'s, It will be about 3200. **MICROBOOKS** has six, which uses roughly 9.5K. Perhaps someone can give us an accurate way to calculate it. I have had different programs show a byte loss of from 5 to 7.

To experiment with these parameters, use the BASIC EDIT Command to put in different CLEAR and DIM sizes, then RUN again. If you have reserved too much space, you will get an OM ERROR, which breaks you out of the program. This means you ran out of memory before the CLEARing and DIMensioning were complete. If you do not get an OM ERROR, you know it goes into the memory you have available, but then you will want to know if you have enough room left to use the Program. Type PRINT MEM or the shorter ? MEM (? is short for PRINT) and <ENTER> to see how much room you have left.

It would be a good idea to leave two or three hundred bytes in memory. The computer will use a certain amount as it functions, and will break out with an OM ERROR if enough room is not available. **MICROBOOKS** seems to need about 175 bytes above the program memory, but I leave more just to be sure it doesn't bomb.

Since GOSUB's make it hard to follow a program, here's a rundown of the Subroutines in MICROBOCKS.

| SELECT ONE |
|-------------------|
| YOUR SELECTION |
| Tape loading |
| NOT PROGRAMMED |
| Scan screen print |
| ANOTHER SCAN? |
| IS TAPE LOADED? |
| |

PROGRAM DESCRIPTION

One of the fun things about programming is that you can do ANY job in more than one way, and many jobs in many ways. Sometimes you will need to change something a little in order to use it for more than one function. For instance, do a little comparing of IF-THEN and INSTR.

The menu section in Line 1000 begins with a GOSUB to print a prompt above the menu. If you don't make use of Subroutines in your Programs, you are probably using too much memory. Just about anything that must be done more than once will use less memory if it is put into a Subroutine. This is one of the ways I cut down the size of the original program. Also in Line 1000 is the setup of the Main Menu, with numbers leading to the ON GOSUB in Line 1010. The last statement forms an "Error Trap" to prevent numbers other than the Menu selections from sending you on a wild goose chase, or bombing the program. If you enter the wrong number, the program simply prints the menu again. Of course, this happens so fast you hardly notice it. A proper choice sends you through Line 1010 to the Line Number for the selected routines. Starting at Line 2000 is, first, a Sub-Menu for either Old or New Tapes, and then another kind of Error Trap. IF you give a valid number THEN you go to a line number, or **ELSE** back to the Menu again. Line 2020 asks if you have already loaded the tape and sends you through Lines 2400 to 6200 to load it if you haven't. If you have loaded a 12

Tape, you go to Line 2100 to begin the actual entry of data.

Line 2100 represents a lot of head scratching. It was easy enough to put in the instructions on how to exit the Entry Mode, but I wanted to have numbers from the last two entries to keep myself oriented as to where I was. The problem appeared when I tried to go to the Entry Mode without having previous entry numbers already in, as is the case when starting a new tape for a new period. If I called for only one back number, it would just leave that place blank; but if I called for TWO back numbers when there were none, I would get an FC ERROR. So, by checking whether "1" had been chosen from the menu (NEW FILE), I would know whether a file had been loaded or I was starting a new one, and therefore, whether back entry numbers were available. If not, the back number call is bypassed until after the first entry by IF-THEN'ing to Line 2105. Because Line 2100 is used over and over, it would not do to have the back numbers skipped every time, so Line 2105 nulls "S" to allow the program to get past the IF-THEN the next time around and all times thereafter. It also spaces down one line on the screen for display clarity. The GOTO in Line 2100 skips the space in 2105 after the first entry. Actual input of data begins at 2110.

Since this is also your location when you are finished Entering Data, an IF-THEN tests for "XX" (which is the signal to the Program that you are finished entering data), and if XX is input, you are sent to Line 2180 to Save your Data to Tape. Similarly, the next two lines test for CC, which is the sign for "correction needed", and sends you back to start that input over again.

The next point of interest is in Line 2140, where you have **one more chance** to correct your current entry. INPUT and <ENTER> are used here instead of INKEY\$ to provide some error trapping. The truth is that the trap only half works, because I felt that it would be a lot faster if you didn't actually have to hit Y each time you had finished an entry. While "N" will return you to the start of the same entry again, you will go to the next entry if you hit the <ENTER> key.

Line 2170 sends you back to 2100 after incrementing N by 1. In your first entry, input N will be input number 1. The next one will be input (N+1) or 2, since N is now equal to N+1, and so on until you finish.

After you have ended your Input (entries), Line 2180 will ask how many times you want the data saved. I put this in because I had had so many tape glitches that one save was useless. By having several saves in the tape (I usually have 3 or 4), you can always find a good one. I have greatly reduced the problems, but that is another subject. At any rate, you may save as many times as you wish. The variable SA carries the number of saves desired into the FOR-NEXT loop in Line 2300. A FOR-NEXT loop is nothing more than a counter which counts from the number before the TO to the number after the TO. If you press <ENTER> without a number, the 1 in FORV=1TOSA (Line 2300) becomes the only number to be counted, therefore only 1 save is made.

screen, you can help eliminate that nagging feeling that maybe the computer is hung up while it is sitting there saving large amounts of data. Of course, you could turn up the sound and listen to the 1's and Ø's fly, but that gets old fast. You may want to try changing the CLS (which clears old information off the screen) to CLSØ. By doing this you will have a black screen while saving the data. When it goes green again, the save is done. If you try this, you'll also want to put a semicolon (;) between the quote (") and the colon (:); this will prevent the green from running out to the edge of the screen after the prompt. Also, if you put an extra space before and after the prompt (inside the quotes), it will look a little better.

You will also find an example of a "Nested Loop" in Line 2300. The innermost loop prints the array to the Tape starting at the first X, in this case 1, and looping (counting) until the N'th X. N is equal to the number of entries you made, and determines how many loops are required to complete the array. Each loop (the term loop applies both to the FOR-NEXT loop itself, and to each cycle through the loop) prints one entry, and when all strings in that entry are printed, the NEXT tells FOR to loop again for the next higher number. Thus each entry is printed in turn until the entire array is printed.

Note that since N has become a total, the "print to tape" part uses X to count its' way up to N. Note also that after the cassette File was opened for output (OPEN"O", #-1), and the Save given a name ("LEDGER"), the value of N was printed to tape for later reference (PRINT=-1,N). When N number of loops has been made, the cassette File is closed, and control moves on to the next thing, which is actually another loop inside the X loop in the nest. This T loop is only a timer to allow space on the tape between saves. Again, control moves on. This time, a comma is substituted for a NEXT, but the effect is the same and a few bytes are saved. The program moves to the next loop back that has not been done, namely the V loop. It loops SA number of times, the number of saves you called for, and goes on. After the prompt there is another timer, to give you time to read the prompt, and then you go back to 1000, the menu.

NOTES for the beginners:

Each entry you made had six parts, called strings. The number, for instance, became NU\$(N), the date became DA\$(N), the amount became AM(N) etc. As each entry was made, it was given a number to replace the N in each string in

Oine 2300: By putting the prompt "STORING DATA" in the middle of the that entry. Since each entry is numbered in order, each is printed to tape in the same order by the PRINT #-1,NU\$ etc. #-1 is the basic word for the tape recorder.

When you want to add data to what you already have, first choose Number 1 from the Main Menu for LEDGER and then Number 2 from the Sub-Menu for EXTEND FILES. You are then sent to Line 2400, which handles the loading of the most recent tape data into memory. A GOSUB sends you to Line 6200, which loads the data by reversing what was done in Line 2300. The value of N is **Color Micro Journal**

TEN MOST-ASKED QUESTIONS about DYNAGALCTM

THE ELECTRONIC SPREAD-SHEET FOR 6809 COMPUTERS

1. What is an electronic spread-sheet, anyway? Business people use spread-sheets to organize columns and rows of figures. DYNACALC simulates the operation of a spread-sheet without the mess of paper and pencil. Of course, corrections and changes are a snap. Changing any entered value causes the whole spread-sheet to be re-calculated based on the new constants. This means that you can play, 'what if?' to your heart's content.

2. Is DYNACALC just for accountants, then?

Not at all. DYNACALC can be used for just about any type of job. Not only numbers, but alphanumeric messages can be handled. Engineers and other technical users will love DYNACALC's sixteen-digit math and built-in scientific functions. You can build worksheets as large as 256 columns or 256 rows. There's even a built-in sort command, so you can use DYNACALC to manage small data bases - up to 256 records.

3. What will DYNACALC do for ME?

That's a good question. Basically the answer is that DYNACALC will let your computer do just about anything you can imagine. Ask your friends who have VisiCalc[™], or a similar program, just how useful an electronic spread-sheet program can be for all types of household, business, engineering, and scientific applications. Typical uses include financial planning and budgeting, sales records, bills of material, depreciation schedules, student grade records, job costing, income tax preparation, checkbook balancing, parts inventories, and payroll. But there is no limit to what YOU can do with DYNACALC.

- 4. Do I have to learn computer programming? NO! DYNACALC is designed to be used by nonprogrammers, but even a Ph.D. in Computer Science can understand it. Even experienced programmers can get jobs done many times faster with DYNACALC, compared to conventional programming. Built-in HELP messages are provided for quick reference to operating instructions.
- 5. Do I have to modify my system to use DYNACALC? Nope. DYNACALC uses any standard 6809 configuration, so you don't have to spend money on another CPU board or waste time learning another operating system.

Order your DYNACALC today!

6. Will DYNACALC read my existing data files?

You bet! DYNACALC has a beautifully simple method of reading and writing data files, so you can communicate both ways with other programs on your system, such as the Text Editor, Text Processor, Sort / Merge, STYLOGRAPH[™] word processor, RMS[™] data base system, or other programs written in BASIC, C, PASCAL, FORTRAN, and so on.

7. How fast is DYNACALC?

Very. Except for a few seldom-used commands, DYNACALC is memory-resident, so there is little disk I/O to slow things down. The whole data array (worksheet) is in memory, so access to any point is instantaneous. DYNACALC is 100% 6809 machine code for blistering speed.

8. Is there a version of DYNACALC for MY system?

Probably. You need a 6809 computer (32k minimum) with FLEX[™], UniFLEX[™], or OS-9[™] operating system. You also need a decent crt terminal, one with at least 80 characters per line, and direct cursor addressing. If your terminal isn't smart enough for DYNACALC, you probably need a new one anyway. The UniFLEX and OS-9 versions of DYNACALC allow you to mix different brands of terminal on the same system. There's also a special version of DYNACALC for Color Computers equipped with FLEX (Frank Hogg or Data-Comp versions).

9. How much does DYNACALC cost?

The FLEX versions are just \$200 per copy; UniFLEX version \$395; OS-9 version (works with LEVEL ONE or LEVEL TWO) \$250. Orders outside North America add \$7 per copy for postage. We encourage dealers to handle DYNACALC, since it's a product that sells instantly upon demonstration. Call or write on your company letterhead for more information.

10. Where do I order DYNACALC?

See your local DYNACALC dealer, or order directly from CSC at the address below. We accept telephone orders from 10 am to 6 pm, Monday through Friday, Call us at 314-576-5020. Your VISA or MasterCard is welcome. Please specify diskette size for FLEX or OS-9 versions. Software serial number is required for the UniFLEX version.

Computer Systems Center 13461 Olive Blvd.



Chesterfield, MO 63017 (314) 576-5020

Foreign Dealers:

Australia & Southeast Asia: order from Paris Radio Electronics, 161 Bunnerong Road (PO Box 380) Kingsford, 2032 NSW Australia. Telephone: 02-344-9111.

United Kingdom: order from Compusense, Ltd., PO Box 169, London N13 4HT. Telephone: 01-882-0681.

Scandinavia: order from Swedish Electronics hk AB, Murargatan 23-25, Uppsala S-754 37 Sweden. Telephone: 18-25-30-00.

Color Micro Journal

UniFLEX software prices include maintenance for the first year.

DYNACALC is a trademark of **Computer Systems Center**

VisiCalc Is a trademark of VisiCorp. STYLOGRAPH is a trademark of Great Plains Computer Co. RMS is a trademark of Washington Computer Services. FLEX and UniFLEX are trademarks of TSC. OS-9 Is a trademark of Microware and Motorola.

loaded first (remember the PRINT#-1,N) so the computer will know how many entries there are. Then the loops go to work as before.

After the data is loaded from Tape, you go back to Line 2100 to enter data the same way as before. But, there is a difference. Rather than starting with 1, the computer starts with the current value of N which was just loaded. After each entry, the value of N is increased by one (remember the N=N+1), and when the entries are completed, you will have a new N total. Starting out with the same number you ended up with on the last tape might look like it would replace the last entry you made and, in fact, it does. But, remember that your last entry was XX to signal the end. Starting out with the same number causes the first new entry to go where the XX was, so there will be no lost space. When the save is made, the old array and the new array are saved together as one new array, so you will not have to keep the old tape unless you want it for a partial backup.

The next section of the program starts with Choice Number 2 on the Main Menu - "TOTALS". You are branched to Line 3000 for a Sub-Menu. After a quick GOSUB for a prompt, there are three chioces. You will soon find that **only the first one works** as of now. As mentioned, a Balance Sheet has yet to be added, but it could be included in the space provided by choice #2. Choice #3 is similar. GOSUB6100 is another screen prompt, and the branching and loading which follow should be familiar now.

The TOTALing Routine is similar to the one on page 229 of the Radio Shack "GETTING STARTED ..." Manual that

14

comes with your CoCo. It would have been nice if they had bothered to tell you that that little program only works for ten checks. I learned that this is because the computer will automatically dimension an array for 10 elements if you have not specified any other number. For some reason, I had a real hard time getting this information; maybe I missed something in the book, but I sure didn't know it. Finally, I got the information I needed concerning arrays, not from a Computer Center, but from Roger Bryson, who worked in a local Radio Shack Store at the time. I certainly got a lot of help from Roger, and I wish him luck in his new business.

When the input is made answering "JOB OR ACCOUNT?", the B\$ labels it as just that - B\$. A loop is set up based on N again, but this time a different routine is placed between the FOR and NEXT which searches for a string that is the same as B\$. Once again, the array is gone through from 1 to N. If a string match is found under ACCOUNT or (ELSE) JOB, the amount listed under the same entry number is added to T, which was set to Ø at the beginning. More loops are completed, and each time a match is found, the corresponding amount is added to T until all matches are found; the TOTAL is then printed for that string.

When I think I have an understanding of PRINTUSING that is adequate, I may write some about it. In the meantime, I'll just say that it keeps your figures in the right place, and let you look in the manual for information.

At the end of Line 3140, GOTO3130 sends you back for another search based on another JOB Number or ACCOUNT. T is reset to 0 to clear the way for another totals routine.

A lot of lines in this program open with a CLS in order to keep the screen neat. While I wanted to Clear the Screen before this part, I couldn't put a CLS at the beginning of the line because I wanted to have several totals on the screen at once. If it was there, it would clear each total before another was printed. That is why you see the CLS at the end of the previous This is one of several line. improvements over the larger program in listing 1. The CLS could have gone on a line of its' own, at the expense of several bytes of memory.

Lines 3200 and 3300 are spaces for future routines, as mentioned earlier. The subroutine displays a message and times it for several seconds, then returns to the main menu.

The SCAN Routine starting at Line 4000 is for the purpose of looking at your files after they have been put into Memory and/or on Tape. First you are asked whether you have loaded the Data Tape, which is really asking if the current data is in memory, not whether you have put a tape in the recorder, etc. If the data is already in memory, you go directly to the SCAN Sub-Menu. If not, then you get a subroutine which loads the Tape. This is the same subroutine that is used to load for the LEDGER extension and for the TOTALS retrieval. The Tape Load prompt could have been put in a common sub-routine, but, as it now stands, it identifies where you are in the program in case that information is needed.

Lines 4070 and 4080 both have nested loops as well as sub-routines which do work during the main loop. The sub-routines print your files to the screen, but, since the printing is done so fast, it must be slowed down by the nested timing loop. Each time an entry is printed, time is counted off before the next one is printed. If you see something you want to copy you can press **SHIFT @** to stop the scrolling.

NOTE for beginning beginners

Your manual tells you that SHIFT @ will pause program execution. You do not need to hit them at exactly the same time. I like to press first <SHIFT> then @ in a sort of rocking motion. Your manual also says to press any key to continue. Since P is right next to @ I always use it when pausing and continuing.


Instead of the nested timing loop, you could experiment with straight printing statements putting **POKE359,60** before the print and **POKE359,126** afterwards. This will print one character at a time to screen, which is much slower. The strings have been placed onto the screen in a way that fits them all onto two lines. This allows several entries to be on the

Miss Byte STRIP TEASE A MATHEMATICAL DIVERSION FOR MATURE GENTLEMEN! by BRITT MONK, CDP GALAK SOFTWARE RATED "R"



screen at the same time, which is more than some commercial programs allow.

Line 6500 begins with a **PRINT** Statement which spaces entries apart for better readability. For some reason, the first ten or so lines do not space??? The **TAB** Statements are similar to typewriter tabs. The item is printed at that number of spaces across the screen. The **PRINTUSING** statements keep the numbers right justified, as well as covering a rounding glitch in which the computer sometimes prints an unwanted number of digits to the right of the decimal.

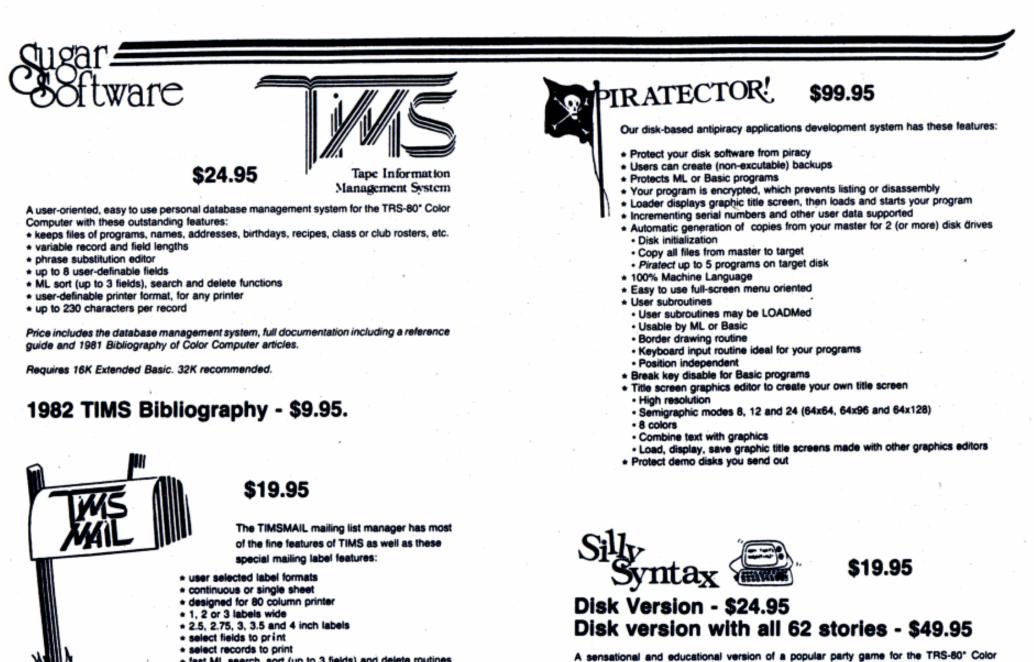

Computer... For 1 to 10 players. Load a story into the computer. The players are asked to supply a noun, verb, part of body, celebrity, etc. which the program uses to complete the story. The story, which is displayed when all words are entered, will be hilarious.


Price includes Silly Syntax game, user guide and 2

Requires I6K Extended Basic (32K for disk).

You can create your own stories or order story tapes from the selection below.

Each story tape is \$9.95.

Silly Syntax stories - Ten stories per tape. SS-004 - Current Events SS-001 - Fairy Tales SS-006 - Adventure Sci-Fi SS-007 - Potpourn SS-002 - Sing Along SS-003 - X-Rated



Help your preschool age (3-5) child learn to read with this easy to use menu-driven program. Great high resolution graphics, colors and sound effects. Includes capital and small-letters, numbers, shapes and colors, much more! Requires 32K Extended Basic and joysticks.



Disk - \$29.95

STATGRAF is a linear regression analysis package combined with sophisticated high resolution plotting/line graphing. Features include: allows entry of up to 250 pairs of (x,y) data, transforms observations using logarithmic, square root, inverse exponential or additive

+ fast ML search, sort (up to 3 fields) and delete routines

Requires 32K Extended Basic



Auto Run is a utility program for the TRS-80° Extended Basic Color Computer. It is used to add convenience and professionalism to your software.

Auto Run will help you create your title screen with the graphics editor. The graphics editor allows you to choose a background color and border style. Using the arrow keys and several other commands you can draw pictures, block letters and also include text.

Auto Run will generate a machine language loader program to preceed your program on the tape. Then, to start up your program, simply type CLOADM to load in the Auto Run loader program, which will then automatically start itself up, display your title screen, load your program and then RUN or EXEC it.

Also you may record a vocal or musical introduction preceeding your program. The Auto Run loader will control the audio on/off.

Basic programs can be set to load anywhere in memory above the PCLEAR 0 page. Software authors: The Auto Run prefix may be appended to your software products. Price includes complete documentation and assembly source listing.

Requires 16K Extended Basic.

Galactic Hangman

A great new twist to the popular educational word guessing game for the Color Computer. Large (700 words) and sophisticated vocabulary. Or enter your own words, your child's spelling list, foreign language vocabulary, etc.




Outstanding high resolution graphics, animation and sound effects. Price includes both 16K and 32K versions.

\$17.95

codes, plots any number of data sets on a single graph, type information directly onto the graph in 3 orientations.

Requires 32K Extended Basic.



Add \$1.00 per tape or disk for postage and handling. Ohloans add 5.5% sales tax. COD orders are welcome. Dealer inquiries invited.

SUGAR SOFTWARE 2153 Leah Lane Reynoldsburg, Ohio 43068 (614) 861-0565

CIS orders EMAIL to 70405, 1374

VISA

*TRS-80 is a trademark of Tandy Corp.

Color Micro Journal

15

The Original FLEX[™] for Color Computers

Upgrade to 64K

- RS to FLEX, FLEX to RS file transfer ability
- Create your own character set
- Automatic recognition of single or double density and single or doubled sided
- All features available for either single or multiple drive systems
- Settable Disk Drive Seek Rates
- Faster High Resolution Video Display with 5 different formats
- Save RS Basic from RAM to Disk
- Move RS Basic to RAM
- Load and save function on FLEX disk
- 24 Support Commands 12 with Source Text
- External Terminal Program

DATA-COMP has everything you need to make your TRS-80C Color Computer WORK for YOU; from Parts and Pieces to Full Ready To Use Systems. DATA-COMP designs, sells, services, and SUPPORTS Computer SYSTEMS, not just Software. CALL DATA-COMP TODAY to make your Computer WORK FOR YOU!

System Requirements

| FLEXS Special General Version + Editor & Assembler (which normal for \$50.00 ea.) | 11y sel1 \$150.00 |
|--|----------------------|
| P-MATE(RS) FLEX9 Conversion Rout. for the RS Disk Controller when purchased with Special General FLEX9 Sys. when purchased without the General FLEX9 Sys. | \$ 49.95 \$ 59.95 |
| Color Computer with 64K RAM and EXT.BASIC | \$399.95 |

Color Computer with 64K RAM and EXT BASIC

SPECIAL SYSTEM PACKAGES

64K Radio Shack COLOR COMPUTER, Radio Shack COLOR DISK CONTROLLER, a Disk Drive System, Special General Version of FLEX9, F-MATE(RS), and a Box of 10 Double Density Diskettes, a COMPLETE ready to run SYSTEM on your Color TV Set.

\$999.95

64K Radio Shack COLOR COMPUTER, Radio Shack COLOR DISK CONTROLLER, a Disk Drive System, and a Box of 10 Double Density Diskettes, a COMPLETE ready to run SYSTEM on your Color TV Set. \$799.95

PARTS AND PIECES

| Radio Shack Disk Controller | \$169.95 | Single Drive Disk Cable for RS Controller | \$ 19.95 |
|--|----------|--|----------|
| 1 Single Sided, Double Density Disk Drive Tandom | \$229.95 | Double Drive Disk Cable for RS Controller | \$ 24.95 |
| 1 Double Sided, Double Density Disk Drive Qume | \$319.95 | Micro Tech. Prods. Inc. LOWER CASE ROM Adapter | \$ 74.95 |
| 1 Qume Thinline Double Sided, Double Density | \$249.95 | Radio Shack BASIC Version 1.1 ROM or 1.2 ROM | \$ 34.95 |
| 1 Tandon 40 Track SSDD with Cabinet and Power Supply | \$259.95 | Radio Shack Extended Basic ROM | \$ 74.95 |
| Single Drive Cabinet with Power Supply | \$ 79.95 | Radio Shack Disk Basic ROM 1.1 | \$ 29.95 |
| Double Drive Cabinet with Power Supply | \$109.95 | Screen Clean - Clears Up Video Distortion On Your Color Computer | \$ 39.95 |
| | · · · · | Set of Eight 64K RAM Chips w Mod Instructions | \$ 49.95 |

For Ordering Call TOLL FREE 1-800-338-6800


LAST OF PRODUCTION!!!

!! LIMITED QUANTITY !!

SWTPC 8212 Intelligent Terminals New & Demo Models At Discount Prices

EM-82 Video **Terminal**

Emulates the 8200 Series from SWTPC

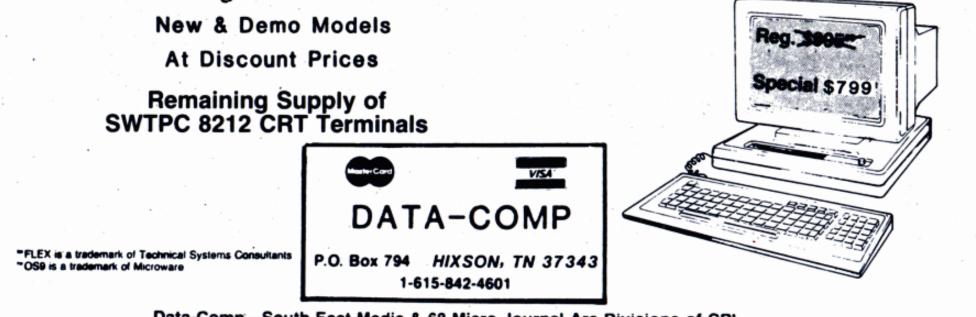

DISK DRIVE PACKAGES, etc.

| These Package include the Radio Shack Disk Controller, Disk D | rives with |
|---|------------|
| Power Supply and Cabinet, and Disk Drive Cable: | |
| PAK #1 - 1 Single Sided, Double Density Sys. | \$389.95 |
| PAK #2 - 2 Single Sided, Double Density Sys. | \$675.95 |
| PAK #3 - 1 Double Sided, Double Density Sys. | \$569.95 |
| PAK #4 - 2 Double Sided, Double Density Sys. | \$919.95 |
| PAK #5 - 2 Qume Thinline Double Sided, Double Density Sys. | \$699.95 |
| PAK #6 - 2 Tandon Thinline Single Sided, Double Density Sys. | \$599.95 |

PRINTERS

| EPSON RX-80 | \$375.00 |
|--------------|----------|
| EPSON MX-100 | \$725.00 |
| EPSON MX-80 | \$395.00 |
| EPSON FX-80 | \$599.00 |

SERIAL BOARDS

| MX-Series | \$119.95 |
|--------------------|----------|
| RX-FX-Series | \$ 99.95 |
| Spectrum MX-Series | \$ 54.95 |

Mark Data Keyboards \$ 67.95

FLOPPY DISKETTES

MEMOREX VERBATIM

| 5" | Soft Sector Disks | | | | |
|----|---------------------|---------|-----------|----------|--|
| | Single Sided Single | Density | \$2.4Øea. | \$2.75ea | |
| | Single Sided Double | Density | \$2.4Øea | \$2.75ea | |
| | Double Sided Double | Density | | \$4.92ea | |
| | Plastic Storage Box | | | \$2.00ea | |
| 8" | Soft Sector Disks | | | | |
| | Single Sided Single | Density | | \$3.75ea | |
| | Single Sided Double | Density | | \$4.1Øea | |
| | Double Sided Double | | | \$4.75ea | |
| | Plastic Library Box | - | | \$5.00ea | |
| | | | | | |

Data-Comp—South East Media & 68 Micro Journal Are Divisions of CPI

Software

For Ordering Call TOLL FREE 1-800-338-6800 FLEX™ OS-9™ Color Computer



AT LANTH A FILL BLOW DISCHARGE FOR THE COLOR CONVERSE Computer Systems Consultants SUPER SLEETH is a "Time Tested", reliable, FRONTS Disassembler that has gained acceptance through out the FLEX Community as an extremely FOHDOWL, BUTMENCENT, Software Tool. Now, this powerful Disassembler has been converted to run on a Standard J3X Color Computer or TUN-188 System with a Disk System. The COLO SLEATHS Software Fackage consists of 3 Programs; SLEATHS (the Disassembler), CHRAM (used to gidbally Charge Labels to a meaningful Name, and XHEF (a Cross Medicerone Commerciant Surger Color SLEATHS will Disassemble Table Ticks Files of SOFT, 6007, 6883 (the "haby ChCO"), 6085, 6000, 6007, and 652 (Apple, Atari, Commoders, etc.) Object Code if you can get it on a Char Computer Disk. (See Aug. '83 '66' Micro Journal "Color Users Notes" Column for a full Review.) Color Computer Disk - Object Code Only \$49.80

FORTH Programming Language Stances Electronics FORTH -- Intrigued by Porth/77 Here is a Porth package tailored to the Oblar Computeri This package is supplied on Tape, with instructions for transforring it to disk if you wish. Written primerily in machine language, it's speed is supparalled. A full Semigraphic-8 Editor is provided, along with "goodies" like Graphics and Sound Commands, Printer Commands, Auto-Repeat and Control Raye, etc. If you are interested in Learning Forth, a Trace Postare is provided which is invaluable. If you are a FORTH Fro, this package provides CTU carry Flag accessibility, Part Task Mitiplezing, Clean Interrupt Handling, etc. (Or you won't "out grow" the Basic capabilities of this Bellementation). Onebine this package with Loo Enclis's EXCELLENT Book "Starting FORTH", and you will be a FORTH Expert before you know it (and have a lot of fun doing it). Other Ormater TAPE (w/ instructions for transferring to Disk) \$58.95

| Color Computer GRAMMIC SCHOOL 191 | T Program |
|--|---|
| Dumps any "PMODE" Screen to the Printer with the BASIC USR Punction. | Shift the Printout Left or Right or Reverse Print |
| (Dark for Light Screen and Vice Versa). All Programs on Tape. | |
| GEER for Radio Shack LP-VII/VIII & DEP 100/200/400 Printers | \$7.95 |

| GBEWE for Epson w/ Graftrax and Graftrax + Printers | 9.95 |
|---|------|
| GENEG for Gamini 18 and 15 Printers | 9.95 |
| GEEP for the Prostiter Printers | 0.05 |

DATE-O-BASE CALSHEAR Program Henu Driven EXTINGED BALLC Program which allows the entry of up to 12 Memos per Day, each of which may contain up to 28 aracters, for any day of the Month between the years 170% and 2009. A Graphic Calendar shows which days contain Memos, d a "New Word" Search is provided which can be output to the Screen or Printer. INME DATE-O-BASE CALENDAR (Each Tape File will hold up to 400 Memos) \$16.95 DEME (ATE-D-BASE CALENDAR (Lach Tape File will hold up to 400 Memos) \$16.95

An EXTERED BASIC Program that will help you deal with numerous problems requiring interest calculations. Present Value, Rate of Return, Current Bond Yield and Rate of Return to maturity, Loan Repayment Amortization Scheduals, etc. INVE \$29.95

DESK DATA BACKLER 64K - EXTENDED BASIC w/ Mach. Lang. Boutines. Allows a max of 246 Chars. and 14 Pields per Becord, and another Record can be linked to the first; 8 Char. Field Nemes, up to 99 Chars. per Field. Rowerful On-Screen editor for input and update, firstible output capabilities including output to Disk Files for use by other Programs. Charge File Definition without re-entering the Data, Split Files, etc. Allows Multiple Field Sorts, Select on any combination of Fields, etc. An extremely POMERFUL TOOL; instructions provide examples of Malling Lists and a Financial Stock Profit and Loss DESK 554-95

ACCURTED DISK DOUBLE ENTRY - DISK EXTENDED BASIC W/ Mach. Lang. Routines. A "Traditional" Accounting Peckage for Small Business. Clubs, Churches, Personal Use, etc. Up to four levels of subtotals with Trial Bulance. Income Statement, and Bulance Steet Reports. DDS allows up to 300 accounts and a Trial Bulance of \$9,999,999.99. Transactions may be up to 14 lines long. and Comments and explanations may be freely used. Accounts are traceable to the journal transaction, which may include comments. Screen reports allow review of past transactions and current balances. DDMS \$44.95

Fast SPELING CHECKER - allows directly changing the Text File, adding words to the dictionary, etc. 75,000 words in less than 400 sectors. FLEX, Os/9 \$125.00 UniFLEX \$175.00

NAIL MERCE — greatly extends the power and flexibility of STMLOGANH. Allows Multiple Text files to be printed out as one large document. Provides for merging information into the Text File during printing (such as different names and Advances)

FLAR, Color FLAR, 08-9 \$145.00 UniFLAR \$195.00

DBROWNG Data Hase Hunagement System -- An XBASHC-based, Henu Driven, DBMS with "Built-In" Audit Tracking, Extremely Powerful Report & Format Capabilities, etc... This Time Provem DBMS will become the "Work Horse" of your Software Stable FLEX and Dokor FLEX 1997-00 - Uniful System

Accts Rec., Accts Peyeble 5 Can Ladger — A FELL Accounting Peckage that can be used together, or as separate packages; provides the IRS required Audit Tracking. (X8ASIC, based on the "Osborns Susiness Programs.") FLEX and Color FLEX Sey-80/PROG UNIFLEX 5395-80/PROG

An Electronic Spread Sheet DYNACHIC - THE Electronic Spread Sheet for 6889 Computer Systems. An extremely ROMENFUL Business Tool, this Program will find an unlimited number of "non-business" applications, also (for example, i have just finished metting up a Full Junior College Electronics Curriculum using DENALUS. Advanced features like Table Lockup Take Income Tax work easy Column or Row Sorting for numerous applications; etc. Completely "Nemory Resident", Machine Language, this Program is FAST. Provides STANDAUD FLEX Text File output for use with MACL, Mod Processors, Pascal, "", etc. FLEX and SPECIAL Color FLEX (Both File and Data-Comp) \$200.08 UniFLEX \$355.00

Nestchester Applied Business Systems XDME Data Management Systems. Resembler and the most powerful DMS's available, this machine language program is anall enough to operate on a single sided 5° disk, yet provides the speed of M.L. and power limited only by the user's insgination. Supports Sequential, Hierarchial, and Random Access Pile Structures, and has Virtual Memory capabilities for those diant Data Bases. Zay-to-use English Language Command Structure. XDMS - FLEX and Color FLEX \$179.95 XDMS + - FLEX and Color FLEX \$258.60

UNIVERSAL DATA REIZEARCH INC. --- Note: ALL Accounting and DMM Props. Require FLEX and XMASIC These are Time Tested programs from an oid, established, software house; in Chior FLEX Systems Data Base Hensey: Furl 1 = 549.95 Church Contributions - \$49.95 Bingle Entry Gen Ledger - \$49.95 Balanced Billing System - \$49.95

Intergrated Software for Color FLEX N/C \$99.95

A/P \$99.95 Om Ledger \$189.00 Inventory 2 \$69.08 Payrol1 \$99.95

| FLEX | (and UniFLEX Note: Reg A/C - FLEX \$295 Gen Ledger - FLEX \$295 Peyroll - FLEX \$295 | UniFLEX \$395 Inventory 2 - FLEX \$295 UniFLEX \$395 | |
|------|---|---|--|
| | SCHEEN POINS DISPLAY SCHEEN MAILING LIST | Computer Systems Consultants FLEX XDASC Programs FLEX and Color FLEX 558.00 Dairtex 575.00 FLEX and Color FLEX 510.00 | |

| FULL SCHERE HALLING LINT FULL SCHERE INVESTORY/MED TABLEA HALA SPHERASHEET | FLEX and Color FLEX \$100.00 UniFLEX FLEX and Color FLEX \$100.00 UniFLEX | \$110.00 \$150.00 \$200.00 |
|--|--|----------------------------------|
| | | |

STELLS "Computer Dictionary" ---- OVER 128,889 wordsi No more "Let your fingers do the walking through the Dictionary" while you are inputting Text with your favorite Editor or Word Processor. STELLS is more than "another Spalling Checker"; it allows you to look up a word from within your Editor or Mord Processor so that you ROOM it is right WHEN YOU TTPE IT Is with the STELCOD Utility (which operates in the FLEX Utility Space). Yes, it ALSO allows you to check and update the Text after you are finished, along with allowing you to ADO WORDS to the Dictionary. "Yisq" questionable words in the Text for evaluation later, "Yiew a word in contaxt" before changing or ignoring, etc. SPELLS first checks a "Common Mord Dictionary", then a "Personal Word List", and finally, any "Special Word List" you may have specified. SPELLS allow the use of Small Disk Storage Systems. FLEX and Color FLEX \$129.95

JUST — a Text Pormatter JUST, a Text Pormatter developed by Ron Anderson, provides numerous features which make it a valuable addition to any FLEX Sectures: Software Library. JUST is designed for formatting Text Output for Dot Matrix Printers and provides many unique

Users Software Library. JUBT is designed to: total tanks and change. -Output the "Tormatted" Text to the Display for format analysis and change. -Output the "Tormatted" Text to a Text File for use with the seguided FFRDFT.CMD for producing multiple copies of the Text on the Printer INCLUDNG UMBROBE PROMPER COMMANDS (this Utility is very useful at other times also, and worth the price of the program by itself). -Tuest Configurable" for adapting to other Frinters (comes set up for Epson HK-88 with Graftrax); provides for up to ten (10) inbedded "Frinter Control Commande", such as Italics on and off, boldface on and off, etc. -Automatic companies in for a "Double Width" printed line. -Includes the normal line width, margin, indent, paragraph, space, vertical skip lines, page length, page numbering, -Use with MET Editor. -Supplied with "Structured Source" (Mindrish PL/9); easy to see the flow of the program. FLOX and Color FLOX 549-95

Pinally: the barrier has been removed between 08/9 to FLZE - FLZE to 08/9 ----Sided 5" or 8" FLEE diskets from 05-9 with 0-F. 0-F is a new and unique program, written in SASEOD9 (with Source), that performs the following functions: EEPOSPAT: A BASIOF9 Program that reformats a chosen of the functions:

s the following functions; MT: A BAGICHP Program that reformats a chosen amount of an QE-9 disk to PLEX Format so it can be used normally by

PLEX users can read, write and use the special disk as any other FLEX disk, provided the FLEX directory is not allowed to continue beyond track zero (too many files). FLEX and Obler PLEX \$79.95

COPPELT.OD --- Copy LARE tisks to several smaller disks ---The following FLEX utilities allow the backup of ANT dism disk to any SWLIPS size diskettes (Minchester to %'s or 5's, 6' to 5's, etc.). By simply inserting diskettes as requested by COPPELT, a large disk system may be downloaded to your present floppy disk system, any size. So need to fiddle with directory deletions or any of the other tabload pertines. COPPELT: COD understands normal copy routines. COPPELT: COD understands normal 'copy' system allows keeps up with files already copied by maintaining directories for both host and receiving disk system, eliminating hours of tedious keyboard entries and other time consuming cleanup chores.

COPYNELT-CAP while the second second

Peatures:

CHEEK 6009 Requires FLEX and DISPLAYS On key Type Ter

"No display boards. "Change skill level. "Swap side. "Point scoring system. "Four levels of play. "Solve Checkmate problems in 1-2-3-4 moves. "Hake now and swap sides. "Flay white or black. This is one of the strongest CHESS programs running on any microcomputer, estimated USCP Rating 1600+ (better than most 'club' players at higher levels). FLEX and Onlog FLEX \$79.95

DIRT-TINC Personster DIRT-TINC Personster DIRT-TINC Personster is an XBASIC program that plans a dist in terms of either calories and percentage of carbohydrates, proteins and fats (C P GR) or grams of Carbohydrate. Protein and Pat food exchanges of each of the six basic food groups (wegetable, bread, mest, skim mik, fruit and fat) for a specific individual. Sex, Age, Height, Present Weight, Prase Size, Activity Level and Basal Metabolic Rate for normal individual are taken into account. Ideal weight, Prase Meight, Prase Size, Activity Level and Basal Metabolic Rate for normal individual are taken into account. Ideal weight and sustaining calorise for any weight of the above individual are calculated. When a weight goal is given (either gain or loss), and a calorie plan is agreed upon between the computer and the individual, the number of days to reach the weight goal is projected. The starting and ending rate of weight lose is calculated, and a daily calendar with each day's weight for a 38-day period is printed. FLEX = \$39.95 UniFLEX = \$89.95

ZDATA ---- A COMMENCIATION Peckage for the UniFLEX Operating System ----Allows UniFLEX Based Systems to Transmit and Receive files to and from other Computer Systems via Hoden. Use with CP/H, An Pramewission integrity using checksum or CBC -- Automatically Re-Transmits backs --- Transmits data in 128 byte blocks

UniFLEX \$299.99

Super Slouth -- Powerful, DYTERACTIVE, Disassembler; provides Hax/ASCII Screen Dump of Memory Blocks or Disk Files for easy Examine/Change, Area Definition; X-REF Generator of Source Code; thange Address Labels to Names; etc. Disassembles 6600/1/2/3/5/0/9 and 6502 Code. Color FLEX (b). Only \$58.00, w/source \$99.00; FLEX \$99.00; UniFLEX \$100.00; OB-9 \$181.00

DYNAMITE + -- An "easy to use" 6889 Disassembler for use w/ Disk Files, (will also disassemble 6880 Oxds). Develop a "Control File" of Area Definitions during successive disassemblies; X-Ref Source Files; replace Hax locations with Label Sames; etc. Label Files provided for Mini-FileX, FileS2, FileS3, Color Computer FileX. FileS and Color FileX \$100.00 GB-9 \$150.00 UniFileX \$300.00

TSC Mecro Assemblar — the FLEX STRMEARD Assemblar FLEX and Onlor FLEX 558.88 TSC Baloc. Assb./Link. Lond. — Heed for many of the C and Pascal Onep. FLEX & Onlor FLEX \$158.88

RSMAC -- Relocating, Recursive Amero Assemblar and Linking Londer for the 6009. Use either standard Motorola Pormet or Special Ed Smith Format. Supports Recursive Macros, Conditional Assembly, etc. Opt. X-Mef Listing: Includes a Small Line-oriented Editor as part of the Assemblar. Greatly improved operating manual. FLAX and Color FLAX 6009 RRMAC v/Link and Editor \$150.00 v/Source, add \$58.00

aSoft Belocatable Assembler and Linking Londer — 2-pase Heloc. Asmby 2-pase link. Load. Supports 6 Char. Labels, Calls (SMI(x) PCB x), Expressions with Arith., Logic, and Shifts, etc. #SALL1 FLEX and Color FLEX 5125-88 (one year Maint. 556-88)

MACE -- (by Graham Trott) from WINERERMICED STRTUGE. A combined Rditor/Assemblar designed to allow the Programmer to Enter, Edit, and Assemble Programs with a minimum of effort, w/o leading the Program. XMMCE is a Gross Assemblar for the MCG8888/1/3 and Hitachi HD6381 (CMOS 6881) with the same functions and features as NACE. FLEX and Cohor FLEX - SM0.88

DUB --- Re-Create a Source Listing from Unitary Compiled RASIC Programs. Easy to User, works w/ ALL Versions of Unitary basic; Output to Disk or Term. The TENTED and FROME: SOLIDI Unitary \$210.95

PL/9 -- (by Graham Trott) from NEMERINE NECKO STOTES. A "Birurtured" Assembly Language Editor/Complian/Debugger, all in OME PACKADE: provides a totally EFFSMACTIVE Program Dwelgment Quie. The Complian supports large Symbol Hense, Variable Types, Pointers, Control Structures, Stack, A-, B-, and D-Register manipulation, etc. The Boards oriented Trace/Debugger provides Single Stepping, Breakpointing, etc. An excellent Software Development Tool for utilizing the poart of the 6895. C -- (By James McCosh) from NEMERING STOTES. SUPER Complian for the FLEX Operating Dynam. Medde the TRC Belocating Assembler/Linking Loader for those "full blows" System Packages.

Introl 6009 "C" Compiler; generates very efficient object code. Output "benchmarks" close to 10445 68000 in 8 sit Operations; 1.5 times faster than a 4 Mis 288 when using a 2902 689 System (Re. p 43, "68" Micro Journal, May '83). Floats, etc. FLOX, Onlow FLOX, OS/9 \$375.00 thiFLOX \$425.00

TSC FARCHL - Native Code Compiler (UCSD Oriented). FLEX and Color FLEX \$200.00

Lucidata PASOL — P-Code Compiler (190 Standard). Designed especially for Microcomputer Systems: Run-time System checks available resources for each task, allowing operation on even minimal computer systems. Allows linkage to Assemblar Code for maximum flexibility.

FLEX and Onlow FLEX 5" \$198.00 FLEX 8" \$285.00

OmegaBoft PASCAL --- For the PACHESSIONAL: 180 Based, Native Code Compiler. For Real-Time and Process Control applications. Use custom I/O devices in place of the Pascal DRVT and OUTVUT; Long Dt. (12 Bit); Dynamic length strings; Interrupt Processing, RDM-able, PIC, Re-Entrant Code, etc. POTENTI Includes Source for the Symbolic Debugger, Runtime, and several Utilities. Requires a "Notorols Compatible" Palconting Assembler and Linking Londer. SPC52 FLEX and Color FLEX \$425.00 (one year Maint. \$100)

DEMANDER --- Multi-Geer, Multi-Teaking with FLEE

DIMMENSION — Multi-User, Multi-Tasking with FLEE Bootheast Media is now shipping DIMAGNUE FROM STOCK - the multi-user, multi-tasking capability of DIMMENSION and the series of proce softhaticated and time series googutar usage without heading to bay or learn a new language or Operating System syntar. DIFENSIONEL, as its name implies, allows true "time-sharing" operation under the popular FLEX operating system syntar. DIFENSIONEL are to run too simultaneous jobs (multi-tasking) even on single-user systems. For while a fort is in progressi DIFENSIONEL also provides some firms benefits that will be greatly appreciated by FLEX users, ' including type-shead, command line editing, and instant response to "secaps". DIFENSIONE to some of time editing, and instant response to "secaps". DIFENSIONE to an an an an intermediate and interacting first computer by simply adding 64K of SMM for each user. Fact is, you still use FLEX, and does not offer password protection or other niceties of a fail-bloom multi-user system. Mult DIFENSIONE does not offer password protection or other niceties of a fail-bloom multi-user system. What DIFENSIONE does not offer password protection or other niceties, entringe package, word processors, compilare, DIMACALI spread-sheet package, and so on are still good. STORE - The initial rules are for DANKER is for server 3.000 computers, but versions will also be sealished for other popular extended-emercy (up to MISCH STARCE is for server 3.000 computers, but versions will also be evaluable for other popular extended-emercy (up to MISCH STARCE is for server 3.000 computers, but versions will also be evaluable for other popular extended-emercy (up to MISCH STARCE is for server 3.000 computers, but versions will also be evaluable for other popular extended-emercy (up to MISCH STARCE is for server 3.000 computers, but versions will also be evaluable for server popular extended-emercy (up to MISCH STARCE is for server 3.000 computers, but versions will also be evaluable for server popular extended-emerc

- AUTHORS - PROGRAMMENTS ------ QUALTY SUFTIMATE INSUED PLEX - UniPLEX - OS/9 - Color Computer

FIRE - UNIFIEX - GE/9 - Golor Computer For the past several months, we at the Bosthmast Media Diskadom of Computer Publishing, Inc. (GPD), the parent company of FGP NECED JOURNAL and COLOR MECED JOURNAL, have dehated expanding our software distribution business. Have other magazines have been doing so for years (in fact, MOFT were in the Software Distribution Business HEYDER they began to publish a Hangatine). Presently there are many fine samples of software that has been developed by YCU, our readers, that will never see the "light of day" due to the cost of Advertising and TDME and cost included in the production, distribution, and Customer BIPPORT of that software unless SOMENE, with snowph exposure and the willingness to continually advertise, runs with the ball. Boftware is the Tackbone" for the FEAL utilization of any Computer System, and ours are no exception! This has been no simple decision. While we realise that there could be some conflict with some of our solvertisers, we ALSO hear a LOUD and COMTINUOUS cry for HELP from our Badders. From day one, the Enverse concern of '65' MCHO JOURNAL has been it's BEAD MILLINE, software Development, Basiness Application Frograms, etc. In the past there has been too mask noftware officient that was not quite ready. We will strive to eliminate that alament. Bur, right up front, we tail you only that we will do our way best; nothing more. Also, we will strive to keep cost to a has product. Of course, we vill expect, no -- BENNEL, that the uniter main readity pained, and in customer support for his product.

BRECIALI SPECIALI SPECIALI DI Dictionary and WHETE 'N SPECIA Hord Look Up Frogram Di CHE PACHAE; MAE and Color MAE Systems —— BOTE Bor CHEI \$156.00 When these are gone; the price goes UPHI WAY UPHI CHEER NOM! Star-Kits excellent SPELL'M FIX Dicti

Also, call for "More Info" on both the FLEX Hased and Color Computer Based STAB-Rits Products; including the HEMBOD Monitor, Check 'N Tax Program, REMOTENM Color Computer External Terminal Program, etc.

PARCAL UTILITIES - Requires LUCIDATA Pascal ver 3.

XMMF — produce a cross Reference Listing of any text; oriented to Pescal Source. INFLIRE — allows the inclusion of other Files in a Source Text; has unlimited meeting capabilities. Also allows Binary File

Inclusions. PROFILER -- produces an indented, Numbered, "Structogram" of a Pascal Source Text File. Allows viewing the overall structure of large programs, and provides clues as to the integrity of the program. Supplied as Source Code; requires

PLEX and Oslow PLEX - Each program \$25.00

COPYCAT -- (Pascal BOT required) Allows reading TSC Mini-FLEX, S2B IDS66, and Digital Research CP/H Hisks while operating under FLEX 1-0, FLEX 2-0, or FLEX 9-0 with 6600 or 6809 Systems. CDPPCAT will not perform Hiracles, but, between the program and the manual, you stand a good chance of accompliciting a transfer. Includes Utilities to List Directories, Copy Files, and convert Text Files when required. Also includes a Utility for investigating Physical Compatibility problems. Programs supplied in Hodular Bource Code to make it easier to solve unsual problems. FLEX and Coder FLEX 5 550.00 Min. FLEX 5 550.00

Note and the product. Of course, we will expect, no -- DESAMD, that the suffice keypty product free of errors (bugs), and maintain it in a prompt and business lists marner. Also we shall require that authors be willing to farmish 'source' for those programs that justify, by price and utility, inclusion of same. The lack of source code, properly commented, is a continual complaint we har. Not all programs will be exild with source, but where necessary, we will insist that it be included. In some instances the program may be easil or short and not justify itself as a "single" asle product. In this event it will be combined with other like programs, and offered as a package. In that event, the royalties will be split between the various authors. If you have software that you feel will qualify under this program, please contact one of the people below. Remember, if your software has any publism or "furnis" -- GET IT STRAMET BECOME TOO CONTACT USH Also get your source code in proper shape and well commented; there is too mach 991 code already drifting around.

If your software is HENDY contact: Bob May, Don Milliams, or Tom Williams

Southeast Hedia is a division of Computer Publishing, Exc. (CPN), a family of 100% 66000 support facilities.

Depend On South East Media

Make Your 'BACK-UP' On South East Media

FREE DISKETTE With Each \$50 Purchase SOUTH EAST MEDIA For Ordering Call TOLL FREE 1-800-338-6800 5900 Cassandra Smith Rd., Hixson, TN 37343

(615) 842-4601

"FLEX is a trademark of Technical Systems Consultants "OS9 is a trademark of Microware

Color Micro Journal

17

You have probably noticed that the same list of strings found in the Entry Routine is used in the SCAN Routine, but in a little different order, and at TAB(28) there is the same number that was generated for each entry by the N=N+1 in 2170. By using this number, you can edit entries from outside the program. This may seem inconvenient, at first, but it saves considerable memory and works quite well.

To Edit, you must first have the entry number. Use SCAN to find the bad entry, and write down the number to its right. Have the correct entry ready. Press <BREAK>. Now, if, for example, the check number should have been 1555 and the entry number was 123, type in NU\$(123)="1555" and press <ENTER>. Or, if the amount should have been \$234.00 and the entry number was 112 then type AM(112)=234.00 and press <ENTER>. Each string in Line 6500 can be used in this way.

The timing loops can be changed to suit your preference. I made them faster after I had used the program for a while. By increasing the number, you increase the pause between prints. If you change them, remember to put the highest number with the line for the slowest timing.

USING THE PROGRAM

One of the many reasons I had for doing my own program was that the inexpensive Bookkeeping Programs I had seen had no feature for job information, other than to make up a whole account for each job. If you have a lot of small jobs, this can be a pain. Not only does it waste memory, but it doesn't link with general categories well. Amounts are entered either to this account or that

🖢 GRAND SLAM BRIDGE 🗸

SHARPEN UP YOUR BRIDGE GAME. COM-PUTER BIDS YOUR PARTNER'S HAND AND PLAYS THE OPPONENT'S HANDS. RANDOM HANDS DEALT EACH TIME. CARDS, TRICKS, BIDS, AND CONTRACT SHOWN ON SCREEN.

32K

18

CASSETTE \$19.95

S STOCK OPTION STRATEGIES

DEVISE YOUR OWN STOCK OPTION STRATEGIES. COVERED OPTIONS, STRADDLES, CALLS, AND PUTS. % GAINS AND LOSSES VS. FUTURE STOCK PRICES GRAPHED IN COLOR. EASY TO USE, NO DATA BASE REQUIRED, JUST account, but not to both.

The way MICROBOOKS is written, you can put information from ANY entry into at least two categories. And JOB could be changed to ITEM for more general applications. You can get figures from the same entry, even from the same amounts, for separate categories. For example, I can call for a total spent for materials, or for a total spent on one job. Even though the amounts are mixed, I can get both sets of information by using both descriptors.

Lets get a little more specific. My expenses include materials, labor, truck, tools, office, personal, charitable contributions, and taxes and licensing. Rather than use numbers which I find hard to remember, I use three letter abbreviations: MAT, LAB, TRU, TOO, OFF, DRA (for draw), CON and TAX. Job numbers start with J (J147 etc.) if it is an expense. I use an M prefix (for "M"oney in the bank) if it is income. (This actually makes another category of information to draw from.) You could have as many categories as you have entries if that is what you need.)

You have probably noticed that Listing 1 has Income Entry routines, but Listing 2 does not. This is another way to save memory. By using an "Account Descriptor" to distinguish between Income and Expense, the same routine can be used for both tasks.

Most of my data is Expense since a large deposit usually covers many small expenses. If your operation is sales oriented, you might have more income entries. JOB# could be changed to SALE#. To keep track of certain of my personal expenditures, which come from the "draw" account, I use fictitious job numbers so I can locate these non business items.

MICROBOOKS is user friendly in the sense that once you know what you are going to do, you can do it easily and quickly. I'm sure that someone knowledgable in setting up books could get more out of it than I can. It is somewhat similar to a Single Entry Ledger, with the account descriptors paralleling columns headings and the payee descriptor paralleling line headings. With these, and the added JOB parameter, you can develop considerable utility, but it does take imagination.

EXPERIMENTATION OF


If the program is still too big to suit you, you can take out some more fat by altering some of the screen prompts, combining a few more lines, etc. Combining lines is a tedious process, but will remove a surprising amount from the size (it is a good idea to only compress ONE LINE at the time, then RUN the Program to see if you introduced any problems). I have reduced it to below 1700 bytes by continuing to work on it in these ways, and would be glad to hear from anyone who has made it smaller yet. It was a little surprising to learn that renumbering it to 1 per line actually removes over 100 bytes. This is of little significance if you have 32K, but that 100 bytes equals 4 to 6 entries, which could make a difference in small memory. Use RENUML, (old first line number),1. I have put Listing 2 plus a 1.7K version plus a 3.2K version with edit, tape merge, and a number of other bells, whistles and conveniences on a

cassette. If you would like to have this, plus a fairly detailed documentation, send \$10.00 to the author, c/o this Magazine.

Jim LaLone

LISTING 1

| 1 CLEAR4000' POBOON | |
|---|---|
| 5 DIMNU\$(200), DA\$(2 | |
| AM(200), JO\$(200), AC | \$(200) |
| 10 N=1 | |
| 1000 ' MENU | |
| 1010 CLS:PRINT:PRIN | T |
| 1020 PRINT" | SELECT ONE" |
| | SELECT ONL |
| :PRINT:PRINT | |
| 2000 111211 | ENTER EXPE |
| NSES" | |
| 1040 PRINT" <2 | 2> ENTER INCO |
| ME" | |
| 1050 PRINT" <3 | > MONTH TOTA |
| LS" | |
| | > YEAR TOTAL |
| S" | IDAK IOIND |
| | A NUMBER OF DO |
| 1070 PRINT" < | > VIEW FILES |
| | |
| 1080 PRINT: INPUT" | ENTER YOU |
| R SELECTION"; F | |
| 1090 IFF<00RF>5GOT | 01000 |
| 1100 ON F GOTO 2000 | |
| 00,6000 | ,, |
| 2000 | |
| | The second s |
| | EXPENSES |
| 2020 ' | |
| 2030 ' SUB | MENU |
| 2040 ' | |
| 2050 CLS:PRINT:PRI | T" |
| CHOOSE ONE" | |
| 2060 PRINT: PRINT: PI | TNT + DRTNT |
| <1> NEW FILES | |
| | |
| | |
| 2070 PRINT: PRINT" | <2> EXT |
| 2070 PRINT:PRINT" END FILES" | <2> EXT |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI | <2> EXT RINT: PRINT: INP |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE | <2> EXT RINT: PRINT: INP LECTION"; A\$ |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE | <2> EXT RINT: PRINT: INP LECTION"; A\$ |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2 | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2 2100 IFA\$="2"THEN2 | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2 2100 IFA\$="2"THEN2 2110 IFA\$<00RA\$>2TH | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2THEN2: 2170 ' | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2! 2100 IFA\$="2"THEN2! 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2! 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I 2190 ' | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INT | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES-P |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INT | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INT | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES-P |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2110 IFA\$<00RA\$>2TH 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUN NISHED"</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES-P MBER? WHEN FI |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2! 2110 IFA\$<00RA\$>2T 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" IN RESS <xx> FOR NU NISHED" 2210 PRINT" last en</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES-P MBER? WHEN FI |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUN NISHED" 2210 PRINT" last en N-1)</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES MBER? WHEN FI htry was:"NU\$(|
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUN NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES HEN FI htry was: "NU\$(|
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUN NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER' 2230 IFNUS(N)="XX"</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES-P MBER? WHEN FI htry was: "NU\$("; NU\$(N) THEN2320 |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUM NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX" 2240 INPUT" DATE":</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES-P MBER? WHEN FI htry was: "NU\$("; NU\$(N) THEN2320 DA\$(N) |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUM NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX" 2240 INPUT" DATE":</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES-P MBER? WHEN FI htry was: "NU\$("; NU\$(N) THEN2320 DA\$(N) |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUM NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX" 2240 INPUT" DATE":</xx> | <2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES-P MBER? WHEN FI htry was: "NU\$("; NU\$(N) THEN2320 DA\$(N) |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUM NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE"; 2250 INPUT" PAYEE" 2260 INPUT" AMOUNT 2270 INPUT" JOB #"</xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT expenses ntry was:"NU\$(";NU\$(N) THEN2320 DA\$(N) ;PA\$(N) ;JO\$(N)</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUM NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE"; 2250 INPUT" PAYEE" 2260 INPUT" AMOUNT 2270 INPUT" JOB #"</xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT expenses ntry was:"NU\$(";NU\$(N) THEN2320 DA\$(N) ;PA\$(N) ;JO\$(N)</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SE 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TM 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUM NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX" 2240 INPUT" DATE"; 2250 INPUT" PAYEE" 2260 INPUT" JOB #" 2280 INPUT" ACCOUNT</xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT expenses ntry was:"NU\$(";NU\$(N) THEN2320 DA\$(N) ;PA\$(N) ;JO\$(N) T"; AC\$(N)</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TT 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUN NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";1 2250 INPUT" DATE";1 2250 INPUT" DATE";1 2260 INPUT" JOB #" 2280 INPUT" JOB #"</xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT expenses ntry was:"NU\$(";NU\$(N) THEN2320 DA\$(N) ;PA\$(N) ;JO\$(N) T"; AC\$(N)</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TT 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUT NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";1 2250 INPUT" DATE";1 2250 INPUT" DATE";1 2260 INPUT" JOB #" 2280 INPUT" JOB #" 2280 INPUT" JOB #"</xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PU</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TT 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUT NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";1 2250 INPUT" DATE";1 2250 INPUT" DATE";1 2250 INPUT" JOB #" 2260 INPUT" JOB #" 2280 INPUT" IS THIS OR <n>";A\$ 2300 IFA\$="N"THEN2</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PU</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TT 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INT RESS <xx> FOR NUT NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER' 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" JOB #" 2260 INPUT" JOB #" 2280 INPUT" IS THIS 0R <n>";A\$ 2300 IFA\$="N"THEN2 2310 N=N+1:GOTO220</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PU</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2! 2110 IFA\$<00RA\$>2TH 2130 'ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUR NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" JOB #" 2260 INPUT" JOB #" 2280 INPUT" IS THIS OR <n>";A\$ 2300 IFA\$="N"THEN2 2310 N=N+1:GOTO220 2320 PRINT" LOAD A</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PU</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2130 'ENTER I 2190 'ENTER I 2190 'ENTER I 2200 CLS:PRINT" INI RESS <xx> FOR NUR NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" DATE";I 2260 INPUT" JOB #" 2280 INPUT" JOB #" 2280 INPUT" IS THIS 0R <n>";A\$ 2300 IFA\$="N"THEN2 2310 N=N+1:GOTO220 2320 PRINT" LOAD A</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT expenses ntry was:"NU\$("; NU\$(N) THEN2320 DA\$(N) ; PA\$(N) ; JO\$(N) T"; AC\$(N) S CORRECT? <y> 2200 0 ND REWIND TAPE</y></pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2130 'ENTER I 2190 'ENTER I 2190 'ENTER I 2200 CLS:PRINT" INI RESS <xx> FOR NUR NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" DATE";I 2260 INPUT" JOB #" 2280 INPUT" JOB #" 2280 INPUT" IS THIS 0R <n>";A\$ 2300 IFA\$="N"THEN2 2310 N=N+1:GOTO220 2320 PRINT" LOAD A</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PUT EXPENSES PUT EXPENSES PUT expenses ntry was:"NU\$("; NU\$(N) THEN2320 DA\$(N) ; PA\$(N) ; JO\$(N) T"; AC\$(N) S CORRECT? <y> 2200 0 ND REWIND TAPE</y></pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TT 2170 ' 2180 ' ENTER I 2190 ' 2195 N=1 2200 CLS:PRINT" INI RESS <xx> FOR NUR NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" DATE";I 2260 INPUT" JOB #" 2260 INPUT" JOB #" 2280 INPUT" IS THIS OR <n>";A\$ 2300 IFA\$="N"THEN2 2310 N=N+1:GOTO220 2320 PRINT" IOAD A " 2330 PRINT" PRESS</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT EXPENSES PU</pre> |
| 2070 PRINT:PRINT" END FILES" 2080 PRINT:PRINT:PI UT" YOUR SEI 2090 IFA\$="1"THEN2: 2100 IFA\$="2"THEN2: 2110 IFA\$<00RA\$>2TH 2130 'ENTER I 2190 'ENTER I 2190 'ENTER I 2200 CLS:PRINT" INI RESS <xx> FOR NUR NISHED" 2210 PRINT" last en N-1) 2220 INPUT" NUMBER 2230 IFNU\$(N)="XX"' 2240 INPUT" DATE";I 2250 INPUT" DATE";I 2250 INPUT" DATE";I 2260 INPUT" JOB #" 2280 INPUT" JOB #" 2280 INPUT" IS THIS 0R <n>";A\$ 2300 IFA\$="N"THEN2 2310 N=N+1:GOTO220 2320 PRINT" LOAD A</n></xx> | <pre><2> EXT RINT: PRINT: INP LECTION"; A\$ 195 500 HEN2050 EXPENSES PUT expenses PU</pre> |

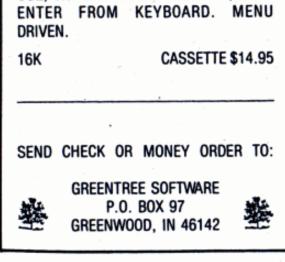

1 104 2350 OPEN"O", #-1, "EXPENSE" 2360 PRINT#-1,N 2370 FORJ=1TON 2380 PRINT#-1, NU\$(J), DA\$(J), PA\$(J),AM(J),JO\$(J),AC\$(J) 2390 NEXTJ:CLOSE#-1 2400 CLS: PRINT@233, "DATA IS STOR ED":FORT=1T01000:NEXTT 2410 GOTO1000 2500 2510 ' EXTEND EXPENSE FILES 2520 ' TO EXTEND EXP 2530 CLS:PRINT" ENSE FILES"

LOAD CA 2540 PRINT: PRINT: PRINT" RENT FI SSETTE CONTAINING CUR LES ENTERED TO DATE" 2550 PRINT:PRINT:PRINT" REWIN D TAPE-PRESS PLAY" PRESS 2560 PRINT: PRINT: INPUT" <ENTER> WHEN READY"; R\$ 257Ø ' 2580 ' LOADING 2590 ' 2600 CLS: PRINT@234, "LOADING DATA 2610 OPEN"I", #-1, "EXPENSE" 2620 INPUT#-1,N:FORJ=1TON 2630 INPUT#-1,NU\$(J),DA\$(J),PA\$(J),AM(J),JO\$(J),AC\$(J) 2640 NEXTJ:CLOSE#-1 2650 CLS: PRINT@233, "DATA IS LOAD ED" 2660 FORT=1TO1000:NEXTT 267Ø GOTO22ØØ 3000 3010 ' ENTER INCOME 3020 ' 3Ø3Ø ' SUB MENU 3040 ' 3050 CLS:PRINT:PRINT" CHOOSE ONE" 3060 PRINT: PRINT: PRINT: PRINT" <1> NEW FILES" <2> EXT 3070 PRINT: PRINT" END FILES 3080 PRINT: PRINT: PRINT: PRINT: INP YOUR SELECTION"; S\$ UT" 3090 IFS\$="1"THEN3195 3100 IFS\$="2"THEN3500 3110 IFS\$<00RS\$>2THEN3050 317Ø ENTER INCOME 3180 3190 ' 3195 N=1 3200 CLS:PRINT" INPUT INCOME-PRE SS <XX> FOR NUMBER? WHEN FI NISHED" 3210 PRINT" last entry was:"NU\$(N-1) 3220 INPUT" NUMBER"; NU\$(N) 3230 IFNU\$(N)="XX"THEN3320 324Ø INPUT" DATE"; DA\$(N) 3250 INPUT" PAYER"; PA\$(N) 3260 INPUT" AMOUNT"; AM(N) 327Ø INPUT" JOB #"; JO\$(N) 3280 INPUT" ACCOUNT"; AC\$(N) 3290 INPUT" IS THIS CORRECT? <Y> OR <N>";A\$ 3300 IFA\$="N"THEN3220 3310 N=N+1:GOTO3200 3320 PRINT" LOAD AND REWIND TAPE 3330 PRINT" PRESS RECORD" 3340 INPUT" PRESS <ENTER> TO CON TINUE"; R\$ 3350 OPEN"O", #-1, "INCOME" 3360 PRINT#-1,N 3370 FORJ=1TON 338Ø PRINT#-1,NU\$(J),DA\$(J),PA\$(J),AM(J),JO\$(J),AC\$(J) 3390 NEXTJ:CLOSE#-1 3400 CLS: PRINT@233, "DATA IS STOR ED":FORT=1T01000:NEXTT 3410 GOTO1000 3500 . 351Ø EXTEND INCOME FILES

3620 INPUT#-1,N:FORJ=1TON 3630 INPUT#-1,NU\$(J),DA\$(J),PA\$(J),AM(J),JO\$(J),AC\$(J)3640 NEXTJ:CLOSE#-1 3650 CLS: PRINT@233, "DATA IS LOAD ED" 366Ø FORT=1TO1000:NEXTT 367Ø GOTO32ØØ 4000 ' MONTH TOTALS 4100 CLS:T=0:PRINT:INPUT NAME ";B\$ ACCOUNT TO BE TOTALED 4110 CLS:PRINT:PRINT:PRINT:PRINT REWIND TAPE-PRESS PLAY 4120 PRINT: PRINT: PRINT: INPUT" PRESS <ENTER> WHEN READY"; R\$ 4130 CLS: PRINT@236, "SCANNING" 4140 OPEN"I",#-1,"EXPENSE" 4150 INPUT#-1, N:FORJ=1TON 4155 INPUT#-1,NU\$(J),DA\$(J),PA\$(J),AM(J),JO\$(J),AC\$(J) 4160 NEXTJ:CLOSE#-1 4165 FORJ=1TON 4170 IF B\$=AC\$(J) THEN T=T+AM(J) ELSE IF B\$=JO\$(J) THEN T=T+AM(J) 4175 NEXTJ т 4200 CLS: PRINT: PRINT: PRINT' OTAL SPENT ON JOB# "B\$," IS \$ "т 4210 PRINT: PRINT: PRINT: PRINT: PRI PRESS <ENTER> NT:PRINT:INPUT" FOR MENU"; R\$ 4220 CLS:GOTO1000 NOT P 5000 CLS: INPUT" PRESS < ROGRAMMED YET ENTER> FOR MENU"; R\$:GOTO1000 6000 ' INPUT DATA 6010 CLS:PRINT:PRINT:PRINT:PRINT REWIND TAPE-PRESS PLAY 6020 PRINT: PRINT: PRINT: INPUT PRESS <ENTER> WHEN READY"; R\$ 6030 CLS: PRINT@234, "LOADING DATA 6040 OPEN"I",#-1,"EXPENSE"

6050 INPUT#-1,N:FORJ=1TON 6060 INPUT#-1, NU\$(J), DA\$(J), PA\$(J, AM(J), JO\$(J), AC\$(J) 6070 NEXTJ:CLOSE#-1 6080 CLS:PRINT:PRINT" SCREENING SPEEDS-CHOOSE ONE" 6090 PRINT: PRINT: PRINT: PRINT" <1> LOW SPEED" 6095 PRINT:PRINT" <2> H IGH SPEED" 6110 PRINT: PRINT: INPUT" YOUR SELECTION"; S 6120 ON S GOTO6130,6190 6130 CLS:FORJ=1TON 6140 PRINT: PRINT NU\$(J); TAB(8)DA \$(J);TAB(17)PA\$(J):PRINTAM(J);TA B(8)"JOB#"JO\$(J);TAB(17)AC\$(J) 615Ø FORT=1TO3ØØ:NEXTT 616Ø NEXTJ PRESS <ENTER> FOR 617Ø INPUT" MENU"; R\$ 618Ø GOTO1ØØØ 6190 CLS:FORJ=1TON 6200 PRINT: PRINTNU\$(J); TAB(8) DA\$ (J);TAB(17)PA\$(J):PRINTAM(J);TAB (8) "JOB# "JO\$(J); TAB(17)AC\$(J) 6210 FORT=1TO100:NEXTT 622Ø NEXTJ 6230 INPUT" PRESS <ENTER> F OR MENU"; M\$ 624Ø GOTO1ØØØ

LISTING 2

| - | CLS PRINT" | м | ICROBOOKS |
|---|---------------|----|-------------|
| 6 | • | BY | JIM LALONE" |

7 FORT=1TO2000:NEXT

10 CLEAR5000:DIMNU\$(230),DA\$(230), PA\$(230), AM(230), JO\$(230), AC\$(23Ø):N=1:T=Ø

1000 GOSUB6000:PRINT@136,"<1> LE DGER": PRINT@168, "<2> TOTALS": PRI NT@200,"<3> SCAN FILES":PRINT@23 2, "<4> UNASSIGNED": PRINT@327, ;: I



If you're ready to really get some use out of your CoCo - Then it's time for XDMS! The XDMS Data Management System is designed to allow quick and easy file definition, update and processing - All without programming! It will handle anything from bowling scores to inventory and can produce reports, inquiry, forms, screen and file output.

Multi-step processing is controlled by English-like statements, either interactively or from a file. (This is MUCH more flexible than menu driven systems.) Complex functions, such as file merging, generation and summation of arrays, line calculations, subtotaling, selection, etc, are easily accomplished with "results oriented" instructions.

Once installed, you will find XDMS applicable to a wide variety of uses. (You may even wonder why others bother with specific application programs when XDMS does it all!) So put the joysticks aside, load in KDMS, and get some real use out of your CoCo - It's time has come...

3520 3530 CLS:PRINT" OME FILES"

TO EXTEND INC 3540 PRINT: PRINT: PRINT" LOAD CA SSETTE CONTAINING CUR RENT FI LES ENTERED TO DATE 3550 PRINT: PRINT: PRINT" REWIN D TAPE-PRESS PLAY" 3560 PRINT: PRINT: INPUT" PRESS <ENTER> WHEN READY"; R\$ 3570 ' 3580 ' LOADING 3590 ' 3600 CLS: PRINT@234, "LOADING DATA

3610 OPEN"I", #-1, "INCOME" Color Micro Journal

XDMS+ Data Management System with DMS Utilities \$249.95

WESTCHESTER Applied Business Systems Post Office Box 187, Briarcliff Manor, N.Y. 10510

All software is written in macro/assembler and runs under 6809 FLEX. CoCo users will need F-MATES or FHL FLEX, 64K RAM and 1-2 disk drives. Terms: Check, Money Order, Visa or Mastercharge. Shipment first Class. Add P&H \$2.50 (\$7.50 Foreign). N.Y. Res add sales tax. Specify 5 or 8". Sales: Southeast Media 800-338-6800 Consultation: 914-941-3552 eves.

FLEX is a trademark of Technical Systems Consultants, Inc.

COMPILER EVALUATION SERVICES

The S.E. MEDIA Division of Computer Publishing Inc., is offering the following 'SUBSCRIBER SERVICE':

COMPILER COMPARISION AND EVALUATION REPORT

Due to the constant and rapid updating and enhanchment of numerous compilers, and the different utility, appeal, speed, level of communication, memory usage, etc., of different compilers, the following services are now being offered with periodic updates.

This service, with updates, will allow you who are wary or confused by the various claims of compiler vendors, an opportunity to review comparisons, comments, benchmarks, etc., concerning the many different compilers on the market, for the 6809 microcomputer. Thus the savings could far offset the small cost of this service.

Many have purchased compilers and then discovered that the particular compiler purchased either is not the most efficient for their purposes or does not contain features necessary for their application. Thus the added expense of purchasing additional compiler(s) or not being able to fully utilize the advantages of high level language compilers becomes too expensive.

The following COMPILERS are reviewed initially, more will be reviewed, compared and benchmarked as they become available to the author:

PASCAL "C" GSPL WHIMISCAL PL/9

Initial Subscription - \$39.95

NPUT"YOUR SELECTION"; S: IFS<10RS> 4THEN1000 1010 ONS GOTO2000, 3000, 4000, 5000 2000 GOSUB6000:PRINT@168, "<1> NE W FILES": PRINT@232, "<2> EXTEND F ILES":GOSUB6100:IFS\$="1"THEN2100 2010 IFS\$="2"THEN2020ELSE2000 2020 GOSUB6800: IFA\$="Y"THEN2100 2030 IFA\$="N"THEN2400ELSE2020 2100 CLS: PRINT" INPUT ENTRIES -WHEN FINISHED REPLY <XX> TO <N UMBER?>": IFS\$="1"THEN2105ELSE: PR INT" last entries: "NU\$(N-2)" & "NU\$(N-1):GOTO2110 2105 S\$="":PRINT 2110 INPUT" NUMBER"; NU\$(N): IFNU\$ (N)="XX"THEN2180 2120 INPUT" DATE"; DA\$(N): IFDA\$(N)="CC"THEN2110 2130 INPUT" PAYEE/ER"; PA\$(N): IFP A\$(N)="CC"THEN2110 2140 INPUT" AMOUNT"; AM(N): INPUT" JOB#"; JO\$(N): INPUT" ACCOUNT"; AC \$(N): INPUT" IS THIS CORRECT? <Y/ N>"; A\$: IFA\$="N"THEN2110 2170 N=N+1:GOTO2100 2180 CLS:PRINT@129, ;: INPUT"HOW M ANY SAVES"; SA: IFSA=0THEN1000ELSE PRINT@225, "LOAD AND REWIND TAPE" :PRINT@289, "PRESS RECORD":PRINT: INPUT" PRESS <ENTER> TO CONTINUE ";R\$ 2300 CLS:FORV=1TOSA:PRINT@233, "S TORING DATA": OPEN"O", #-1, "LEDGER ":PRINT#-1,N:FORX=1TON:PRINT#-1, NU\$(X), DA\$(X), PA\$(X), AM(X), JO\$(X), AC\$(X):NEXTX:CLOSE#-1:FORT=1TO 1500:NEXTT, V:CLS:PRINT@233, "DATA IS STORED":FORT=1TO900:NEXTT:GO TO1000 2400 REM EXTEND LEDGER 2420 CLS: PRINT@4, "TO EXTEND LEDG ER FILES": PRINT@97, "LOAD CASSETT E CONTAINING FILES ENTERED TO D ATE":GOSUB6200:GOTO2100 3000 REM TOTALS 3010 GOSUB6000:PRINT@104, "<1> SU B TOTALS": PRINT@168, "<2> BALANCE SHEET": PRINT@232, "<3> UNASSIGNE D":PRINT:PRINT:GOSUB6100:IFS\$="1 "THEN3100 3020 IFS\$="2"THEN3200 3030 IFS\$="3"THEN3300ELSE3010 3100 GOSUB6800: IFA\$="Y"THEN3130 3110 IFA\$="N"THEN3120ELSE3100 3120 CLS: PRINT@33, "LOAD CASSETTE CONTAINING FILES TO BE TOTALED ":GOSUB6200:CLS 3130 T=0:INPUT" JOB OR ACCOUNT"; B\$:IFB\$="END"THEN1000ELSE:FORX=1 TON: IFB\$=AC\$(X)THENT=T+AM(X)ELSE IFB\$=JO\$(X)THENT=T+AM(X) 3140 NEXTX: PRINT" TOTAL IN "B\$" IS: ";:PRINTUSING"\$\$####.##";T: GOTO313Ø 3200 GOTO6300 3300 GOTO6300 4000 REM SCAN FILES 4020 GOSUB6800: IFA\$="Y"THEN4050 4030 IFA\$="N"THEN4040ELSE4020 LOAD TAPE TO 4040 CLS:PRINT" BE SCANNED": PRINT: GOSUB6200

":OPEN"I", #-1, "LEDGER": INPUT#-1, N:FORX=1TON: INPUT#-1, NU\$(X), DA\$(X), PA\$(X), AM(X), JO\$(X), AC\$(X): NE XTX 6210 CLOSE#-1:CLS:PRINT@233, "DAT A LOADED":RETURN 6300 CLS: PRINT" NOT PROGRAMMED": FORT=1TO9ØØ:NEXT:GOTO1ØØØ 6500 PRINT: PRINTTAB(1)NU\$(X); TAB (8);:PRINTUSING"####.##";AM(X);: PRINTTAB(17)PA\$(X):PRINTTAB(1)DA \$(X);TAB(12)AC\$(X);TAB(17)"JOB# "JO\$(X);TAB(28)X:RETURN 6600 PRINT: INPUT" ANOTHER SCA <Y/N>"; S\$: IFS\$="Y"THEN4060 N? 6610 IFS\$="N"THEN1000ELSE6600 6800 CLS: PRINT@228, ;: INPUT" IS TA PE LOADED? <Y/N>"; A\$: RETURN

LANDER GAME

4K LANDER GAME

Hey 4Ker, tired of all the CoCo articles requiring 16K or more? Well, here's a Lunar Lander type game that uses Color Basic and only about 2K, so it should run on your machine.

The game has five difficulty levels which determine the size of the landing pad, the amount of fuel on board, and partially determines the strength of the gravitational field. The landscape changes each time you play, and the ship will appear at a different location, but will always be in the upper half of the screen. The ship will have random vertical and horizontal motion when first appearing. It is controlled using the Left and Right Arrow Keys for sideways motion and Number Keys one to four for vertical rocket thrust. You must guide the ship to a safe landing on the blue pad. To do this, the ship must not be moving any faster than five units down and one unit sideways, in either direction.

Now let us examine the listing. Line 3 has the POKE 65495,0 speedup command. If your computer cannot handle it, omit this line. Line 6 lets you input the difficulty level. Note that one is hardest while five is easiest.

Lines 12-63 draw the landscape and landing pad. Line 12 produces a random number that determines where the pad will be placed. Lines 15-18 set some variables to zero allowing the game to replay without having to restart. Lines 21-24 determine how long and high any ground feature will be. Lines 30-36 set the ground layer and lines 39-42 build it up to make a triangle shape. Note that these are variables, so you may get some strange shapes (what do you expect on an unknown planet, anyway!).

Line 45 sets the location for the

(includes 1 year updates) Updates for 1 year - \$14.50

S.E. MEDIA - CPI 5900 Cassandra Smith, POB 794 Hixson, TN 37343 615 842-4601 > SLOW SCAN": PRINT@233, "<2> FAST SCAN":GOSUB6100:IFS\$="1"THEN407 0 4060 IFS\$="2"THEN4080ELSE4050 4070 CLS:FORX=1TON:FORT=1TO170:N EXTT:GOSUB6500:NEXTX:GOTO6600 4080 CLS:FORX=1TON:FORT=1TO80:NE XTT:GOSUB6500:NEXTX:GOTO6600 5000 GOTO6300 6000 CLS:PRINT@75, "SELECT ONE":R

4050 CLS:GOSUB6000:PRINT@169, "<1

ETURN

6100 PRINT@360, ;: INPUT"YOUR SELE CTION"; \$\$: RETURN

6200 PRINT: PRINT: PRINT" REWIN D TAPE-PRESS PLAY": PRINT: PRINT: I NPUT" PRESS <ENTER> WHEN READY "; R\$: CLS: PRINT@233, "LOADING DATA next ground feature and line 48 checks to see if it is time for the pad to be drawn, or if it has already been drawn as controlled by the J variable. If the pad has been drawn or, it is not yet time for it, line 51 sends the program back to draw the next ground feature. Otherwise lines 54-63 draw the landing pad. Line 54 and 58 control the size of the landing pad.

Lines 66-69 pick the random location for the ship. Line 72 determines how strong the gravity field will be. Line 75 determines the amount of fuel you get, which ranges from 250 to 450 units.

Color Micro Journal

20

.

Lines 78-81 picks random side and downward motions for the ship. If SV is negative, the ship moves left; positive and it moves right. If SV equals six, it will have no side motion.

Line 84 draws the ship the first time it appears. Afterwards, the ship is controlled via the keyboard. This is done in a loop that starts at line 87, where the ship's downward velocity is increased by the gravity field divided by three. Do not ask why I used this particular formula, it just seemed to work out nicely.

Line 90 will skip over your keyboard control if you have used all your fuel, but the graphics will be continued until the bitter end.

Lines 93-102 are the sub loop that checks keys one to four. By using the PEEK command, the keys can be held down for continuous engine thrust. Line 99 checks which key, if any is pressed, and makes the value of BX equal to BU, which is the rocket burn.

Lines 108-111 use the PEEK command to check on the arrow keys and make the adjustments to the side velocity. They also have a sound effect and use fuel.

Line 114 figures out your vertical velocity status if the main engine has been fired. Note that the burn factor remains constant for each key, but its effect is determined by the strength of the gravity field. As the field gets stronger or weaker, the burn will have less or more effect.

The altitude readout is determined by the Y, or height component, of the ship times ten. If the ship's height is less than 50, it is multiplied by two to make it look a little better. If the Y component reaches 28, the ship has hit bottom and crashed.

Line 123 adjusts the ship's vertical visual movement in accord with its velocity. Feel free to change the parameters, but remember you have less than 30 points to work with.

Lines 126-132 control the ship's sideways movements. Line 135 checks to see if the ship has reached either the top or sides of the screen. The ship's motion will continue unless you or gravity do something, but it will happen off screen as line 135 will make the program skip over the graphics until the ship is back within the screen's limits.

Line 138 actually draws the spaceship. Line 141 checks your fuel and sets it to zero if you burned it up in the last loop. Line 144 gives the readout of the various factors found at the bottom of the screen. F is fuel, A is altitude, S is sideways motion, V is vertical velocity, and G is gravity field strength. If V is negative, you are going up. Positive and you are coming down. When you land, S cannot be greater than plus or minus one and V cannot be greater than five of the way CoCo handles low resolution color blocks. In a four block square, each color has to be the same. What was happening was when the ship was one level above the pad, it would turn the pad yellow, matching its color. Since the computer was only looking for white and blue, it would take no action and the ship would continue down and through the pad. To prevent this, I adjusted the points to be checked so they would be in a different square than the ship. The ship now lands one level above the pad.

If the ship has not hit anything, or landed, line 168 resets the points so a new position can be displayed. Line 171 is used after the first time the ship is drawn so that the computer will accept keyboard inputs, and 174 sends the program back to start the loop over.


If you hit the ground, line 177 lets you know and 180-192 tells you what you did wrong. Lines 195-198 produce a sound effect and 201 moves you to the play again option.

If you did land on the pad, lines 204-207 make sure you were within the given parameters, and if not, sends you to line 177 to tell you that you blew it. Line 210 congratulates you if you did it right, and 213-216 produce a sound effect. Line 219 again asks if you want to play again. If you choose to play, you go back to line 6 and can choose a new level. You automatically

get a new landscape. If you choose not to play, line 225 shuts off the high speed poke and ends the game.

That, in a cracked nutshell, sums it up. If you need a justification of what is going on, pretend you are trying to remote control ships to a safe landing after they have warped out of hyperspace. We all know how tricky hyperspace is, so over which planet, and where over it, and going in what direction is all left up to chance. In each ship is a cargo of gold, or arms, or gorgeous members of the opposite sex, or whatever you little heart lusts for. To reap the rewards, you must bring those little ships in safe and sound.

1 REM LANDER BY ROBERT TOSCANI 3 POKE65495,Ø 6 INPUT"LEVEL 1 HARD-5 EASY";H 9 CLSØ 12 L = RND(42)15 E=0:RT=0:J=0 18 F=Ø:G=Ø 21 B=RND(27): IF B<7THEN21OR IF E >50 AND B<12THEN21 24 D=RND(28): IF D<14 OR D>27THEN 24 27 FOR C=29 TO D STEP-1 30 FOR A=E+F TO E+B-G 33 IF A>63THEN66 36 SET(A,C,5):NEXTA 39 F=F+1:G=G+1 42 NEXTC

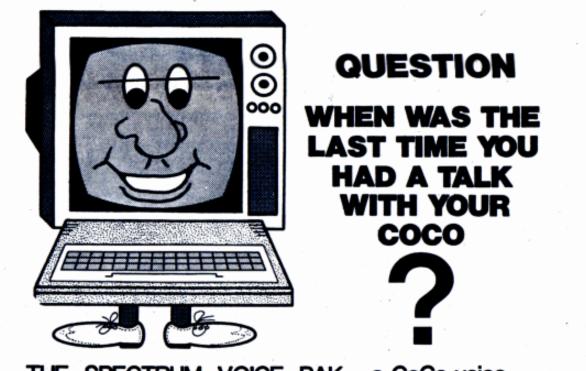

THE SPECTRUM VOICE PAK – a CoCo voice synthesizer – is a complete phoneme based voice system that uses the famous VOTRAX SCO1 chip synthesizer in a cartridge style pak. It provides an unlimited vocabulary with automatic or user supplied inflection, plus four programmable levels of pitch. With a single line of code, THE VOICE PAK adds speech to any BASIC program in minutes. The system comes complete with user instructions, software cassette with 16K and 32K – DISK/TAPE versions, a text to speech scanner translator and a Word Manager that constructs and edits custom user dictionaries. The unit is fully assembled, tested and ready to plug in and talk, talk, talk. \$69.95

cannot be greater than five.

Line 147 again checks to see if the ship is on or off the screen. If off, you loop back to 87 to start another cycle. If on, lines 150-167 check to see if you have hit the ground or landing pad. This is done by checking the color of the three points directly under the ship, and one on each side when it is above a certain height. If they register white, you have hit something. Below a certain height the three points under the ship are the only ones checked but with a difference. Instead of being immediately under, they are the next level down. I had to do this because Color Micro Journal

ALL ORDERS PLUS \$3.00 S/H - NY RESIDENTS ADD SALES TAX

SPECTRUM PROJECTS / 93-15 86th DR / WOODHAVEN NY 11421 / 212-441-2807

45 E=E+B 48 IF E>=L AND J=0THEN54 51 GOTO18 54 FOR K=1TO H+4 57 SET(E+K, 29, 3) 58 IF E+K=>63THEN63 60 NEXTK 63 E=E+K:J=1:GOTO18 66 M=RND(60):N=RND(11) 69 IF M<4 OR N<3 THEN66 72 GR=RND(12)-H:IF GR<=4THEN GR= з 75 FU=200+H*50 78 SV=RND(11): IF SV<=5THEN SV=-S V ELSE IF SV>6 THEN SV=SV-5 ELSE sv=ø 81 VE=RND(30) 84 IF RT=ØTHEN138 87 BX=0:BU=0:VE=VE+INT(GR/3) 90 IF FU<=0THEN114 93 FOR PE=339 TO 342 96 BX=BX+BX+1 99 IF PEEK(PE)=239THEN BU=BX:SOU ND90-(BU*2),1 102 NEXT PE 105 FU=FU-BU 108 IF PEEK(343)=247 THEN SV=SV-1:SOUND100,1:FU=FU-1 111 IF PEEK(344)=247THEN SV=SV+1 :SOUND100,1:FU=FU-1 114 VE=INT(VE-BU*.5) 117 AL=(28-N)*10:IF AL<50 THEN A L=(28-N)*2120 IF N>27THEN177 123 IF VE>Ø AND VE<20THEN N=N+1 ELSE IF VE>=20THEN N=N+2ELSE IF VE<Ø AND VE>-20THEN N=N-1ELSE IF VE<=-20THEN N=N-2 126 IF SV=ØTHEN S=Ø:GOTO135 129 S=INT(SV/2): IF S=ØTHEN S=1 132 MHM+S 135 IF M<=2 OR M>6Ø OR N<=ØTHEN1 44 138 SET(M-1,N+1,2):SET(M+1,N+1,2):SET(M,N,2):SET(M+1,N+2,2):SET(M,N+2,2):SET(M-1,N+2,2)

141 IF FU=<07THEN FU=0 144 PRINT@480, "F"; FU; : PRINT@485, A"; AL; : PRINT@492, " S"; SV; : PRIN T@499, " V"; VE; : PRINT@504, " G"; GR 147 IF M<=2 OR M>60 OR N<=0THEN8 150 IF N=25THEN ZX=1ELSE ZX=0 153 IF N=25THEN CV=3ELSE CV=4 156 IF N=25THEN BN=4ELSE BN=3 159 FOR QW=ZX TO CV:ER=POINT(M-2 +QW, N+BN) 162 IF ER=5 THEN 177 ELSE IF ER= 3 THEN 204 165 NEXT OW 168 RESET(M-1,N+1):RESET(M+1,N+1):RESET(M,N):RESET(M+1,N+2):RESE T(M, N+2): RESET(M-1, N+2)171 RT=1 174 GOTO87 177 PRINT@Ø, "CRASHED!"; 180 IF VE>5AND AL<19THENPRINT" G OING TOO FAST"; 183 IF FU<=OTHENPRINT" RAN OUT O F FUEL"; 186 IF AL>19THENPRINT" RAN RIGHT INTO IT"; 189 IF AL<19AND ER=5THENPRINT" M</p> ISSED THE PAD"; 192 IF SV<-10R SV>1THENPRINT" TO O MUCH SIDE MOTION" 195 FOR U=255TO 1 STEP-3 198 SOUND U, 1:NEXTU 201 GOTO219 204 IF VE>5THEN 177 207 IF SV -- 10R SV>1THEN177 210 PRINT00, "GREAT LANDING"; 213 FOR U=1TO255 STEP5 216 SOUND U, 1:NEXTU 219 PRINT" TRY AGAIN Y/N": INPUT D\$ 222 IF D\$="Y"THEN 6 225 POKE65494, Ø:END

Robert Toscani



| GOLD PLUG 80 Mod I (6) | \$44.95 | \$54.95 |
|-------------------------|---------|--------------------|
| Keyboard/El (mod l) | 15.95 | -18.95 |
| | 7.95 | -9.95- |
| COCO Disk Module (2) | 16.95 | -18.95- |
| Ground tab extensions | INCL | -1.00- |
| Disk Drives (all R.S.) | 7.95 | -9.95- |
| Gold Disk Cable 2 Drive | , | 29.95 |
| Four Drive Cable | DULEN | 39.95 |
| | NOTIO | 54.05 |

THIS 'N THAT

Continued from page 1

gained an excellent reputation for the quality and support of their products. We will have a full review of the RDC-1 next month, but, in the mean time, here are some of our initial findings.

F & D is primarily ONLY selling the PC Board and a 'special' chip (the FDC9216B), with instructions, for \$49.95. The PC Board will have Gold Plated PC Lands for the Edge Connector, and the circuitry consists of only about two dozen parts, total, including 14 IC's and a Crystal, with NO Adjustments. It will take an experienced "Solderer" less than two hours to assemble the unit once he has the parts rounded up, and the layout is 'spacious', so the soldering is not at all tedious. Ours worked the first time we plugged it in. We used a standard Western Digital Controller Chip, and had NO problems with Radio Shack or FLEX, but was unable to format an OS-9 Disk due to a chip timing problem. A call to F & D, and some checking and discussions, led to the discovery that OS-9 works fine with the Radio Shack supplied Disk Controller Chip, but NOT with the standard WD Chip. Also, the RDC-1 is designed to use either an F & D ROM (FADBUG-C, \$25.00), OR the standard Radio Shack Disk BASIC ROM (about \$35.00, depending on your source). So far, we are EXTREMELY pleased with this Color Computer Disk Controller.

'This Month'

It is the "Nature of the Beast" that MOST Color Computer Owners are NEW Computer Users, and therefore have MANY questions about much of the 'stuff' that many of us consider to be 'Old Hat'. Yet, there is also a HIGH percentage of CoCo Owners that are 'mature" Computer Users; who understand Disk Systems, Assembly Language Programming, etc. With Color Micro Journal's thrust towards USABLE **INFORMATION** for the Color Computer User, we must provide a broad coverage

The large majority of CoCo Owners have, and are fairly familiar with, the Tape System and its operation, but the Disk Systems open up a whole new can of worms. We have an Article this month that should help those considering the purchase of a Disk System by answering some basic questions about Disk

For the BASIC Users, we offer a "Lander" type of Game for the 4K Owners, and a Small Business Bookkeeping System for the Tape Users. Finally, we have the first part of an Assembly Language "Linking Loader" System which can be Assembled for

SUPER SALE ON

NEW DISK DRIVES As low as \$199.00 with Power Supply and Case

Plus 6 Month Warranty

| Even more Savings!! | |
|--|---------------------|
| Color Computer Controller | \$139.95 |
| Color Computer Disk Drive Kit | \$349.95 |
| Diskettes | from \$19.95 |
| Disk Drive Head Cleaning Kits | \$Call |
| Disk Drives Cleaned & Aligned & Tested | \$29.95 |
| Case And Power Supply | |
| Single drive | \$49.95 |
| Dual drive | \$79.95 |
| Unadvertized Specials | \$Call |

Call us today!! (617) 234-7047

| We welcome | Visa/MasterCharge | | |
|------------|--------------------------------------|-----|--|
| | •Checks (allow 2 weeks for clearing) | | |
| | •C.O.D. (add \$2.00 per shipment) | | |
| | Shipping: Please call for amount. | • . | |

TRS-80 trademark Tandy Corporation



TRUE DATA PRODUCTS

195 Linwood Street, P.O. Box 546

Linwood, Massachusetts 01525

(617) 234-7047

We are receiving more and more requests for "Hardware" INFORMATION and PROJECTS; Basic Digital Electronics, information on the "innards" of the CoCo such as the SAM Chip, PIAs, VDG, A/D and D/A conversions, the Memory Chips and Addressing Methods, Video Systems, Disk Controllers and Chips, etc. We also see a lot of interest for information about "adding more capability" to the Color Computer, such as a Hard Disk Interface, ACIA's, R-G-B conversions, etc. How about some of you "Hardware Hackers" giving us a call, or drop us a note. We are also receiving a lot of requests for "basic information"; BASIC Programs for 4K systems, Methods for using the Tape System for File Storage and Retrieval, etc., etc., etc.

CoCo POWER . . .

Some of us have been "preaching" about the power of the Radio Shack TRS-80C Color Computer since it first hit the streets, because we KNOW the capabilities of the 6809 CPU that resides under the cover of this Computer. While the Z80 Series CPU Chips are very good devices, they have been "out-dated" by what has been learned during the last 10 to 15 years of USING Microcomputers, and by the progression of Programming Methods over this same period of time. In the vast majority of cases, the Z80 has been strapped to the CPM Disk Operating System, which STILL restricts the Z80 to the old 8080 Instruction Sub-set, which makes NO use of some of the Z80's more powerful capabilities.

One of the most illuminating comparisons between the two CPU Chips can be found in the Operating Systems available for them. While probably 90% of the Assembly Language Programmers in the US has been working with the 280 for better than 10 years, they are JUST NOW beginning to develop Multi-User, Multi-Tasking Operating Systems for that CPU (such as Oasis, Isis, Zenix, etc.). Less than a year after the 6809 hit the market, there were TWO good Multi-User, Multi-Tasking Operating Systems available for the it; OS-9 and UniFLEX. Now, as I am sure most of you are aware, OS-9 is running on the Color Computer.

Another indication of the power of the Color Computer is the number of them purchased by "Technical" people; especially those in the Space Industry. From the Engineers through the "Technicians", the Color Computer appears to be their primary choice.

While it is extremely powerful, it also has some limitations. The biggest limitation is the use of Software in providing the Serial Output and Keyboard Interface. This really shows up with the OS-9 Operating System, which much prefers to be "doing its own thing" rather than having to look through rows and columns for a key from the Keyboard, or "punch bits" through a PIA to provide a Serial Output. Even with this limitation, OS-9 still provides more inherent power in an Operating System than is available for any other Home Computer, and most Business Computers.

Overall, the Color Computer provides more **Power for the Dollar** than <u>ANY</u> other Computer available; Home or Business, Micro or Mainframe. No, the Color Computer will not replace the Business Computers, small or otherwise.



The Color Computer's slot in the "scheme of things" is in the area of EDUCATION.

The first area of learning that the Color Computer fills is that of "Personal Computer Education". EVERYONE knows that "Computers" are the "wave of the future". They are appearing EVERYWHERE: on the job, in the home, in college; in household appliances, in cars, in the grocery store cashiers line, at the 'instant banker' location, in the drug store, in the auto repair shop, etc., etc. "John Doe" buys a "Personal Computer" just to keep from being left behind in the world he lives in. For around \$300, he can begin to "learn about Computers", and for less than \$2000 total, spread over a period of time, he can have a Computer System that provides an introduction to the use and operation of some of the most sophisticated and powerful Operating Systems in the World, along with the availability of equally powerful Programming Tools.

The other area of EDUCATION which can be fulfilled by the Color Computer is that of "Formal Education"; i.e., in the Schools. Here, even more than in the Home, COST is a major consideration. Again, the Color Computer is "untouchable" as far as capability versus cost is concerned. In the lower Grades, the combination of Color and Sound provides maximum attention span, and is EASY to Program on the CoCo. In the later Grades, the Color Computer provides the Advanced Operating Systems and Programming Languages that can allow a student to move into a College Situation and concentrate on CONCEPTS, rather than learning "how to use the Computer".

The major hold-up in the Color Computers emergence as a MAJOR Educational Tool is the shortage of GOOD Software. If you look at the emergence of Software for the comparable Computer Systems (i.e., Atari, Apple, Commodore - the little TI is not even in the same league), you will see that the first 'thrust' of the Software was towards Games. This happens for a couple of reasons: first, that is the "quick buck" Market and provides both the Computer Programmer and Computer User a means of becoming familiar with the machine; and, second, it allows Programmers to develop techniques and skills to be used as a basis for writing good 'Working' Software. We are now beginning to see some results from these experiences in some of the CoCo Software. All of this Software is applicable to the "Computer Education" area; i.e., the Computer User uses it to learn more about HIS Computer, and Computers in general.

The REAL lack of GOOD Software in is the "Formal Education" area. There are a few good programs, mostly in the

below 7 year old area, but there the Software dies. Not only is this area weak on the Color Computer, but it is no better with ANY of the small Computers. The problem in not so much that the Software in not available; it is that the BASIC CONCEPTS are wrong! The use of the Computer in Formal Education requires DIFFERENT methods and concepts than the old, established, "book learning" methods. New techniques for instruction are required, along with new classroom concepts, different teaching methods, etc. How many of your childrens' Color Micro Journal schools "Have a Computer"?? Well, how many USE JUST ONE TYPEWRITER for a typing class? See what I mean. Not only that, but most school administrators can not even grasp the concept that a Program for an Apple will not run on a Color Computer. After all, a Computer is a Computer. Right?

Even though there is a REAL need for a MAJOR OVERHAUL in the Educational System, and the Computer appears to provide MANY of the answers, it will take a long time to overcome the inertia of the "present system". Most of you reading this can begin to make some inroads in these areas through work with School Groups, such as the PTA, by offering your "expertise", and RECOMMENDING the Radio Shack Color Computer. You can put a half dozen CoCos in a classroom for ONE Apple, and give up WHAT? Sure, there is a lot of Software for the Apple, but is it any better than the little bit avaliable for the CoCo? NO! In fact, as I mentioned earlier, there is very little VALID Software available for ANY of the computers. Most of the Computers in a School are used either to keep kids "out of the way", or as a "candy bar" for doing something right. VERY SELDOM is a Personal Computer put to any good use in a School. Think about YOUR situation, and let us know YOUR thoughts on the matter.

We will pursue this matter as time goes on. Again, let us know your thinking, whether you are a Parent, a Software Developer, a Teacher, or what ever; LETS HEAR FROM YOU!

--- RLN, Editor ----

GRAPHIC LETTERS

Here is a useful utility, LETTERS, that I wish you to consider for possible publication. I am 15 years old and I have owned my Color Computer for two and half years. I enjoy using the graphic and sound capabilities of the Color Computer, and I have written LETTERS to be an aid in doing so.

LETTERS is designed to provide text symbols on the graphic screen without the time-consuming chore of drawing each individual one. It is not designed to replace the text screen, but to make it easier to use labels and prompts for your hi-res games and graphic displays.

I have included in **LETTERS** almost all of the Keyboard Symbols available. The 26 letters correspond to a variable named the same as the letter. For example: to draw the letter 'A'

| x (TIMES) DIVISION SIGN = ! # \$; % () | MULT\$ DIVI\$ EQUAL\$ EXCLAIM\$ QUOTE\$ NUMBER\$ DOLLAR\$ APOS\$ PRCENT\$ LPAREN\$ RPAREN\$ DASH\$ |
|---|---|
| / < ; ; UP ARROW UNDERLINE SPACE | COMMAŞ SLASHŞ LTHANŞ GTHAN SEMIŞ CLON QMARKŞ ARROWŞ ULINEŞ PERIODŞ SPŞ |

If you wanted to draw something on the graphic screen, here is an example of what you would enter:

10 PMODE 4:PCLS:SCREEN 1,1

20 DRAW "BM0, 100"+LL\$+EE\$+TT\$+TT \$+EE\$+RR\$+SS\$+SP\$+SP\$ 30 DRAW A\$+DASH\$+ZZ\$+SP\$+N\$(1)+D ASH\$+N\$(9) 40 GOTO 40

The result the graphic screen would look like this:

LETTERS A-Z 1-9

Here is a description of each line:

LINE 10: Sets the pmode, clears the graphic screen and sets the color mode. These can be whatever you want them to be. Of course, the symbols look best in PMODE 4, since it is the highest resolution. LINE 20: Starts to DRAW at location 0, 100 on the graphic screen. The 0 is the horizontal coordinate, and 100 is the vertical coordinate. These can also be whatever you wish. Then it draws the word LETTERS and two spaces following it.

LINE 30: Draws the letters 'A-Z' and the numbers '1-9'

LINE 40: It keeps going back to itself, and it will keep the program in an endless loop to keep the graphics on the screen. It can be stopped by pressing the BREAK Key.

Be sure that there are no variables in your program that have the same variable names as the ones used in LETTERS. This will cause undesired results in your program. I have used double variables such as BB\$ and ZZ\$ to keep them from getting confused from variables such as B\$ and Z\$. On the longer variable names, such as EQUAL\$, the computer only uses the first two letters - EQ\$, so be sure no other variables in your program have even the first 2 letters of a variable the same. If you want to use shortened variables, that will work fine; I have used longer variables to keep the program organized.

Use LETTERS as a subroutine at the end of you program. The first or second line of your program should GOSUB to that routine and then RETURN. All the variables will be defined, and you will not need to go back to that routine again.

I hope LETTERS will make it easier to provide text on the graphic screen. Many times I have avoided putting text in my graphic programs because it was too difficult. It is now much easier with this utility. This program can be modified to suit you needs, or used as

| SUPER SLEUTH DISASSEMBLER | Each \$99-FLEX |
|---|----------------|
| (specify for 680x/6502 or for Z80/8080/5) | \$101.05/9 |
| Object-Only Version (680x/6502) For Color FLEX or OS/9 | \$50.00 |
| CoCo Sleuth | \$49.00 |
| CROSS-ASSEMBLERS | Each \$50-FLEX |
| (specify for 6800/1.6805, 6502.280, or 8080/5) | \$55-08/9 |
| DEBUGGING SIMULATORS | Each \$75-FLEX |
| (specify for 6805 or 6502) | \$100-05/9 |
| 6502-TO-6809 ASSEMBLER XLATOR | \$75-FLEX |
| | \$85-05/9 |
| 6800-9 & 6809 PIC XLATORS | Both \$50-FLEX |
| the second se | \$75-08/9 |
| FULL SCREEN TSC XBASIC PROGR | AMS FOR FLEX |
| (with full cursor control) | |
| MAILING LIST | \$100 |
| INVENTORY/MRP | \$100 |
| TABULA RASA SPREADSHEET | \$100 |

type DRAW AAS. The letter 'X' would be XXS.

The numbers are drawn in a different way. For example: to draw the number '5' type **DRAW N\$(5)**. The N stands for number and the number in parenthesis is the number you want to draw. The numbers range from Ø to 9. To draw a larger number such as '29' type **DRAW N\$(2)+N\$(9)**.

Here is a list of symbols that have more than one letter for a variable.

| + | PLUS\$ |
|---|---------|
| - | MINUS\$ |

Color Micro Journal

XBASIC/XPC UTILITIES

(reseq, xref, xpc sort gen)

All \$25

Computer Systems Consultants, Inc. 1454 Latta Lane Conyers, Georgia 30207 404-483-1717/4570

Programs in source on 5"/8" disk. Detailed printed manuals provided. Call for catalog or dealer information.

VISA and MASTER CARD accepted. US Funds Only Add 5% Shipping

"FLEX is a trademark of Technical Systems Consultants "OS9 is a trademark of Microware



| | 20 amp POWER SUPPLY w/fan w/Disk protect relay 350.00 400.00 DISK CABINET w/regs. & cables less DRIVES 200.00 250.00 WOTHER BOARD, & SS-50c, & SS-30c NWI button 225.00 325.00 | |
|--|---|--|
| | ItemBareKITAATIT3- INTERRUPT TIMER 1, 10, 100 per sec. 19.9529.9539.95PB4- INTELLIGENT POBET BUFFER Single board comput.39.95114.95139.95DPIA- Dual PIA parallel port 4 buffered I/Oe24.9569.9589.95MADE- Extended Addressing BAUD gen. PIA port 29.9569.9589.95MB8- MOTHER BOARD 85-50c w/KAUD gen.64.95149.95199.95P168168% PROM DISK 21, 2764 EPROMe39.9579.95109.95PD88- MOTHER BOARD 85-50c w/KAUD gen.64.95149.95199.95P168168% PROM DISK 21, 2764 EPROMe39.9579.95109.95P16821.8764 EPROMe 2716 BURNER39.9584.95114.95IMPR2716 BURNER 2764 PROM BURNER 19.9519.95Color Computer | |
| 11931 W. Bluemound Road MILWAUKEE, WIS. 53226 (414) 257 - 0300 | Wise for FREE Catalog ADD \$3.00 S&H PER ORDER WIS. ADD 5% SALES TAX | |
| | | |

COMPUTER Color Computer

SS-50C

2420 QUOTES="BR3BRBU4U2BR2D2BR2B

CORN SYSTEMS

6"

2 · AMMARCH

Stackable Modules

50 CLEAR 1000 60 DIMN\$(15) 7Ø GOSUB 2080 710 '***DRAW TITLE SCREEN*** 720 PMODE4, 1: PCLS: SCREEN1, 1 73Ø GOSUB82Ø:GOSUB94Ø 74Ø SCREEN1, Ø: GOSUB94Ø 750 PMODE3, 1: PCLS: SCREEN1, 1 76Ø GOSUB82Ø:GOSUB94Ø 77Ø SCREEN1,Ø:GOSUB94Ø 780 PMODE1,1:PCLS:SCREEN1,1 79Ø GOSUB82Ø:GOSUB94Ø 800 SCREEN1,0 810 GOSUB940:GOTO720 820 DRAW"BM40, 40S12"+LL\$+EE\$+TT\$ +TT\$+EE\$+RR\$+SS\$ 830 DRAW "BM44,40"+UL\$+UL\$+UL\$+U L\$+UL\$+UL\$ 840 DRAW"BM102,65S8"+BB\$+YY\$ 850 DRAW"BM35, 90"+PP\$+EE\$+TT\$+EE \$+RR\$+SP\$+SS\$+TT\$+UU\$+MM\$+PP\$+FF 860 DRAW"BM0, 120"+AA\$+BB\$+CC\$+DD \$+EE\$+FF\$+GG\$+HH\$+II\$+JJ\$+KK\$+LL \$+MMS 870 DRAW NN\$+00\$+PP\$+QQ\$+RR\$ 880 DRAW"BM0, 140"+SS\$+TT\$+UU\$+VV \$+#W\$+XX\$+YY\$+ZZ\$ 890 DRAW EX\$+QU\$+NU\$+DO\$+PR\$+AP\$ +LP\$+RP\$+EQ\$+DA\$ 900 DRAW"BM54, 160"+AR\$+PL\$+SE\$+C L\$+LT\$+GT\$+CO\$+PE\$+QM\$+SL\$ 910 DRAW"BM50, 180"+N\$(1)+N\$(2)+N

(3)+NS(4)+NS(5)+NS(6)+NS(7)

920 DRAW N\$(8)+N\$(9)+N\$(0)

26

a sub-routine in your programs; even

ones you wish to copyright. I just ask

that you simply mention in REM

statements, or in you title screen,

where you took it from (this is

standard procedure for any Published

information - Editor). I hope you

LETTERS

BY PETER STUMPF

enjoy LETTERS

10 '***

20 '***

940 FORX=1T01000:NEXT 950 RETURN 2070 '***INITILIZE LETTERS*** 2080 SP\$="BR9" 2090 AA\$="BR3U4E2F2D2L4R4D2" 2100 BB\$="BR3R3L3U6R3FDGL3R3FDGB R" 2110 CC\$="BR3BUFR3L3HU4ER3BD6" 2120 DD\$="BR3R3L3U6R3FD4GBR" 2130 EE\$="BR3R4L4U3R3L3U3R4BD6" 214Ø FF\$="BR3U3R3L3U3R4BD6BL" 2150 GG\$="BR3BUFR2EUHLBL2D2U4ER3 BRBD6" 2160 HH\$="BR3U6D3R4U3D6" 217Ø II\$="BR3R4L2U6L2R4BD6" 218Ø JJ\$="BR3BUFR2EU5BD6" 219Ø KK\$="BR3U6D3RE3G3F3" 2200 LL\$="BR3BU6D6R4BL" 2210 MM\$="BR3U6F2E2D6" 2220 NN\$="BR3U6DF2F2DU6BD6" 223Ø OO\$="BR3BUU4ER2FD4GL2HFBR3" 224Ø PP\$="BR3U6R3FDGL2BD3BR3" 225Ø QQ\$="BR3BUU4ER2FD4GL2HFR2EH F2BL" 226Ø RR\$="BR3U6R3FDGL3R2F2D" 227Ø SS\$="BR3BUFR2EUHL2HUER2FBD5 228Ø TT\$="BR3BU6R4L2D6BR2 229Ø UU\$="BR3BU6D5FR2EU5BD6" 2300 VV\$="BR3BU6D2FD2FEU2EU2BD6" 231Ø WW\$="BR3BU6D6E2F2U6BD6" 2320 XX\$="BR3UE4UBL4DF4D" 2330 YY\$="BR3BU5UDF2E2UDG2D3BR" 234Ø ZZS="BR3BU6R4DG4D1R4 2350 '**INITILIZE OTHER SYMBOLS* 236Ø PLUS\$="BR5BUU4D2L2R4BRBD3" 237Ø MINUS\$="BR5BU3R4BD3" 2380 MULT\$="BR5BUE3BL3F3BLBDBR2" 239Ø DIVI\$="BR5BU3R4L2BUUBD3DBR2 BD1" 2400 EQUALS="BR5BU3R4BUL4R4BD4" 2410 EXCLAIMS="BR3BR2UBU2U4BR2BD

930 RETURN

Peter Stumpf

D5 2710 RETURN

2690 N\$(9)="BR3BU1F1R2E1U4H1L2G1 D1F1R3BD3" 2700 N\$(0)="BR3BUFR2EU4HL2GD4E4B

EIT

ANT

Color Micro Journal

267Ø N\$(7)="BR3U1E3U2L4D1BD5BR3 268Ø NS(8)="BR3BR1R2E1U1H1L2G1D1 F1H1U1E1H1U1E1R2F1D1G1F1D1BD1"

U2R4BD6" 266Ø N\$(6)="BR2BUFR2EUHL2GDU4ER2 FBD5"

E1U1H1L2G1BD5BR4" 2640 N\$(4)="BR6U6G3R4BD3" 2650 N\$(5)="BR3BU1F1R2E1U1H1L2H1

2G1BD5BR4" 263Ø N\$(3)="BR3BU1F1R2E1U1H1L1R1

2620 N\$(2)="BR3R4L4U2E1R2E1U1H1L

259Ø ULINE\$="BRØBD1R8BU1 2600 '***INITIALIZE NUMBERS*** 261Ø N\$(1)="BR3BR2R4L2U6G2BD4BR3

D5BR4" 258Ø ARROW\$="BR3BR2U6G2R4H2BD6BR 2"

256Ø SEMI\$="BR3EUBUUBD4BR2" 257Ø QMARK\$="BR3BR2UBUU2REUHL2GB

2550 CLON\$="BR3BRBUUBUUBD4BR2"

254Ø GTHAN\$="BR3BR4BU3G3E3H3BD6B R4"

2530 LTHAN\$="BR3BU3F3H3E3BD6BR"

2520 SLASH\$="BR3UEU2EUBD6

2510 PERIOD\$="BR3UDBR4"

2500 COMMA\$="BR3BRUDGBR3"

249Ø DASH\$="BR3BU3R4BD3"

2480 RPAREN\$="BR5EU4HBR2BD6

2470 LPAREN\$="BR5BUHU4EBR2BD6

246Ø APOS\$="BR3BRBU6UDGBR3BD5"

2450 PRCENT\$="BR3BU6DRUBR3G5BR3U RDBRBD"

D6BR3BD"

U2R4BD5BR2" 2440 DOLLARS="BRBU2R4U2L4U2R4L2U

D6" 2430 NUMBER\$="BR3BU2U4BR2D4URL4B

COLOR TUTOR REVIEW

Elite Software Box 11224 Pittsburg, PA 15238 16K Ext. BASIC Tape - \$19.95; Disk - 22.95

Learning is not a gift. Learning is a habit of employing certain skills necessary to retain information. Students who appear to have an easy time mastering their studies will tell you that the secret is having good study habits (SKILLS). Time spent by students with good study habits is well used time. Many students complain that the material or subject of study was very hard to learn, even after hours of trying to learn it. On the other hand some students will report that had they no unusual complications of learning their subject even when they spent much less time at study. Spending twenty minutes to study (employing good study habits) will allow a student to follow the material and retain it better than a student (who has not developed good study habits) who has spent two hours studying.

COLOR TUTOR by JOHN WACLO is not going to give a person good study skills overnight, but it will guide a person through a subject matter in a uniform manner that will will begin to pay dividends from the very start. Using COLOR TUTOR is easy and repetitive. COLOR TUTOR provides a skeletal structure by which study material can be entered into a computer, edited, and saved on either disk or tape (depending on which version you need). I will restrict my remarks to the Disk Version, although the Tape Version is exactly the same.

Once you have inserted your COLOR TUTOR disk into the machine and powered up, merely type:

RUN TUTOR

A menu will appear on the screen as follows:

- 1. TYPE NEW LESSON
- 2. LOAD LESSON FROM DISK
- 3. EDIT LESSON FROM DISK
- 4. SAVE LESSON ON DISK
- 5. STUDY LESSON
- 6. EXIT LESSON

When selecting #1, you will be prompted with:

HOW MANY QUESTIONS DO YOU HAVE?

At this time you enter the number of questions you desire (a maximum of 50 questions are allowed for one lesson). This will be followed by:

TYPE QUESTION 1:

A question mark is automatically entered for you after each question is typed. After typing in the question, you will be asked to type in the answer to question #1. This will continue until you have typed in the pre-selected number of questions and answers. If a 16K machine is being used, restriction to 32 characters (64 on 32K machines) for each question is recommended. The program then returns to the main menu.

If a person has already entered a list of questions and answers, then selecting #2 will call that data in from the disk by asking for the:

FILENAME

Once the data has been loaded into memory, the main menu will reappear for you to make a selection.

longer than 8 characters, and with the disk version a 3 character extension can be added to the filename. Pressing "ENTER" will then save the lesson on disk and return to the main menu.

Finally, when you are ready to study the lesson, selection #5 is entered. The questions will be randomized. You will be asked if you want all spelling checked? If you answer Y, then the answer must match exactly with the answer stored in memory. Selecting N will count an answer correct if the first three characters match. Upon completion of this section, you will be asked if you wish to go through the questions again; if not, you are returned to the main menu.

COLOR TUTOR is a great program for students. COLOR TUTOR aids in subjects like Language, Sciences, Social Studies, History, Math and Vocabulary drills. COLOR TUTOR can be utilized by students from the third grade all the way to college students. This program receives my grade of "A". To have the ability to recall any lesson at any time is a feature of great value to any COLOR TUTOR allows a student to student. save lessons that can be reviewed again later to brush-up on certain subjects before test time. COLOR TUTOR is flexible and versatile (well worth the money). COLOR TUTOR helps students begin to develop good study habits by helping them to learn how ask the right questions, and will reinforce their memory by randomly requiring the proper answer to each question. COLOR TUTOR requires a student to concentrate on the study material before him. COLOR TUTOR is truly a self-educational program. If you have a student in your family, or are yourself a student, this program is a must.

I have had a hard time using the word student throughout this review. I keep thinking about teachers. How can this program help Teachers? While this program is well done, I will be discussing the possibility of adding one more feature to COLOR TUTOR with John. An option to allow the questions and answers to be sent to a printer would make COLOR TUTOR one of the most well-rounded pieces of educational software available on the market. COLOR TUTOR is already powerful, versatile and useful. The inclusion of a print feature would open an additional world of potential users. Imagine what a print option could do for a teacher's lesson planning and test preparation.

Larry E. Williams

INTERNATIONAL COLOR COMPUTER CLUB, INC. Main Office 2101 E. Main St., Henderson, TX 75652 Canadian Branch P.O. Box 7498, Saskatoon, SK S7K-4L4

Book & Program's Library 119 County Fair, Houston, TX 77060 Voice Line (214) 657-7834 *

Parts Library P.O. Box 1220, Henderson, TX 75653 BBS Line (214) 657-8147

World's Largest Color Computer Club

Dear Sir(s):

Thanks for writing.


The International Color Computer Club, Inc. was formed to help people get to know the Color Computer and how it operates, to make available to it's members all the information about the Color Computer that we can find, including information which Radio Shack isn't willing to give you. To make programs and parts available so you may extend your library and so that if your computer ever breaks, you will have the parts to repair it without waising to go through "Official" Radio Shack channels. The parts library is located at P.O. Box 1220, Henderson, TX.

SOME BASIC BASICS ABOUT DISK SYSTEMS

Answers to BEGINNERS Questions about Disk Systems

After purchasing the computer, the next big decision facing the Computer Owner is whether or not to go into Disk Operations. CoCo owners will probably spend more on the first Disk Drive than the computer cost originally. Of course, you can put some pretty big money into Software, but even then the question looms as to whether you should get an expensive piece of software for a Cassette System with the possibility of obsoleting it if you get a Disk System. When you are first considering the purchase of a Disk System, there are a multitude of questions that need answering. This article is aimed at providing some of the answers.

You may wonder why you should even consider going to Disk. True, Tape works fine with small programs, small data files, etc. But, when you start getting into more serious applications, you are usually dealing with large, sophisticated programs which do not fit into memory. These programs can be

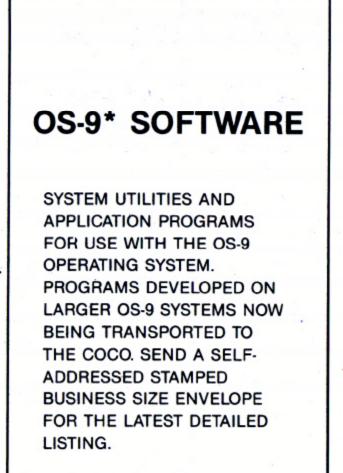

If the need arises to change a question or answer because of a typographical error, using #3 (EDIT LESSON MATERIAL) will ask which question or answer you want to change, by number. A nice feature to this program is that when selecting #3, a password must be entered. This keeps unauthorized editing of a lesson to a minimum. Options for continuation of editing or returning to the main menu are given after each question is edited.

To save a lesson on disk, you would Belect #4 (SAVE LESSON ON DISK), which will ask you for a filename for the lesson to be Baved. The filename selected can not be

Color Micro Journal

with problems alt to learn, and the club is a place you can turn to with problems you might have in writing a program or adapting a piece of hardware to it. We can-not solve all problems, but with hundreds of other members "worldwide" with expertise in every ect of the Color Computer, we can solve most of them.

We also want to save our members MONEY. We receive discounts from 10% to 40% from some of the major suppliers of software and hardware for the Color Computer. In addition, we try to make available all the catalogs and program lists from the larger software suppliers, as many have lots of programs, (too many) and just can't advertise them all. You will find several of these in th new member kit.

We publish a bi-monthly newsletter larger than some "magazines" running from 56 to 8 the average, in which we try to keep you up to date on all the latest events within the club, the latest items to be voted on, the newest findings on the 80-C (CoCo) and several programs which we hope you will find useful or entertaining

New subscribers receive a new member kit, which contains a tape of programs, a tape caddy, data on the 80-C and many other goodies.

The club maintains a library of books. ROMpacks (R.S. only), and MEMBER WRITTEN programs (in Houston, TX) which you may check out (books and ROMpacks) for up to 3 weeks at a time. The programs contained in the library are FREE and do not have to be returned, however, you mus send 52,00 to the library for the cost of the tage and the postage. There is is programs per tage (called packages) and are mixed in a variety for your convenien

Members may buy/stil/trade with an ad in the newsletter, FREE! (classified style up to ¼ page). A display ad will be charged at the standard rate, less 25% to members. The only conditions for the ads are that they must not be offensive and they must be computer related.

I hope you have found this letter informative and decide to join our club. We would really like to have you. I am sure that you will find the benefits of the club worthwhi

Thanks again for your interest.

Sincerely.

President

* Temporary until a new phone line is installed.



D.P. Johnson 7655 S.W. Cedarcrest St. Portland, OR 97223

OS-9 is a trademark of Microware and Motorola Inc.

27

PRNTDUMP BASIC

by Jeff Euton

Here's a short Extended Basic Program for the CoCo that might be of interest to other CoCo fans. The routine converts CoCo PMODE3 Graphics Memory to serial data in a format compatible with the Integral Data Systems IDS440 Paper Tiger Printer for bit-mapped black & white hard copy. Since Dataproducts Corp. just acquired IDS, we should continue to see Paper Tigers around for a while.

The program allows the operator to select which colors get printed as black, (and which colors get printed as white) by entry of values for each of the 4 possible colors of PMODE3 (CO-C3). For example, with a PMODE3 screen in Color Set Ø, we could print yellow, red and blue as black (with the green background printed as white) by selecting CØ=4, Cl=1, C2=2, C3=3. The non-printing (white) color code is thus set to a value >3, while the printable (black) color code(s) are set to their associated values. There's a little more explanation in the program display while the operator is prompted for the color code entries.

Other Points Of Interest

- Line 16 Color and Screen Statements can be changed as required
- * Line 18 serial printer bit-rate can be changed as required



16K Cassette - \$19.95 / 32K Cassette - \$24.95 / 32K Disk - \$26.95

- * Line 30 defaults to Disk System Graphics Page 1 starting at \$0E00; this can be changed to \$0600 for non-Disk Systems
- * Line 65 'vitamin' Poke can be removed for systems that can't handle it
- * Algorithm could be modified for PMODE4 by changing the horizontal screen resolution (lines 50-110) and the printer horiz resolution (lines 260-300)
- * The extended basic routine is pretty slow (be patient), maybe a machine code equivalent someday...

2 'COCOTIGR.BAS COCO GRAPHICS P RINT DRIVER FOR IDS PAPER TIGER PRINTER 3 CLS: PRINT"COCO-TIGER GRAPHICS

PRINT DRIVER": PRINT" COPYRIGH T 1983 JEFF EUTON ": PRINT: PRINT" COLOR CODES Ø-3": PRINT"GRN YEL B LU RED/BUF CYN

MAG ORG": PRINT

4 PRINT"ENTER CORRESPONDING VALU ES FOR COLOR CODES TO BE PRINTED (CØ=Ø, C1=1, C2=2, C3=3) ELSE

- VALUE >3 FOR NON-PRINT COLORS" 6 INPUT"CØ = ";CØ 8 INPUT"C1 = ";C1
- 10 INPUT"C2 = ";C2
- 12 INPUT"C3 = ";C3

16 PMODE3, 1: COLOR1, 2: SCREEN1, Ø ' LET'S SEE WHAT WE'RE PRINTING 18 POKE 150, 41 '1200 BAUD RS232

18 FORE 150,41 1200 BAOD RS232 PRINTER 20 PRINT#-2,CHR\$(3); ' GRAPHICS

MODE

30 M=&H0E00 'START OF GRAPHICS M EM (WITH DISK

40 FOR V=1 TO 32 '192 VERT LINES OF 6 LINES/SET

50 FOR H=1 TO 32 '128 HORZ BYTES OF 4 DIBITS/BYTE

60 FOR DIBIT=1 TO 4 '4 DIBITS PE R BYTE

65 POKE 65495,Ø 'SPEEDUP

70 IF DIBIT=1 THEN MASK=&HC0 'MS B DIBIT


90 IF DIBIT=2 THEN MASK=&H30 'NS B DIBIT

100 IF DIBIT=3 THEN MASK=&HOC 'N SB DIBIT

110 IF DIBIT=4 THEN MASK=&H03 'L SB DIBIT

120 D=0 'START WITH NULL PRINTER DATA BYTE

130 B=PEEK(M): B=B AND MASK 'MASK OUT ALL BUT CURRENT DIBIT

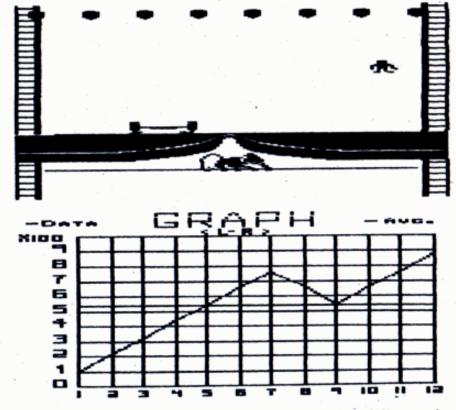

135 GOSUB 1000 'SELECT PRINTABLE COLOR(S) 140 IF P=1 THEN D=D OR 1 'SET PR INTER DATA BIT IF REQ'D 150 B=PEEK(M+32): B=B AND MASK 'G ET DIBIT FROM NXT VERT LINE 155 GOSUB 1000 'SELECT PRINTABLE COLORS 160 IF P=1 THEN D=D OR 2 'SET NX T PRINT DATA BIT IF REQ'D 170 B=PEEK(M+64):B=B AND MASK 175 GOSUB 1000 180 IF P=1 THEN D=D OR 4 190 B=PEEK(M+96):B=B AND MASK 195 GOSUB 1000 200 IF P=1 THEN D=D OR 8 210 B=PEEK(M+128):B=B AND MASK 215 GOSUB 1000 220 IF P=1 THEN D=D OR &H10 230 B=PEEK(M+160):B=B AND MASK ' RETAIN DIBIT FROM 6TH VERT LINE 235 GOSUB 1000 'SELECT PRINTABLE COLOR(S) 240 IF P=1 THEN D=D OR &H20 'SET HI-ORDER PRINT DATA BIT IF REQ' 250 NOTE THAT IDS PRINTER DOESN 'T USE 2 HI-BITS OF 8-BIT CHAR 255 POKE 65494,0 'NORMAL SPEED F OR PRINTING 260 PRINT#-2, CHR\$(D); CHR\$(D); 'P MODE 3=HALF HORIZ RESOLUTION 265 IF D=3 THEN PRINT#-2, CHR\$(3) CHR\$(3); 'DBBL ETX 'CAUSE IDS D ROPS 1 270 NEXT DIBIT 'PROCEED TO NXT 2 BITS OF SAME BYTE 280 M=M+1 'NEXT HORIZ BYTE OF 4 DIBITS 290 NEXT H 'NEXT MEM LOCATION 300 PRINT#-2, CHR\$(3); CHR\$(&HB); 'ETX, VT=PRINT GRAFX LINE 310 M=M+160 'NEXT VERT SET OF 6 LINES 320 NEXT V 'BMP MEM POINTER 6 LI NES (32 BYTES/LINE) 330 PRINT#-2, CHR\$(3); CHR\$(2); CHR \$(&HC) ' EXIT GRAPHICS, FF, CR // 340 STOP 1000 P=0:IF DIBIT=4 THEN IF B=C0 OR B=C1 OR B=C2 OR B=C3 THEN P= 1 1010 IF DIBIT=3 THEN A=B/4:IF A= CØ OR A=C1 OR A=C2 OR A=C3 THEN P=1 1020 IF DIBIT=2 THEN A=B/16:IF A =CØ OR A=C1 OR A=C2 OR A=C3 THEN P=1 1030 IF DIBIT=1 THEN A=B/64:IF A =CØ OR A=C1 OR A=C2 OR A=C3 THEN P=1 1040 RETURN 'SHIFT DIBITS TO LSB & CHK SELECTED COLOR(S)




28

CoCo HEADQUARTERS Looking to unlock the capacity of your Color Computer? Search no more

TOLL FREE 1-800-251-5008



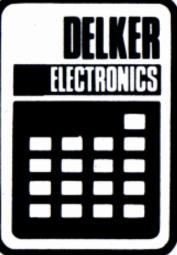



SPECIALS

| 1.1 Extended Basic w/bk | \$ 69.95 | 26-3026 Color Computer 2 16k | \$ 149.95 |
|-------------------------|-----------|---------------------------------|-----------|
| 64k Memory Upgrade | \$ 59.95 | 26-3026E Extended CoCo 2 16k | \$ 224.95 |
| RS 1.1 Disk Controller | \$ 149.95 | 26-3003 64k Extended CoCo | \$ 329.95 |
| 1.2 Color Basic Rom | \$ 29.95 | 26-3011 MC-10 CoCo | \$ CALL |
| Amdek Disk Drives | \$ 499.95 | 26-1261 TP-10 Thermal Printer | \$ 89.95 |
| 26-3022 CoCo Drive 0 | \$ 349.95 | 26-1192 CGP-115 Printer/Plotter | \$ 179.95 |
| 26-3029 CoCo 2 Drive 0 | \$ 349.95 | C. Itoh Banana Seríal 50 cps | \$ 249.95 |
| 26-3023 Drive 1 | \$ 239.95 | C. Itoh Prowriter 8510 (par) | \$ 399.95 |
| Super Pro Keyboard Kit | \$ 64.95 | 26-1268 CGP-220 Color Jet Ptr. | \$ 639.95 |
| 26-3016 RS Keyboard kit | \$ 34.95 | 26-3024 RS Multi-Pac Interface | \$ 149.95 |

ACCESSORIES

| RS D.C. Modem IB | \$ 89.95 | Elephant Disks ssdd 🛛 💲 | 22.95 |
|------------------------|------------|----------------------------|-------|
| Novation J-Cat Modem | \$ 129.95 | Verbatim Disks ssdd \$ | 27.95 |
| RS D.C. Modem II | \$ 179.95 | Kraft Joystick \$ | 39.95 |
| Hayes SM 300 Modem | \$ 239.95 | CoCo Switcher \$ | 39.95 |
| USR Password 300/1200 | \$ 449.95 | 26-3020 4 pin DIN cable \$ | 5.29 |
| Hayes/USR/Banana cable | s \$ 19.95 | Botek ser/par Interface \$ | 69.95 |

SOFTWARE & BOOKS

| OS-9 (req. 64k) | <pre>\$ 64.95 (Disk) Color Computer Graphics</pre> | \$ 5.95 |
|----------------------|--|-------------------|
| Basic-09 (req. OS-9) | \$ 89.95 (Disk) CoCo Assembly Prog. | \$ 6.95 |
| Color Logo | \$ 44.95 (Rom) CoCo Programs | \$ 9.95 |
| MSI Diskutil | \$ 19.95 (Disk) 101 CoCo Programs | \$ 9.95 |
| MSI Maillist | \$ 24.95 (Disk) Programming the 6809 | \$ 14.95 |
| MSI Color Finance | \$ 49.95 (Disk) Basic Faster and Better | \$ 29.95 |
| Elite-Calc | S 44.95 (C or D Pooyan by Konami (32k) | \$ 34.95 (C & D) |
| Colorcom/E | \$ 49.95 (Disk) Sea Dragon (32k) | \$ 34.95 (C or D) |
| ***** | ****** | **** |
| | | |

Call for prices and availability of your other favorite software

FREE TENNESSEE 1-800-545-2502

All of the above units covered by our 120 day carry in warranty.

TRS-80 Trademark Tandy Corporation. Prices subject to change without notice.

Write for our FREE newsletter!

All advertised items subject to availability Prices do not include shipping & handling 1-800-251-5008

FACTORY DIRECT PURE RADIO SHACK EQUIPMENT "THE COCO PROFESSIONALS"



DELKER ELECTRONICS, INC. P.O. BOX 897 DEPT D SMYRNA, TN 37167 800-251-5008 800-545-2502 (TENNESSEE) 615-459-2636 (TENNESSEE) 615-254-0088 (NASHVILLE)

Color Micro Journal

FREE

DISK QUESTIONS

arranged so that you call only the part you need at the moment into RAM from tape or disk. With a Tape System, this takes minutes, where with Disk, it takes only seconds. The same thing is true of data storage, only more so, because data files can become much larger than the programs that generate them.

Cassette Tapes must be searched sequentially - from one end to the other. Disks are accessed randomly the head will go to the proper place in a split second, and get or put the desired information. Also, Tapes read or write a LOT more slowly, even after the proper location is found. With Tape, you need to do a lot of manual shifting of the controls and cassettes. With Disk, most of this is automatic. And, the more sophisticated the Disk Operating System, the more automatic it is, and the more things you can do with it.

Some Questions and Answers

Let's say I have decided to buy a disk system. Do I understand correctly that I need a Controller Board and Software, as well as the Disk Drive (or Drives) to make up a Disk System?

Yes. The Controller plugs into the Cartridge Slot, and a cable goes from there out to the Drives. The Controller is normally only a Hardware item, but for the Color Computer, there is also Software in the controller; the DISK BASIC ROM.

DISK BASIC? Is that a replacement for BASIC?

No, it adds more capability to the BASIC that is already in the CoCo. You are using BASIC plus EXTENDED BASIC

COLOR COPY

COLCOPY is a menu driven copy utility that copies data files or programs: disk to tape, tape to disk or disk to disk. It also kills files or programs.

Many options are provided: copies basic programs, machine language programs or data files, allows selection by groups of filenames or extensions, individual files by menu selection, writes multiple copies of files to tape, backup a disk to tape, restore a disk from tape, copies files in alphabetic sequence and much more.

Written in basic with machine language subroutines. Includes program on cassette and instructions.

Requires 32K, DOS.

ONLY \$15pp

CASSETTE DIRECTORY

REVISED! Displays hex addresses to printer or screen. Still only \$2.50 or FREE with any product plus the DISK BASIC. Also, there are the Disk Commands in the DOS, or the Disk Operating System.

Is the RS Disk Controller the only one that works with the CoCo?

Not necessarily. There are a few others being advertised, but ANY Disk Controller you use must be Color Computer COMPATIBLE. The F & D Controller for the Color Computer looks GOOD. They supply a PC Board with a Gold Plated edge connector, which uses a new Timing Chip that eliminates any adjustments. They can supply some of the "special" parts, but you must be able to assemble and solder Digital Electronics to use this Controller (see Dec. CMJ for a full Review). So far, just about anything that uses the Color Computer is using the RS Disk Controller.

I understand that the Color Computer disk drives are 35 track. Will the controller actually handle 40 tracks?

The RS (Microsoft) software is written to only support 35 Track, Single Sided Disk Drives, but the controller itself will work with 40 tracks. In fact, the controller could care less. It has NOTHING to do with how many tracks. It is the Software that determines that. We have a routine in the Data Comp FLEX(tm) Conversion that would FORMAT a Disk with 255 tracks through the RS controller IF there were a drive that could read and write that many.

Will the controller work with both Single and Double Density?

Again, the controller will do either single or double density; it is the Software that determines which way it is to be done. For instance, in the FLEX(tm) System conversions for the CoCo, which uses the RS controller, you can use either Single or Double Density, where the RS system, using the same controller, is strictly Double Density. The Disk DRIVE must be high enough quality to work Double Density, though.

Of course, there are still some System around that use only Single density. What is the difference between Single and Double Density?

New technology has made it possible to build Controller Chips and Disk Drive Read/Write Heads that can handle the Data faster. This allows the Data to be written more compactly on the Disk Surface, providing about 90% more Data in the same amount of Disk space.

Then, whether I wanted to use the RS Disk System, or some other Disk Drives, I would need the RS Controller board?

As of right now, yes. And, if you get a 40 track drive, you can still use

on the Color Computer, but now you are looking at \$3000 or so and Hardware modifications to the Computer. The biggest problem is the Clock speed of the Color Computer; Radio Shack (actually, Microsoft) had to use some 'tricks' to get the Double Density on the 5 1/4" Systems (these 'tricks' cause a few problems for the CoCo OS-9, also).

How many disk drives will the RS controller handle?

It has four Drive Select lines, so it can control 4 Disk Drives. You can use four RS Drives or, with proper software, you can use one of the Drive Select Lines to select Sides on Double Sided Drives (the FLEX Conversions use the Drive 3 Select Line, since THAT line on the Color Computer Disk Controller is the Side Select line on most of the newer Disk Drives). (You can't get a RS Double Sided Drive for the Color Computer, but other Drives are available with both Double Sided and 40 or 80 Track capacities.) If you use that one Control line for Side Select, you can have only three drives, but, with two sides on each one, you get six Disk Surfaces compared to the maximum of four that is available from RS. Again, the Software determines, within limits, how to use what is available.

What other advantages are there to having Double Sided Drives?

Most people are going to need more than ONE Single Sided Drive. Rather than pay two or three hundred dollars for another Disk Drive, you can get a Double Sided Drive for about a hundred more. There is a very short BASIC Program floating around (check the Bulletin Boards and Magazines) that will make the RS DOS think your Double Sided Drive is **two** Single Sided Drives, IF you have **64K RAM** so that the Disk ROM can be changed.

What are some reliable names in disk drives?

The Qume Thinlines have been working very well. Tandon was good, but some problems have shown up with the later units. The Teac Drives have given very little trouble, and there are other good Drives available.

Where can I find a Controller and one of these good Drives?

Data-Comp, as well as many other Disk Drive suppliers, would be more than happy to help out in that respect.

Can you think of anything Else I should know before I rush out and plunk down my cash?

Just ASK QUESTIONS, and buy from someone with GOOD ANSWERS! If the supplier you are talking too uses the **SAME Disk Drives** in \$5,000 to \$20,000 Business Computer Systems, they should be good enough for the CoCo. Remember, there are **GOOD** prices, and there are **CHEAP** prices. Enough said!!

-ask for it!

FREE CATALOG with order or send self addressed stamped envelope.

Send check or money-order to:

30

COCOPRO P.O. BOX 37022 ST. LOUIS, MO 63141

Postage paid on all pre-paid orders in U.S. Missouri residents add 5.625 percent sales tax.

DEALER INQUIRES INVITED

it with the RS Software, AND have the extra tracks available for use with some of the other Disk Operating Systems, such as FLEX, which can use the 40 tracks (this ALSO applies to the Double SIDED Drives). One advantage of the CoCo is that you can step your way up to a pretty sophisticated system this way.

We're talking about 5 1/4 inch floppy disk systems. What about 8 inch? That is a whole different ballgame. The Data transfer rate for 8" Systems is twice as fast as that of the 5 1/4" Systems. There are controllers that could handle both sizes, and possibly For more information, see the article by Dr. Bud Pass in the Sept. '83 issue of Color Micro Journal titled "Why CoCo Can't READ".

Jim LaLone



AustraliaA \$ 4.75SingaporeS \$ 9.45MalaysiaM \$ 9.45

S \$ 9.45 H M \$ 9.45 S

New Zealand Hong Kong Sweden NZ \$ 6.50 H \$23.50 30:-SEK

MICRO JOURNAL

You have HEARD about FLEX(tm); now LEARN about FLEX. Subscribe to the '68' Micro Journal!

You have HEARD about the power of the 6809 Computer Chip in your Color Computer; now LEARN how to use this power. Subscribe to the '68' Micro Journal!

You have HEARD about the "Multi-User, Multi-Tasking" UNIX(tm) style Operating Systems (such as OS-9(tm) and UniFLEX(tm)); now LEARN about them. Subscribe to the '68' Micro Journal!

Your have HEARD about all the Software available for the 68xx Series Based Computer Systems; now LEARN about this Software AND the Computer Systems. Subscribe to the '68' Micro Journal!

"68" Micro Journal provides INFORMATION thru:

Regular MONTHLY Columns like "FLEX Users Notes" by Ron Anderson, "OS-9 Users Notes" by Peter Dibble, "C Users Notes" by Norm Commo, "Color Users Notes" by Bob Nay, etc.

Regular MONTHLY Features like the "Bit Bucket", Reviews, Articles, Programs, etc., covering Software Development, Business Use, Operating System operation, hints, etc.

DON'T MISS A SINGLE ISSUE; SUBSCRIBE NOW!

SUBSCRIPTION RATES

USA

1 Year \$24.50, 2 Year \$42.50, 3 Year \$64.50

OK. PLEASE ENTER MY SUBSCRIPTION

For 1-Year 2 Years 3 Years

*FOREIGN SURFACE Add \$12.00 per Year to USA Price

Enclosed: \$_____

| Name | | |
|-----------------|-----------|-----|
| Street | · · · · · | |
| City | State | Zip |
| My Computer Is: | - | |

68 Micro Journal 5900 Cassandra Smith Rd. Hixson, TN 37343


Color Micro Journal

*FOREIGN AIRMAIL Add \$36.00 per Year to USA Price

31

****CANADA & MEXICO Add \$5.50 per Year to USA Price** Cash (USA) or drawn on a USA Bank!!!





EXXX buildings Three por IS-2000 Sector Interface advanting increase the transpipul of a multi-over system whop data transfers between uses and the system, and memory the data. It reduces the number or user up to

Techniki I cologenstatic on-hoose 2445 (4807 CPU 4 Dp to 250 color board several (2470 color) (AAA) 4 Dp to 250 color boards mexican (2470 color) (AAA) et al. (2470 color) (2470 color) (2470 color) (2470 color) et al. (2470 color) (2470 color) (2470 color) (2470 color) 5 Techniki (2470 color) (2470 color) (2470 color) 1 Techniki (2470 color) (2470 color) (2470 color) (2470 color) 1 Techniki (2470 color) (2470 color) (2470 color) (2470 color) 1 Techniki (2470 color) (2470 color) (2470 color) (2470 color) (2470 color) 1 Techniki (2470 color) (2470 color)

togethermine the end of the set o

ton: result is - Intelligent the port secks interface #13 for the 50 pin bus

2 Port Serial Interface #43

Soldaries of option

OS-9 firmware and drivers for the Intelligent 3-port Serial Interface

Excelligent 3-port Series Interface The 6/4 structure and drives subtance to performance or mail-are rejerences the performance in the subtance interfacing signific characteristic transmission and the subtance interfacing signific characteristic transmission and structure interfaces and sociated by the 90 board orbit me to be too dowing its and more lines or other proceeding water. The hot dowing its and more lines or other proceeding water the not a object performance of the subtance of the subtance of the object performance or the subtance of the subtance of the and performance of the subtance of the subtance of the output data are balance on the 50 board is that the hot on performs of the subtance of the board are to CTA performance of them used with the GAC CPU III such acts transmiss between the 10 board on the board are to CTA performance of them used with the GAC CPU III such acts transmission to performance expensions with the hot on the too CTA and the subtance of the too the the CTA board on the performance expension and the subtance of the course between the hot is board and the subtance of the board doe transmit "meanger" to any or cell i/O port to indicate hot the 10 biarboard to not not distribute the performance of the board with the too of the subtance.



Intelligent Parallel I/O Processor Board #12

en performance by bullering data transers to pherate such as prosen andras by bullering and ng paratiel input data tran keyboards, servors, etc.

Vertical Exclusion relation in second 2005 CPC 4 Up to 2012 or on board memory (19900) and 2000 9 Uptimed date transit between board and on board CPUs using a 2000 PIO with 100 byte in-direction (1900 balan or of institute memory or physical 9 Fear 14/b balance & Rei provide pers with homolectings or of physical part labels (no 400 VeV) fact A00 alon between 1-548 consistentionen and a shaft register for and direct the physical parts

Benefits and Benef

GIMIX 2MHz Input/Output Boards Parallel Interface Boards 8 Port Serial Board #46 Parallel boards use the 6501 HA for compatibility and venatility bach 6511 provides two 6 bit parts with a variety of handshake and alternast generation modes.

The Bablet Fold Bablet Automatic Bablet and Respective Termination and provider tool by ports will be variefy of constructions for which all constructions for the party construction of the provider tool and point which Teacer Deta Receive Data and agend grandet to dia point. The owner of constructions of the provider tool and grand grandet to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the Theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelactive level RTL ICCD and CTS for specific to well as the theradelac

EXELL EFFERTACE from the vertex calculate of 8500 program mobile ACA that provide software calculate over marines at det bits party top bits and marines. They all actual 85-20 competitive spallware with KB CTS and CCD nand software spatial. All sense linearia have gaint private spectrum. whith have gold pieled header type connectors sectors and reliable operation State State

Serial Interface Boards



estana. • 6 suportie 85.323 ports (with handalicale) on a single 50 per loand • Eak-acte codeses decoding for the 5500 has • Concepts only 16 byther of codeses space • Contraction of the sector and only 11 byte • Contraction of the code, associate OF which estimates to day is type boundary indexedual DP-which wile clable boud roles and sterruph for each part - On board boud role generator for tokal when train 75 to 31 AE board then i or 2 Mb cubie set.

Single Port Serial Interface #41 8 Port Parallel Interface Board #45

between 2 - properties 1222 points (with homoloxies) on a larger boom - Junger programmable connector procus to recars con-paration to estimate devices (Connector can be pro-grammed og DCE or DTL). - Prometin sifeting and et standard 15 223 concentres with same units of the page of standards 15 223 concentres with same units optimum Extence cable and. - Balandard Dates and caller page (with page) which page for - Balandard Dates and caller page (with page) which - Balandard Dates and caller page (with page) which page for - Balandard Dates and caller page (with page) which page for - Balandard Dates and caller page (with page) which page for - Balandard Dates and caller page (with page) which page for - Balandard Dates and page (with page) which page (with page) - Balandard Dates and page (with page) which page (with page) - Balandard Dates and page) which page (with page) - Balandard Dates and page (with page) which page (with page) - Balandard Dates and page) which page (with page) - Balandard Dates and page (with page) which page (with page) - Balandard Dates and page) which page (with page) - Balandard Dates and page) which page (with page) - Balandard Dates and page) - Balandard Dates and page (with page) - Balandard Dates and page) - Balandard Dates each port = Selectable for use with 4.8 or 16 addresses per skill then 1 or 2 #75 caller sets (for the 30 pin bus)

#95 Cable Sets For LO Boards de Ribbon cable with a mate e 25 per 10' type data conner and monitoring borchares. Pare

ng cabie ae

the the 50 pin busi

Dif-netzinas provide tall conting over VD and handalatik conducation — estaly occessible. In a sidemity recrearing e 5332 or 20 An Curves Long sidem = One of two basis may an an estimated forch = Operation contention for the interrupt Respect = Operating on the DCD and CTB recome rules require means of the operation for the interrupt Respect means of the operation for the interrupt Respect to the transmission of the interrupt Respect means of the operation for the interrupt Respect to the operation of the interrupt Respect Respect to the operation of the interrupt Respect Respect Respect to the operation of the operation of the operation of the operation operation of the operation operation of the operation operation

Egal it bit partial port on a single boart
 Four with I Mar
 Sport budiend or output
 Sport budiend or output
 Sport budiend or output
 Sport budiend provide an output
 Sport budiend provide an output
 Data an element generator output
 Sport budiend budiend
 Donyages I Stress or output
 Donyages I Stress or output

• One sublemait output handhing the first is inception for signal to the incentions for connecting to the interrupt limit. Both-Mandhing Interrupt limit, the sublemail based broader connection to explain the analysis. A Difference to connecting to bench their need all animi-rued Solit or output port such as the GMME Solit Board Connection. In Solit Context, the Solit Board Connecting Solit Board Connecting

GIMIX 6809 CPU PLUS Board #05 for use with FLEX, OS-9 GMX I, UniFLEX, and OS-9 GMX II

The GMMX AMN PUBICPU a constructive yversitile boost floot others the avera great more instrume and approximation to make a deal character or yversky of stress and applychtomic • Any control 5 memory transgement techtagain can be used Strength Stress Heart GMMX (Lanamach DAT work ware write protect (genoral) SMTPC comparisie DAT (recovered are \$90.6 11 (genoral) • Software write protect at & block (Lanamach DAT work space or when protect at & block (Lanamach DAT work) • Software write protect at & block (Lanamach DAT work) • Software write protect at & block (Lanamach DAT work) • Software write protect at & block (Lanamach DAT work) • Software write protect at & block (Lanamach DAT work) • Software write protect at & block (Lanamach DAT work) • Software write write software (Lanamach DAT work) • Software write protect and the software (Lanamach DAT work) • Software write protect (Lanamach DAT work) • Software (Lanamach DAT work) • Softwar

post RAM. Software revealed and a software consignations for the 8 on cert devices (allow software enclosing between on bottle Procede Societ AnAI resident agreem: monitori () All FTLA decoded devices can be individually enclosed contrast.

decisied PTPA devokad devoke die ontdichie for DRA occess Estimated addressing for the TPLA decoded devices (cells the quadrad) is polityte eviciting between on and of board system monities using extended addressing i subject extended address


ndi convector 84.6 Ki junger wiectable for independent or galed

operation ther defined latch output goad Molec connectors for invable free contect \$5.50 and \$5.60C compatible Full DMA capabilities (works with any of the 680% DMA methods)

Full Size memory capabilities
 Fully calentizied, letted and burned in

The GIMIX CLASSY CHASSIS 6800/6809 SS-50 Bus Mainframe

The CLASET CEASE SE technice: stamptum colored (18" in a pully colored, dur holds our all00m809 m rensuppy and has pr evel (18" wide x 21" deep high) periods in mother board. CV provisions for mounting

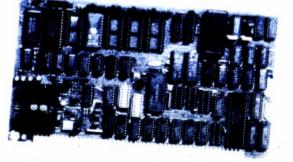

GMEX fac meaning the right to change pricing and product specifications of any time without further ratios MARCHP and OS-P are inclements of Monovare Typiette Curp. and MCP puts, and UniFLEX are inclements of Technical Systems Consultants, Inc. about, GROST GMS, and CLASSY CHASSE are involvements of GMSE live

COMPANY OF THE OWNER SHALL MADE NO THEN WARANTED OF MULTI-PROVIDE DEPARTMENT OF MULTI-PROVIDE OF ANY DEPARTMENT OF MULTI-PROVIDE AND ANY DEPARTMENT OF MULTI-PROVIDE ANY DEPARTMENT OF MULTI-PROVIDE ANY DEPARTMENT OF MULT-PROVIDE ANY Quality was not be regroupline for our duringent of any land out control by the exclusion restricted and the transmission of the restricted wateries wheth was not be regressible for any general insident or conservation buildays conserve the products. by the periodical set point or consumer use SARX approach dealers all committee on any of its photo-tication and periodical sets produce non-network waits an personal or static personal sets of the instrument of the mean set of the formation of sets and or periodical a dealershe statige for an account or periodical and an anamating.

Industrial Quality Power Supply

Partner: A Content Voltage. Feno-resonant Fazaday shelded, trans-torner cason desgrad torGMM. to brow-root and overroi-tage patiention and tor proper system operators, even under adverse AC power space conditions. I includes an AC toe site 3 DC titler capacition, and a titler assembly board with clamp-

The GMX 6809 CPU III

The GARD, SAY, CPI II boost is an advanced aways specificatly intered for an with water and reading specific specificatly intered for an with match and match table tags density logic the GARD CPI II enhanced for performance tags density logic the GARD CPI II enhanced for performance interesting and the GARD CPI II enhanced for performance interesting and the GARD CPI II enhanced for the performance interesting and the GARD CPI II enhanced for the performance interesting and the GARD CPI II enhanced for the performance interesting and the GARD CPI II enhanced for the performance and CPI II enhanced and conclusion the performance and the second conclusion of the conclusion the enhanced and the second conclusion of the performance and tables in the respective the state and performance with performance and a bactware stage the spectrum of the schware stage tags bacters for schware sebugging MOI 660V CPU III board a an advanced design IV Wended for use with multi-calang-spenz-

The boostic prevents the expectation of contrast, shapping pathods boat resis investigating the entering the monotomic planning is to the delty could an investigate of them in the processor does not expected to can unsering in statule. This investigation is to be determined by and careful as packed inner works (the prevent can be determined by an expectation of the prevent can be investigated in the length of that all calendary (with retrain these length the length of that that all calendary (with retrain-tions length the length of that that all calendary (with retrain-tions length working) and servicing cable used. In addition preventing under a length of the prevention to the length of the system is the particular charance to the system case is response to with quantum charance to the elevent nucleon and memory access cale of the lengthese in the intervention and memory access cale of the length of the prevention.

THE WAR ALC: NO DE -----GMX 6809 CPU Sest. im. --11 9 4991 Б.

All GIMIX boards have Gold But Connectors and are fully

Advance information of the entropy of the second method in the back second method in the second method method method in the second method in the second method in the second method in the second method method method in the second method in the second method in the second method method method in the second method in the second method in the second method metho

Windrush EPROM Programmer


- Windquash BPROM Programmer Indext Production and water Environment Indext Production and water Production and water Indext Production and Production of 550 has water and 550 has water to 550 has a 1952, 2952, 2958, 2958, 2954, 2954, 2954 additional periodial Statuse contraction and show on the event 5 of Metal pair cable Disease contraction and show other read, program, water (BROM, examine change balan contracted show of balance all balance change balan contracted show of Programmer and the event water read, program, water (BROM, examine change balan contracted show of Production and the event water and a balance all balance all balance change balance contracted show of a field occurrented and the womentance is the balance all composed motion.

8 Disk Cabinet and Power Supply Winchester Systems

The obtained inclusive the scale quadry syllag, and state of the Gerbard inclusion that the scale of the properties of the scale of the scale of the scale of the the scale of the scale of the scale of the scale of the scale registry into the scale of the prover scale of the scale of the scale of the scale of prover scale of the scale of prover scale of the scale of the

occessory usually three the computer is harvest en in all the computer cost that parameter or downeed in United Solv to the one discussion that is an entitied in the consensity downeed on all discussing is also previded in the ALC data to both CN that (if y more received accidiar). A built then with its accessory downeed to the consentation of the consensation in the local parameter space with a consensation (in the computer The parameter space) and a constant voltage. The comparison that for consensationality and previden in difference resource and parameter space as a constant voltage. There resource and parameters are an experised in the comparison and parameters are an experised in the space of the comparison of a strape and " Solved of DMA constantiation" and angle in any constant and access and prevident in the resource to design the space and in any parameter is the resource of data and any and any and the space of the space of the angle that any space of the space of the space of the space is and the space of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space of the space of the space is any assertable of the space is any assertable of the space of the

Whothese pockages the imministe to significant numeric GARs and set system sourcepted with And GARA controllers not an load one loopy dia drive the policitaties inside and the the information of the set one transmission and the appropri-te when the transmission is the transmission and the information and policitation and the transmission and con-tention and policitation and the transmission and con-tention and policitation and the transmission and the trans-ent driver can be used together to transmission the stronger — or use the two bookup or the other (Nore controller) and results than use bookup or the other (Nore controller) and results than use bookup or the other (Nore controller).



111 -

GIMIX 30 and 50 Pin Prototyping Boards

• Double study with picture five holes and photoe power and ground time. • The earth top stage holes put its to 100 insuder (biolog) connection. • Providance for decoupling caps steppined formulation the array = Can be and with your wrgs writing precisi, study writing, at a with grad but construction and hand made - unmernitived • 1 is to a gradie decoupling and writing at the study and • 1 is to a gradie decoupling and writing and the study of the • 1 is to a gradie decoupling and writing and a with • 1 is to a gradie decoupling and writing and a writing of the study of the study of the study to 12 hourses of the study of the study of the study to 12 hourses of the study of the study of the study of the study of 1 bits on the ++ - 100 lines.

cannot be the fractionary plane (see the fractionary set of the fractionary of the fractionary plane) is the fractionary of the fractionary of the fractionary of the fractionary of the constant is a fractionary of the fractionary of the fractionary of the constant is a fractionary of the fractionary of the fractionary of the constant is a fractionary of the fractionary o



The GMC CPU II the emission chall success strendt say effect with year of a advance large years organy to strong the connection, and a DX control paid SAM each with bothery back is to previse presents strong buckness (a deal paid a separate SAD 644 (previse), ICCSN) that base excluder a separate SAD 644 (previse), ICCSN (and base control or a separate SAD 644 (previse), ICCSN) that base excluder a separate SAD 644 (previse), ICCSN (and base base or previse and the separate SAD 644 (previse), ICCSN (and base base of the set of the separate strends) and the set of the SAD set of the SAD set of the set of the SAD set of the set of the vector set of the set of the SAD set of the set of the set vector control. OS-9 GMX III Operating System

Cost Golds and Operating System Cost Golds is entranced CoSt End II for take tail admittage of the industry of CoSt End II for take tail admittage of the industry of the CoSt End II for take tail multi-see math-taking generating refers tools for registed o-for admittage to the industry of the industry of the take entrance in the industry of the industry of the industry for admittage is industry of the industry of the industry is admittage to the industry of the industry of the entrance is industry of the industry of the industry with protected to prevent surgering. Memory morphile in take with protected to prevent surgering. Memory morphiles indu-tation establishes to admittage industry of the industry of the industry of the cost is located in admittage. Each take com the discreted on the Cost is located in the operating sphere over-limits in the take oddree spool.

UniFLEX for the GMX 6809 CPU III and Intelligent I/O boards is in development. and Intel developm

Non-Volatile 64KB CMOS STATIC RAM Boards with Battery Back-up#64 256K Byte STATIC RAM Board #63 Whe Protect Switch permits the entire board to be write protected tor PEOMINOM emutation and soft wave desagging

Without Battery Backup #67

L

ESTERAIS - No.
 Ester NMCS RAM
 request las trais N. AMP
 (50 Ma) typical of the
 Whe intend optional
 with choice applies
 which or jumper

16 Socket EPROM/ROM/RAM Board #32

11 1 1

Perture: Up to 1360 on a single board (using NK devices) Can be used with 2.4. and NK 24 pin. 27167816 pinous. Single apply valage EPBCHs and most pin-completele IRONs and

- Performant
 Addressentials to contriguenzations to suit du versiety de opgetieven forme R-III 20 banditiese contriguenzation (au VIII New Yorkens Addressing compactates with COVE Obtal II and III. UniFLEX and FLEX with COREA FORM
 Rully Marks Meetody does not negate complication nervails trang of existent Address Ardities
 Rully Marks Meetody does not negate complication with cray EMA wetwargue
 Guary Marks 2048. Operation uses high speed (150m).
 Bala auto: DAMa with not wet wheth are clock shrething required
 Dav Forwar RAM requires less than 300 mit hypocol of 60 and 300 Res. A Medicative (4 boorthi) negaties less than 15 Arage. ALSO AVAILABLE NMOS Version



256K Byte Non-Volatile, Battery Backup Version (as pictured) #72

With the some leadures on the shows PLUS • NCod Battery Bootup for power of data retention up to 300 files with a fully charged battery power-up and power down to proved labe writes to the nerway. ectable for PROMIPON struction and soft

supply voltage DROMs and mar pis-completie ROMs and space DMA. 4 Decise same and type can be maded on the same board 5 departed a socker section 1 DR-much selection of back outdress for each vector, substang extended obtaves devoltage the each vector, substang extended obtaves devoltage the each vector, substang extended obtaves devoltage and the same test of device same within a section 5 Separate sock on eaching extent sector, (above only) 5 Each social is surger programminghe for device same and type (2 4 or 80 RECMS/045/AMA) GIMIX DMA Double Density Disk Controller #68

The GINIX SMA (Sinct Hencey Access) DSK CONTROLLED has the opposition needed in making the skip parameter of house supplication mail sections (spectral grifters such as GINT" and MATLE" many species starts (spectral skip) DAA concept sor parame-tered (spectral or 3 Metric DMA transmiss that place at skil bar peed and 9 Metric DMA transmiss that place at skil bar periorshell for indicate the completion of the stratem at a set spectral shapement on the periorshell for indicate the completion of the stratem



Single and Dealies Deality and darage on any concern-tion of 547 and 17 loopsy disk drives single and diskle results: angle and double track deality up to 5 drives tool. Low trace lists are insured by a data recovery aloud (54 execution and adjustice wite precomparation contains).

Lev form fails on research by a data recovery docut (data separation) and existance with precomparation (and existing the data separation of existance of the precomparation of the set of the provide of the 3rd and (f) different is in the set of the matrix of the set of the set of the set of the set of the board acceptance only is the set of these space. National exists and the set of the set of the set board acceptance on the set of the set of the board of the set of the set of the set of the board of the set of the set of the set of the board of the set of the set of the set of the board of the set of the set of the set of the board of the set of the board of the set of the set of the set of the board of the set of the produce of the set of the set of the set of the set of the produce of the set of the set of the set of the set of the produce of the set of the set of the set of the set of the produce of the set of the set of the set of the produce of the set of the set of the set of the produce of the set of the produce of the set of the



• 30 pan 1/0 d for 4. I

is an entry terminated

W7 Netk, double sided PC board has a hill ground graday Shalid on the top side to further reduce nose

32



SIMIX 6809 system opport five pred peruting systems

OS-9 GMX III.

and a wide variety of languages and development software

ional, scientific or bu red single or multi-us fiX has hardware an

ms to get the job done

are and the

er your application

the or write if you need further into

OS-9 GMX II, UniFLEX,

OS-9 GMX 1,

FLEX

ING SY

ALL and United are being

0 0

1337 WEST 37th PLACE CHICAGO, ILLINOIS 60609 (312) 927-5510 TWX 910-221-4055

(INC.



GIMIX 2MHZ 6809 SYSTEMS CAN BE CONFIGURED TO RUN: FLEX * OS-9 LEVEL ONE * UNIFLEX * OS-9 LEVEL TWO

SINGLE USER SYSTEMS with 56KB of static RAM MULTI USER SYSTEMS with 128-512KB of static RAM and up YOUR GIMIX SYSTEM CAN GROW WITH YOUR NEEDS

CHOOSE FROM GIMIX 514" OR 8" FLOPPY DISK DRIVE SYSTEMS AND WINCHESTER DRIVE SYSTEMS

Color Micro Journal

354440