

December 1986

Canada \$4.95

U.S. \$3.95

Just for your
Tandy Color
Computer 1, 2 and 3

RAINBOW[®]

THE COLOR COMPUTER MONTHLY MAGAZINE

Our Co-Co-Cold Winter Extravaganza

Featuring:

**Music, Games and Graphics
In Celebration of the Season**

**A Holiday Shopping Guide
Of Color Computer Gifts**

**Hebrew Characters on a
Dot Matrix Printer**

**And Three Great Hardware
Projects to Fill Those
Long Winter Months**



0

12

44254 00001

Co-Co-3

DIECOM PRODUCTS

BOUNCING BOULDERS



Bouncing Boulders is a new, fast paced arcade-style game for your Coco. As you race your man around the screen you try to collect enough stars to open the exit to the next level. You can drop rocks to kill aliens that follow you around the screen trying to catch you. But beware of the falling and bouncing boulders as they will crush your man if you get trapped under one. The many different screens with lots of puzzles will keep you playing for hours on end.

64 K REQUIRED
TAPE OR DISK

\$28.95 U.S.
\$38.95 CAN.

WRESTLE MANIAC



You've asked for it and now it's here, a wrestling game for your color computer. Play a single match or play a tag team match in this 1 to 4 player game. Wrestle against the computer or wrestle against your friend in a single or tag team match. Use punches, kicks, body slams, back breakers and many other moves as you attempt to pin your opponent. Super graphics and realistic play action make this a great game for all.

64 K AND JOYSTICK
REQUIRED
TAPE OR DISK

\$28.95 U.S.
\$38.95 CAN.

GANTELET



MISSION F-16 ASSAULT



MARBLE MAZE



THE GATES OF DELIRIUM



Travel through towns and explore strange lands in the ultimate fantasy role-playing game for the color computer. As you travel the land you will meet different characters that you may convince to join you in your quest. During your quest you will learn the secrets of magic spells and ultimately, your final goal.

Enter The Gates of Delirium contest! The first person to solve the game shall be our grand prize winner of a Coco 3. There will be 5 second prizes of one free game from Diecom Products and 5 third prizes of one free hat from Diecom Products.

64K
REQUIRED **\$38.95 U.S.**
\$52.95 CAN.

AVAILABLE ON DISK ONLY

ALSO AVAILABLE

— Paper Route, Knock Out, Karate, each game requiring 64K. Tape or disk.

\$28.95 U.S.
\$38.95 CAN.

DIECOM PRODUCTS

6715 FIFTH LINE, MILTON, ONT., CANADA L9T 2X8

We accept:



cheque or money order

24 hr. order line:
(416) 878-8358
personal service 9-5

Please add \$2 for shipping & handling. Ontario residents add 7% sales tax. C.O.D. Canada only. Dealer inquiries invited. Looking for new software.

From Computer Plus to YOU ...


PLUS after PLUS after PLUS




Tandy 200 24K \$510*
Tandy 600 32K \$810*
Tandy 102 24K \$339*




Color Computer 3
w/128K Ext. Basic \$169




Tandy 1000 EX \$569.00
Tandy 1000 SX \$839.00



DMP-130 \$219*



Color Computer Disk Drive
Drive 0 \$179* Drive 1 \$149



DMP-105 \$110*

BIG SAVINGS ON A FULL COMPLEMENT OF RADIO SHACK COMPUTER PRODUCTS

COMPUTERS

Tandy 1000 EX 1 Drive 256K	569.00
Tandy 1000 SX 2 Drive 384K	839.00
Tandy 3000 HL 1 Drive 512K	1229.00
Model IVD 64K with Deskmate	889.00

PRINTERS

Radio Shack DMP-105 80 CPS	110.00*
Radio Shack DMP-130 100 CPS	219.00*
Radio Shack DMP-430 180 CPS	559.00
Radio Shack DWP-230 Daisy Wheel	310.00
Star LV-1210 120 CPS	199.00
Star NX-10 120 CPS	279.00
Star SG-15 120 CPS	410.00
Panasonic P-1091 120 CPS	259.00
Panasonic P-1092 180 CPS	339.00
Okidata 292 200 CPS	529.00
Okidata 192+ 200 CPS	375.00
Epson LX-80 100 CPS	275.00
Epson FX-85 160 CPS	419.00

MODEMS

Radio Shack DCM-7 Modem	85.00
Radio Shack DC Modem Program Pac	99.00
Radio Shack DC Modem 212	179.00
Hayes 300 Baud Modem	169.00

COLOR COMPUTER MISC.

Radio Shack Drive Controller	99.00
Extended Basic Rom Kit	39.95
64K Ram Upgrade Kit	39.00
Radio Shack Deluxe Keyboard Kit	24.95
HJL Keyboard Upgrade Kit	79.95
COCO Max Y Cable	27.95
Color Computer Mouse	44.00
Multi Pack Interface	89.00
Botek Serial to Parallel Conv.	69.95
Radio Shack CCR-81 Recorder	52.00
Radio Shack Deluxe Joystick	26.95
Amdek Video 300 Green Monitor	139.00
Amdek Video 300 Amber Monitor	149.00
Goldstar Green Monitor	85.00
Panasonic Amber Monitor w/audio	99.00
Radio Shack VM-4 Green Monitor	99.00
Mark Data Universal Video Driver	29.95

COLOR COMPUTER SOFTWARE

	TAPE	DISK
Approach Control Simul.	29.95	34.95
Worlds Of Flight	29.95	32.95
Mustang P-51 Flight Simul.	29.95	34.95
Spectral Typing Tutor	19.95	22.95
Dungeon Quest	24.95	27.95

Major Istar	24.95	27.95
Sam Sleuth Private Eye	24.95	27.95
Mark Data Graphic Adven.	24.95	27.95
COCO Util II by Mark Data		39.95
COCO Max by Colorware	69.95	
COCO Max II by Colorware	79.95	
AutoTerm by PXC Computing	39.95	49.95
TelePatch II by Spectrum		29.95
TeleWriter 64	49.95	59.95
Deft Pascal Workbench		99.95
Deft Extra		39.95
Pro Color File Enhanced 2.0		59.95
Max Fonts (72 COCO Max Fonts)	64.95	
Elite Calc	69.95	69.95
Elite Word	69.95	69.95
Elite File (disk only)		74.50
DynaCalc (disk only)		99.95
Word Pack RS by PBJ		99.00
VIP Writer (disk only)		69.95
VIP Integrated Library (disk)		149.95

Order any 2 software pieces listed and take 10% off their listed price. All Radio Shack software 10% off list. Send for completely list. *Sale prices through 12/15/86

**CALL TOLL FREE
1-800-343-8124**

- LOWEST POSSIBLE PRICES
- BEST POSSIBLE WARRANTY
- KNOWLEDGEABLE SALES STAFF
- TIMELY DELIVERY
- SHOPPING CONVENIENCE



computer plus


P.O. Box 1094
480 King Street
Littleton, MA 01460

SINCE 1973


IN MASSACHUSETTS CALL (617) 486-3193

Under
The

RAINBOW

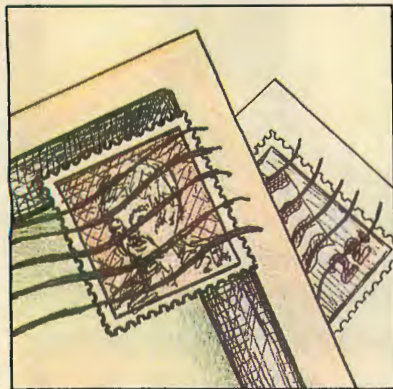

18

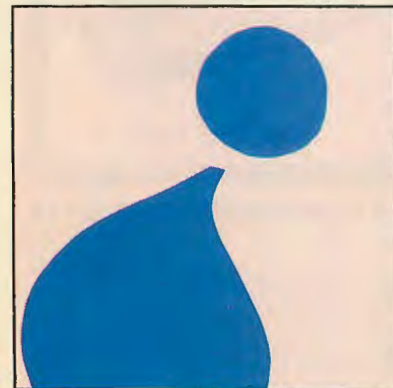


36



42

Cover illustration copyright © 1986
by Fred Crawford

 The cassette tape/disk symbols beside features and columns indicate that the program listings with those articles are on this month's RAINBOW ON TAPE and RAINBOW ON DISK. Those with only the disk symbol are not available on RAINBOW ON TAPE. For details, check the RAINBOW ON TAPE and RAINBOW ON DISK ads on pages 172 and 159.

FEATURES

-  **Season's Greetings/Eugene Vasconi** _____ 18
HOLIDAY SPECIAL *Add your name to this computerized greeting*
- Rainbow's Holiday Shopping Guide/Rainbow Staff** _____ 25
HOLIDAY SPECIAL *CoCo gift ideas for everyone*
-  **Mortar Command/Charles Farris** _____ 29
GAME *Your mission is to hold the bridge*
-  **Hebrew Writer/Aryeh Glaberson** _____ 36
LANGUAGE *An aid to printing out Hebrew characters*
-  **Deck the Halls/Rick Woods** _____ 42
MUSIC *Four-voice harmony with a word processor*
- Fortune Wheel on Tape/Arron Branigan** _____ 50
MODIFICATION *Use this popular game with a tape system*
- Power Supply Fixes/Marty Goodman** _____ 54
HARDWARE PROJECT *Help for common CoCo and multipack problems*
-  **From Our Home to Yours/Ilene Fortin** _____ 62
GRAPHICS *Generate money-saving holiday cards*
-  **Go Tell It on the CoCo/Arron Branigan** _____ 66
HOLIDAY SPECIAL *A seasonal songfest highlights these graphics*
-  **The Solitary Endeavor/Tudor P. Jones** _____ 76
GAME *A clever computer version of the old card game*
- The CoCo ROS, Part I/Dennis H. Weide** _____ 85
HARDWARE PROJECT *Build your own robot operating system*
-  **Where Is It?/Brian Biggs** _____ 93
ORGANIZATION *Disk labels display up to 24 program names*
-  **Holiday Hearth/Eugene Vasconi** _____ 108
HOLIDAY SPECIAL *CoCo nuts roasting near an open fire*
-  **O Tannenbaum/Becky F. Matthews** _____ 116
GRAPHICS *A lovely tree and a tutorial to boot*
-  **Up on the Rooftop/J. D. German** _____ 124
GAME *Santa needs your help to fly his magical mission*
- LED Power Indicator/Logan Ward** _____ 160
HARDWARE PROJECT *Lets you know when your disk drives are on*

STATEMENT OF OWNERSHIP, MANAGEMENT AND CIRCULATION

1A) Title of publication: The Rainbow, The Color Computer Monthly Magazine. B) Publication No.: 705050. 2) Date of filing: September 30, 1986. 3) Frequency of issue: Monthly. 3A) No. of issues published annually: 12. 3B) Annual subscription price: \$31.00. 4) Complete Mailing Address of known office of publication: The Falsoft Building, 9509 U.S. Highway 42, Prospect, Jefferson County, Kentucky 40059. 5) Complete Mailing Address of headquarters of general business offices of the publisher: Same. 6) Names and complete addresses of publisher, editor, and managing editor: Publisher and Editor: Lawrence C. Falk, The Falsoft Building, 9509 U.S. Highway 42, Prospect, Kentucky 40059; Managing Editor: James E. Reed, The Falsoft Building, 9509 U.S. Highway 42, Prospect, Kentucky 40059. 7) Owner: Falsoft, Inc., The Falsoft Building, 9509 U.S. Highway 42, Prospect, Kentucky 40059. 8) Known bondholders, mortgagees and other security holders owning or holding 1 percent or more of total amount of bonds, mortgages or other securities: None. 9) For completion by nonprofit organizations authorized to mail at special rates (Section 423.12 DMM). The purpose, function and nonprofit status of this organization and the exempt status for Federal Income tax purposes (Check one): Not applicable. 10) Extent and nature of circulation: (X)=Average No. copies each issue during preceding 12 months; (Y)=Actual No. copies of single issue published nearest to filing date. A) Total No. of copies printed: (X)71,554 (Y)69,200. B) Paid circulation: 1) Sales through dealers and carriers, street vendors and counter sales: (X)26,084 (Y)35,037. 2) Mail subscription: (X)35,487 (Y)31,789. C) Total paid circulation: (X)61,571 (Y)66,826. D) Free distribution by mail, carrier or other means, samples, complimentary and other free copies: (X)1,957 (Y)1,821. E) Total distribution: (X)63,528 (Y)68,647. F) Copies not distributed: 1) Office use, left over, unaccounted, spoiled after printing: (X)179 (Y)533. 2) Returns from news agents: (X)7,847 (Y)20. G) Total: (X)71,554 (Y)69,200.

COLUMNS

BASIC Training/Joseph Kolar _____	80
<i>Formatting text to suit yourself</i>	
Building December's Rainbow/Jim Reed _____	16
<i>Managing Editor's comments</i>	
CoCo Consultations/Marty Goodman _____	102
<i>Just what the Dr. ordered</i>	
Delphi Bureau/Cray Augsburg _____	169
<i>More on using Mail and Goodman's database report</i>	
Doctor ASCII/Richard E. Esposito _____	156
<i>The problem fixer</i>	
Education Notes/Steve Blyn _____	88
<i>Binary dice conversions</i>	
Education Overview/Michael Plog, Ph.D. _____	173
<i>Computers and our English vocabulary</i>	
PRINT#-2/Lawrence C. Falk _____	12
<i>Editor's notes</i>	
Turn of the Screw/Tony DiStefano _____	98
<i>The no-switch VDG</i>	
Wishing Well/Fred B. Scerbo _____	163
<i>Creating designer arcade games</i>	

RAINBOWTECH

Barden's Buffer/William Barden, Jr. _____	190
<i>The BASIC PSET and graphics display speeds</i>	
Bits and Bytes of BASIC/Richard White _____	195
<i>Dealing with variables in BASIC09</i>	
Downloads/Dan Downard _____	178
<i>Answers to your technical questions</i>	
KISSable OS-9/Dale L. Puckett _____	198
<i>A bundle of holiday goodies</i>	
OS-9 Spooler/Stephen B. Goldberg _____	183
<i>Print a file as a background task</i>	

DEPARTMENTS

Advertiser Index _____	208	Rainbow Info _____	165
Back Issue Information _____	47	Received & Certified _____	131
CoCo Cat _____	39	Scoreboard _____	150
CoCo Gallery _____	114	Scoreboard Pointers _____	152
Corrections _____	101	Submitting Material	
Letters to Rainbow _____	6	to Rainbow _____	64
The Pipeline _____	104	Subscription Info _____	64
One-Liner Contest		These Fine Stores _____	206
Information _____	64		

PRODUCT REVIEWS

Product Review Contents _____	129
--------------------------------------	------------

The RAINBOW

December 1986

Vol. VI No. 5

Editor and Publisher
Lawrence C. Falk

Managing Editor James E. Reed
Senior Editor T. Kevin Nickols
Submissions Editor Jutta Kapfhammer
Copy Editor Jo Anna Wittman Arnott
Reviews Editor Judi Hutchinson
Editorial Assistants Wendy Falk, Jody Gilbert,
Angela Kapfhammer, Monica Wheat
Technical Editor Dan Downard
Technical Assistant Cray Augsburg
Contributing Editors William Barden, Jr.,
Steve Blyn, Tony DiStefano,
Richard Esposito, Martin Goodman, M.D.,
Joseph Kolar, Michael Plog, Dale Puckett,
Fred Scerbo, Richard White
Consulting Editors Ed Ellers,
Danny Humphress, Belinda C. Kirby

Art Director Heidi Maxedon
Production Coordinator Cynthia L. Jones
Designers Tracey Jones, Rita Lawrence,
Sandra Underwood, Denise Webb

Chief of Typography Debbie Hartley
Typography Services Jody Doyle,
Suzanne Benish Kurowsky

Falsoft, Inc.

President Lawrence C. Falk
General Manager Patricia H. Hirsch
Asst. General Mgr. for Finance Donna Shuck
Admin. Asst. to the Publisher Sue E. Rodgers

Editorial Director James E. Reed
Asst. Editorial Director Jutta Kapfhammer
Creative Director Heidi Maxedon

Chief Bookkeeper Diane Moore
Advertising Accounts Beverly Taylor
Dealer Accounts Judy Quashnock
Fulfillment Services Director Bonnie Frowenfeld
Fulfillment Services Asst. Dir. Sandy Apple
Asst. Customer Service Mgr. Beverly Bearden
Word Processor Manager Patricia Eaton
Development Coordinator Ira Barsky
Chief of Printing Services Melba Smith
Pre-press Production John Pike
Dispatch Janice Eastburn
Asst. Dispatch Mark Herndon
Business Assistants Laurie Falk, Sharon Smith,
Pam Workhoven

Advertising Coordinator Doris Taylor
Advertising Representative Kim Vincent
Advertising Assistant Debbie Baxter
(502) 228-4492

West Coast Advertising and Marketing Office
Director Cindy J. Shackelford
Advertising Representative Shirley Duranseau
For RAINBOW Advertising and
Marketing Office Information, see Page 208

THE RAINBOW is published every month of the year by FALSOFT, Inc., The Falsoft Building, 9509 U.S. Highway 42, P.O. Box 385, Prospect, KY 40059, phone (502) 228-4492. THE RAINBOW, RAINBOWfest and THE RAINBOW and RAINBOWfest logotypes are registered trademarks of FALSOFT, Inc. Second class postage paid Prospect, KY and additional offices. USPS N. 705-050 (ISSN No. 0746-4797). POSTMASTER: Send address changes to THE RAINBOW, P.O. Box 385, Prospect, KY 40059. Forwarding Postage Guaranteed. Authorized as second class postage paid from Hamilton, Ontario by Canada Post, Ottawa, Ontario, Canada. Entire contents copyright © by FALSOFT, Inc., 1986. THE RAINBOW is intended for the private use and pleasure of its subscribers and purchasers and reproduction by any means is prohibited. Use of information herein is for the single end use of purchasers and any other use is expressly prohibited. All programs herein are distributed in an "as is" basis, without warranty of any kind whatsoever. Tandy, Color BASIC, Extended Color BASIC and Program Pak are registered trademarks of the Tandy Corp. Subscriptions to THE RAINBOW are \$31 per year in the United States. Canadian rates are U.S. \$38. Surface mail to other countries is U.S. \$68, air mail U.S. \$103. All subscriptions begin with next available issue. Limited back issues are available. Please see notice for issues that are in print and their costs. Payment accepted by VISA, MasterCard, American Express, cash, check or money order in U.S. currency only. Full refund after mailing of one issue. A refund of 10/12ths the subscription amount after two issues are mailed. No refund after mailing of three or more magazines.

LETTERS TO THE RAINBOW

But, What Does It Mean?

Editor:

Regarding the cover of the September 1986 RAINBOW, where the monitor is protruding through the cover, I recognize the wording as being from a Hard Drive Specialist advertisement. Why is this?

I want to thank you for publishing the letter from William Capich in the "Downloads" column [August 1986, Page 187]. I recently purchased a new 64K CoCo 2, with a 'B' after the model number. I knew that some newer CoCos had built-in lowercase and was hoping mine did as well.

The manual that came with the CoCo just said to type SHIFT-0 to get lowercase, it didn't mention the pokes Mr. Capich wrote about at all. It was disappointing to have the regular "checkerboard" characters.

Now I can have 16 different text screens! That orange lowercase is really easy on the eyes!

Lee Deuell
Shell Rock, IA

The screen shown on our September 1986 cover shows part of Tandy's demonstration program for the CoCo 3. The wording on the "backside" of the "torn" portion of the illustration is just something selected by our cover artist to represent the "insides" of a typical Rainbow. My, you are observant!

BACK TALK

Editor:

A letter in the August 1986 issue [Page 6] from Ronald Pettus discussed the lack of a carriage return at the end of each line when using *VIP Writer*.

To get around that problem, I use the programmable feature of *VIP Writer* to put a carriage return at the end of each line, after I have made the line width any value I desire (up to 240). However, it has one fault: It will not stop at the end of the document being altered, so you have to watch the monitor and press BREAK to make it stop. You can then save the result.

Press the following keys: BREAK, CLEAR, Z, E, UP ARROW, CLEAR, SHIFT-0, RIGHT ARROW, RIGHT ARROW, ENTER, DOWN ARROW, SHIFT-0 and DOWN ARROW. Type 100 and press ENTER.

To execute, go to top of document; having set the desired line width, press CLEAR and then E, and the process will start.

John Winchester Dana
Hamden, CT

HINTS AND TIPS

Editor:

Here's a change for anyone who wants to use the program *Picpri* [May 1986, Page 72] for a tape system.

Change all the LOADMs to CLOADMs in the BASIC program. After assembling the three machine language programs together type:

```
POKE&H797F,6:POKE&H7B0B,6:POKE&
H7B8F,29:POKE&H7B90,255:POKE7
D10,6:POKE&H7DBE,29:POKE7DBF,255
```

This changes the start and end addresses where the graphic picture is stored. You can now CSAVEM them as one program.

James R. Dean
Stirling, Ontario

Forget the Arrow Keys

Editor:

For those who would like to use a joystick instead of the arrow keys on Ira Goldwyn's *Scrambled Pix* [September 1986, Page 108], just replace lines 160 to 210 and 2010 with the following:

```
160 H=JOYSTK(0):V=JOYSTK(1)
170 P=PEEK(652B0):IFP=1260RP=254
    THEN2000
180 IFH=0THENA=A+1:GOTO220
190 IFH=63THENA=A-1:GOTO220
200 IFV=0THENA=A+4:GOTO220
210 IFV=63THENA=A-4:GOTO220ELSE
    150
2010 P=PEEK(652B0):IFP=1260RP=
    254THEN2000
```

This modification is for the right joystick. Press the firebutton to see what the picture is supposed to look like.

Donald S. Ricketts
Boring, OR

Don't Forget to Toggle

Editor:

I agree with Mike McPeck [October 1986, Page 9], when he said that without RAINBOW, his computer would just be an expensive paperweight on his desk.

I use *Telewriter 64* (disk version) for many tasks, both personal and business. One of the problems I often encountered was when I exited the editor to either load or save a file, I would forget to toggle to uppercase. This often resulted in saving a file with a lowercase filename or when attempting to load a file I would get the File Not Found message.

An easy solution to this was to add POKE 282, 255 to the beginning of both the S.XXX and S.ASC filenames. By adding this poke, when you access the disk I/O programs, it toggles the computer to uppercase characters. This enhancement has saved me a lot of frustration.

Michael L. Dunn
Winton, CA

REQUEST HOTLINE

Editor:

I have a Radio Shack Color Computer 2. Where can I get a program that I can run through my Heathkit interface on a short-wave radio to bring the Morse code through my computer and onto my screen?

Robert G. Yerkes
1234 Putnam Howe Drive
Belpre, OH 45714

Barking up the Family Tree

Editor:

I have a 64K CoCo 2 with one disk drive and a CGP-220 (ink jet) printer. We own a kennel and I'm looking for a program that will keep dog show records, pedigrees, etc. Please send any information to me.

Stanley Hughes
VIP Kennel
Box 2630
Corinna, ME 04928

Gimme an Angle

Editor:

I am a tenth grader and would like to get information on where I could obtain a program on geometry.

Todd Kirchenberg
4004 S. 12 Place
Sheboygan, WI 53081

Paint the Fence; Wax the Car


Editor:

I have a 64K CoCo and I am looking for a karate program. I would also like information on how to make a program run automatically after you load it from cassette.

Alan Asher
95 Korby Road
Esco, MN 55733

See Kung Fu Fighter on Page 66 in the March 1986 issue. Also, Diecom Products has the game Karate.

TOP RATINGS
HOT COCO MAGAZINE
SEPTEMBER 1984 AND MAY 1985

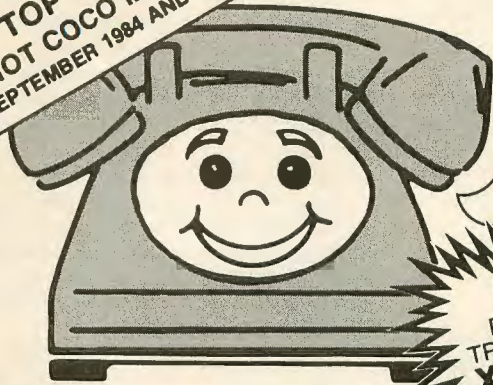

NEW
DISK FILE
TRANSFER VIA
XMODEM

YOU COULD FALL IN LOVE WITH **AUTOTERM!**

IT TURNS YOUR COLOR COMPUTER INTO THE

WORLD'S SMARTEST TERMINAL

**AND
MOST
LOVABLE**

GOOD LOOKIN'

AUTOTERM shows true upper/lower case in screen widths of 32, 40, 42, 51, or 64 characters with no split words. The width of 32 has extra large letters. Scrolling is forward, backward, and fast. Block graphics pictures are displayed automatically and can be scrolled.

The screen's top line shows operating mode, unused memory size, memory on/off, and caps-lock on/off. It also gives helpful prompts.

SWEET TALKIN'

KEY-BEEP can be on/off. Unacceptable keystrokes cause a lower pitched BOP! This ERROR-BEEBOP can be on/off.

Talks to other computers with Full or Half Duplex; Baud Rate of 110, 150, 300, 600, 1200; Parity as even, odd, mark, space, none; 7 or 8 bit Word; any Stop Bits; all 128 ASCII characters; true line Break; XON/XOFF protocol; and optional line-at-a-time transmission. Able to send and receive text, block graphics, BASIC and ML programs. A 64K machine holds up to 45,000 characters (33,300 in HI-RES).

DUAL PROCESSING lets you review & edit while more data is coming in.

XMODEM for disk file transfer.

Fully supports D.C. Hayes and other intelligent modems.

Talks to your printer with any page size, margins, line spacing, split word avoidance. Embed your printer's control sequences for boldface, underlining, etc. Narrow text can be automatically spread out.

You'll also use Autoterm for simple word processing and record keeping

You can display directories, delete files, transmit directly from disk, and work with files larger than memory. Easily maintain a disk copy of an entire session.

Compatible with TELEWRITER (ASCII) & other word processors.

SMOOTH WALKIN'

AUTOTERM moves smoothly and quickly between word processing and intelligent terminal action. Create text, correct your typing errors; then connect to the other computer, upload your text, download information, file it, and sign-off; then edit the received data, print it in an attractive format, and/or save it on file.

Editing is super simple with the cursor. Find strings instantly, too! Any operating parameter, such as screen width, can be altered at any time. Uncompleted commands can be cancelled.

PUTTY IN YOUR HANDS

The word processor can be used to create, print, and/or save on file your personal KSMs. They let AUTOTERM act like you. For example, it can dial through your modem, sign-on, interact, perform file operations, & sign-off; an entire session without your help. KSMs can answer the phone, prompt the caller, take messages, save them, hang-up, and wait for the next call. The KSM potential is unbelievable!

**NO OTHER COMPUTER IN
THE WORLD CAN MATCH
YOUR COCO'S AUTOMATIC
TERMINAL CAPABILITIES!!!**

WHAT THE REVIEWERS SAY

"AUTOTERM is the Best of Class."
Graham, *RAINBOW*, 6/83

"The AUTOTERM buffer system is the most sophisticated — and one of the easiest to use..."
Banta, *HOT CoCo*, 9/84

"Almost a full featured word processor..."
Eilers, *RAINBOW*, 11/84

"AUTOTERM's excellent error-handling routines, thorough documentation, and logical, easy-to-use command structure make it stand out."
Parker, *HOT CoCo*, 5/85

AVAILABLE IN CANADA
from
Kelly Software Distributors
Edmonton, Alberta

CASSETTE \$39.95
DISKETTE \$49.95
Add \$3 shipping and handling
MC/VISA/C.O.D.

PXE Computing
11 Vicksburg Lane
Richardson, Texas 75080
214/699-7273

Please hire the mentally retarded. They are sincere, hard working and appreciative. Thanks!
Phyllis.

Editor:

I am deaf and I recently tried to use my Tandy 64K CoCo 2 and modem to telephone other deaf people with a TTY (teleprinter). The modem on my computer did not work with the TTY. The TTY is only 50 baud and my computer modem is only 300/1200 baud. Can you make the modem program a true 50 baud? How much would it cost to make the programs sync?

John Metcalfe
5 Cooley Avenue
Macleod, Victoria 3085
Australia

Copy Cat

Editor:

I have a CoCo 2, J&M disk controller and a disk drive. How do you copy binary files from one disk to another with a single disk drive?

Thomas Crowe
Apartado aereo 2353
Villavicencio, Colombia
South America

To copy any file from one disk to another on a one-drive system, insert the disk with the file to be copied and type COPY filename.ext ENTER. The computer will prompt you to insert the original and, then, the destination disk. The file will be copied with the same name, so if there is already a file with that name on the new disk you should rename or kill it first.

The Force was with Him

Editor:

I have a copy of *Colorkit* from Arizin, Inc. in Scottsdale, Ariz., and have used it a lot. Last week I was unable to load it because it gave me an error. Like a good disk system user, I tried to load my backup copy. No go, my backup copy was under a bag of magnets my wife had purchased for next Christmas.

Bruce Butterfield
3318 Pepperwood Lane
Fort Collins, CO 80525

Expanding Horizons

Editor:

I have a DMP-105 printer which I use with my CoCo 2. I often print out graphics displays. I use the *Hi-Res Screen Print Utilities*. My printer will only print half-width pictures. The manual that came with the print utility said to check the printer manual on how to set the printer to the expanded print mode. When I looked in the manual for my printer I found no such information. I tried the elongated font (CHR\$(14)) but that did not work. Is there any way to set my printer to the expanded print mode?

Tom Cook
229 N. Second Avenue
Villa Park, IL 60181

Editor:

I am in search of CoCo users who have any BBS numbers, telecommunications software or public domain BBS system software they can send me.

Philip Cavanagh
6840 Beaton Road
R.R. 3
Sooke, British Columbia
Canada V0S 1N0

Radio Rodeo

Editor:

I am a Ham radio operator and am looking for CW, RTTY, and any other programs for my Tandy Color Computer. . . .

Silvio Araujo
950 N.E. 100th Street
Miami Shores, FL 33138

Editor:

. . . I have been looking for a program that would translate CW (continuous wave Morse code transmission) and RTTY from a shortwave radio. Have you ever printed anything on this order in RAINBOW. . . ?

Charles Dockham
36 Davey Street
Buffalo, NY 14206

Editor:

. . . I would like to know if the February 1985 issue of your magazine dealing with weather fax printouts using the 64K Color Computer is still available, and also, whether subsequent issues are available dealing with this subject and RTTY reception in general?

Leigh Wright
3020 Bridgeway #452
Sausalito, CA 94965

In addition to the WEFAX program on Page 42 in our February 1985 issue, see Page 36 in the November 1986 issue for coverage of RTTY.

THE NEW ADDITION

Editor:

In the September 1986 issue of RAINBOW I was thrilled to read that Tandy had introduced the CoCo 3. In Steve Bjork's commentary [Page 26], he stated that a graphics resolution of 640 by 225 could be achieved using the analog RGB monitor. However, in both the 1987 Tandy catalog and in the brochure I picked up in the Radio Shack Computer Center it stated that the highest resolution possible for the CoCo 3 with a CM-8 was 640 by 192. Please explain this conflict in specs.

Jay Puckhaber
1057 Echo Woods Court
Clarkston, GA 30021

The highest resolution requires OS-9 and certain programming techniques as well as an analog RGB monitor.

Editor:

I am very excited about the new CoCo 3. I have a couple of questions concerning this new computer. In Steve Bjork's article he said that artifact colors were not available with the new CM-8 RGB monitor. Are artifact colors available at all on the CoCo 3 and, if so, would you be able to get them if the computer was set at composite instead of RGB with the CM-8 monitor? Also, I would like to know if windows can be used without OS-9. The CoCo 3 looks great and I plan on buying it as soon as all my questions are cleared up about the CoCo 3.

George J. Hoffman
161 Youngblood Avenue
Shavertown, PA 18708

Artifact colors are supported on the CoCo 3 but only when using a composite color monitor or TV. The CM-8 is strictly an RGB analog monitor and does not support artifacting.


Editor:

To start off, the introduction of the CoCo 3 is not a great thing. I am sure some of the owners of the CoCo 1 and 2 are not happy about this news.

The CoCo 3 is better than the old ones so what are we, the proud owners of the older models to do — get the new CoCo 3? What if the CoCo 3 has its own software, what are we supposed to do, sit around and let the CoCo 3 take over and leave the older models to rust?

I propose that the CoCo makers develop an extension for the old CoCos to make it like the CoCo 3. Like adding extra chips to the computer to make it like new so we don't have to be left out in the cold. If this can be

500 POKES, PEEKs, 'N EXECs FOR THE TRS-80 COCO



NEVER BEFORE has this information of vital significance to a programmer been so readily available to everyone. This book will help you 'GET UNDERNEATH THE COVER' of the Color Computer and develop your own HIGH-QUALITY Basic and ML programs. SO WHY WAIT?? This 80-page book includes POKES, PEEKs and EXECs to:

- ★ Autostart your basic programs
 - ★ Disable Color Basic/ECB/Disk Basic commands like LIST, LLIST, POKE, EXEC, CSAVE(M), DEL, EDIT, TRON, TROFF, PCLEAR, DLOAD, RENUM, PRINT USING, DIR, KILL, SAVE, LOAD, MERGE, RENAME, DSKINI, BACKUP, DSKI\$, and DSKO\$.
 - ★ Disable BREAK KEY, CLEAR KEY and RESET BUTTON.
 - ★ Generate a Repeat-key.
 - ★ Transfer ROMPAKS to tape (For 64K only).
 - ★ Speed Up your programs.
 - ★ Reset, MOTOR ON/OFF from keyboard.
 - ★ Recover Basic programs lost by NEW.
 - ★ Set 23 different GRAPHIC/SEMIGRAPHIC modes
 - ★ Merge two Basic programs.
 - ★ AND MUCH MUCH MORE!!
- COMMANDS COMPATIBLE WITH
16K/32K/64K/COLOR BASIC/ECB/DISK
BASIC SYSTEMS and CoCo I and CoCo II.

ONLY \$16.95

All orders \$50 & above shipped by 2nd day Air UPS with no extra charge. Last minute shoppers can benefit.

NEW!
SUPPLEMENT
to
**500 POKES,
PEEKs 'N EXECs**
ONLY **\$9.95**

200 additional Pokes, Peek's 'n Execs to give you MORE PROGRAMMING POWER. Includes commands for:

- Rompak Transfer to disk
- PAINT with 65000 styles!
- Use of 40 track single/double sided drives with variable step-rates
- High-Speed Cassette Operation
- Telewriter 64[®], Edtasm+[®] and CoCo Max[®] Enhancements
- Graphics Dump (for DMP printers) & Text Screen Dump
- AND MUCH MUCH MORE!
- 500 POKES, PEEKs 'N EXECs is a prerequisite

NEW!
DISK TUTORIAL
(2-Disk Package)



An indispensable tutorial for serious disk Basic/ML programmers. Gives almost everything you MUST know about the disk system. Some features:

- Learn about track/sectors/granules
- How the Directory is organized
- Useful disk utilities
- Useful ROM routines
- How to use double sided/40/80 track drives
- Information security on disk
- Insight into common disk errors
- Many Tips/Hints/Secrets you won't find elsewhere!
- And Much Much More!

ONLY \$36.95

MICROCOM SOFTWARE
P.O. Box 214
Fairport, N.Y. 14450
Phone (716) 223-1477

VISA, MC., Am Ex, Check, MO. Please add \$3.00 shipping and handling (USA & CANADA, other countries \$5.00). COD add \$2.50 extra. NYS residents please add Sales Tax. Immediate shipment. Dealer inquiries invited.

SIGNS 'N BANNERS

At Last! A program to create full-page signs and multi-page Banners on your printer. Many fine features:

- Select from 6 Border Styles
- Includes 6 Font Styles
- Font Editor allows you to create your own fonts
- Automatically centers your signs
- Creates 6" High Banners
- Menu Driven/Easy to use

Why buy expensive Graphics Programs when SIGNS 'N BANNERS can do the job!

Compatible with DMP printers with graphics capability, Gemini 10X, 15X, SG-10, SG-15 and virtually ANY printer with 60 X72 dots per inch capability. Compatible with Disk Basic 1.0 and 1.1

64K DISK ONLY \$26.95

**GREETING CARD
DESIGNER**



Create your own greeting cards for Birthdays, Holidays and Special Occasions. Includes a library of pre-drawn pictures and custom border styles. Includes a Font Editor. Compatible with EPSON RX/FX/GEMINI 10X/SG-10, C-ITOH 8510, DMP-100/105/400/430, SEIKOSHA GP-100/250, LEGEND 808 and GORILLA BANANA printers. Requires a minimum of 32K and a disk drive. Compatible with Disk Basic 1.0/1.1, ADOS or JDOS.

ONLY \$24.95

COCO DISK ZAPPER



Are you frustrated with crashed disks? If so, this program can save hours of labor by restoring complete or part of the information from the disk. It's indispensable!

Requires minimum 32K/64K disk system

ONLY \$24.95

MasterCard

NON-PROFIT
ORGANIZATION

VISA

Call Toll Free (For Orders) 1-800-654-5244 9 AM - 9 PM EST 7 days a week

Except NY. For information, technical information, NY orders & after-hours 1-716-223-1477

done, a lot of people would save a lot of money instead of getting the new CoCo 3.

Anthony Achong
265 Cherry Street
New York, NY 10002

We consider the CoCo 3 to be progress in a fast-changing computer world. It would not be feasible to offer an upgrade from the CoCo 2 to the CoCo 3. Due to the advanced technology and design used in the CoCo 3, such an upgrade would require replacing the CoCo 2 circuit board with a new one. This would not be cost effective.

CoCo Cat Art



Gladys Chappell
Kennewick, WA

Patchin' Up Writer-Zap

Editor:

For those readers who eagerly typed in *Writer-Zap* [September 1986, Page 116] only to see their screen display INCOMPATIBLE VERSION, I have a patch to Ian Millard's outstanding program that may solve the problem. I have been waiting a long time for a program like this and was determined to make it work. After some searching around my *VIP Writer* disk, I was successful.

To see if this patch will work, change the 57 in Line 140 to 4B. Run the program. If it makes it to PART I - TABS, break out of the program and type in the following changes:

Line 150: change 95 to 61, 104 to 70, 94 to 60

Line 220: change 5344 to 65344

Line 230: change 126 to 92

Delete lines 240 and 250

Add lines 262 and 264:

262 C=97:D\$="3":GOSUB 340

264 C=99:D\$="4":GOSUB 340

Note: When entering codes for CLEAR 3 and CLEAR 4 only a one-digit printer code is possible, so do not enter an escape code at the first prompt. Just press the ENTER key to skip to the next prompt and enter a single printer code.

Line 260: delete C\$=A\$: change 1 to 95

Line 270: change 8 to 102

Line 280: change 11 to 105

Line 290: change 14 to 108

Line 300: change 17 to 111

Line 310: change 20 to 114

Line 320: change 23 to 117

Line 330: change C\$ to A\$ change B\$ to C\$

Line 430: add B=B-1: to the beginning of the line

Line 440: change 37 to 21, 64 to 48, 59 to 43

Line 470: add :PRINT@155,E\$ to the end of the line.

Now if someone can just figure out how to modify the fire-up screen parameters (I,C, 24, 64n and width64) *Writer-Zap* will be complete.

Doug Thorsvik
Biloxi, MS

Editor:

We have received dozens of requests for further information on *Writer-Zap* [September 1986, Page 116] and we want to clear up any misconceptions caused by the INCOMPATIBLE VERSION statement. That test was added as an afterthought, just in case someone tried to use *Writer-Zap* on a version of *VIP Writer* that had been modified, thereby destroying their word processor. We were unaware that there was an older version of *VIP Writer* on the market, and did not intend leaving large numbers of users out in the cold.

For those people running 1.0, *Writer-Zap*

may not have worked. These folks should replace these two lines as shown:

30 FOR A=3584 TO 3659:READ B:POKE A,B:NEXT A:EXEC&HE00

570 DATA 134,32,142,4,0,167,128,140,6,0,38,249,142,4,42,49,141,0,23,141,2,32,13,166,160,129,64,38,1,57,128

I want to thank Doug Thorsvik for his research to produce the patch he has sent to THE RAINBOW. As we have been unable to get a copy of the old *VIP Writer*, we could not confirm the value changes that Doug has provided.

However, we have an addition that allows the user to change his line width default by adding the following line.

```
195 PRINT"LINE WIDTH DEFAULT IS"  
ASC(MID$(A$,72,1)):INPUT"CHANGE  
IT TO":C:IF C<>0 THEN MID$(  
A$,72,1)=CHR$(C)
```

The 72 is for the original version of *Writer-Zap*. For those of you with compatibility problems, it seems that changing these two values to 63 may do the trick.

Further details on multiple printer driver codes have become available. For more information, call (416) 456-0032 or write me.

Ian Millard
18 Rowe Court
Brampton, Ontario
Canada L6X 2S2

BOUQUETS AND BRICKBATS


Editor:

I would like to say thanks to Dayton Associates for the technical support I received from them on my newly purchased Gemini NX-10. Thanks, Dayton, for the fast and professional response.

Tracy Walker
Donaldsonville, LA

Continued on Page 176

ARTS AND LETTERS

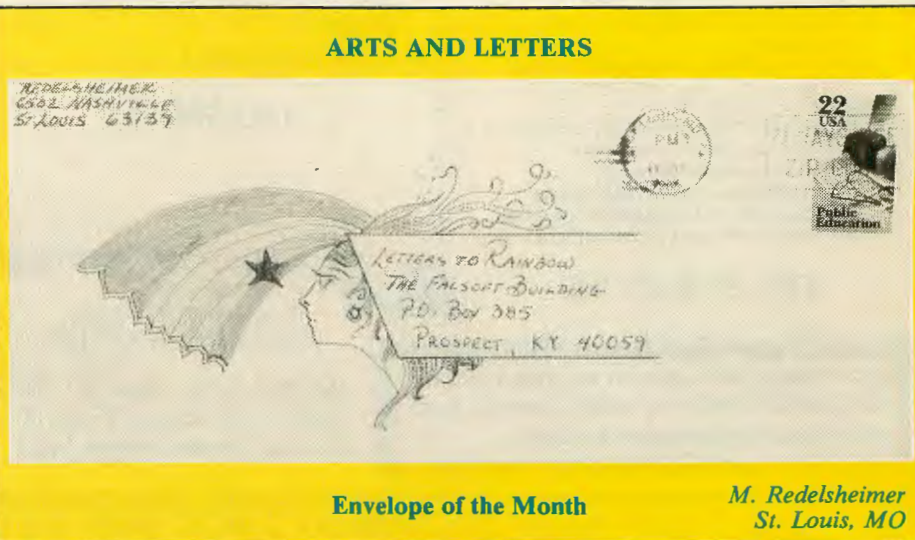

Envelope of the Month

M. Redelsheimer
St. Louis, MO

UTILITIES/BOOKS



UTILITY ROUTINES for the TANDY & TRS-80 COCO (Vol 1)

This powerful book for Basic and ML Programmers, includes program explanation, memory requirements and an annotated source listing for the utility routines given below. These routines if bought individually will cost you HUNDREDS OF DOLLARS.

These are 100% Position Independent ML Utilities and require no ML programming knowledge.

COMMAND KEYS: Access commands with 2 keystrokes

CURSOR STYLES: Over 65000 cursor styles

ERROR SKIP: 'ONERR GOTO' for Basic Programs

FULL LENGTH ERRORS: Get real word error messages

KEY CLICKER: Ensure Key input accuracy

REPEAT KEY: Repeat ANY key

REVERSE VIDEO (Green & Red): Eliminate eye-strain

SPOOLER: Don't wait for those long printouts

SUPER SCROLLER: Save/view scrolled lines

TAPE-TO-DISK: Copy Basic and ML programs

AND MUCH MUCH MORE!!!

For 16K/32K/64K Cassette or Disk Systems, CoCo I & CoCo II

BOOK \$19.95

THESE ROUTINES (READY-TO-RUN) ON CAS/DISK:

\$24.95

BOTH BOOK AND CASSETTE or DISK:

\$36.95

UTILITY ROUTINES (VOLUME II)

(Disk Only)

Includes 20 oft-used utilities such as:

- PAINT with 65000 styles
- Add SUPERSCRIPTS to your DMP printer
- Design your own commands!
- Programming Clock
- Fast Sort for Basic Strings
- Create a character set for your DMP printer
- Find/Replace phrases in your Basic Program
- Let the computer locate your errors!
- CoCo Calculator
- Super EDITing for Basic Programs
- Automatic Directory Backup
- And much much more!

64K DISK ONLY

\$29.95



WE HAVE ALL THAT YOU NEED TO SUCCEED



SUPER TAPE/DISK TRANSFER



- Disk-to-Disk Copy (1 - 3 passes)
- Tape-to-Disk Copy
- Tape-to-Disk Automatic Relocate
- Disk-to-Tape Copy
- Tape-to-Tape Copy

Copies Basic/ML programs and DATA files.
32K Disk System
(Disk to Disk Copy requires 64 K)

DISK ONLY
\$24.95

UTILITY BONANZA I

Includes 20 best-selected utilities:

- 40K Disk Basic
- Disk Cataloger
- Super Tape-to-Disk Copy (with Automatic Relocate)
- Disk-to-Tape Copy
- LList Enhancer (with page numbering!)
- Graphics Typesetter (two text sizes!)
- LARGE DMP Graphics Dump
- X-Ref for Basic Programs
- Hidden 32K (Use the "hidden" 32K from your 64K CoCo)
- Basic Stepper (Super Debugger!)
- RAM Disk (for Cassette & Disk Users)
- Single Key Printer Text Screen Dump
- AND MUCH, MUCH MORE!!!

DISK (64K Req.)
ONLY **\$29.95**

"MUST" BOOKS

UNRAVELLED SERIES: These 3 books provide a complete annotated listing of the BASIC/ECB and DISK ROMs.

COLOR BASIC UNRAVELLED: \$19.95

EXTENDED BASIC UNRAVELLED: \$19.95

DISK BASIC UNRAVELLED: \$19.95

ALL 3 UNRAVELLED BOOKS: \$49.95

RAINBOW GUIDE TO OS-9 (Book): \$18.95

RAINBOW GUIDE TO OS-9 (2 Disks): \$29.00

BASIC PROGRAMMING TRICKS: Tips and tricks for Basic Programmers. Only \$14.95

OTHER SOFTWARE . . .

Telewriter-64 (Cas) \$47.95 (Dsk) 57.95

Teleform: Mail Merge for TW-64® 19.95

Telepatch (Dsk) 19.95

Telepatch II 29.95

CoCo Max (Cas) 67.95

CoCo Max II (Dsk) 77.95

CoCo Max Upgrade (Dsk) 18.95

Pro Color File (Dsk) (includes SIMON) 54.95

Dynacalc (Dsk) 79.95

Autoterm (Cas) 36.95

(Latest Version) (Dsk) 46.95

Graphicom II 22.95

SPIT 'N IMAGE: Makes a mirror image (BACKUP) of ANY disk, even protected ones. Will also initialize and BACKUP in one pass. ONLY **\$32.95**

COCO UTIL II (Latest Version): Transfer CoCo Disk files to IBM compatible computer. Transfer MS-DOS files to CoCo. ONLY **\$36.95**

DISK ANTI-PIRATE: Best copy-protection program for disk Basic and ML programs. ONLY **\$59.95.**

HIDE-A-BASIC 1.1: Best copy-protection program for Cassette Basic programs. ONLY **\$24.95.**

CABLES/HARDWARE

UNIVERSAL VIDEO DRIVER: Use your monochrome or color monitor with your CoCo (ALL CoCos). Includes audio connection. Easy installation - no soldering. ONLY **\$29.95**

INTRONICS EPROM PROGRAMMER: Best EPROM Programmer for the CoCo. Lowest Price Anywhere - **\$137.95.**

RS232 Y CABLE: Hook 2 devices to the serial port. ONLY **\$18.95.**

3-POSITION SWITCHER: Select any one of three RS232 devices (printers/modems) from the serial port. ONLY **\$34.95.**

Y CABLE: Use your Disk System with CoCo Max, DS69, etc. ONLY **\$24.95**

DISKETTES (10): BONUS Brand SS/DD diskettes for the CoCo. 100% Guaranteed. **\$12/box.**



MICROCOM SOFTWARE

P.O. Box 214

Fairport, N.Y. 14450

Phone (716) 223-1477

To order. All orders \$50 & above shipped by 2nd day Air UPS with no extra charge. Last minute shoppers can benefit VISA, MC, Am Ex, Check, MO. Please add \$3.00 shipping and handling (USA & CANADA, other countries \$5.00) COD add \$2.50 extra. NYS residents please add Sales Tax. Immediate shipment. Dealer inquiries invited.

MasterCard



Call Toll Free (For Orders) 1-800-654-5244 9 AM - 9 PM EST 7 days a week

Except NY. For information, technical information, NY orders & after-hours **1-716-223-1477**



New CoCo 3 Brings Back Memories of the Early Excitement

Kim Vincent had some interesting news for me today and I thought I might share it with you because it is some truly exciting information for all of us.

Kim, who we sometimes call "KJK" because about half the letters she gets here are addressed to the wrong first name and the most frequent mistakes are "Kit" and "Jim" (thus Kit, Jim, Kim), said that last week she got a number of calls from people in South Carolina interested in advertising new CoCo 3 products in *THE RAINBOW*.

"How come all from the same place?" asked Kim, who — along with Jack Garland in the eastern part of the country and Cindy Shackelford in the West — sells advertising space in this magazine.

Kim likes to ask questions and I am not always certain of the answers. This time, though, I was. "Simple," I said, "There is a Tandy warehouse in South Carolina and it is obvious that some of the first CoCo 3s to be released got into the hands of people who placed orders at stores close to the warehouse."

Now, despite the fact that we would like to see more advertising in *THE RAINBOW* for a wide variety of reasons, this news is heartening for other reasons as well. I have been part of this whole market long enough to remember the earlier days of the CoCo when just about everyone (or so it seemed) had some idea for a program for this fantastic computer.

The most interesting thing about all of that is that many of those people — the Paul Searbys, Tom Mixes, Bob Rosens, Howard Cohens and Ron Krebses — have established some fine businesses for themselves. They came out early, developed more sophisticated programs as time went on, and became some of the leaders of the CoCo Community. They also — as I did — had a lot of fun doing it, and made some money as well.

I am reminded, too, of people whose names you might not know. People like Wayne Diercks, Mel Heftner and Arnold Pouch. They each developed good programs for CoCo in the early days. Wayne's business got to be too big for him and he sold out to another company who still markets his programs; Mel was the world's leading expert in screen dump programs, but with the advent of super-graphics programs the need for screen dumps pretty much went away, at least as a commercial product; Arnold was one of the most innovative minds I have known in any computer market. Sadly, he has passed away.

Printer Interface Package


\$239.95

Compatible with the new COCO3

Seikosha SP-1000A Printer

Metric Industries Model 104P Interface with Modem Switch

This package includes the SP-1000A Printer, a true parallel printer, not the SP-1000AS which is a serial printer that cannot operate at the standard Color Computer Baud Rate of 600.

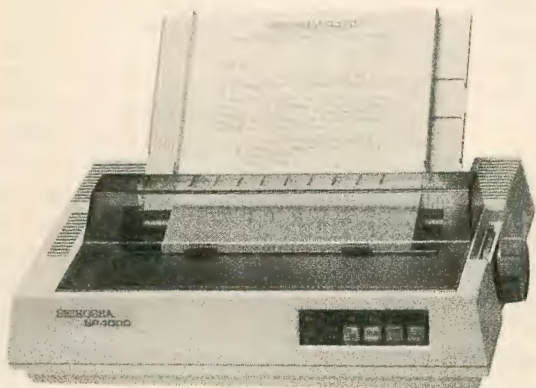

Free shipping

- Graphics
- Multiple Copies
- Variable Line Spacing
- Paper Width
- Pin and friction — 4" to 10"
- Centronics parallel.
- Impact dot matrix method, bi-directional in logic seeking, uni-directional in graphic printing.
- 100 (Draft mode), 20 cps (Near Letter Quality) print speed, with reduced noise level.
- Pin-feed or friction-feed.
- Automatic paper loading function.
- True descenders
- A variety of functions including Under line, Bold print, Double striking.
- A variety of print character sets including Pica, Elite, Italics, Super/Subscripts, Proportional, Elongated, Condensed, and Italic Super/Subscripts.
- Standard 1.5K buffer.


Printer is covered with a two-year warranty.

Model 101 Interface \$39.95

Model 102 Switcher \$35.95

The Model 104 Deluxe Interface \$51.95

Cassette Label Program \$6.95



The Model 101 is a serial to parallel interface intended for use with a COCO and any Centronics compatible parallel input printer. The 101 has 6 switch selectable baud rates (300-9600). The 101 is only 4" x 2" x 1" and comes with all cables and connectors for your computer and printer.

The Model 102 has 3 switch positions that allow you to switch your computer's serial output between 3 different devices (modem, printers or another computer). The 102 has color coded lights that indicate the switch position. These lights also act as power indicators to let you know your computer is on. Supplied with the 102 are color coded labels that can be applied to your accessories. The 102 has a heavy gauge anodized aluminum cabinet with non-slip rubber feet.

The Model 104 is a serial to parallel interface like the Model 101 but it has the added feature of a serial port (sometimes referred to as a modem switch). This feature allows the connection of a parallel printer and any serial device (modem, serial printer etc.) to your computer. You may then select either output, serial or parallel, with the flip of a switch. The 104 is only 4.5" x 2.5" x 1.25" and comes with all cables and connectors for your computer. You supply the serial cable for your modem or other serial device.

New Version 1.3 Tape transferrable to disk. Now save and load Labels from tape or disk.

This fancy printing utility prints 5 lines of information on pinfeed cassette labels. "Cassette Label" is menu driven and is very easy to use. It uses the special features of your printer for standard, expanded or condensed characters. Each line of text is automatically centered. Before the label is printed, it is shown on your CRT — enabling you to make changes if you like — then print 1, 2 or 100 labels. The program comes on tape and it is supplied with 24 labels to get you started. 16K ECB required.

Other Quality Items

High Quality 5 Screw Shell C-10 Cassette Tapes \$7.50 per dozen

Hard Plastic Storage Boxes for Cassette Tapes \$3.50 per dozen

Pin Feed Cassette Labels: White \$3.00 per 100 Colors \$3.60 per 100 (Red, Blue, Yellow or Tan)

Ribbons for your SP-1000 series Seikosha printers \$8.00

The Model 101, 102, and 104 work with any COCO including COCO3, any level basic and any memory size. These products are covered by a **1 year warranty.**

The 101 and 104 require power in order to operate. Most printers can supply power to your interface. Star, Radio Shack, and Okidata are just a few that do. Epson and Seikosha do not. The interfaces can also be powered by an AC adapter (Radio Shack Model 273-1431 plugs into all models). If you require a power supply, add a "P" to the Model number and \$5.00 to the price (Model 101P \$44.95, MODEL 104P \$56.95).

Ordering Information

Free shipping and insurance in the United States (except Alaska and Hawaii) on all orders over \$50.00. Please add \$2.50 for shipping and handling on orders under \$50.00.

Ohio residents add 5.5% sales tax.

Call (513) 677-0796 and use VISA, MASTERCARD or C.O.D. or send check or money order to:



Metric Industries Inc.
P.O. Box 42396
Cincinnati, Ohio 45242

Call for prices on the SP-1000A and other Seikosha printers.

But Wayne, Mel and Arnold all had a lot of fun in the computer business, got to know a lot of people, and put a not inconsiderable amount of money in their own pockets. It was his success, after all, which led Wayne to sell out.

All of these people, and lots of others, were early entrants into the CoCo market — in something like the first 18 months. It was a new market, thriving with enthusiasm and energy. There were new ideas almost every day.

Most of those early programs and ideas came from something someone wanted to do with their computer. When they did it well enough to satisfy themselves, they brushed it up and started selling it. I did, too. I wrote a program, an Adventure called *Vampire*, which enjoyed limited success. Of course, THE RAINBOW enjoyed a lot more, but that's another story.

That's why I'm encouraged by the news Kim brings. The story is a familiar one. Tandy puts a really neat computer in the hands of some creative people, they see something they want to do, and they figure they may as well market it.

Don't try doing that in the IBM or Atari field. That's big bucks territory. Shoot, you'll pay *PC Magazine* as much to run a full-page ad as you will us for almost a whole year! And, to really make a success, there are a lot of other things you have to be able to do to market it as well.

Someone once asked me what the key to THE RAINBOW's success was. The answer was a very simple one: We have always made it possible for people to be successful. Our business is your success — whether it is learning how to get the

most out of your CoCo, or whether it is selling CoCo software or hardware. If you succeed, we succeed. It's as simple as that.

Perhaps that is why I am most excited about KJK's news. I sense a stirring of new ideas, new products, new uses — innovations in general. It bodes well for CoCo.

If you have an idea, call Kim or Jack or Cindy. They'll be happy to help. I look forward to hearing about your ideas, and I am sure they'll be interesting. After all, here is a chance to start off on the ground floor of a new, but well-established, marketplace.

We are very glad to welcome Richard Esposito to these pages as Doctor ASCII. I've admired Richard's column for quite some time and his willingness to share information and assistance with others. As is obvious from these pages, we think question-and-answer columns are good and we like to run them. Richard's is one of the best.

It is really appropriate to thank Eric Maloney, editor-in-chief of *80 Micro* for allowing us to use the Doctor ASCII name for the column.

I am sorry that *80 Micro* has dropped CoCo coverage. They were a worthy competitor, as was the magazine they first gave birth to and then absorbed, *HOT CoCo*. We knew that they did not plan to continue the CoCo coverage — *80 Micro's* bread and butter is Model I, II, III and 4 computers — but felt it not politic to comment publicly.

Someone once asked what we would do if there were no competition. The answer is that we will keep on keeping

on. And, by the way, there are no plans for an increase in subscription rates this coming year — just as there was no increase last year.

We're sorry to see the CoCo coverage end in *80 Micro*, but understand why it must. Its main base of readers have Z-80-based computers and surely don't want the space devoted to CoCo (or MS-DOS, for that matter) when it could be used for their own machines.

By way of finally for this month, you may be interested to know that we are changing the focus of one of our other magazines, SOFT SECTOR. For the past two years, SOFT SECTOR has supported the Sanyo line of MS-DOS machines. Beginning this month, SOFT SECTOR becomes the only magazine I know of that's devoted to the PC Compatible market. Among others, it will cover Tandy, Victor, AT&T, Compaq and Leading Edge MS-DOS machines, from the compatible perspective. Our other publication, PCM will continue to cover the Tandy MS-DOS and portable computers exclusively. But SOFT SECTOR will be something different and we look forward to its debut.

We also look forward to 1987 — a year we think will be highly successful for CoCo and THE RAINBOW, Tandy's compatibles and PCM, and PC compatibles and the new SOFT SECTOR.

But most of the excitement is here at THE RAINBOW. And no wonder; the CoCo and the CoCo 3 are excitement-generating computers!

— Lonnie Falk

ASSEMBLY LANGUAGE PROGRAMMING for the TRS-80 COLOR COMPUTER

At last - The book exclusively for you and your CoCo !! You've learned BASIC and are now ready to learn assembly language programming. This hands-on guide begins with the basics and progresses to the expert level; revealing programming conventions and techniques and all the internal capabilities of the TDP-100, CoCo 1 and 2. At every step of the way are illustrations, sample programs, and plain English explanations. All sample programs are shown as assembled with Radio Shack's EDTASM+ cartridge. Plus a complete chapter explains how to use all EDTASM+ capabilities. This book describes how to write subroutines, interrupt handlers, programs that control the graphics display modes, cassette, disk, keyboard, sound, joysticks, serial I/O, interrupts, and use of ROM resident subroutines. Also covered are the MC6809E microprocessor, the video display generator (VDG), peripheral interface adapters

(PIA), SAM, memory, and how they all work together. Suitable as a high school or college textbook.

CHAPTERS: The Binary Number System - Memory and Data Representation - Introduction MC6809E Microprocessor - Addressing Modes of the MC6809E - MC6809E Instruction Set - Assembly Language Programming with EDTASM+ - Assembly Language Programming - Assembly Language and Extended Color BASIC - Internal Control and Graphics - Technical Details.

289 pages
soft cover

\$16.00 U.S. plus \$1.50 shipping. Check or money order. RI residents please add 6% sales tax. Inquire about volume discounts.

Published and
sold by

TRS-80 & EDTASM+ are
trademarks of Tandy Corp
Check or money order.

TEPCO
30 Water Street
Portsmouth, RI 02871



PRICKLY-PEAR SOFTWARE

QUALITY PROGRAMS FOR YOUR COCO & TDP-100

PROGRAMS REQUIRE 16K EXTENDED BASIC FOR TAPE, AND 32K DISK UNLESS OTHERWISE NOTED.

HALL OF THE KING (Rainbow Review 6/86)

This program combines all the things you look for in a great two disk graphics adventure program. The Hi-Res graphics are superbly done. The text portion of the screen and the graphics change quickly as you move through the **HALL OF THE KING**. You can move freely from one portion of the adventure to another. Call up your inventory at any time. You can even save or load a game at ANY time. **HALL OF THE KING** will challenge even the most seasoned adventurer.

HALL OF THE KING requires 64K EB and one disk drive. This exciting two disk adventure comes packaged in a vinyl case. **\$39.95.**

HALL OF THE KING II (Rainbow Review 9/86)

Continue your quest for the Earthstone in The Inner Chambers of the **HALL OF THE KING**. Outstanding graphics help show the way to success in your search to help restore the legendary power of the Earthstone to the dwarven race. The deeper you travel into the inner chambers, the more difficult your progress becomes. **HALL OF THE KING II** has all the fine features of the first adventure. It is designed to follow the original **HALL OF THE KING** but may be played as a stand-alone adventure. The adventure fills two disks and comes packaged in a handsome vinyl folder. It requires one disk drive and 64K. **\$39.95**

WARP FACTOR X (Rainbow Review 2/86)

If you have been waiting for a game for your color computer that has everything, your wait is over. **WARP FACTOR X** is here. This all graphics simulation game requires strategy, fast thinking, an eye for detail, and above all experience in knowing the capabilities of your starship and its computer. (See review in Feb. 85 issue of Rainbow.) It requires 32K one disk drive and comes packaged in a vinyl library case. **\$34.95**

DARKMOOR HOLD (Rainbow Review 8/86)

You and your comrades will explore the levels of Darkmoor Hold in an effort to gain great riches and defeat the dark wizard. The Wizard will soon realize the threat you pose and the many monsters you meet and battle will become stonger and more powerful as you move through the 10 levels of Darkmoor. A keen eye will help you find weapons and armor to aid your battle along with treasures for you to keep. Your party consists of a Dwarf, an Elf, and you, the Human, each with their own special attributes. The weapons, armor and treasure are placed randomly in each level to provide a new challenge each time you play. You may also save the game you are playing since defeating the evil Wizard is not an easy task. It has great graphics and an impressive text screen to give you more fun than a barrel of elves. Requires 64KEB and 1 disk drive. **\$29.95**

POLICY ON PROTECTION

We believe our customers are honest — all of our software can be backed up using standard backup procedures.

Your Personal check is welcome - no delay. Include \$1.50 shipping for each order. TX residents add 5 1/8% sales tax. Orders shipped within two days.

Dealer and author inquiries are always welcome. Canadian dealers should contact Kelly Software Distributors, Ltd. 608, STNT, Calgary, Alberta T5H 2H2, (403) 236-2161



DRAGON BLADE (Rainbow Review 11/86)

Animated Graphics Adventure

This 100% hi-res graphics adventure features many animated screens which will delight the avid adventurer. You search for the magic Blade which is the only way to rid your homeland of the fearsome dragon which has risen from a long rest to terrorize your village. Fill your screen with super graphics as you try to solve the difficult challenge the village leaders have set before you. Dragon Blade requires 64K EB and 1 disk drive. **\$29.95**

DOLLAR WISE

In todays world of high finance, variable interest rates, balloon payments, and lease options there is a program that can help you sort out the details and make sense of the small print. **DOLLAR WISE** is an extremely flexible program that will allow you to find the best loan by substituting values for all the different variables that make up the loan. Find the future value and interest paid for either single or multiple deposit savings accounts. Determine mortgage interest paid during a tax year—very good for estimating tax savings on credit purchases also. Should you rent or buy. **DOLLAR WISE** gives you all the options. It will even provide a loan amortization table print out with Tax Year summaries either by month or year. Requires 32K Tape -**\$24.95** Disk - **\$27.95**

FONTFILE — (New for the COCO III)

FONTFILE replaces the standard Hi-Res COCO III font with a character set you select. Choose from a menu of 26 or create your own and save it to disk for future use. Use the fontfile in your own basic programs or livenup an old program with a Hi-Res font screen. **FONTFILE** will work on all versions of the COCO but is especially written to take advantage of the special capabilities of the new COCO III. Requires 64K and one disk drive. **\$24.95**

COMING SOON!

Hall Of The King III

Send for our free catalog

Call (915) 584-7784 or

Send Order To: **PRICKLY-PEAR SOFTWARE**

213 La Mirada
El Paso, Texas 79932



TANDY™ The Ideal Buy



**COLOR
COMPUTER 3
128K
\$159.00***
26-3334

COLOR COMPUTERS
26-3127 Color Computer 2 64K
26-3131 Color Disk Drive 0
26-3512 CM-8 RGB Color Monitor
26-3012 Deluxe Joystick



**TANDY™ 1000SX
384K 2 Disk Drives
\$840.00***
25-1051


TANDY™ 1000 COMPUTERS
25-1050 Tandy 1000EX 256K 1 Disk Drive
25-1020 VM-4 Monochrome Monitor
25-1022 CM-10 Color Monitor
25-1023 CM-5 Color Monitor



**TANDY™ 3000 HL
360K Drive 512K
\$1195.00***
25-4070

TANDY™ 3000 COMPUTERS
25-4001 Tandy 3000 1.2 Meg Drive 512K
25-4010 Tandy 3000 20 Meg Hard Drive 512K
25-4011 Tandy 3000 40 Meg Hard Drive 640K
25-4103 MS-DOS 3.2/Basic/DeskMate

**EPSON™
FX-85
\$385.00**



EPSON™ PRINTERS
LX-86 Dot Matrix Printer 80 Column
FX-286 Dot Matrix Printer 132 Column
LQ-800 Dot Matrix Printer 80 Column
LQ-1000 Dot Matrix Printer 132 Column

PERRY COMPUTERS

All prices and offers may be changed or withdrawn without notice. Advertise prices are cash prices. C.O.D. accepted add 2% (minimum charge \$10.00) M.C. - Visa add 2%, AX add 4%. All non-defective items require return merchandise authorization. Call for RMA Number before returning. Delivery is subject to product availability. Prices include shipping costs except for orders under \$100.00 add \$5.00 shipping and handling.
TM - Registered Trademark of Tandy, Epson, and IBM.
*Monitors not included

Monday thru Friday 9am - 6pm Saturday 9am - 3pm EST.
124 South Main Street, Perry, MI 48872
CALL 1-517-625-4161 or TOLL-FREE
1-800-248-3823

The Color Computer 3 and The CoCo Three

At long last, the Color Computer 3 is in the stores. And, with the holiday season upon us, it's being offered at a sale price of \$199.95. Then, too, the 64K Color Computer 2 is also on sale and it is just \$99.95. With that kind of "byte for the buck," the favorite add-on to many CoCo systems this Christmas will be a new CoCo itself!

Historically, the CoCo is Tandy's strongest seller during the holiday season. Tandy's Ed Juge says, "Each year, Christmas sales of the Color Computer break the previous year's record. So, we are very optimistic about the continued success of this machine."

To help you drop a few not-so-subtle hints for those preparing Christmas lists, we've included a Holiday Shopping Guide in this Holiday issue. For maximum effect, we suggest you use a grease pencil to circle a few items on pages 25-28 and then sort of prop the magazine open on the coffee table for a few days. It never hurts to give Santa a helping hand now and then.

Speaking of the CoCo 3, if you'd like to surprise your favorite Radio Shack salespersons, tell them to hold the CTRL and ALT keys down while powering up the new machine. Yep! In addition to the Chicago Seven, Dirty Dozen and Jackson Five, we now have "The CoCo Three," Mark Hawkins, Tim Harris and T. Earles. These intrepid programmers, also known as the Good, the Bad and the Ugly — though not necessarily in that order — have their picture embedded in the ROM of our CoCo 3.

More in a future issue on these "Three Mugateers," immortalized in the screen dump at right. In the meantime, let's have an informal "Free the CoCo Three" contest. Without getting bogged down in rules, we'll send a free tape of CoCo programs to the first person from each state who writes in with an alternate way (other than the method above) to make The CoCo Three appear on the screen.



M. Hawkins T. Harris T. Earles

"The CoCo Three"

Saving the digitized picture to disk is easy enough; it's a standard PMODE 4 graphics screen. Simply press the reset button after viewing the picture and type `SAVEM "PICTURE", &H0E00, &H25FF, &HA027`. To view the picture on a CoCo 1 or 2, load the file and type `10 PMODE4, 1: SCREEN1, 1: GOTO 10` and run it. You may notice an extraneous black line to the left of the picture when you reload the file, due to a glitch caused by the reset process. This can be removed with any graphics editor. To make a printout, you'll need a screen dump program.

As I write this column, we are packing our suitcases for the Princeton RAINBOWfest. One of the highlights we expect will be a round-table on "The Design, Development and Marketing of the CoCo 3." Scheduled speakers include Tandy's Barry Thompson and Mark Siegel, as well as independent CoCo 3 programmers Steve Bjork and Greg Zumwalt. Our plans are to tape record this panel discussion for the benefit of those who could not attend the show, so check Page 174 for details on ordering a copy.

Lastly, in the spirit of CoCo Community, that special feeling that has made us all friends over the past few years, from our house to yours, best wishes for a happy holiday season and a prosperous new year!


— Jim Reed

FROM C.R.C COMPUTERS

DISTO SUPER PRODUCTS

DISTO SUPER CONTROLLER
\$99.95

- Gold contacts on all connectors
- Shielded metal box
- Four 28 pin sockets for software expandibility
- Uses 2764 or 27128 EPROMs only
- EPROMs are software selectable
- Internal Mini-Expansion-Bus interface for DISTO SUPER add-ons or user projects
- C-DOS included (RS-DOS compatible), single or double sided, 6 to 30 ns step rate
- Works on all COCOs or COCO IIs

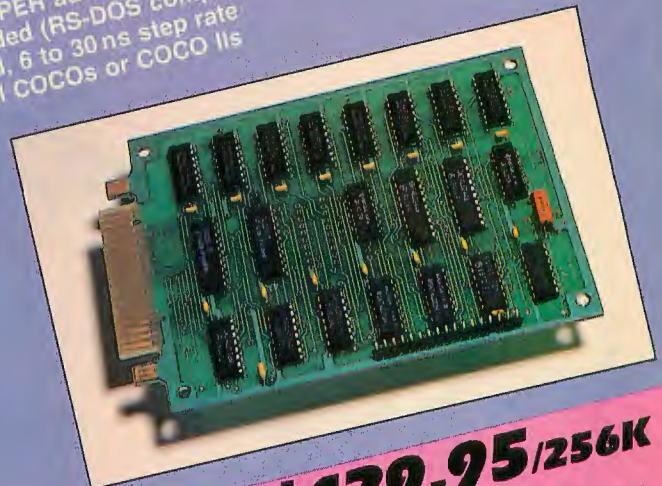

DISTO SUPER ADD-ONS
 Four add-ons are currently available

REAL TIME CLOCK/PRINTER INTERFACE
 An internal clock that will keep the proper time, date and year. A small battery keeps the time when the computer is off. Retrieve and set the time by using simple Basic Pokes. The Real Time Clock/Parallel Printer Adapter is a single unit. Software drivers included. \$39.95

• **MINI EPROM PROGRAMMER**
 Yes, a low cost programmer that attaches to the DISTO SUPER CONTROLLER or SUPER RAMDISK. Program those often used utilities into EPROMs and plug them directly into your controller. Will program 2764's or 27128's. A perfect mate for the DISTO SUPER CONTROLLER. \$54.95

• **DISPLAY 80 SUPER CARD**
 A real knock-out. DISPLAY 80 is a three in one card. It's major function is to add an 80 column by 24 line display to your computer. This feature packed package also includes a REAL TIME CLOCK and PARALLEL PRINTER INTERFACE. An all-in-one package that fits neatly inside the Controller or Super Ramdisk. OS-9 software available*. \$139.95

• **HARD DISK INTERFACE (Coming soon)**
 Fits inside Super Controller or Super Ramdisk. S.A.S.E. interface compatible. OS-9 Drivers available*. Supports WD-1002-SHD or ZEBEC 1410 controller.

DISTO SUPER RAMDISK
\$129.95/256K
\$169.95/512K

- Inexpensive 2nd drive Emulator
- Works with all COCOs (Multi-Pak required)
- Easy installation, Just plug in and go
- Low software overhead
- Much faster than a regular drive
- Plain language instructions
- Complete OS-9 Drivers available*
- Compatible with COCOMAX if used with C-DOS+
- Internal Mini-Expansion-Bus for DISTO ADD-ONS
- Gold contacts on all connectors
- Shielded metal box


CRC COMPUTERS inc.
 10802 Lajeunesse,
 Montreal, Quebec
 Canada, H3L 2E8
 1-514-383-5293

The DISTO SUPER CONTROLLER, add-ons and documentation are received and designed by Tony Di Stefano. The DISTO SUPER CONTROLLER and add-ons are manufactured and distributed by: CRC COMPUTERS INC. DISTO and C.R.C Computers are registered trade marks. The DISTO Super Controller and add-ons are copyrighted by DISTO.

* All OS-9 drivers sold separately

HOLIDAY SPECIAL

*A computerized greeting
for you to personalize*

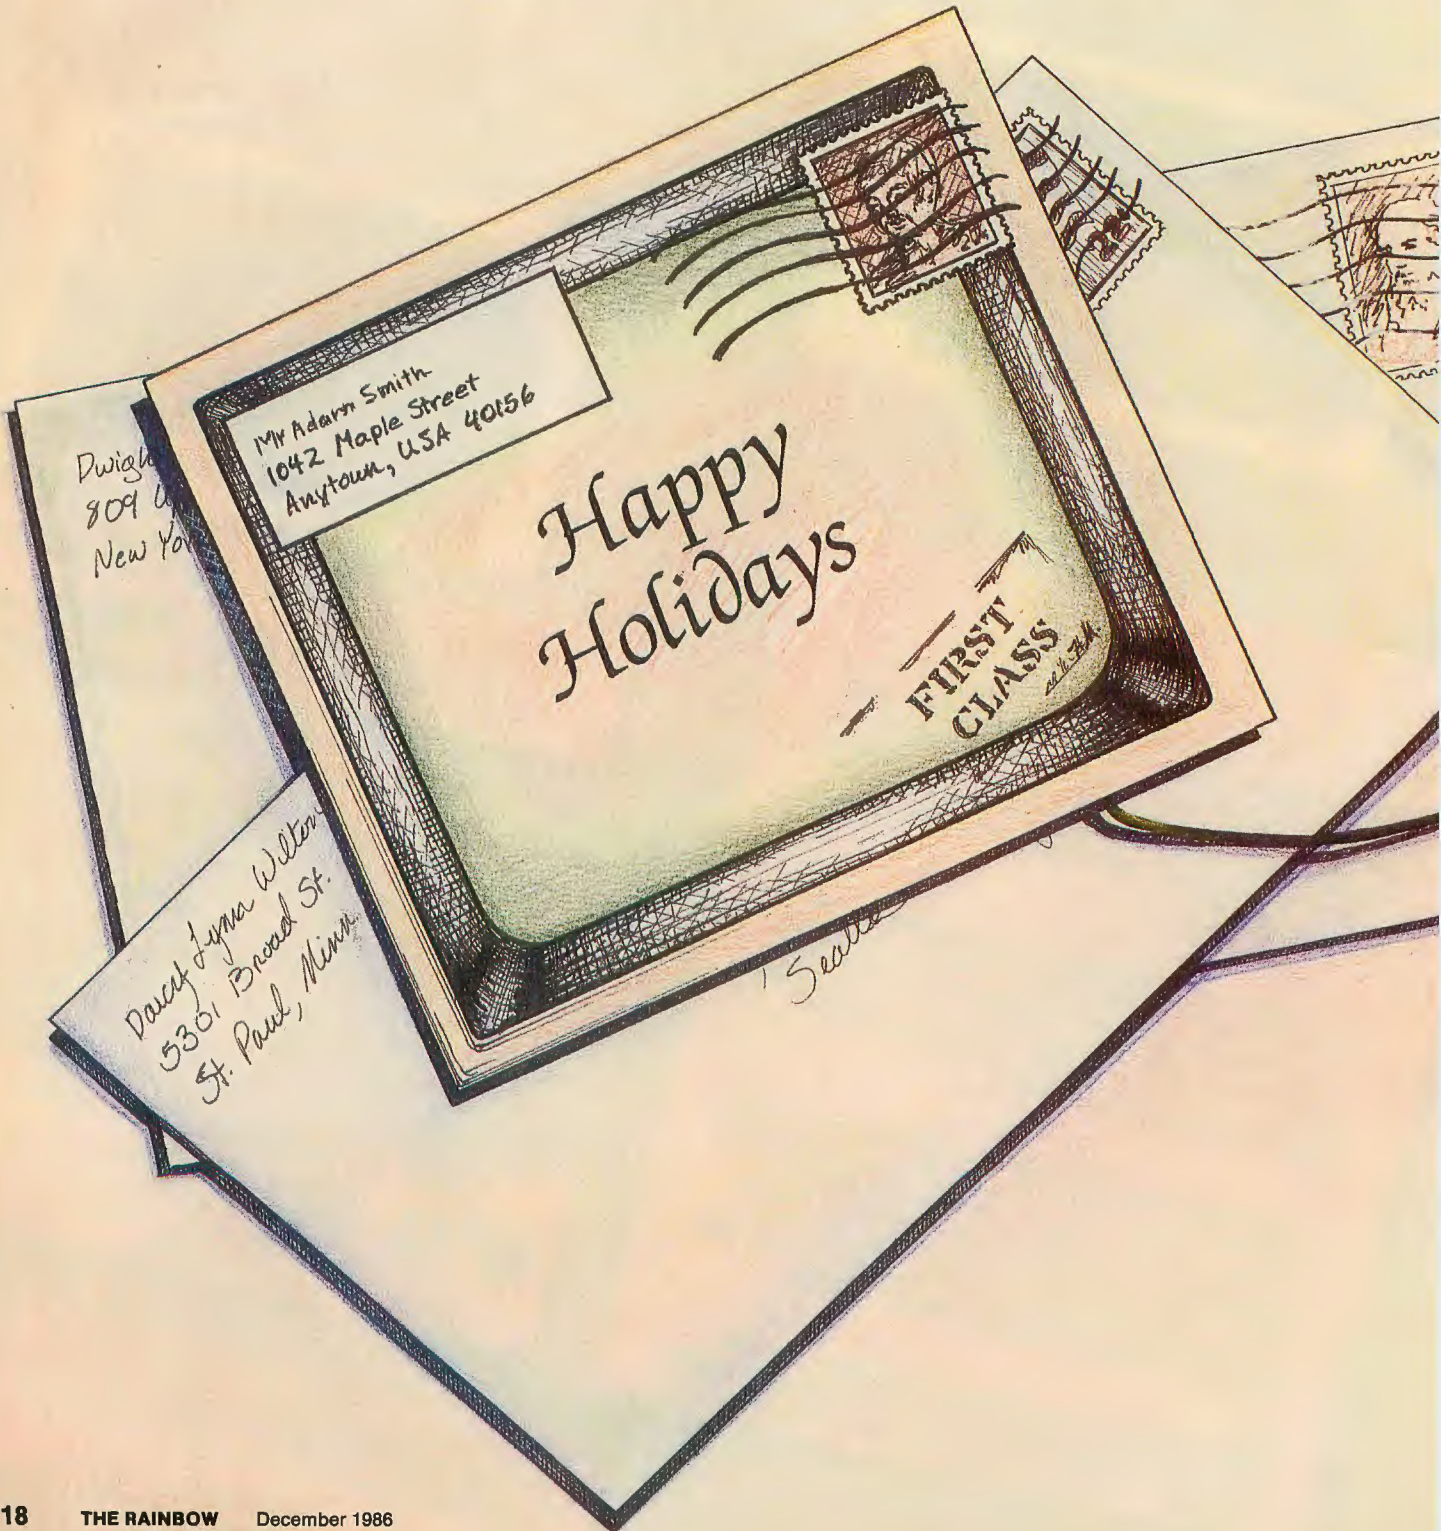



Season's Greetings

By Eugene Vasconi

It's that time of year for warm greetings and renewed friendships, so here's our special Christmas card from the RAINBOW family.

You may also use the program as your very own personalized greeting to fellow CoCoers. All you need do is change one line.

Line 650 presently reads:

```
DRAW "BM40,92;XR$;XA$;XI$;
XN$;XB$;XO$;XW$;"
```

Change the R-A-I-N-B-O-W letters in that line to those of the name desired. Also change the BM40 to fit the number of letters in the name according to the following chart:

Number of letters	Changes to
3	BM60
4	BM55
5	BM50
6	BM45
7	BM40
8	BM30
9	BM20
10	BM10

For example, if your name is Santa, Line 650 would read: DRAW "BM50,92;XS\$;XA\$;XN\$;XT\$;XA\$;". This is the only change necessary to customize the program. A maximum of 10 letters will fit.

Hope you enjoy my holiday gift and have a very happy holiday season!

(You may direct questions about this program to the author at 12474 Starcrest #204, San Antonio, TX 78216, 512-496-5783. Please enclose an SASE when writing.) □

Eugene Vasconi is a commercial helicopter pilot in San Antonio, Texas. His computer interests include graphics, music and education. He has been a CoCoer for five years.

280	119
440	131
630	107
840	156
916	70
975	7
END	178

The listing: GREETING

```
10 DIM X(10),Y(10)
20 A$="U12E4R4F4D4NL12D8BR6"
30 B$="U16R12D4G4NL8F4D4NL12BR6"
40 C$="U16R12BD16NL12BR6"
50 D$="U16R8F4D8G4NL8BR10"
60 E$="U8NR8U8R12BD16NL12BR6"
70 F$="U8NR8U8R12BD16BR6"
80 G$="U16R12BD8NL4D8NL12BR6"
90 H$="U8NU8R12NU8D8BR6"
100 I$="R6U16NL6R6BD16NL6BR6"
110 J$="NU4R12NU16BR6"
120 K$="U8NU8R4NE8F8BR6"
130 L$="NU16R12BR6"
140 M$="U16F6ND2E6D16BR6"
150 N$="U16F6D6F6NU16BR6"
160 O$="U16R12D16NL12BR6"
170 P$="U16R12D8NL12BD8BR6"
180 Q$="U16R12D16NL12NH4BR6"
190 R$="U16R12D8L4NL8F4D4BR6"
200 S$="R12U8L12U8R12BD16BR6"
210 T$="BR6U16NL6R6BD16BR6"
```



```

22Ø U$="NU16R12NU16BR6"
23Ø V$="BR6H6U1ØBR12D1ØG6BR12"
24Ø W$="NU16R6NU8R6NU16BR6"
25Ø X$="E6U4NH6NE6D4F6BR6"
26Ø Y$="BU16D4F6ND7E6NU4BD12BR6"
27Ø Z$="NR12U3E12U2NL12BD16BR6"
28Ø AP$="BU16BR8D4G4BF8BR6"
29Ø HY$="BU8BR2R8BR2BD8BR6"
3ØØ CLS(3):FORFP=1TO3Ø:PRINT@FP,
CHR$(134+8Ø);:PRINT@FP+48Ø,CHR$(
134+8Ø);:NEXTFP:FORFQ=32TO448STE
P32:PRINT@FQ,CHR$(137+96);:PRINT
@FQ+31,CHR$(137+96);:NEXTFQ

```



```

31Ø POKE359,57:SCREENØ,1:PRINT@6
9,"T'WAS THE NIGHT BEFORE ";:PRIN
T@139,"CHRISTMAS ";
32Ø PRINT@228,"AND NOTHING WAS S
TIRING ";
33Ø GOTO41Ø
34Ø PLAY"T1L8V28Ø1CC#CC#CC#CC#CC
#"
35Ø PRINT@358,"EXCEPT THE COMPUT
ER! ";
36Ø PLAY"T4L16Ø1GG-FEE-DO2GG-FEE
-DO3GG-FEE-DO4GG-FEE-DO5GG-FEE-D
L12AA#AA#AA#AA#AA#AA#L2A"
37Ø GOTO49Ø
38Ø PRINT@232,"[PRESS ANY KEY] "
;
39Ø PLAY"L2ØØØ1CEGO2CEGO3CEGO4CE
GO5CEG"
4ØØ GOTO67Ø
41Ø PMODE3,1:PCLS
42Ø CIRCLE(Ø,17Ø),1ØØ,2,.6,.75,.
93
43Ø CIRCLE(18Ø,195),2ØØ,2,.3,.6,
.2
44Ø PAINT(125,19Ø),4,2
45Ø DRAW"BM18Ø,8Ø;C3G1ØR5G2ØR1ØG
3ØR2ØG35R55D1ØR1ØU1ØNL1ØR55H35R2

```

```


ØH3ØR1ØH2ØR5H1Ø"
46Ø PAINT(18Ø,1ØØ),3,3
47Ø PAINT(178,182),5,3
48Ø GOTO34Ø
49Ø COLOR 2
5ØØ FORR=1TO1Ø:READ X(R),Y(R):NE
XTR
51Ø DATA 165,13Ø,15Ø,11Ø,13Ø,14Ø
,12Ø,175,2Ø5,165,21Ø,11Ø,23Ø,14Ø
,24Ø,175,185,1Ø5,17Ø,155
52Ø FORDR=1TO1Ø:FORM=1TO4:CIRCLE
(X(DR),Y(DR)),M:NEXTM,DR
53Ø POKE359,126:CLS(Ø):PLAY"Ø5L3
G"
54Ø LINE(137,16Ø)-(215,13Ø),PSET
55Ø LINE(148,126)-(2ØØ,1Ø5),PSET
56Ø LINE(165,1ØØ)-(187,87),PSET
57Ø COLOR3
58Ø LINE(Ø,Ø)-(255,194),PSET,B
59Ø DRAW"BM1Ø,3Ø;S5;C2;XM$;XE$;X
R$;XR$;XY$;"
6ØØ DRAW"BM1Ø,55;XC$;XH$;XR$;XI$
;XS$;XT$;XM$;XA$;XS$;"
61Ø DRAW"BM1Ø,73;S3;C3;XF$;XR$;X
O$;XM$;"
62Ø DRAW"BM+15,Ø;XT$;XH$;XE$;":'
the
63Ø DRAW"BM45,11Ø;CØ;XF$;XA$;XM$
;XI$;XL$;XY$;":'family
64Ø 'insert line
65Ø DRAW"BM4Ø,92;XR$;XA$;XI$;XN$
;XB$;XO$;XW$;"
66Ø GOTO38Ø
67Ø DIMSO$(337):FORZ=1TO337:READ
SO$(Z):NEXTZ
68Ø EXEC44539
69Ø DIMZF$(63)
7ØØ PMODE4,1:SCREEN1,1
71Ø FORSY=3TO75:SZ=255-SY
72Ø PSET(SZ,SY):PRESET(SZ+3,SY-3
)
73Ø NEXTSY
74Ø FORS=1TO4:CIRCLE(18Ø,75),S,1
75Ø NEXTS
76Ø DRAW"BM18Ø,75;S3;C1NE7NF7NG7
NH7"
77Ø DRAW"BM18Ø,75;CØNU8NR8ND8NL8
"
78Ø REM
79Ø IF PS=1THEN GOTO9ØØ
8ØØ IF ZZ=>337 THEN GOTO82Ø
81Ø ZZ=ZZ+1:PLAY"T15L8;XSO$(ZZ);
":GOTO85Ø
82Ø IF FL=55THEN PS=1:GOTO84Ø
83Ø FL=FL+1:COLORØ,Ø:LINE(5,FL+5
)-(2ØØ,FL+5),PSET:GOTO85Ø

```

The Amazing A-BUS

What will you do with it?

NEW

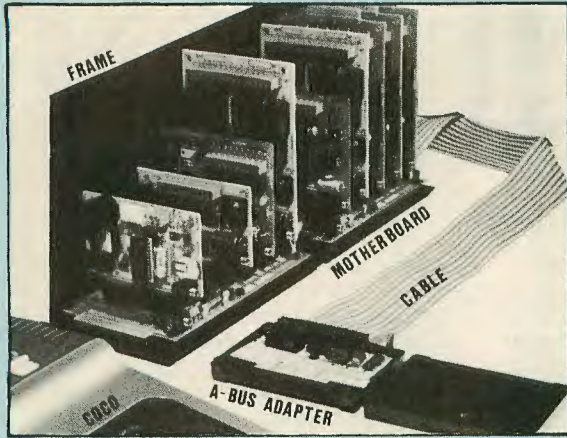

An A-BUS system with 2 Motherboards and 9 Cards.

SHEILA wanted to set up a variety of experiments in her lab. With an A-BUS, the computer can watch the mice instead of Sheila.

HARRY has a model railroad layout that he wished to automate. Now his home computer controls the engines, gates, signals, etc. through the A-BUS.

BOB tests electrical fixtures as they leave the assembly line. He develops test equipment quickly with inexpensive, off-the-shelf, and easy to use A-BUS cards.

But what's an A-BUS? It's the easiest way to connect a variety of cards that sense and control anything outside the computer. With the A-BUS, your CoCo becomes an incredible machine.


What would I need? First, an A-BUS Adapter to convert your computer bus to the A-BUS standard. Then a Cable (with one or two slots) to connect one or two A-BUS Cards. If you need more than two cards, the cable will be connected instead to the A-BUS Motherboard, which has five slots. Up to five motherboards can be chained. Finally, add your choice of A-BUS Cards to fit your project.

I'm not an engineer. Can I use the A-BUS? If you can wire a switch, you can use the A-BUS. No computer hardware knowledge is needed! A screwdriver is all you need for many projects.

What about software? Simple PEEK and POKE commands control the whole system, whether you read the time on the clock, switch the relays, take a temperature reading, or turn a motor.

What if I change computers? Incredibly, this is as simple as replacing the inexpensive adapter card.

Special:
Complete set of all user's manuals. Typeset, illustrated, with schematics. Only \$10

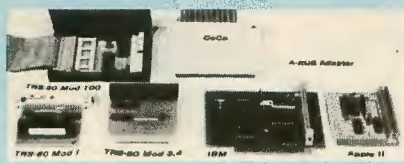

A-BUS Adapters

CoCo to A-BUS Adapter AR-138: \$49

Works with all CoCo's. Plugs into rom slot or Multipak. Disk systems without Multipak need Y-cable (\$19.95)

- A-BUS adapter for: AApple II, II+, IIe. AR-134...\$49
- IBM PC, XT, AT and all compatibles. AR-133...\$69
- TRS-80 Models 100, 200. AR-135...\$69
- TRS-80 Mod 3, 4, 4D. Fits 50 pin I/O bus. AR-132...\$49
- TRS-80 Model 4P. Includes extra cable. AR-137...\$62
- TRS-80 Model II. Plugs into 40 pin I/O bus. AR-131...\$39

A-BUS Motherboard MB-120: \$99

Will accommodate five A-BUS cards. A sixth connector allows a second motherboard to be added to the first (with connecting cable CA-161...\$12). Up to five motherboards can be joined this way to a single adapter. The motherboard is mounted on a sturdy aluminum frame with card guides.

A-BUS Cable (3 ft.) CA-163: \$29

Connects Adapter to 1 A-BUS card or Motherboard. Special Cable for two A-BUS cards CA-162...\$39

Relay Card RE-140: \$129

8 industrial relays on board. Contacts are rated at 3 amps. You can control up to 64 cards (512 relays) using several motherboards. Jumpers are used to simply select the card address. The card is easily controlled in BASIC with "OUT" or "POKE". For example, OUT 1,0 turns all the relays off on card #1. Eight LED's show which relays are on.

Digital Input Card IN-141: \$49


It's safe and easy to connect and read switches, keypads, thermostats, alarm loops, etc. The eight inputs can monitor the presence of voltage or switch position. Simple INP or PEEK commands read the status (On or Off) of the inputs. Each input is optically isolated for convenience and safety.

Analog Input Card AD-142: \$119

With this 8 bit, 8 channel A/D converter, your computer can read voltages, temperatures, pressures, light levels, etc. Take over 100 readings per second in BASIC (several thousand with machine language). It's simple to use, for example: OUT 1,3 selects channel #3, then A=INP(1) reads the voltage on that channel. Input range: 0 to 5.1V. Resolution: 20mV. Conversion time 120us.

Prototyping Card PR-152: \$15

Protocard is 3 1/2 by 4 1/2 in. and accepts up to 10 IC's.

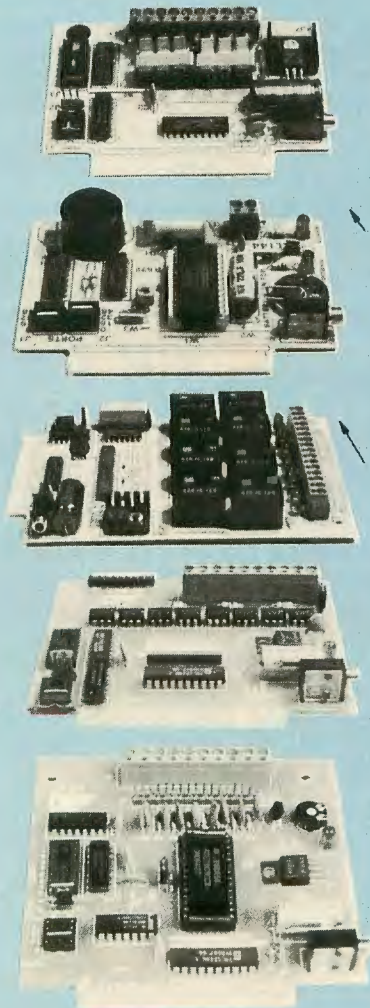

12 Bit A/D Converter AN-146: \$109

This high performance analog to digital converter features accuracy to 0.025%, 130ms conversion time, sign and over range indication. The basic input range is -5 to +5 volts, with 1.2mV resolution, but the gain of the on-board amplifier can be set to measure microvolts. Ideal for a strain gauge, thermocouple, pH meter, etc.

Motor Controller ST-143: \$69

Stepper Motors are the ultimate in motion control. The special package (below) includes everything you need to get familiar with stepper motors: Each controller card drives two stepper motors (12V, bidirectional, 4 phase).

Motor: 48 steps/revolution, 300 steps/second, 1/4" shaft: MO-103...\$15. Power supply: PS-126...\$10

Special Package: the controller card, two stepper motors, and power supply: PA-181...\$99

Clock with Alarm CL-144: \$89

It's the most powerful clock/calendar available. The features: ● 5 second/month accuracy. ● Keeps time, date, and alarm for 5 years (even with computer off). ● Can time events down to 1/100 second. ● Periodic "chime". ● Full time and date alarm. ● Four alarm outputs: Computer, LED, Buzzer, and Reed Relay. ● Easy to use; for example H=INP(1) reads the hours, Y=INP(6) reads the year, etc.

Latest Developments

- Voice Synthesizer VS-153
- 15 Bit Analog to Digital Converter AD-155
- Intelligent Stepper Motor Controller ST-154
- Digital to Analog Converter DA-147
- LCD Display (one and two line) LD-151
- Touch Tone® Decoder PH-145
- Counter Timer CT-154
- 24 Line TTL Input/Output DT-148

Order Line **800 221-0916**
Except in NY
Info and NY orders: (718) 296-5916
Technical Info: (203) 656-1806
All lines open weekdays 9 to 5 NY time.

Add \$3.00 per order for shipping.
We accept Visa, MC, checks, M.O.
C.O.D. add \$3.00 extra.
N.Y. residents add sales tax.
Shipping to Canada is \$5.00
Overseas, FPO, APO add 10%

COLORWARE Colorware Inc
79-04 Jamaica Ave
Woodhaven, NY 11421

CoCo Max™ II



You'll use it all the time and love using it.

What is CoCo Max?

Simply the most incredible graphic and text creation "system" you have ever seen. A Hi-Res Input Pack (more on the pack later) is combined with high speed machine language software. The result will dazzle you.



CoCo Max disk system, with Y-cable.

Is CoCo Max for you?

Anyone who has ever held a pencil or a crayon for fun, school or business will love it. A 4 year-old will have fun doodling, a 15 year-old will do class projects and adults will play with it for hours before starting useful applications (illustrations, cards, artwork, business graphics, flyers, charts, memos, etc.) This is one of the rare packages that will be enjoyed by the whole family.

What made CoCo Max an instant success?

First there's nothing to learn, no syntax to worry about. Even a child who can't read will enjoy CoCo Max. Its power can be unleashed by simply **pointing** and **clicking** with your mouse or joystick. With **icons** and **pull down menus**, you control CoCo Max intuitively; it works the same way you think.

Don't be misled by this apparent simplicity. CoCo Max has more power than you thought possible. Its blinding speed will astound you.

It lets you work on an area 3.5 times the size of the window on the screen. It's so friendly that you will easily recover from mistakes: The **undo** feature lets you revert to your image prior to the mistake. As usual, it only takes a single click.

Later, we will tell you about the "typesetting" capabilities of CoCo Max II, but first let's glance at a few of its graphic creation tools:


With the **pencil** you can draw free hand lines, then use the **eraser** to make corrections or changes. For straight lines, the convenient **rubber-banding** lets you preview your lines before they are fixed on your picture. It's fun and accurate. Lines can be of any width and made of any color or texture.

The **paint brush**, with its 32 selectable brush shapes, will adapt to any job, and make complicated graphics or calligraphy simple.

For special effects, the **spray can** is really fun: 86 standard colors and textures, all available at a click. It's like the real thing except the paint doesn't drip.

CoCo Max will instantly create many shapes: circles, squares, rectangles (with or without rounded corners), ellipses, etc. Shapes can be filled with any pattern. You can also add hundreds of custom patterns to the 86 which are included.

The **Glyphics** are 58 small drawings (symbols, faces, etc.) that can be used as rubber stamps. They're really great for enhancing your work without effort.



Pull down menus



Zoom in!

Control Over Your Work

CoCo Max's advanced "tools" let you take any part of the screen, (text or picture) and perform many feats:

- You can move it around
- Copy it
- Shrink or enlarge it in both directions
- Save it on the electronic **Clipbook**
- Flip it vertically or horizontally
- Rotate it
- Invert it
- Clear it, etc. etc.

All this is done instantly, and you can always **undo** it if you don't like the results.

For detail work, the **fat bits** (zoom) feature is great, giving you easy control over each pixel.

To top it all, CoCo Max II works in color. Imagine the pictures in this ad in color. If you own a Radio Shack CGP-220 or CGP-115, you can even print your work in full color!

There is so much more to say, such as the capability to use CoCo Max images with your BASIC programs, the possibility to use CoCo Max's magic on any standard binary image file. There are also many advanced features such as the incredible **lasso**.




Inside the Hi-Res Input Pack

Why a Hi-Res Input Pack?

Did you know that the CoCo joystick input port can only access 4096 positions (64x64)? That's less than 10% of the Hi-Res screen, which has 49152 points! (256x192). You lose 90% of the potential. The Hi-Res Input Pack distinguishes each of the 49152 distinct joystick or mouse positions. That's the key to CoCo Max's power. The pack plugs into the rom slot (like a rom cartridge). Inside the pack is a high speed multichannel analog to digital converter. Your existing joystick or mouse simply plugs into the back of the Hi-Res Pack.

Electronic Typesetting...

You'll be impressed with CoCo Max's capability. Text can be added and moved around anywhere on the picture. (You can also rotate, invert and flip it...) At a click, you can choose from 14 built in **fonts** each with 16 variations. That's over 200 typestyles!

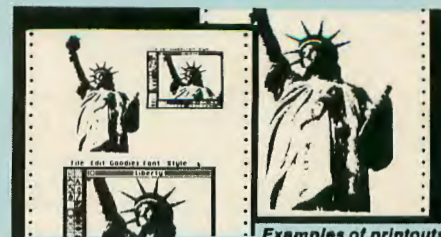

Examples of printouts

Printing Your Creations

There are a dozen ways to print your work. All are available with a click of your joystick (or mouse) without exiting CoCo Max. Your CoCo Max disk includes drivers for over 30 printers!

CoCo Max II™

The whole family will enjoy CoCo Max. Here are a few examples of the possibilities.

All these pictures are unretouched screen photos or printouts (on an Epson RX-80).

Monday, April 1, 1982 25c

Jonison Report

First with the Big Scoops

NO MAJOR NEWS TODAY

Reporters Desperate

They always say no news is good news, but here's a good news story that could lose my job if something doesn't happen quick! Reporter Earl Schmidt is a good and unhappy man. I really don't care this job since nothing ever happens around here - says Schmidt. Schmidt is 75 years old native of the city, has often come up to the newspaper office without a single story. But this week is different, according to Schmidt. I've considered committing a crime myself just to break the monotony, but I can't think of anything newsworthy that would get me on the news.

Editor Jon Jonison looks into Schmidt's file and says: "You're a reporter, we never had that problem. I think these guys are the best bunch of fools I've ever seen." Editor Jonison

Why is this lady smiling?

Lou Schwartz of 87 E 4th St was informed Monday that she had won \$10 in the TMS9 Sweepstakes. See page 1.

On Our Opium:
Life in the fast lane not all it's cracked up to be


So You think you want to go into some glamorous field like Television or Newspapers? You think you've worked like to bring in the big bucks and rub noses with the celebrities? Well forget it! Running a newspaper should be fun. I know, but before you go off beatnik and call your own paper or buy a 100 percent share of the stock of a newspaper, there are a lot of reasons to make a lot of money in run a newspaper. For example printing even a mast page could net over \$14,000. Bear




1 Publish a newsletter or bulletin




5 Over 200 typestyles to choose from! generate flyers.

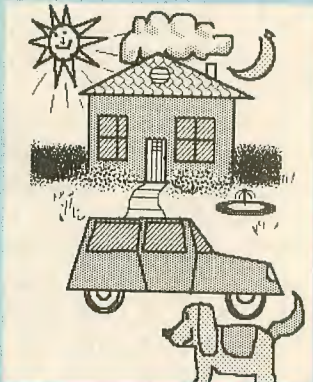

2 Fun for children while stimulating creativity.

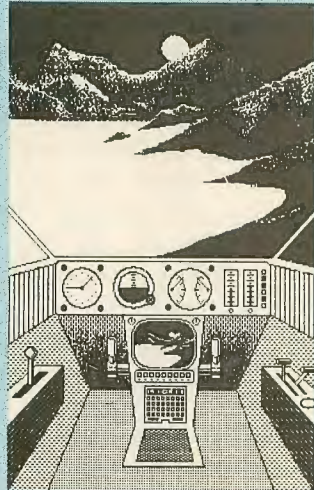


6 A new way to express your imagination.




3 Business graphs, charts, diagrams. Also memos




7 Video portrait (with optional digitizer).

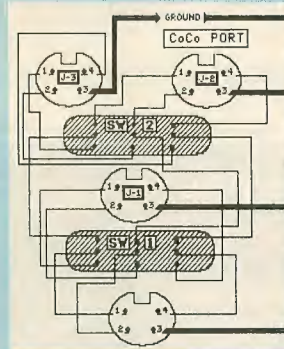


9 schematics and floor plans.



4 Junior's homework and science projects. Term papers too!



8 This is a cartoon.

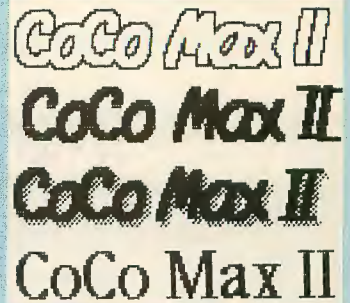

10 Logos and letterheads.

System Requirements:

Any 64K CoCo and a standard joystick or mouse. (The koala pad and the track ball work, but are not recommended.)
Disk systems need a Multi-Pak or our Y-Cable.
CoCo Max is compatible with any Radio Shack DOS and ADOS.
Note: the tape version of CoCo Max includes almost all the features of CoCo Max II except *Shrink*, *Stretch*, *Rotate*, and *Glyphics*. Also, it has 5 fonts instead of 14.
CoCo Max is not compatible with JDOS, DoubleDOS, MDOS, OS-9, the X-pad, and Daisy Wheel Printers.

Printers Supported:

Epson MX, RX, FX and LX series, Gemini, Star, Micronix, Delta 10, 10X, 15, 15X, SG-10, Okidata 82A, 92, 93, C. Itoh Pro-writer, Apple Image-writer, Hewlett-Packard Thinkjet, Radio Shack DMP 100, 105, 110, 120, 200, 400, 500, Line Printer 7, Line Printer 8, TRP-100, CGP-220. (DMP-130 use Line Printer 8), PMC printers, Gorilla Banana.
Color printing: CGP-200, CGP-115

Pricing

CoCo Max on tape \$69.95
with Hi-Res Pack and manual.
CoCo Max II (disk only) \$79.95
with Hi-Res Pack and manual.
Upgrade: CoCo Max to CoCo Max II
New disk and manual. \$19.95
New features of CoCo Max II: 14 fonts and glyphic font, dynamic shrink and stretch, rotate, multiple drive capability, 68 page scrapbook, point and click file load, color printer drivers, full error reporting.
Upgrade: CoCo Max tape to disk
manuals, disk and binder \$24.95
Y-Cable: *Special Price* \$19.95
Super Picture Disks #1, #2, and #3
each \$14.95
All three picture disks \$29.95

Guaranteed Satisfaction
Use CoCo Max for a full month.
If you are not delighted with it,
we will refund every penny.

Font Editor Option

A font is a set of characters of a particular style. CoCo Max includes 15 fonts. You can create new fonts of letters, or even symbols or graphics with the font editor. Examples: set of symbols for electronics, foreign alphabets, etc. \$19.95

Video Digitizer DS-69

This new Low Cost Digitizer is the next step in sophistication for your CoCo Max system. With the DS-69 you will be able to digitize and bring into CoCo Max a frame from any video source: VCR, tuner, or video camera. Comes complete with detailed manual and C-SEE software on disk. Multi-Pak is required.
New Low Price Save \$50. \$99.95
New: faster DS-69A. \$149.95



Colorware Incorporated
79-04A Jamaica Avenue
Woodhaven, NY 11421

800 221-0916
Orders only.
NY & Info: (718) 296-5916
Hours: 9-5 Eastern time.

Add \$3.00 per order for shipping.
We accept Visa, MC, checks, M.O.
C.O.D. add \$3.00 extra.
NY and CT: add sales tax.
Shipping to Canada is \$5.00
Overseas, FPO, APO add 10%

```

84Ø DRAW"BM12,3Ø;S5;C1;XH$;XA$;X
P$;XP$;XY$;BM12,55;XN$;XE$;XW$;B
M+2Ø,Ø;XY$;XE$;XA$;XR$;"
85Ø DRAW"BM18Ø,75;C1NU8NR8ND8NL8
"
855 REM
86Ø DRAW"BM18Ø,75;CØNE7NF7NG7NH7
"
87Ø FORPP=1TO3Ø:NEXTPP
88Ø GOTO76Ø
899 PMODE4,1:SCREEN1,1
9ØØ REM
9Ø1 COLORØ,Ø:FORKT=6ØTO185:LINE(
14Ø,KT)-(24Ø,KT),PSET:NEXTKT:COL
OR1,Ø:PAINT(245,19Ø),Ø,Ø:PRESET(
139,159)
9Ø2 CIRCLE(22Ø,11Ø),15,1,2,Ø,.5:
CIRCLE(22Ø,162),11,1,.6
9Ø3 LINE(2Ø5,11Ø)-(235,11Ø),PSET
9Ø5 LINE(219,14Ø)-(221,16Ø),PSET
,B
9Ø8 IF ZP=>63 THEN GOTO91Ø
9Ø9 ZP=ZP+1:READ ZF$(ZP):PLAY"T1
5L8;XZF$(ZP);":FORYP=1TO2Ø:NEXTY
P:GOTO92Ø
91Ø IF ZP=63THEN GOSUB1ØØØ

```

```

911 R=RND(2Ø)+21Ø:S=RND(1Ø)+85
912 T=RND(2Ø)+21Ø:U=RND(1Ø)+75
913 V=RND(2Ø)+21Ø:W=RND(1Ø)+95
915 CIRCLE(R,S),3,1:CIRCLE(T,U),
3,1:CIRCLE(V,W),3,1
916 CIRCLE(R,S),3,Ø:CIRCLE(T,U),
3,Ø:CIRCLE(V,W),3,Ø
92Ø GOTO9Ø8
95Ø DATA O5A,O4A,A,O5G,F#,P8,E,P
8,D,O4A,O5E,O4A,O5F#,O4A,O5D,P8,
E,F#,G,E,F#,O4A,A,O5E,D,O4A,O5C#
,P8,D,G,F#,E
955 DATA O5A,O4A,A,O5G,F#,P8,E,P
8,D,O4A,O5E,O4A,O5F#,O4A,O5D,P8,
E,F#,G,E,F#,O4A,A,O5E,D,O4A,O5C#
,P8,D,P8,P8,P8
96Ø DATA O3E,P8,P8,F#,G,P8,E,P8,
F#,P8,P8,G,A,P8,E,P8,F#,G#,A,P8,
B,O4C#,D,P8,C#,O2E,O3B,O2E,O3A,G
,F#,E
965 DATA O5A,O4A,A,O5G,F#,P8,E,P
8,D,O4A,O5E,O4A,O5F#,O4A,O5D,A,B
,B,B,B,A,O4G,F#,O5G,F#,O4A,O5E,P
8,L32O4DF#AO5D
97Ø DATA P8,P8,P8,P8,P8,P8,P8,P8
,P8,P8,P8,P8,P8,O1G,P8,P8,A,G,P8
,E,P8,P8,P8,P8,P8,G,P8,P8,A,G,P8
,E,P8,P8,P8,P8,P8,O2D,P8,P8,P8,D
,P8,O1B,P8,P8,P8,P8,O2C,P8,P8
,P8,C,P8,O1G,P8,P8,P8,P8,P8
975 DATA A,P8,P8,P8,A,P8,O2C,P8,
P8,O1B,A,P8,G,P8,P8,A,G,P8,E,P8,
P8,P8,P8,P8,A,P8,P8,P8,A,P8,O2C,
P8,P8,O1B,A,P8,G,P8,P8,A,G,P8,E,
P8,P8,P8,P8,P8,O2D,P8,P8,P8,D,P8
,F,P8,P8,D,O1B,P8,O2C,P8,P8,P8,P
8,P8,E,P8,P8,P8,P8,P8
98Ø DATA C,P8,O1G,P8,E,P8,G,P8,P
8,F,D,P8,C,E,G,C,E,G,L32CGO2CEGO
3C
985 DATA P8,P8,P8,P8,P8,P8,P8,P8
,P8,P8,P8,P8,P8,O4E,P8,A,P8,A,B,
A,G#,F#,P8,F#,P8,F#,P8,B,P8,B,O5
C#,O4B,A,G#,P8,E,P8,E,P8,O5C#,P8
,C#,D,C#,O4B,A,P8,F#,P8,E,E,F#,P
8,B,P8,G#,P8,L32AC#EO5A,P8,O1A
99Ø DATA O2G,P8,O3C,P8,P8,C,C,P8
,E,P8,D,P8,P8,C,D,P8,E,D,C,P8,P8
,C,E,P8,G,P8,A,P8,P8,P8,P8,P8,A,
P8,G,P8,P8,E,E,P8,C,P8,D,P8,P8,C
,D,P8,E,D,C,P8,P8,O2A,A,P8,G,P8,
O3C,O2C,E,G,O3CEGO4C
1ØØØ COLOR1,1:LINE(2Ø5,115)-(235
,115),PSET
1Ø1Ø PAINT(22Ø,138),1,1:ZP=65
1Ø2Ø RETURN

```

ARTIFICIAL INTELLIGENCE FOR YOUR COCO 1, 2 OR 3

THREE GREAT PROGRAMS —

1. COCO HAPPINESS EXPERT — INCREASE YOUR HAPPINESS
2. COCO THERAPIST — DISCUSS YOUR PROBLEMS
3. COCO POET — ENDLESS STIMULATING POETRY

NEW! AI Pack I \$24.95

(SPECIFY TAPE OR DISK)
(AND LEARN YOUR HAPPINESS QUOTIENT)
COMPLETE DOCUMENTATION INCLUDES
"THE HISTORY OF AI"

COCO JOKESTER

JUST TELL HIM YOUR NAME AND HE'LL TALK.YOUR EAR OFF
\$26.95 (DISK ONLY)

Now Available

COCO EXPERT SYSTEM TOOLKIT

BUILD YOUR OWN EXPERT SYSTEM
USING SIMPLE MENU COMMANDS.
— DEMOS, TUTORIAL, EXPERT SYSTEM SHELL, CLEARLY
WRITTEN KNOWLEDGE ENGINEERING MANUAL
— CREATE YOUR OWN KNOWLEDGEBASE
— \$59.95 * DISK ONLY * 64K REQUIRED
INCLUDED: TWO FREE EXPERT SYSTEMS
— STOCK MARKET EXPERT
— EXECUTIVE HEALTH EXPERT

THINKING SOFTWARE, INC.

46-16 65 PLACE
WOODSIDE, N.Y. 11377
(718) 429-4922



CALL RIGHT NOW FOR FREE CATALOG

Talking version of all software available
RS Speechpak required / Add \$5.00 per disk

Rainbow's Holiday Shopping Guide

Making a list? Checking it twice? Well, if Santa's helpers aren't in tune with the care and gift-giving of the family CoCo nut, maybe we can help.

The Rainbow editors, right here in the CoCoLand toy store, have gathered a selection of gift items sure to tickle the CoCo lover at your house.

From stocking stuffers to the "big" gift idea, we think these are bound to please.

(For ordering information on these holiday gift selections, see Page 174.)




Try your hand at the "big one" and see if you can beat the galvanic skin response detector used in the Bio Detector from Computerware, \$24.95.



Rainbow editorial assistant Angela Kapfhammer gives the WICO Trackball a spin while designer Sandy Underwood waits for a turn. From Zebra Systems, \$19.95.



"Any landing you walk away from is a good landing." Get them before they get you with *Mission: F-16 Assault*, Diecom Products, \$28.95; \$38.95 Cnd.

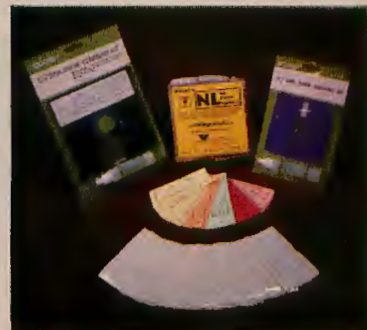

Finding that favorite program is easy as 1-2-3 with the No Label System from Weber and Sons, \$22.45. Also, prolong the life of favorite programs with Disk Cleaning Sets, Ohm Electronics. 3½", \$7.95; 5¼", \$6.95.



For software that produces "one-liners," try *CoCo Jokester*, a barrage of humor to brighten any CoCo nut's screen. From Thinking Software, Inc., \$26.95.



For a winning place in the show, put your money on *The Handicappers*. Separate programs for thoroughbreds, harness horses and greyhounds. Federal Hill Software, \$39.95 each; \$59.95 any two; \$79.95 all three.



Senior editor Kevin Nickols easily installs an HJL-57 Keyboard Kit-2 for a professional keyboard touch. HJL Products, \$89.95.



Howard Medical suggests this Zenith Green Screen Monitor with Hi-Res graphics and 15 MHz band width for \$67.50. Monitor stand also available for \$39.50.



Let the light of the season shine throughout the year with a subscription to THE RAINBOW, RAINBOW ON DISK or RAINBOW ON TAPE. Other gift ideas from Falsoft, Inc., include magazine binders and selections from the Rainbow Bookshelf.



Laurence Tepolt's *Assembly Language Programming for the TRS-80 Color Computer* is ideal for the serious CoCo user. From Tepco, \$16 (beginning Jan. 1, \$18). Any Adventurer would appreciate 20 *Solved Adventures* Volumes 1 and 2 from Lomiq, \$8; \$10 Cnd. each.



Cinsoft offers the inexpensive Seikoshia SP-1000A dot matrix printer as a complement to any computer system, \$209. Utility programs from Tothian Software include *Homeware*, \$19.95; *Diskman*, \$21.95; and *Time Master*, \$19.95 (\$49.95 whole set)



Personalize your gift giving with CoCo graphics and printer transfer paper from Foto-Wear, \$8.95 (4 pack); \$19.95 (10 pack). Add color to graphics creations with Underware Ribbons and Color Pens from Diversions. Ribbons range from \$14.95 to \$21.95; Color Pens, \$14.95.



"If I were president, I'd . . ." You make decisions and you run the country with *Congress*, from B5 Software, \$29.95.



Here's an add-on you can subtract on, too! Beverly Bearden, in Rainbow's business division, multiplies the CoCo's usefulness with HJL's Numberjack, \$89.95.



You can 'talk in Dale Lear's language! Based on M.I.T.'s LOGO, *D.L. LOGO* is a programming language designed to run under OS-9. Radio Shack stores nationwide.



These stocking stuffers can help your children sharpen basic skills. Educational software from York 10, \$49.95 per volume of eight cassettes.



The bargain-priced Avatex 1200 baud modem opens up a whole new "online" world. From Spectrum Projects, \$129.95.



Delight your favorite CoCoist with the MouseTop from H&H Enterprises, \$5.95. From The Lyter Side, this foam rubber Computer Hammer adds a touch of humor \$8.95. The A2D Deluxe two-button joystick puts the action in the palm of your hand, works with the CoCo 3 and is available from Cinsoft, \$29.95.



If your gift is for someone hardware oriented, consider the Banker II memory expansion board. J & R Electronics, from \$39.95 to \$169.95.



Fantasia II brings the spirit of the holiday season to life with graphics and music. From Speech Systems, \$19.95.



The Tandy Color Computer 3 has made its debut in time for holiday giving, and Radio Shack's new CM-8 analog RGB color monitor is what is needed to maximize its potential. Radio Shack stores nationwide.



Mission: Hold the Bridge



By Charles Farris

During World War II, your paratrooper battalion is dropped behind enemy lines to capture several bridges along the Rhine River. Unfortunately, your battalion runs into a Panzer division at one bridge. After a short battle, your battalion retreats. In the confusion, you become separated from the battalion, finding yourself at the far end of the bridge. Looking back across the bridge, you see the German tanks start up to pursue your fleeing battalion. After finding an abandoned mortar hidden in the bushes, you prepare to meet the enemy. As the first tank rolls onto the bridge, you fire.

Charles Farris is a student at AFCENT High School in Brunssum, the Netherlands. He has had his CoCo 2 for four years and enjoys programming in BASIC.

Mortar Command is a 16K ECB program requiring one joystick plugged into the right port. Control the angle of the mortar by moving the joystick horizontally. Moving the joystick to the right decreases the angle of the mortar while moving it to the left increases the angle. The maximum angle is 85 degrees and the minimum angle is 45 degrees. Pushing the button fires the mortar.

The tanks that roll across the bridge come in waves of six. The speed of the tank is controlled by its placement in the wave. The first tank moves very slowly, the second a little bit faster and so on until the last tank in the wave crosses, moving very fast. Once the sixth tank is destroyed, the next wave begins.

There are two ways to destroy the tanks. One is to hit them with your mortar shells. A hit anywhere on the tank destroys it. The second way is to let the tank roll over your ammo, which is in front of your mortar, and blow up.

The only problem with this method is that you lose a life. Every time you destroy a tank with your mortar, a small swastika is drawn in the score box at the top of the screen. You only get a swastika if you hit the tank with a shell. Allowing the tank to run over your ammo does not count as a "kill" and you will not get a swastika. After destroying 36 tanks, a glider will fly down and land on the bridge, signaling that you have won the game. Also, for every 10 tanks you destroy, you get an extra man.

Upon running the game, you are asked if you want to use the high speed poke (POKE 65495, 0). If your computer cannot take this poke, delete lines 6 through 9. After you have selected YES or NO, the title screen is drawn. Pushing the firebutton starts the game. After you lose all your men, the words GAME OVER are displayed and the triumphant German tanks roll across the bridge at high speed. Pushing the firebutton restarts

the game. Pressing the space bar returns the computer to normal speed if you selected the high speed poke and ends the program. Be sure when you type in the program that the poke in Line 365 is POKE 65494,0 and not POKE 65495,0.

Line changes for playing the game on the keyboard are listed at the end of the article. The use of the high speed poke can be chosen at the beginning of the game. The game is best played on a monitor, since the artifact colors in PMODE 4,1:SCREEN 1,1 make the ground look striped. To fix this, change the command SCREEN 1,1 in Line 175 to SCREEN 1,0. The ground will still look striped, but it will look better than before. On a monitor, the ground is not striped, but black speckled with white dots.

The program uses a sine wave to plot the course of the shell. The routine for that is located in lines 115 through 160 and accessed from Line 60. The angle of the mortar is controlled from lines 55 through 75. The tanks are controlled from lines 90 through 110. The tanks' coordinates are defined in lines 190 through 215. The background is drawn in lines 285 through 340. The score box and scoring is done in lines 385 through 430. The routine for determining whether or not a tank is hit by a shell is found in lines 250 through 255, and the tank is destroyed in lines 260 through 280. The other parts of the program not mentioned here are labeled with remark statements for easy access.

Most of the graphics are done with DRAW statements, such as the tanks, glider, score box, swastikas, and the lettering in the title screen, game-over sign, and end-of-the-game graphics. The bridge was done using the LINE command, the river with CIRCLE commands, the banks with the PRESET command.

The hardest part of the program to develop was explosions. I put the tank array that I defined with GET in Line 185 onto a smaller area. The computer, confronted with this problem, mashes the picture in order to fit it into the smaller area. By using a FOR-NEXT loop to slowly decrease the size of the PUT area, the tank seems to blow apart while in reality, it is being squashed together. An interesting explosion happens when the computer only decreases the PUT area by one pixel. The tank appears to be blown off its treads.

When I wrote the bridge graphics, I did not know that you can use the bridge pylons as sights. The mortar shells will either land on the pylons or in the blank spaces on the bridge between them. The last two tanks in every wave move extremely fast and you will be able to get only one shot in, so wait till they get on the bridge, then shoot straight up. The shot should catch them just before they roll over you. Experiment to find the right setting and time to fire.

Change the M=M-1 in Line 95 to M=M-0 for more lives.

For those without joysticks, I have

included a list of line changes for converting the game to keyboard control. They are:

```

55 A$=INKEY$
60 IF A$=CHR$(32) THEN MF=1
65 IF A$=CHR$(8) THEN LINE(0,170)
  -(C,D),PSET:C=C-1:IF C<1
  THEN C=1
70 IF A$=CHR$(9) THEN LINE(0,170)
  -(C,D),PSET:C=C+1:IF C>10
  THEN C=10
245 IF INKEY$=CHR$(32) THEN
  PCLS5:GOTO 285 ELSE GOTO 240
360 IF INKEY$=CHR$(32) THEN
  RE=0:K=0:GOTO 20
365 IF INKEY$="E" THEN POKE
  65494,0:STOP
550 IF INKEY$=CHR$(32) THEN 9
  ELSE 550

```

These changes will enable you to control the angle of the mortar with the right- and left-arrow keys. The space bar becomes the firebutton. When the GAME OVER sign appears, the E key stops the game and returns the speed to normal. The space performs as the firebutton for all other functions.

If you have any questions concerning the game, send an SASE with your questions to me at P.O. Box 582, 1141 USAFSAS Det 2, APO, NY 09011. If you live in Europe, send the SASE to Eindstraat 15, 6451 AA Schinveld, the Netherlands.

Have fun and good luck! □

65	126
160	251
235	81
295	91
370	143
440	211
480	164
END	0

The listing: MORTAR

```

0 REM *****
1 REM * MORTAR COMMAND *
2 REM * BY *
3 REM * CHARLES FARRIS *
4 REM *****
5 ' HIGH SPEED POKE (Y/N)
6 CLS0:PRINT@33*8,"high"+CHR$(12
8)+"speed"+CHR$(128)+"poke";
7 PRINT@302,"y"+CHR$(128)+"n";
8 IF INKEY$="Y" THEN POKE 65495,

```

```

0:GOTO 9 ELSE IF INKEY$="N" THEN
  POKE 65494,0:GOTO 9 ELSE GOTO 8
9 REM
10 SS=1
15 DIM T(43),TX(10),TR(78)
20 GOTO 170
25 RE=0:C=10:D=160:TY=157:WT=1:M
  =3:TS=1:K=0:L=0
30 ' DRAW MEN LEFT
35 IF M=0 THEN C=0:GOTO 350 ELSE
  FOR G=1 TO M:L=L+10:DRAW"S4BM"+
  STR$(L)+"",191C0URE2G2RDL2":NEXT
  G:L=0
40 DRAW"C5"
45 ' MAIN PROGRAM
50 A=JOYSTK(0):B=JOYSTK(1)
55 IF PEEK(65280)=126 OR PEEK(65
  280)=254 THEN MF=1
60 IF A=0 THEN LINE(0,170)-(C,D
  ),PSET:C=C-1:IF C<1 THEN C=1
65 IF A=63 THEN LINE(0,170)-(C,D
  ),PSET:C=C+1:IF C>10 THEN C=10

```

```

70 MA=C*50
75 COLOR 5,0:LINE(0,170)-(C,D),P
RESET
80 CIRCLE(0,170),5,0
85 ' TANK MOVEMENT
90 IF WT=6 THEN RE=1:WT=1:GOSUB1
90
95 PUT(TX(WT),TY)-(TX(WT)+26,TY+
12),T,PSET
100 TX(WT)=TX(WT)-TS:IF TX(WT)<=
0 THEN TX(WT)=0:M=M-1:TS=WT:GOTO
260
105 IF MF=1 THEN GOTO 110 ELSE I
F MF=0 THEN 50
110 ' FIRE ROUTINE
115 X=X+6
120 H=0+X*MA/360
125 V=160-SIN(X/57.29578)*(160/2
)
130 H=INT(H):V=INT(V)
135 PSET(H1,V1,5)
140 PRESET(H,V)
145 IF V>161 THEN X=0:PSET(H,V,5
):MF=0:GOTO 250
150 H1=H:V1=V
155 GOTO 90
160 GOTO 160
165 ' DRAW, DEFINE, & GET TANK
170 PMODE 4,1:PCLS 5:SCREEN 1,1
175 DRAW"BM50,50C0S4R7ER4FDGL4HU
BD2RL4GLG2E2RDLGDFR15EUHL15R14UR
F2H2LHL4BDBR5BL14BDRFDGR4HUERFDG
R3HUERFDGR4HUEC5
180 GET(50,45)-(76,57),T,G
185 ' SET UP TANK X COORDINATES
190 TX(1)=255+6
195 FOR N=2 TO 7
200 TX(N)=TX(N-1)+20
205 NEXT N
210 IF RE=1 THEN RE=0:RETURN EL
SE 220
215 REM 'SOFTWARE CO. TITLE
220 IF SS=1 THEN PCLS5:GOTO 225
ELSE IF SS=0 THEN PCLS5:GOTO 285
225 FORC=1TO20STEP3:LINE(0+C,0+C
)-(255-C,191-C),PRESET,B:NEXT C:
DRAW"C0S24BM30,50U3R3D3L3U3BFDRU
LRBEBRD2FREU2LD2LU2LBR4R3DL2RDLR
2DL3U3R3BRR2FGFLHDLU3RBDRBR2BUR3
DL2R2D2L3UR2L2U2BR4R3DL2RDLR2DL3
U3R3BRBDD2RURDRU2HLGBRRBEBRR3DL2
R2D2L3UR2L2U2"
230 DRAW"BM30,55R3DL2R2D2L3UR2L2
U2R3BRR3D3L3U3BFDRULBUBR3R3DL2RD
LDLU3R3BRR3DLD2LU2LUR3BRD3ERFU3L
DLULBR4BDD2RURDRU2HLGBRRBR2UR2FG
FLHDLU2BRBUBR2R3DL2RDLR2DL3U3"
235 DRAW"S16BM80,140R2DL2DU2BR3R
2DLFHLDU2BR3R2L2DRLDR2BRR2UL2UR2

```

```

BRR2L2DRLDR2BRU2F2U2BRR2LD2BR2R2
UL2UR2"
240 IF PEEK(65280)=126 OR PEEK(6
5280)=254 THEN PCLS5:GOTO 285 EL
SE 240
245 ' HIT OR MISS ROUTINE
250 IF H>TX(WT) AND H<TX(WT)+26
THEN K=K+1:GOTO 260 ELSE FOR Y=1
TO 4:CIRCLE(H,V),Y,0,1,.5,1:NEX
T Y:MF=0:FOR Y=1 TO 4:CIRCLE(H,V
),Y,5,1,.5,1:NEXT Y:MF=0:X=0:GOTO
50
255 ' DESTROY TANK
260 FOR B=1 TO RND(6):PUT(TX(WT)
,TY)-(TX(WT)+26-B,TY+12-B),T,PSE
T:NEXT B:IF TX(WT)=0 THEN LINE(0
,188)-(63,191),PSET,BF:LINE(TX(W
T),TY)-(TX(WT)+26,TY+12),PSET,BF
265 TS=WT:SS=0
270 TX(WT)=255:SS=0:WT=WT+1:GOSU
B 385
275 GOTO 35
280 ' DRAW RIVER,BANKS, & BRIDGE
285 Y=170:L=15
290 L1=255-L
295 FOR X=1 TO L STEP 2:PSET(X,Y
,0):NEXT X:FOR X=L1 TO 255 STEP
2:L1=255-L:PSET(X,Y,0):NEXT X:Y=

```

SUPER PROGRAMMING AID



"Best value of the year", see the review in the July Rainbow.

The Super Programming Aid is the best integrated software utility available for your COCO. Add what Tandy left out, COPY and MOVE statements, FIND, PRINT FORMATTER, KEY CLICKER, PROGRAMMABLE KEYBOARD, MULTIPLE EDIT SESSIONS, MERGE PROGRAMS, TYP-O-MATIC keys and much more, saves hours of time for BASIC programmers. Version II and III add many more features, PRINT SPOOLER, FULL SCREEN EDIT COMAND, SCREEN PRINTING and more.

VERSION I — \$19.95 — for 16K & 32K COCO
VERSION II — \$24.95 — for 64K COCO
VERSION III — \$29.95 — for COCO 3

Call or Write
for Info
Satisfaction
Guaranteed!

Bangert Software Systems
P.O. Box 21056
Indianapolis, IN 46221
(317) 262-8865

```

Y+1:L=L+1:IF Y=186 THEN 305 ELSE
FOR X=0 TO L STEP 2:PSET(X,Y,0)
:NEXT X:FOR X=L1 TO 255 STEP 2:L
1=255-L:PSET(X,Y,0):NEXT X:Y=Y+1
:L=L+1
300 IF Y=186 THEN 305 ELSE 295
305 LINE(0,170)-(5,177),PRESET,B
F
310 FORB=38 TO 224 STEP 10:CIRCL
E(B,185),6,0,.41,1,.5
315 NEXT B:O=0
320 LINE(19,170)-(236,175),PRESE
T,B:LINE(19,170)-(14,170),PRESET
:LINE(236,170)-(243,170),PRESET
325 FOR X=45 TO 224 STEP 27:O=O+
1:IF O=2 OR O=4 OR O=6 THEN LINE
(X-7,175)-(X+7,188),PRESET,B:NEX
T X
330 NEXT X
335 GOSUB 385
340 X=0:GOTO 25
345 ' GAME OVER

```



```


350 X=50:Y=50
355 DRAW"S20BM50,90C0L3D3R3ULBR2
DU2ERFD2UL3R3BFU3M+1,+2RM+1,-2D3
BRR3L3URLU2R3BR6R3D3L3U3R3BRM+1,
+3RM+1,-3BRR3L3D2RLDR3BRU3R3D2L2
FHL"
360 IF PEEK(65280)=126 OR PEEK(6
5280)=254 THEN RE=0:K=0:GOTO 20
365 IF INKEY$=CHR$(32) THEN POKE
65494,0:STOP
370 IF SS=0 THEN 460
375 GOTO 360
380 ' SCORE BOX GRAPHICS
385 IF SS=1 THEN 430 ELSE IF K=1
0 OR K=20 OR K=30 THEN M=M+1:GOT
O 390 ELSE IF K=36 THEN 475
390 LINE(0,0)-(250,75),PRESET,B:
DRAW"C0BM95,10;S16R2UL2UR2BRR2L2
D2R2BRR2U2L2D2R2BRU2R2DL2RFBR2L
2URLUR2"
395 F=5:LV=20
400 FOR KI=1 TO K:IF F>240 THEN
F=5:LV=LV+20
405 IF K=0 THEN RETURN
410 DRAW"S8C0BM"+STR$(F)+", "+STR
$(LV)+"F2E4F2BL4F2G2BU8G2F2"
415 F=F+20

```

```

420 NEXT KI
425 RETURN
430 ' TITLE SCREEN
435 DRAW"S24C0BM22,50U5RFRERD5LU
4GLHD4LBR7R3EU3HL3GD3FBU2UERFDGL
HBM+5,+2U5R4FDGLFRDLH2LD2LBU3BRR
3UL3DBF3BR4RLU4L2UR5DL2D4BR3U3E2
RF2D3LUL3DLRBU2UERFDL3R3BRBD2BRU
5R4FDGLFRDLH2LD2LBU3BRR3UL3D"
440 DRAW"BM4,90BRR3L3HU3ER3FDLUL
2GDFR2URDGBR3R3EU3HL3GD3FBEREUHL
GDFBR4BDU5RFRERD5LU4GLHD4LBR6U5R
FRERD5LU4GLHD4LBR6U3E2RF2D3LUL3D
LRBU2UERFDL3BR5BD2U5RF3U3RD5LUH3
D4LBR6U5R3F2DG2L3RBUU3R2FDGL2"
445 DRAW"BM80,120S16U2FED2BRR2LU
2LR2BRR2L2DR2DL2BR3R2UL2UR2BRR2L
D2LR2BRR2U2L2D2R2BRU2F2U2BRBDR2
450 DRAW"BM33,140U2DR2UD2BRR2U2L
2D2R2BRU2D2R2BRREHLD2BR6U2LR2BRD
2UR2UD2BRR2L2URLUR2BR4BD2R2U2L2D
2R2ULRBFU2R2DL2RFBR2LU2LR2BRRFG
LU2BR3R2L2D2R2ULRBDBRR2L2URLUR2C
5"
455 SS=0:TX(1)=255:TY=157
460 DRAW"C5":TX(1)=TX(1)-6:IF TX
(1)<=0 THEN LINE(0,TY)-(TX(1)+26
,TY+12),PSET,BF:GOTO 455
465 PUT(TX(1),TY)-(TX(1)+26,TY+1
2),T,PSET
470 GOTO 360
475 ' GLIDER DRAWN AND DEFINED
480 DRAW"S12C0BM128,96E2R3M+4,+1
M+1,-2RD2GM-5,+1L3M-2,-1R2U2DLDB
R2ERM+2,+1BR3BUR2L2BDBL3L4C5"
485 GET(128,85)-(170,99),TR,G
490 LINE(128,85)-(170,99),PSET,B
F
495 X=230:Y=96
500 ' LAND GLIDER ON BRIDGE
505 IF Y=155 THEN 525 ELSE 510
510 X=X-3:Y=Y+1
515 PUT(X,Y)-(X+42,Y+14),TR,PSET
520 GOTO 500
525 X=X-1:PUT(X,Y)-(X+42,Y+14),T
R,PSET:IF X=10 THEN 540
530 GOTO 525
535 ' END OF GAME GRAPHICS
540 DRAW"BM60,120S20C0U2R2L2D2R2
ULRDBRU2R2D2L2R2BRU2R2D2L2R2BRU2
RFG LBR5U2D2EFU2BRR2D2L2U2R2BRD2U
2R2DL2RFBRU2DM+2,-1BD2M-2,-1"
545 DRAW"BM25,140U2FED2BRR2U2L2D
2R2BRU2R2DL2RFBR2U2LR2BRBDDUEFDU
L2R2BRBDU2R2DL2RFBR4R2L2U2R2BRR2
D2L2U2R2BRD2U2FED2BRU2FED2BRUEFD
UL2R2BDBRU2F2U2BRRFGLU2"
550 IF PEEK(65280)=126 OR PEEK(6
5280)=254 THEN 9 ELSE 550

```

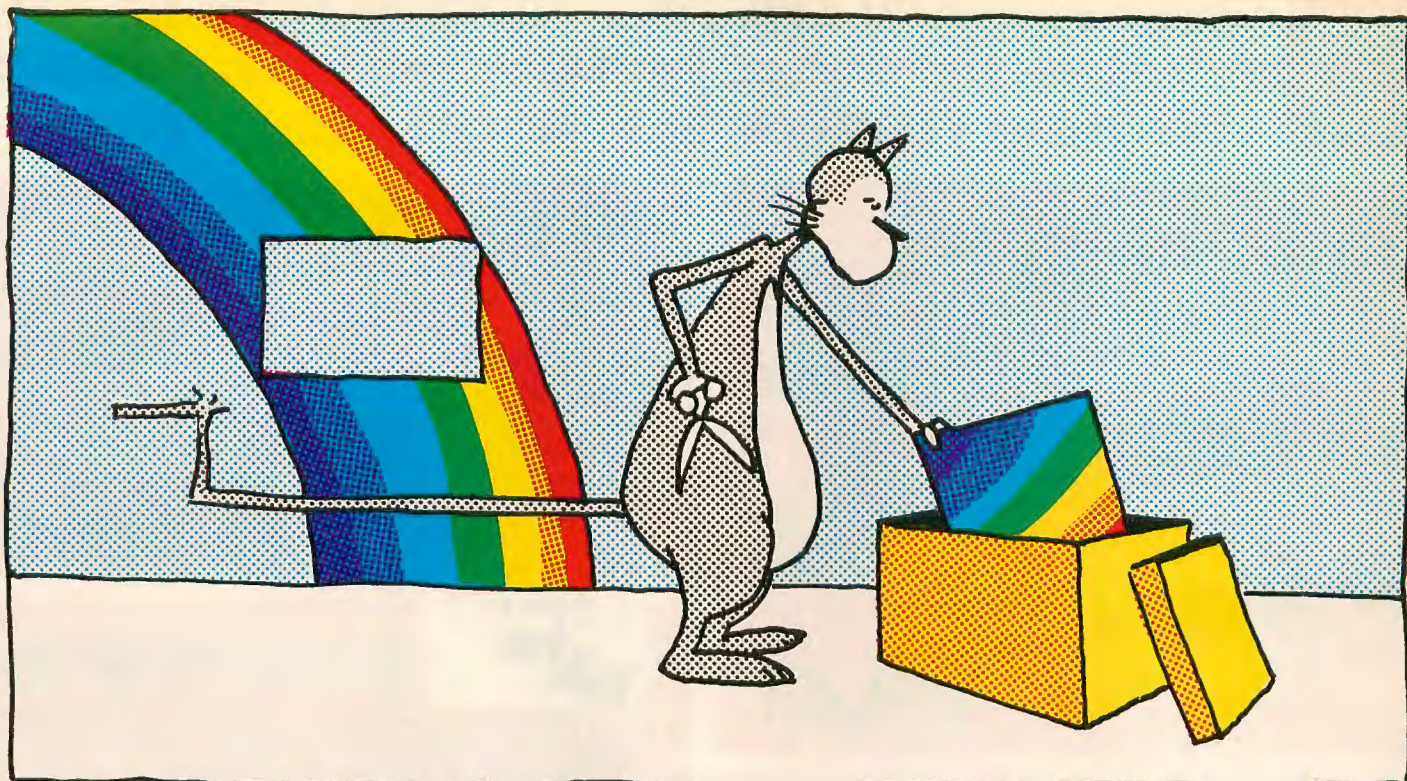HOW DO YOU GIVE A RAINBOW?

It's simple — Give a RAINBOW gift certificate . . .

Let a gift subscription to THE RAINBOW carry the premier Color Computer magazine right to your friends' doorsteps. THE RAINBOW is *the* information source for the Tandy Color Computer.

Each month, your friends will enjoy the intelligent programs, reviews and articles written exclusively for their CoCo.

First, your gift will be announced in a handsome card. Then, all year 'round, they'll remember you and your thoughtfulness when they get each edition of THE RAINBOW — more than 200 pages loaded with as many as 24 programs, 15 regular columns and lots of helpful hints and tips.

Generosity benefits the giver, too. There'll be no more tracking down borrowed copies of THE RAINBOW. Your collection will be safe at home.

Give a RAINBOW gift certificate and let your friends in on the fun. THE RAINBOW is the perfect companion for the Color Computer!

Get your order to us by Dec. 25 and we'll begin your friends' subscriptions with the February RAINBOW.

Please begin a one-year (12 issues) gift subscription to THE RAINBOW for:

Name _____

Address _____

City _____ State _____ ZIP _____

From:

Name _____

Address _____

City _____ State _____ ZIP _____

My payment is enclosed.

Bill to: VISA MasterCard American Express

Acct. # _____ Exp. date _____

Signature _____

Mail to:

Rainbow Gift Certificate, The Falsoft Building, P.O. Box 385, Prospect, KY 40059

For credit card orders call (800) 847-0309, 8 a.m. to 5 p.m. EST.

All other inquiries call (502) 228-4492.

Subscriptions to THE RAINBOW are \$31 in the United States; U.S. \$38 in Canada. The surface rate to other countries is U.S. \$68; the air rate, U.S. \$103. Kentucky residents add 5% sales tax. U.S. currency only, please. All subscriptions begin with the current issue. Please allow 6 to 8 weeks for delivery. In order to hold down non-editorial costs, we do not bill.

Most Howard Medical products are COCO 3 compatible, some require special patches. Please inquire when you order.



We have Rainbowfest prices year 'round!

COCO MAX II

Lets the graphic capabilities of your CoCo EXPLODE on the screen or on paper.

\$78.45

Y CABLE

Needed to connect CoCo Max and disk drive at same time.

\$19.45

FONT EDITOR

Lets you create your own fonts or symbols

\$19.45

RS DOS ROM CHIP

ROM chip fits inside disk controller. 24 pin fits both J&M and RS controller Release 1.1.

Reg. \$40
(\$2 shipping) **\$20** each

BOTEK

Serial to parallel converter converts the CoCo 4 pin serial output to run a parallel printer like Star or Epson. Includes all cables. Add \$10 for modem attachment.

(\$2 shipping) **\$68.45**



WORD PACK RS

This ROM pack is the hardware answer for an 80 column display. It includes a built-in video controller to drive a monochrome monitor like our 123A. To get started, you need OS-9 2.0, a Y-cable or multipack interface drive 0, and a monochrome monitor.

(\$2 shipping) **\$89**

New basic driver runs word pack without need for an OS-9.

\$10

DISK CONTROLLER

NEW FROM J&M

The DC-4 is a scaled down version of the popular DC-2 without a parallel port or memory minder. It includes a switch with 2 ROM sockets, JDOS, manual and such features as gold connectors and metal box. It accesses double sided drives and accepts RSDOS 1.1 for Radio Shack compatibility.

(\$2 shipping) **\$65**



TEAC DISK 55B DRIVE

The Teac 55B fits into the spare slots in the Radio Shack 501 Disk Drive. This bare drive features 40 Track, double sided 360K potential and a six millisecond track seek rate.

(\$2 shipping) **\$132**

The DD-2 combines the Teac 55B with our 1/2 height horizontal case and heavy duty power supply.

(\$2 shipping) **\$188**

GUARANTEE

Howard Medical's 30-day guarantee is meant to eliminate the uncertainty of dealing with a company through the mail. Once you receive our hardware, try it out; test it for compatibility. If you're not happy with it for any reason, return it in 30 days and we'll give you your money back, (less shipping).

Howard Medical has located and tested a select few typewriters that can connect to the Tandy Color Computer and we offer them here at mail order prices. These typewriters bridge the gap between dot matrix and daisy wheel printers with excellent letter quality and keyboard access. Try one in your home for 30 days and if you do not agree that this is the best of both worlds return it pre-paid for a courteous refund.

OLIVETTI CX880 with built-in parallel port **\$395***

OLYMPIA ORBIT XP with built-in parallel port **\$286***

OLYMPIA CARERRA with free \$75 starter kit
Needs \$75 parallel interface adapter **\$225***

SMITH CORONA 6100 with spell checker
Needs \$98 parallel & serial interface adapter **\$315***
*(\$7 shipping)

Howard Medical Computers 1690 N. Elston Chicago, IL 60622



ORDERS

(800) 443-1444

INQUIRIES AND ORDER STATUS

(312) 278-1440

Showroom Hours:
8:00 - 4:00 Mon. - Fri.
10:00 - 3:00 Sat.

WE ACCEPT: VISA • MASTERCARD • AMERICAN EXPRESS
C.O.D. OR CHECKS • SCHOOL P.O.'S

The Biggest The Best The Indispensable

**ORDER RAINBOW
ON DISK NOW
AND SAVE!**

As a special introductory offer, you can subscribe to **RAINBOW ON DISK** before January 1, 1987, for only \$90 — \$9 off the regular subscription price. *Don't miss out — order today!*

The RAINBOW THE COLOR COMPUTER MONTHLY MAGAZINE

It's called the *premier Color Computer magazine* for good reason. **THE RAINBOW** is the biggest, best, brightest and most comprehensive publication a happy CoCo ever had! Is there any wonder we get letters daily praising **THE RAINBOW**, the magazine one reader calls "A Pot Of Gold" for his Color Computer.

THE RAINBOW features more programs, more information and more in-depth treatment of the Tandy Color Computer than any other source.

A monthly issue contains more than 200 pages and up to two dozen programs, 14 regular columns and as many as 20 product reviews. And advertisements: **THE RAINBOW** is known as the medium for advertisers — which means every month it has a wealth of information unavailable anywhere else about new products! Hundreds of programs are advertised in its pages each month.

But what makes **THE RAINBOW** is its people. Nationally known people like Bill Barden, who has written 27 books on computer topics and writes for us each month. Or, Fred Scerbo, who writes special programs at the request of readers. Experts like Dick White and Joseph Kolar, two of the most knowledgeable writers on BASIC. Communicators like Marty Goodman and Cray Augsburg, who stay abreast of telecommunications advances. Or, Dan Downard, **RAINBOW** technical editor, who answers our readers' toughest questions. Educators like Dr. Michael Plog and Steve Blyn, who show how CoCo can be used at home or school. Advanced programmers like Dale Puckett, who guide you through the sophisticated OS-9 operating system. Electronics experts like Tony DiStefano, who explain the "insides" of the CoCo. These people, and many others, visit you monthly through columns available only in **THE RAINBOW**.

Every single issue of **THE RAINBOW** covers the wide spectrum of interests in the Tandy Color Computer — from beginners' tutorials and arcade games to telecommunications and business and finance programs. Helpful utilities and do-it-yourself hardware projects make it easy and fun to expand your CoCo's capabilities. And, monthly reviews by independent reader reviewers take the guesswork out of buying new software and hardware products.

Join the tens of thousands who have found **THE RAINBOW** to be an absolute necessity for their CoCo. With all this going for it, is it surprising that more than 90 percent of **THE RAINBOW** subscribers renew their subscriptions?

We're willing to bet that, a year from now, you'll be doing the same. For more information call (502) 228-4492. **For credit card orders only, you may call (800) 847-0309.**

Get Your Very Own Pot O' Gold!

Here's your chance to have a Pot O' Gold full of programs, articles and information about CoCo every month of the year! A subscription to **THE RAINBOW** is only \$31* and you won't miss a single chock-full issue.

As the premier magazine for the Tandy Color Computer, **THE RAINBOW** has more of everything — and greater variety, too. Do yourself and your CoCo a favor and subscribe to **THE RAINBOW** today!

We accept VISA, MasterCard and American Express. Non-U.S. rates higher. **U.S. currency only, please.**

YES! Sign me up for a year (12 issues) of THE RAINBOW.

NEW RENEW (attach label)

Name _____ State _____ ZIP _____
Address _____
City _____

Payment Enclosed (payment must accompany order)

Charge: VISA MasterCard American Express

Account Number _____
Signature _____ Card Expiration Date _____

For credit card orders, you may want to phone in your subscription; our orders only number is (800) 847-0309, 8 a.m. to 5 p.m. EST. All other inquiries, please call (502) 228-4492.

*Subscriptions to **THE RAINBOW** are \$31 a year in the United States. Canadian rate is U.S. \$38. Surface rate elsewhere is U.S. \$68. Air mail U.S. \$103. All subscriptions begin with the current issue. Please allow 6 to 8 weeks for first copy. Kentucky residents add 5% sales tax. **In order to hold down non-editorial costs, we do not bill.**

Give Your Fingers A Break!

RAINBOW ON TAPE \$80*
RAINBOW ON DISK \$90* (regularly \$99)
Single Issue \$10** \$12**

YES! Sign me up: NEW RENEW (attach label)

RAINBOW ON TAPE RAINBOW ON DISK

A Full Year Single Issue (specify month & year)

Name _____
Address _____ State _____ ZIP _____
City _____

Payment Enclosed (payment must accompany order)

Charge: VISA MasterCard American Express

Account Number _____
Signature _____ Card Expiration Date _____

For credit card orders, you may want to phone in your subscription; our orders only number is (800) 847-0309, 8 a.m. to 5 p.m. EST. All other inquiries, please call (502) 228-4492.

*Subscriptions to **RAINBOW ON TAPE** are \$80 a year in the United States, \$90 U.S. funds in Canada and \$105 U.S. funds in all other countries. Special introductory subscriptions through January 1, 1987, to **RAINBOW ON DISK** are \$90 (regularly \$99) a year in the United States, \$100 (regularly \$115) U.S. funds in Canada, and \$115 (regularly \$130) U.S. funds in all other countries. **Individual issues of **RAINBOW ON TAPE** are \$10 in the United States, \$12 U.S. funds in Canada and all other countries. Individual issues of **RAINBOW ON DISK** are \$12 in the United States, \$14 U.S. funds in Canada and \$16 U.S. funds in all other countries. Kentucky residents add 5% sales tax. **In order to hold down non-editorial costs, we do not bill.** **RAINBOW ON TAPE** and **RAINBOW ON DISK** are not stand-alone products; you will still need the magazine for loading and operating instructions and the necessary documentation. **THE RAINBOW** magazine is a separate purchase.

*Two great ways to bring
the Rainbow into your life . . .*



Rainbow on Tape & Rainbow On Disk!

For more than four years now, tens of thousands of **RAINBOW** readers have enjoyed the luxury of **RAINBOW ON TAPE**. Each month our tape service subscribers receive all the great programs from the pages of **THE RAINBOW** (those over 20 lines long), without the trouble of having to type them in.

Now, in addition to **RAINBOW ON TAPE**, there is **RAINBOW ON DISK** — another great way to bring **THE RAINBOW** into your life.

Each month, all you do is pop the tape into your cassette player or the disk into your drive. No more lost weekends typing, typing, typing. As soon as you read an article about a program in **THE RAINBOW**, it's ready to load and run. No work. No wait.

Yes, you could type the programs in yourself, as many people do. But all of them? Every month? There simply isn't enough time.

Just think how your software library will grow. With your first year's subscription, you'll get almost 250 new programs: games, utilities, business programs, home applications — the full spectrum of **THE RAINBOW**'s offerings without the specter of keying in page after page of listings and then debugging. And, with **RAINBOW ON DISK**, you'll also get all the OS-9 programs.

RAINBOW ON TAPE and **RAINBOW ON DISK** — as we've said before, they're the "meat" of **THE RAINBOW** at a price that's "small potatoes." And now you even have a choice about how it should be served up to you.

To get your first heaping helping, just fill out and return the attached reply card. No postage necessary.


BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 1 PROSPECT, KY

POSTAGE WILL BE PAID BY ADDRESSEE

RAINBOW
THE COLOR COMPUTER MONTHLY MAGAZINE

The Falsoft Building
P.O. Box 385
Prospect, KY 40059



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES




BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 1 PROSPECT, KY

POSTAGE WILL BE PAID BY ADDRESSEE

RAINBOW
THE COLOR COMPUTER MONTHLY MAGAZINE

The Falsoft Building
P.O. Box 385
Prospect, KY 40059



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES





Drive 0 and 1 **269⁹⁵**


One double sided drive with doubler board and new RS controller so you can have the equivalent of 2 drives in one. You can even backup from 0 to 1. Works with all CoCo's. Compatible w/RS DOS. No special operating system needed.



EPSON® LX-80 PRINTER **239⁹⁵**


The logical choice for your CoCo! 80 column, 100 CPS in draft mode, 16 CPS in near letter quality mode, 1K Buffer, compatible with CoCo max. 1 year warranty* LX-80 Tractor Feed 27.95. Serial to parallel converter starting at only 49.95.

*We are authorized Epson® Sales and Service

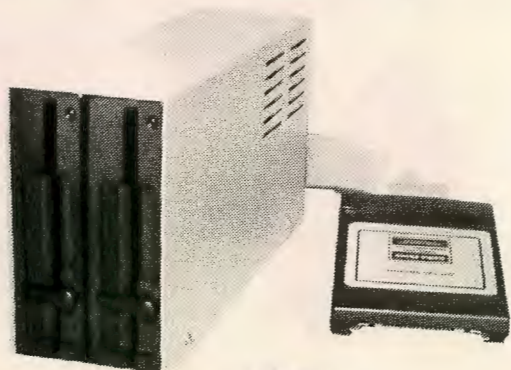


2 Drives **299⁹⁵**

Both our drive 0 and 1 in one case, with cable and R.S. controller. The best just got better!

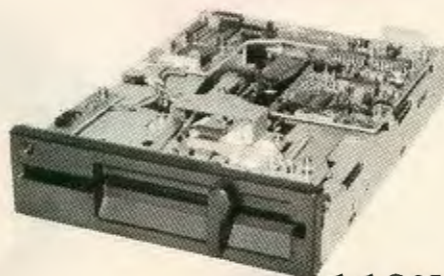


Drive 1 Upgrade **119⁹⁵**

Add a second 1/2 height drive to your Radio Shack® Thin Line Disk Drive. Comes with 3 minute installation instructions, screwdriver required. Please specify either catalog #26-3129 or 26-3131 when ordering.

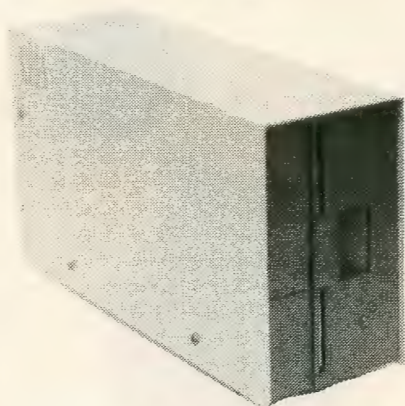

Drive 1 **125⁹⁵**

Your Choice
Silver or White

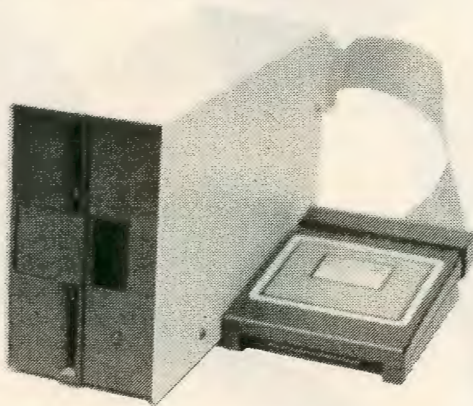

199⁹⁵ Drive 0

SUPER DRIVE SALE

Special prices on new first quality disk drives. They even have GOLD connectors on the back... Some other places charge 229.00 for dr. 1 and 299.00 for dr. 0, not us! Drive 1 is I, Second Color Computer drive, or external mod III, IV. Drive 1 just plugs into the extra connector on your Drive 0 cable. Both drives are compatible with any version of the Color Computer and all versions of drives. Drive 0 is your first Color Computer drive and comes complete with cable, manual, and R.S. controller. Bare full hgt SSSD drive only 79.95.

THE COMPUTER CENTER

901-761-4565, 5512 Poplar, Memphis, TN 38119

Add \$4.90 for shipping and handling—Visa, MC & money orders accepted, No CODs

Allow an additional 3 weeks for personal checks—Drive faceplates may vary slightly

Prices subject to change without notice. Radio Shack is a registered trademark of Tandy Corporation

Prices subject to change without notice.





Use this program to print out Hebrew characters for Chanukah cards, party invitations or thank you notes

HEBREW WRITER

By Aryeh Glaberson

Have you ever had to write a report in Hebrew, and didn't like making draft after draft because of a few spelling errors? For the many needy programmers out there who just want prepackaged/pre-programmed software without having to read manuals, I decided to make an easy-to-learn program to do the job.

Hebrew Writer is a program that consists of a primitive screen editor for use with Hebrew, and a corresponding downloading character set for the Okidata 92 and 93 printers. The combination is roughly equivalent to a smart electronic typewriter. This program should be useful for preparing invitations to Chanukah parties, thank-you notes to Bubie and Zaide for Chanukah "gelt," and holiday greetings to your friends.

The program has three main parts: The character table for the dot matrix printer (lines 420 to 710), the character set for the PMODE 4 Hi-Res screen (lines 720 to 1300), and the executing part of

Aryeh Glaberson lives in Edison, N.J., and is a sophomore at the Rabbi Jacob Joseph Yeshiva where he is presently pursuing Talmudic Studies.

the program (lines 1310 to 1810).

One of the main difficulties with writing Hebrew is that it is printed out from right to left instead of left to right as in English. To print the characters on the screen, the program pokes the character data into graphics memory instead of drawing, because DRAW is a rather slow process. One way to improve the characters would be to change the first part of the program, which has all the data for the screen characters. The same can be done to the printer characters by changing the second part of the program, which contains the data for the characters downloaded to the printer. A different code would have to be written for a printer other than the Okidata.

The cursor is an underline that is drawn underneath the next character to be drawn. The printer baud rate (set for 2400) can be changed by editing Line 130.

The program starts by setting the baud rate and sending you to the help screen. The uppercase characters are gotten by using the shift keys (the program sets the lowercase flag in Line 1590). The listing doesn't have to be changed to fit into a disk system because

it checks for the beginning of graphics memory in Line 1485 by peeking at Hex \$BA.

The two arrow keys are used to move the cursor around. Typing H at any time calls the help screen which shows the key equivalents. A carriage return then returns to the editor with the cursor not moved. Typing the appropriate keys produces a right-to-left display of the Hebrew characters. Another carriage return clears the screen, sends the line to the printer and produces the proper right-to-left hard copy. Two passes are made by the printer to achieve double-strike and to put in appropriate descenders. The cursor is returned to the upper-right of the screen. When nearing the 18th character, some beeps are sounded to warn of an end-of-line because the program automatically sends the line to the printer on the 18th character. Typing K before printing deletes the line, and Q quits to BASIC.

When the computer is doing some calculations it uses the speed-up poke, but slows down when it does any printing. If your machine can't handle it, take out Line 390, take out the poke in Line 1500, and delete lines 1760 and 1790. □

```

280 .....136 1330 .....218
460 .....89 1540 .....108
620 .....35 1700 .....173
750 .....224 END .....107
1080 .....52

```

The listing: HEBWRITE

```

100 REM**** HEBREWWRITER
110 REM**** 16K ECB COCO
120 REM**** OKIDATA 92&93
130 POKE 150,18
150 GOTO 330
160 CLS:PRINT"ALEF - a BET
- b"
170 PRINT"GIMMEL - g DALED -
d"
180 PRINT"HAY - h VAV -
v"
190 PRINT"ZAYIN - z CHET -
k"
200 PRINT"TET - t YUD -
y"
210 PRINT"CHAF - c CHAF S.-
C"
220 PRINT"LAMED - l MEM -
m"
230 PRINT"MEM S. - M NUN -
n"

```

```

240 PRINT"NUN S. - N SAMECH-
s"
250 PRINT"AYIN - i PHAY -
p"
260 PRINT"PHAY S.- P TSADIK-
x"
270 PRINT"TZADIK S.-X KUF -
k"
280 PRINT"RESH - r SHIN -
S"
290 PRINT"TAF - T"
300 PRINT"KILL LINE-K, EXIT-Q, H
ELP-H"
310 INPUT"PRESS ENTER TO START";
ZZ$
320 RETURN
330 CLS:PRINT@70,"hebrew typewri
ter"
340 PRINT@102,"BY ARYEH GLABERSO
N"
350 PRINT@130,"COPYRIGHT @1985 A
. GLABERSON"
360 PRINT@198,"PLEASE WAIT A MOM
ENT"
370 PMODE4,1:PCLS:CLEAR1000
380 REM ***SPEEDDOWN
390 POKE65494,0
400 DIM N(30),D$(58,7)
410 GOTO1310

```

SPECIAL DEAL ON 500 PROGRAMS!

GET 50 DISKS OR 50 CASSETTE TAPES FULL OF OVER 500 PROGRAMS. HERE IS WHAT YOU'LL RECEIVE:

- * Over 250 Utility/Home Application Programs including a Word Processor, DataBase, Spreadsheet, Account Manager, 2 Basic Compilers, Terminal Programs, ROM Copies, Mail List, Machine Language Tutorials, Plus Much More!
- * Over 200 exciting games including Warlords, Star Trek, Super Vaders, Solar Conquest, Horse Races, Football, Baseball, Frog Jump, Invader, Plus Much More! (Many machine language games)
- * Over 30 adventures including The College Adventure, Dungeon Master, Space Lab, Ice World, Ship Wreck, Zigma Experiment. Plus 32K Graphic Adventures.

EACH INDIVIDUAL ISSUE SOLD FOR \$9.00 EACH OR \$450 FOR ALL 50 ISSUES. WE SLASHED THE PRICE TO ONLY 150.00.

REG. \$450

NOW \$150.00

★★THIS MONTH ONLY★★

Buy this package of 500 programs and receive a free 6 month subscription. (A \$35 value)



THE GREATEST SOFTWARE DEAL ON EARTH JUST GOT BETTER!

THAT'S RIGHT! THIS MONTH WE'VE DROPPED OUR YEARLY SUBSCRIPTION RATE AN UNBELIEVABLE \$10.00 TO ENTICE YOU INTO SUBSCRIBING WITH US. GET 12 DISKS OR TAPES A YEAR CONTAINING OVER 120 QUALITY PROGRAMS. A SUBSCRIPTION TO T & D SOFTWARE CONSISTS OF 10 READY-TO-LOAD PROGRAMS DELIVERED BY FIRST CLASS MAIL EVERY MONTH.

NO WE ARE NOT THE SAME AS THE RAINBOW ON TAPE. IN FACT, MANY SUBSCRIBERS HAVE WRITTEN IN AND SAID THAT WE ARE MUCH BETTER THAN RAINBOW ON TAPE!



	TAPE	THIS MONTH ONLY
1 YEAR (12 issues)	78.00	60.00
6 MO. (6 issues)	48.00	35.00
1 ISSUE	9.00	8.00

Michigan Residents Add 4%
Overseas Add \$10 to Subscription Price
Personal Checks Welcome!

- * 16K-64K Color Computer
- * Over 4000 Satisfied Customers
- * Back Issues Available From
- * July '82 (Over 500 Programs)

OUR LATEST ISSUE CONTAINED

1. Computer I.O.U.
2. Disk Disassembler
3. Bak Chekers
4. Pachinko
5. Stock Charting
6. Haunted Staircase
7. Canyon Bombers
8. Dragon Adventure
9. Graphic Scroll
10. Auto Border

T & D SUBSCRIPTION SOFTWARE, P.O. BOX 256C, HOLLAND, MI 49423 (616) 396-7577


```

42Ø REM ***PRINTER CHAR TABLE**
43Ø DATA A,a,Ø,97,26,1ØØ,8,23,32
,67,Ø,Ø,Ø
44Ø DATA A,b,Ø,67,Ø,99,Ø,99,Ø,12
7,Ø,32,Ø
45Ø DATA A,g,Ø,Ø,96,1,96,31,Ø,96
,Ø,Ø,Ø
46Ø DATA A,r,Ø,1,6,Ø,6,Ø,6,Ø,6,1
2Ø,Ø
47Ø DATA A,h,Ø,Ø,1,1Ø2,16,6,Ø,6,
Ø,126,Ø
48Ø DATA A,v,Ø,Ø,Ø,1,6,Ø,126,Ø,Ø
,Ø,Ø
49Ø DATA A,z,Ø,Ø,Ø,Ø,1,118,8,6,Ø
,Ø,Ø
50ØØ DATA A,k,Ø,Ø,121,6,Ø,6,Ø,6,Ø
,126,Ø
51Ø DATA A,t,Ø,57,7Ø,Ø,7Ø,Ø,72,4
,64,62,Ø
52Ø DATA A,y,Ø,Ø,1,6,Ø,6,24,Ø,Ø,
Ø,Ø
53Ø DATA A,c,Ø,Ø,65,34,65,34,65,
34,65,62,Ø
54Ø DATA A,l,Ø,Ø,4,1Ø,Ø,75,Ø,43,
Ø,24,Ø
55Ø DATA A,m,Ø,123,4,3,64,32,66,
33,7Ø,56,Ø
56Ø DATA A,M,Ø,125,1,99,1,99,1,9
9,1,127,Ø
57Ø DATA A,n,Ø,Ø,Ø,99,Ø,99,28,Ø,
Ø,Ø,Ø
58Ø DATA A,N,Ø,Ø,Ø,Ø,3,12Ø,7,Ø,Ø
,Ø,Ø
59Ø DATA A,s,Ø,61,66,Ø,66,Ø,66,Ø
,66,6Ø,Ø
60ØØ DATA A,i,Ø,97,6,61,Ø,24,Ø,12
,Ø,7,Ø
61Ø DATA A,p,Ø,67,8,7Ø,8,66,Ø,66
,4,56,Ø
62Ø DATA A,P,Ø,5,2,5,Ø,1,Ø,1,Ø,1
26,Ø
621 DATA D,G,Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø,1
27,Ø
63Ø DATA A,q,Ø,1,124,1,Ø,17,Ø,9,
Ø,6,Ø
635 DATA D,Z,Ø,Ø,Ø,Ø,Ø,127,Ø,Ø,Ø
,Ø,Ø
64Ø DATA A,d,Ø,Ø,1,6,Ø,6,Ø,6,12Ø
,6,Ø
65Ø DATA A,S,Ø,127,Ø,1Ø4,4,114,9
,1ØØ,2,1,Ø
66Ø DATA A,T,Ø,97,Ø,127,Ø,1,Ø,1,
2,124,Ø
67Ø DATA A,C,Ø,3,Ø,3,Ø,3,Ø,127,Ø
,3,Ø
675 DATA D,H,Ø,Ø,Ø,Ø,Ø,Ø,Ø,127,Ø
,Ø,Ø
68Ø DATA A,x,Ø,65,2,69,8,64,8,85
,34,65,Ø

```

```

69Ø DATA A,X,Ø,3,4,11,Ø,12Ø,4,3,
Ø,3,Ø
70ØØ DATA A,,Ø,Ø,24,Ø,24,Ø,Ø,Ø,Ø
,Ø,Ø
71Ø DATA A,"",Ø,Ø,24,64,56,Ø,Ø,
Ø,Ø,Ø,Ø
72Ø REM ***HI-RES CHAR TABLE
73Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
74Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
75Ø DATA 31,2,2,2,2,2,2
76Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
77Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
78Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
79Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
80ØØ DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
81Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
82Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
83Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
84Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
85Ø DATA 16,15,17,17,17,31,31
86Ø DATA 4,4,4,4,4,4,4
87Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
88Ø DATA 3Ø,9,21,1,1,1,1
89Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
90ØØ DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
91Ø DATA 17,17,21,21,21,21,31
92Ø DATA 31,9,9,9,9,9,25
93Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
94Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
95Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
96Ø DATA 27,17,1Ø,4,4,4,4
97Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø

```

CoCo Cat



```

98Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
99Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
1ØØØ DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
1Ø1Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
1Ø2Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
1Ø3Ø DATA Ø,Ø,Ø,Ø,12,12,Ø
1Ø4Ø DATA Ø,Ø,Ø,12,12,4,8
1Ø5Ø DATA 19,11,6,12,1Ø,25,25
1Ø6Ø DATA 3Ø,2,2,2,2,2,31
1Ø7Ø DATA 3Ø,31,1,1,1,31,3Ø
1Ø8Ø DATA 31,31,2,2,2,2,2
1Ø9Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
11ØØ DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
111Ø DATA 14,2,2,2,2,13,13
112Ø DATA 31,31,1,1,9,9,9
113Ø DATA 9,9,9,11,6,12,24
114Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
115Ø DATA 16,3Ø,17,17,17,17,17
116Ø DATA 8,16,14,1,2,4,8
117Ø DATA 26,29,9,17,17,23,23
118Ø DATA 12,12,4,4,4,12,12
119Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
12ØØ DATA 3Ø,9,9,29,1,1,3Ø
121Ø DATA 31,1,1,5,5,4,4
122Ø DATA 14,17,1,1,1,1,1
123Ø DATA 3Ø,17,17,17,17,17,14
124Ø DATA 16,25,27,21,17,17,14
125Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
126Ø DATA 12,4,4,4,4,4,4
127Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø
128Ø DATA 27,27,18,1Ø,4,2,31
129Ø DATA 12,12,4,Ø,Ø,Ø,Ø
13ØØ DATA 4,2,5,4,4,4,4
131Ø FORJ=1TO32
132Ø READ T$,C$,N(1),N(2),N(3),N
(4),N(5),N(6),N(7),N(8),N(9),N(1
Ø),N(11)
133Ø PRINT#-2,CHR$(27);CHR$(37);
T$;C$;
134Ø REM ***SEND TO PRINTER
135Ø FOR I=1TO11:PRINT#-2,CHR$(N
(I));:NEXTI
136Ø NEXT J
137Ø PRINT#-2,CHR$(27);CHR$(5Ø);
138Ø GOSUB 16Ø
139Ø CLS:INPUT"GREEN SCREEN ";GL
$
14ØØ IFGL$="Y"THENAO=192:BO=255:
ELSEIFGL$<>"Y"THENAO=63:BO=Ø
141Ø CLS:PRINT@198," just one mo
ment";
142Ø FORJ=1TO58
143Ø FORI=1TO7
144Ø READM
145Ø IFGL$="Y"THENM=255-M
146Ø D$(J,I)=CHR$(M)
147Ø NEXTI
148Ø NEXTJ
1485 XZ=256*PEEK(&HBA)

```

```

1486 XY=XZ+256
149Ø POKE &H11A,Ø
15ØØ POKE65495,Ø:SCREEN1,Ø:IFGL$
="Y"THENPCLS(1)ELSEPCLS
151Ø B$=STRING$(8Ø,CHR$(32))
1515 C$=STRING$(8Ø,CHR$(32))
152Ø FL=Ø:CT=32:CN=8Ø
153Ø A$=INKEY$:IFA$=""THEN153Ø
154Ø POKEYY+CT+FL*288,BO
155Ø IF A$="H" THEN SCREEN1,1:GO
SUB 16Ø:SCREEN1,Ø:GOTO 153Ø:ELSE
IF A$="Q" THEN 178Ø:ELSE IF A$=
CHR$(13) THEN 176Ø:ELSE IF A$="K
" THEN 15ØØ:ELSE IF A$<>CHR$(9)
THEN 16ØØ
156Ø CT=CT+1:CN=CN+1
157Ø IFCT>32ANDFL=ØTHENCT=32:CN=
8Ø:ELSEIFCT>63ANDFL=1THENCT=Ø:FL
=Ø:ELSEIFCT>95ANDFL=2THENCT=32:F
L=1
158Ø POKE XY+CT+FL*288,AO
159Ø GOTO 153Ø
16ØØ CT=CT-1:CN=CN-1
161Ø IFCT<ØTHENCT=63:FL=1:ELSEIF
CT<32ANDFL=1THENCT=95:FL=2:ELSEI
FCT<81ANDFL=2THENGOTO176Ø:ELSEIF
CT<86ANDFL=2THENSOUND2ØØ,1
162Ø FF=XZ+CT+FL*288
163Ø POKE FF+256,AO
164Ø IFA$=CHR$(8)THENGOTO153Ø
165Ø J=ASC(A$)-64
166Ø IFA$="."THENJ=31ELSEIFA$=",
"THENJ=32
167Ø IFJ<1ØRJ>58THENJ=1
168Ø GG=32
169Ø REM***PRINT CHARS ON SCREEN
17ØØ FORK=1TO7:POKEFF+GG,ASC(D$(
J,K)):GG=GG+32:NEXTK
171Ø POKE FF+256,AO
172Ø IFCN<1THENCN=1ELSEIFCN>8ØTH
ENCN=8Ø
173Ø MID$(B$,CN,1)=A$
1732 IFA$="N"THENA$="Z"
1733 IF A$="C" THEN A$="H"
1734 IF A$="P" THEN A$="G"
1735 MID$(C$,CN,1)=A$
174Ø GOTO153Ø
175Ø REM***SPEEDDOWN,SEND LINE T
O PRINTER
176Ø POKE65494,Ø
1762 PRINT#-2,CHR$(27);CHR$(37);
CHR$(57);CHR$(Ø);B$
1766 PRINT#-2,CHR$(27);CHR$(54);
C$
177Ø GOTO 15ØØ
178Ø POKE&H11A,&HFF:CLS
179Ø POKE65494,Ø
18ØØ PRINT#-2,CHR$(27);CHR$(48);
181Ø END

```

Good News . . .
over 85% of our
products work on
the CoCo 3!

Good Products . . .
what you'd expect
from Computerware

Good Deals . . .
Special holiday
prices!

For CoCo II and CoCo 3

RSDOS required for CoCo3



Exclusively
CoCo 3



Business Applications

\$100. (payroll \$125.)

- General Ledger
- Check Ledger
- Inventory Control
- Accounts Receivable
- Accounts Payable
- Payroll

Adventures/Simulations

- cassette \$24.95 disk \$27.95
- Omniverse
- Major Istar
- Treasure of the Aztecs
- Escape: 2012
- Star Trader
- Franchise
- Dungeon Quest
- Sam Sleuth
- Bio Detector
- Synther 77

- Return of Junior's Revenge .. \$34.95
- Color
- Connection IV . \$49.95
- OS-9 Color
- Connection . \$49.95
- The Magic of Zanth .. \$34.95
- Color
- Scribe II \$49.95

RSDOS Programming Tools

- Sourcerer \$49.95
- Color Basic Compiler \$39.95
- Macro Assembler \$49.95
- Color Connection III \$49.95
- Advanced Editor \$29.95

Personal Productivity

- C.E.O. \$49.95
- Scribe \$49.95
- Personal Finance \$32.95

Only
CoCo II

OS-9 Tools

- Sourcerer \$39.95
- OS-9 Basic \$49.95
- Raid \$39.95
- Macro Assembler \$49.95
- Textools \$29.95
- Text Formatter \$34.95
- Advanced Utilities \$29.95
- Disk Fix and Utilities \$29.95
- Advanced Editor \$39.95

Games—Sports—Arcades

- cassette \$24.95 disk \$27.95
- Ice Hockey
- Football
- Mr. Dig
- Pro Golf
- Bloc Head



- Merge 'n Mail . \$32.95
- Don't Forget \$32.95
- Screen Expander . \$27.95

RSDOS rom & manual \$19.95

RSDOS rom, manual, & 2764 for Disto \$24.95

ORDER FORM

Call or Write to:



COMPUTERWARE®

Box 668,
Encinitas, CA 92024

(619) 436-3512

Name _____
 Address _____
 City _____ State _____ Zip _____
Yes! Send me your FREE catalog! CoCo
 VISA MasterCard
 Card # _____ Exp. _____
 Signature _____

Item	Format	Price

Shipping _____ 6% Calif Sales Tax _____
 Surface — \$2 minimum. COD Add \$5 _____
 2% for orders over \$100 Shipping* _____
 Air or Canada — \$5 minimum. TOTAL _____
 5% for orders over \$100
 Checks are delayed for bank clearance

Holiday
Special!

- 25% off CoCo II
- 20% off CoCo II / 3
- 15% off CoCo 3

Offer expires December 31st

MUSIC

Four voice music is a snap with your word processor



Deck the Halls

By Rick Woods

One of the shortcomings of the Color Computer is its single voice music in the BASIC mode. But one of the programs available for the 32K CoCo is *Musica II* from Speech Systems, a versatile software music synthesizer. Using it, I've written some music that I think most CoCo users will find enjoyable.

My brother, Randy, and I belong to the New Mexico All-State Choir. Using my choir experience and some help from Randy, I've written music for my CoCo that shows what a great machine it really is.

I converted the music into a string of hexadecimal numbers that can be keyed into the computer using a word processor or the BASIC program in Listing 2. My version of the song "Deck the Halls" is an excellent example of what a CoCo can do when properly programmed.

About Machine Language

Musica II lets you write music for the CoCo in machine language. All the music I've written, therefore, is in machine language. For those who are new to computers, machine language

Rick Woods is a senior at West Mesa High in Albuquerque, N.M., where he is student president of the music department. His hobbies include music and computers, and he enjoys arranging music for the CoCo.

(ML) is the lowest level language that a computer can be programmed in. It consists of zeros and ones (binary values) that the computer uses to turn off and on the many thousands of electrical switches inside the computer. These binary digits are called bits and are assembled in groups of eight to form a byte. Each memory address in the CoCo stores one byte of information. Since listing programs in binary format would lead to unusually long listings, a hexadecimal format is most often used. The hexadecimal numbering system is base 16 and is represented by the numbers 0 to 9, and the letters A to F to represent the values 11 to 15. Notice that Listing 1 consists entirely of these characters. This is the machine language program converted to a string of hexadecimal numbers. Each hexadecimal digit in the music listing represents 4 bits or one-half of a byte (a nibble). Therefore, each address you want to load in the computer requires two hexadecimal characters. Hexadecimal numbers in this article will be represented by a leading dollar sign (\$). Looking at Listing 1 then, you can see that the first address (\$3DA0) will be loaded with \$BD; the second address with \$A9; the third address with \$28 and so forth.

Loading Music With a Word Processor

Any word processor that saves files in ASCII (the standard data format used

Now Create Your Own Signs, Banners, and Greeting Cards.

Introducing The Coco Graphics Designer

Last Christmas we introduced our COCO Greeting Card Designer program (see review April 86 Rainbow). It has been so popular that we've now expanded it into a new program called the COCO Graphics Designer. The Coco Graphics Designer produces greeting cards plus banners and signs. This program will further increase the usefulness and enjoyment of your dot matrix printer.

The Coco Graphics Designer allows you to mix text and pictures in all your creations. The program features picture, border, and character font editors, so that you can modify or expand the already built in libraries. Plus a special "grabber" utility is included to capture areas of high resolution screens for your picture library.

Requirements: a Coco or Coco II with a minimum of 32K, One Disk Drive (Disk Ext. BASIC 1.0/1.1, ADOS, or JDOS). Printers supported include: Epson RX/FX, GEMINI 10X, SG-10, NX-10, C-Itch 8510, DMP-100/105/400/430, Seikosha GP-100/250, Legend 808 and Gorilla Banana. Send a SASE for complete list of compatible printers.
#C332 Coco Graphics Designer \$29.95

Over 100 More Pictures

An optional supplementary library diskette containing over one hundred additional pictures is available.
#C333 Picture Disk #1 \$14.95.

Colored Paper Packs

Now available are packs containing 120 sheets of tractor-feed paper and 42 matching envelopes in assorted bright RED, GREEN, and BLUE. Perfect for making your productions unforgettable.
#C274 Paper Pack \$19.95



With Zebra's Coco Graphics Designer it's easy and enjoyable making your own greeting cards, signs, and banners.

WICO TRACKBALL

Now \$19.95

Order Cat# TBR501
(Was \$69.95)



You can benefit from our purchase of brand new WICO Trackball Controllers at closeout prices. This model was designed specifically for the Radio Shack Color Computer and plugs right into the joystick port.

WICO is the largest designer and manufacturer of control devices for commercial arcade video games. If you've ever played an arcade video game, chances are you've used a WICO joystick or trackball and experienced its

We have bargain priced trackballs for ATARI, Commodore, TI, and other computers. Call or write for our price list.

superior control, pinpoint firing accuracy, and exceptional durability.

Includes one-year limited warranty. Phenolic ball offers 360-degree movement. Two optical encoders provide split-second response. Quick-action fire button for smooth, two handed arcade response and feel. Long 5' computer connection. Heavy duty plastic case for long hard use. Compatible with all color computer models.

Ordering Instructions: All orders add \$3.00 Shipping & Handling. UPS COD add \$3.00. VISA/MC Accepted. NY residents add sales tax.

Zebra Sytems, Inc
78-06 Jamaica Ave.
Woodhaven, NY 11421
(718) 296-2385

Listing 2: MUSCLOAD

```

10000 ' LISTING 2
11000 '
12000 '
13000 ' *****
14000 ' **** MUSIC LOAD ****
15000 ' *****
16000 ' FOR LOADING
17000 ' MUSIC PROGRAMS
18000 ' USING WORDPROCESSOR
19000 ' WITH DISK SYSTEM
20000 '
21000 '
22000 ' BY RICK WOODS
23000 ' (C) 1985
24000 '
25000 '
26000 '
27000 CLEAR2000, &H3DA0
28000 CLS
29000 PRINT:PRINT:PRINTTAB(6)"MUS
IC LOADER PROGRAM"
30000 PRINT:PRINTTAB(10)"BY RICK
WOODS"
31000 PRINT:PRINTTAB(8)"=====
=====
32000 PRINTTAB(10)"PROGRAM MENU"
33000 PRINTTAB(8)"=====
="
34000 PRINTTAB(8)"1. CONVERT MUSI
C"
35000 PRINTTAB(8)"2. PLAY SONG"
36000 PRINTTAB(8)"3. END PROGRAM"
37000 PRINT:PRINTTAB(5)"";:INPUT
"ENTER ONE OF THE ABOVE";Z
38000 IF Z<1 OR Z>3 THEN 28000
39000 ON Z GOTO 47000,41000,40000
40000 END
41000 CLS
42000 IF PEEK(15776)=189 THEN 450
0
43000 LOADM"DECKHALL"
44000 FOR X=1 TO 30000:NEXT X
45000 EXEC &H3DA0
46000 GOTO 28000
47000 OPEN"D",#1,"DECKHALL.DAT",2
48000 FIELD#1,2 AS B$
49000 X=&H3DA0
50000 FOR Y=1 TO LOF(1)
51000 GET#1,Y
52000 A$="&H"+B$
53000 POKE X,VAL(A$)
54000 X=X+1
55000 NEXT Y
56000 CLOSE#1
57000 FOR X=1 TO 50000
58000 NEXT X
59000 VERIFY ON

```



```
6000 SAVEM"DECKHALL", &H3DA0, &H48
09, &H3DA0
6100 GOTO 2800
```

Listing 3: TAPELOAD

```
1000 ' LISTING 3
1100 '
1200 '
1300 '*****
1400 '***** MUSIC LOAD *****
1500 '*****
1600 ' FOR LOADING
1700 ' MUSIC PROGRAMS
1800 ' IN NON-DISK SYSTEMS
1900 '
2000 '
2100 ' BY RICK WOODS
2200 ' (C) 1985
2300 '
2400 '
2500 '
2600 CLEAR 200, &H3DA0
2700 CLS
2800 PRINT:PRINT:PRINTTAB(6) "MUS
IC LOADER PROGRAM"
2900 PRINT:PRINTTAB(10) "BY RICK
WOODS"
3000 PRINT:PRINTTAB(8) "=====
=====
3100 PRINTTAB(10) "PROGRAM MENU"
3200 PRINTTAB(8) "=====
="
3300 PRINTTAB(8) "1. ENTER MUSIC"
3400 PRINTTAB(8) "2. PLAY SONG"
3500 PRINTTAB(8) "3. PRINT DATA"
3600 PRINTTAB(8) "4. END PROGRAM"
3700 PRINT:PRINTTAB(5) """;:INPUT"
ENTER ONE OF THE ABOVE";Z
3800 IF Z<1 OR Z>4 THEN 2700
3900 ON Z GOTO 4100,6100,7300,40
00
4000 END
4100 CLS
4200 X=&H3DA0
4300 INPUT"ENTER START ADDRESS";
SA
4400 IF SA=0 THEN SA=X
4500 PRINT:INPUT"ENTER DATA STRI
NG";D$
4600 IF D$="SAVE" THEN 6800
4700 IF D$="" THEN 4500
4800 IF LEN(D$)/2=INT(LEN(D$)/2)
THEN 5300
4900 CLS:FOR Q=1 TO 10
5000 PRINTTAB(5) "IMPROPER STRING
LENGTH":SOUND 100,1
```

The RAINBOW

THE COLOR COMPUTER MONTHLY MAGAZINE

Back Issue Availability



Back copies of many issues of **THE RAINBOW** are still available.

All back issues sell for the single issue cover price. In addition, there is a \$3.50 charge for the first issue, plus 50 cents for each additional issue for postage and handling if sent by United Parcel Service. There is a \$5 charge for the first issue, plus a \$1 charge for each additional issue on orders sent by U.S. Mail. UPS *will not* deliver to a post office box or to another country.

Issues July 1981 through June 1982 are available on white paper in a reprint form. All others are in regular magazine form. VISA, MasterCard and American Express accepted. Kentucky residents please add 5 percent state sales tax. In order to hold down costs, we do not bill and no C.O.D. orders are accepted.

Due to heavy demand, we suggest you order the back issues you want now while supplies last.

To order, just fill out the form on the next page and mail it with your payment to:

THE RAINBOW
The Falsoft Building
P.O. Box 385
Prospect, KY 40059

For greater convenience, order RAINBOW Back Issues through the shopping area of the CoCo SIG of Delphi!

BACK ISSUE ORDER FORM

(See overleaf for instructions.)

(Payment must accompany back issue orders. We do not bill.)

Please send me the following back issues:

NO.	MONTH YEAR	VOLUME 1	PRICE
1	JULY '81	PREMIER ISSUE	\$2.00 <input type="checkbox"/>
2	AUG. '81		\$2.00 <input type="checkbox"/>
3	SEPT. '81	EDUCATION	\$2.00 <input type="checkbox"/>
4	OCT. '81	PRINTER	\$2.00 <input type="checkbox"/>
5	NOV. '81		\$2.00 <input type="checkbox"/>
6	DEC. '81	HOLIDAY	\$2.00 <input type="checkbox"/>
7	JAN. '82		\$2.00 <input type="checkbox"/>
8	FEB. '82		\$2.00 <input type="checkbox"/>
9	MAR. '82		\$2.50 <input type="checkbox"/>
10	APR. '82		\$2.50 <input type="checkbox"/>
12	JUNE '82		\$2.50 <input type="checkbox"/>
11	JUNE '83	VOLUME 2 PRINTERS	\$2.95 <input type="checkbox"/>
12	JULY '83	ANNIVERSARY	\$2.95 <input type="checkbox"/>
1	AUG. '83	VOLUME 3 GAMES	\$2.95 <input type="checkbox"/>
2	SEPT. '83	EDUCATION	\$2.95 <input type="checkbox"/>
3	OCT. '83	GRAPHICS	\$3.95 <input type="checkbox"/>
4	NOV. '83	DATA COMM.	\$3.95 <input type="checkbox"/>
5	DEC. '83	HOLIDAY	\$3.95 <input type="checkbox"/>
8	MAR. '84	BUSINESS	\$3.95 <input type="checkbox"/>
9	APR. '84	GAMING	\$3.95 <input type="checkbox"/>
10	MAY. '84	PRINTER	\$3.95 <input type="checkbox"/>
11	JUNE '84	MUSIC	\$3.95 <input type="checkbox"/>
12	JULY '84	ANNIVERSARY	\$3.95 <input type="checkbox"/>
1	AUG. '84	VOLUME 4 GAMES	\$3.95 <input type="checkbox"/>
2	SEPT. '84	EDUCATION	\$3.95 <input type="checkbox"/>
3	OCT. '84	GRAPHICS	\$3.95 <input type="checkbox"/>
4	NOV. '84	DATA COMM.	\$3.95 <input type="checkbox"/>
5	DEC. '84	HOLIDAY	\$3.95 <input type="checkbox"/>
6	JAN. '85	BEGINNERS	\$3.95 <input type="checkbox"/>
7	FEB. '85	UTILITIES	\$3.95 <input type="checkbox"/>
8	MAR. '85	BUSINESS	\$3.95 <input type="checkbox"/>
9	APR. '85	SIMULATIONS	\$3.95 <input type="checkbox"/>
10	MAY '85	PRINTER	\$3.95 <input type="checkbox"/>
11	JUNE '85	MUSIC	\$3.95 <input type="checkbox"/>
12	JULY '85	ANNIVERSARY	\$3.95 <input type="checkbox"/>
1	AUG. '85	VOLUME 5 GAMES	\$3.95 <input type="checkbox"/>
2	SEPT. '85	EDUCATION	\$3.95 <input type="checkbox"/>
3	OCT. '85	GRAPHICS	\$3.95 <input type="checkbox"/>
4	NOV. '85	DATA COMM.	\$3.95 <input type="checkbox"/>
6	JAN. '86	BEGINNERS	\$3.95 <input type="checkbox"/>
7	FEB. '86	UTILITIES	\$3.95 <input type="checkbox"/>
8	MAR. '86	BUSINESS	\$3.95 <input type="checkbox"/>
9	APR. '86	HOME HELP	\$3.95 <input type="checkbox"/>
10	MAY '86	PRINTER	\$3.95 <input type="checkbox"/>
11	JUNE '86	MUSIC	\$3.95 <input type="checkbox"/>
12	JULY '86	ANNIVERSARY	\$3.95 <input type="checkbox"/>
1	AUG. '86	VOLUME 6 GAMES	\$3.95 <input type="checkbox"/>
2	SEPT. '86	EDUCATION	\$3.95 <input type="checkbox"/>
3	OCT. '86	GRAPHICS	\$3.95 <input type="checkbox"/>
4	NOV. '86	DATA COMM.	\$3.95 <input type="checkbox"/>
5	DEC. '86	HOLIDAY	\$3.95 <input type="checkbox"/>

RAINBOW INDEX A complete index to our first three years, July 1981 through June 1984, is printed in its entirety in our July 1984 issue. Separately bound copies are also available. \$2.50

Note: Our Fourth and Fifth Year Indexes, including RAINBOW ON TAPE indexes, are included in the July 1985 and 1986 issues, respectively.

TOTAL _____

KY RESIDENTS ADD 5% _____

U.S. MAIL CHARGE _____

SHIPPING & HANDLING _____

U.P.S. CHARGE _____

TOTAL AMOUNT _____

ENCLOSED _____

Name _____

Address _____

City _____ State _____ ZIP _____

Payment Enclosed, or charge to my:

VISA MC AE

CARD # _____

EXPIRATION DATE _____ PHONE # _____

SIGNATURE _____

To order by phone (credit card orders only) call (800) 847-0309, 8 a.m. to 5 p.m. EST. All other inquiries call (502) 228-4492.

```

5100 NEXT Q:FOR Q=1 TO 1000:NEXT
Q
5200 CLS:GOTO 4500
5300 FOR Q=1 TO LEN(D$) STEP 2
5400 E$=MID$(D$,Q,2):E$="&H"+E$
5500 POKE SA,VAL(E$)
5600 PRINT"LOAD ADDR=";HEX$(SA),
5700 SA=SA+1
5800 PRINT"NEXT ADDR=";HEX$(SA)
5900 NEXT Q
6000 GOTO 4500
6100 CLS
6200 PRINT:PRINT:PRINTTAB(7)"NOW
LOADING MUSIC"
6300 CLOADM"DECKHALL"
6400 FOR Q=1 TO 1000:NEXT Q
6500 EXEC
6600 GOTO 2700
6700 STOP
6800 CLS:PRINT:PRINT
6900 PRINTTAB(5)"PREPARE TAPE RE
CORDER"
7000 PRINT:PRINTTAB(7)"THEN PRES
S <ENTER>"
7100 CSAVEM"DECKHALL",&H3DA0,&H4
809,&H3DA0
7200 GOTO 2700
7300 CLS
7400 PRINT:PRINT:PRINTTAB(10)"NO
W PRINTING"
7500 FOR Q=&H3DA0 TO &H4809
7600 A$=HEX$(PEEK(Q))
7700 A$="0"+A$:A$=RIGHT$(A$,2)
7800 PRINT#-2,A$;
7900 QQ=QQ+1
8000 IF QQ=30 THEN PRINT#-2:QQ=0
8100 NEXT Q
    
```

Hint . . .

Monochrome Magic on the CoCo 3

Several people have expressed concern that a monochrome monitor is not supported on the Color Computer 3. The CoCo 3 does support a composite color monitor, however. If you want to hook a monochrome monitor to this output, you can obtain acceptable results by issuing the following command line:

```
WIDTH40:PALETTE 8,255:PALETTE 0,0:CLS9
```

All the CLS9 does is display the Microware name. It is not necessary for this line to work.

Bob Rosen
Howard Beach, NY

Great Christmas Savings from Radio Shack.

The Tandy® 102 Portable

Reg.
\$499⁰⁰

\$399⁰⁰

Save \$100 on our most popular portable.



Good things really do come in small packages

Here's the perfect gift for busy executives, students and people on the move. The Tandy 102 provides the performance of a desktop computer in a much smaller—and much more affordable package.

We've redesigned our best-selling portable—the Model 100—into the slimmer, more lightweight Tandy 102. Ideal for businesspeople who travel, the Tandy 102 includes five instant-on programs, an 8-line by 40-character LCD display and a built-in modem. Despite its small size, the Tandy 102 features a full-size typewriter-style keyboard and 24K memory.

Use the Tandy 102 as a personal word processor, address/phone directory, appointment calendar and telephone auto-dialer. Access other computers or national information services by phone with the built-in 300 bps modem and communications program. Or write your own programs in BASIC.

The Tandy 102 includes parallel, RS-232C, cassette and bar code reader interfaces. You can even add a Disk/Video Interface for up to 184,000 characters of disk storage, as well as connection to a TV or display monitor. The powerful little Tandy 102 is a Micro Executive Workstation™ that operates on batteries or optional AC adapter.




Save on our other portables!

The powerful Tandy 200 (26-3860, Reg. \$799.00, Sale \$599) and the professional disk-based Tandy 600 portable computers (26-3901, Reg. \$1599.00, Sale \$999) are available at special holiday savings as well. Stop by your local Radio Shack. We've got the perfect portable for everyone on your list.

Radio Shack®
The Technology Store™
A DIVISION OF TANDY CORPORATION

Prices apply at Radio Shack Computer Centers and participating stores and dealers. Sale begins 10/21/86, ends 12/31/86.

Fortune Wheel on Tape

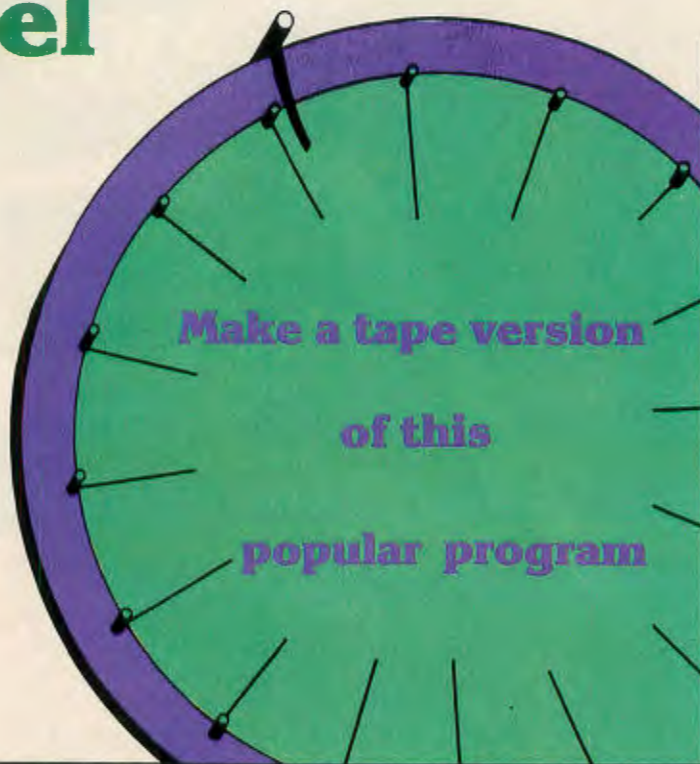

By Arron Branigan

After having *Fortune Wheel* published in the August 1986 issue of *RAINBOW*, I have received several calls and letters from people wanting to know how to make the program work with a tape system. With my goal clearly laid before me, I set out to accomplish the task. What follows are the results.

To alter Listing 1 (the actual *Wheel* program) for tape operation, you first need to change the following lines as indicated.

```
56Ø CLS:PRINT@224,"POSITION TAPE
AT PROPER COUNTER NUMBER, PRESS
PLAY THEN PRESS [ENTER]":INPU
TXV:SCREEN1,1:PT=PL
57Ø POKE65494,Ø:CLOSE#-1:OPEN "I
",#-1,"CATEGORY":FORZZ=1TO1Ø:INP
UT#-1,CT$(ZZ),K$(ZZ):NEXTZZ:POKE
65495,Ø
```

Arron Branigan is a technical sergeant in the U.S. Air Force and is pursuing a bachelor's degree in computer applications at Arkansas State University. He enjoys programming his computer and singing country and western music.

```
58Ø FORO=1 TO RD
6ØØ SS=Ø:DS=RND(1Ø):CAT=VAL(CT$(
DS)):C$=K$(DS):GY=1
61Ø FORSS=1 TO RO:IFK(SS)=DS THE
N 6ØØ ELSENEXTSS
62Ø K(RO)=DS:POKE65495,Ø
63Ø TL=Ø:FOR TL=64 TO 1 STEP-1:I
FMID$(C$,TL,1)<>" " THEN64Ø ELSE
NEXTTL
```

Then delete Line 590 from the original program. Change the CLEAR 1000 in Line 70 to CLEAR 1500. Now, save this altered version to tape.

To alter Listing 2, the *Creator* program, change the following lines as indicated. Note that lines 1000 to 2030 are new and are necessary for tape operation.

```
1ØØ CLS:PRINT@23Ø,"";:INPUT "
(1)-CREATE FILES
(2)-CORRECT FILES
(3)-LIST FILES
(4)-GET TAPE FILE
(5)-SAVE A TAPE FILE
(6)-END
AKE SELECTION";SE
```

M

Great Christmas Savings from Radio Shack

64K Color Computer 2[®]

ONLY \$99⁹⁵*

Save \$60 on a colorful gift
for the whole family



Here's a perfect gift that's sure to fit

Give your family Radio Shack's remarkable Color Computer 2 (26-3127, Reg. \$159.95), and start computing the first thing Christmas morning—even if you've never used a computer before! Simply attach to your TV, and you're set.

Everyone in your family can use the Color Computer 2 year round for education, entertainment, and home management tasks. It can even be used for writing your own sophisticated programs—simply pop in an instant-loading Program Pak™

cartridge, or choose ready-to-run cassette software (requires optional recorder) to set up a family budget, monitor investments, create an inventory of household items or play exciting games with sound effects. Your children will use the Color Computer 2 to help strengthen their math, spelling and reading skills, too.

Save \$100 on the matching disk drive.

The Color Computer 2 lets you access 32,000 characters of memory with the built-in BASIC language. As your family's interests and skills grow, the Color

Computer 2 can be expanded to keep up with everyone's needs. Add the FD-501 Color Thinline Disk #0 (26-3131, Reg. \$299.95, Sale 199.95) to access the full 64K memory and to store over 156,000 characters of data. Plus, you can add a telephone modem for communications, a printer, joysticks and much more.

Put the Color Computer 2 in its place—at the top of your family's gift list—and do your shopping early at Radio Shack.

Radio Shack[®]
The Technology Store™
A DIVISION OF TANDY CORPORATION

*TV, platform and disk drive not included. Prices apply at Radio Shack Computer Centers and participating Radio Shack stores and dealers. Sale begins 10/21, ends 12/24.

```

110 IF SE=6 THENPOKE65494,0:END
120 ON SE GOSUB 270,180,510,1000
,2000:GOTO100
190 GOSUB 1000
200 IF FI<1 OR FI>10 THEN 180
210 A1$=A$(FI):B$=B1$(FI)
270 PS=1:POKE65495,0:CLS:IF SE=1
THENFORFI=1TO10:CLS(6):B$=STRIN
G$(64," "):PRINT@480,"RECORD";FI
;
430 A$(FI)=A1$:B1$(FI)=B$
440 IF SE=1 THENPS=1:NEXT FI
450 RETURN
520 GOSUB1000:POKE65494,0
530 CLS:INPUT"ENTER FILES:START,
END";ST,EN:IF EN>10 THEN EN=10:E
LSE IF ST<1 OR ST>10 OR EN<1 OR
EN>10 OR ST> EN THEN 530
580 PRINT"RECORD";X;CR$;"CATAGOR
Y";CR$;A$(X);CR$;B1$(X)
590 IF CO$="Y" THEN PRINT#-2, US
ING P$ ;X,A$(X),B1$(X)
610 NEXTX:PRINT#-2,CHR$(27);CHR$
(19);:RETURN
1000 POKE 65494,0:CLS:PRINT@224,
"";:INPUT"IF FILE IS NOT IN MEMO
RY THEN POSITION TAPE TO PROPE

```

```

R COUNTER NUMBER THEN PRESS PLAY
, TYPE LOAD[ENTER] ELSE TYPE
R[ENTER]";Q$:IFQ$<>"LOAD"ANDQ$<>
"R" THEN 1000:ELSE IFQ$="R" THEN
POKE65495,0:RETURN
1010 OPEN "I",#-1,"CATEGORY"
1020 FOR X5=1TO10:INPUT#-1,A$(X5
),B1$(X5):NEXTX5:POKE65495,0:RET
URN
2000 CLS:PRINT@224,"POSITION TAP
E, PRESS PLAY AND RECORD THEN
PRESS [ENTER]":INPUT ZZ:POKE6549
4,0:OPEN "O",#-1,"CATEGORY"
2010 MOTORON:FORZZ=1 TO 1800:NEX
TZZ:MOTOROFF:'** CLEAR LEADER ON
TAPE **
2020 FORX5=1 TO 10:PRINT#-1,A$(X
5),B1$(X5):NEXTX5
2030 CLOSE#-1:RETURN

```

Delete lines 420, 570 and 620 to 680. Now, add CLEAR 2000 to the beginning of Line 75. Save the result to tape as CREATOR. This is all there is to it.

Creator creates a file called CATEGORY on your tape. This file will have 10 records. You can put as many files as you want on one tape, however, make sure you start with a blank tape for the first file. ☺



CoCo Cat
Says
Drugs Are
NOT
User-Friendly

Get your own CoCo Cat button by writing to Falsoft, Inc., The Falsoft Building, P.O. Box 385, Prospect, KY 40059. Please enclose \$1.50 for shipping and handling.

C.R.C. **COMPUTERS** **CANADA'S COCO** **HARDWARE SHOP**



DISTO SUPER PRODUCTS

- **SUPER CONTROLLER &**
- **SUPER RAMDISK 256K/512K**
WITH ADD ONS
- ▶ Parallel Printer Interface
- ▶ Real Time Clock
- ▶ 80 Column Card
- ▶ Hard Disk Interface
- ▶ EPROM Burner

C.R.C. PRODUCTS

- Serial to Parallel Interfaces
- Dual-Dos Switchers (for J&M)
- Color & Monochrome Monitor Drivers
- Project Boards
- RS-232 Switchers
- COCO Memory Upgrades
- Model 100 Upgrades
- "Y" & Extender Cables
- Drive and other Cables
- 5.25" SS or DS Drive Kits

OTHER PRODUCTS

5.25" Drive Case & Power Supply
5.25" Bare Drives
Hard Disks
Printers and Ribbons
Monitors
Keyboards
Joysticks
EPROMs
DS-69A Digitizers
Drive Cleaning Kits
Flip & File Cases
5.25" Floppy Diskettes
COCO Support Litterature

SERVICES

- EPROM Burning
- Repairs on COCOs and Drives

**SEND FOR
FREE CATALOGUE**



**C.R.C.
COMPUTERS**

10802 Lajeunesse
Montréal, Québec
Canada H3L 2E8

1-514-383-5293

WE ACCEPT
PHONE ORDERS



C.O.D.
IN CANADA
ONLY

Fixing CoCo and Multipak Power Supplies

By Marty Goodman

The Color Computer is a very well-made machine. Compared to the competition in its price range, the CoCo has a far superior track record of hardware reliability. Tandy's excellent construction and quality control deserve our appreciation.

Even the best-constructed machines, however, have problems now and then. In the case of the Color Computer, one known problem area is the power supply. I've fixed a number of flaky CoCo power supplies, and heard stories of many others, both from hacker friends and from Tandy repair personnel. In this article I'll tell you some of the problems we've seen and the fixes we've used.

A word of caution: The power supply on all models of CoCo contains *live* 110-volt lines at the transformer board, which are not shut off even when the power switch on the CoCo is turned off. Be *sure* your CoCo is unplugged before working on the power supply.

When measuring voltages on it, be very careful not to brush up against the

circuit board on the power transformer. On new machines this board is protected by a piece of cardboard. But on many older machines I've seen, the cardboard has been pulled off by hackers, exposing bare contact points carrying 110 volts AC. Don't forget, hacking on your CoCo or Multipak voids any warranty that may be in effect.

Both the gray CoCo and the older Multipak use pretty much the same power supply for generating 5, +12 and -12 volts. The +12 and -12 volt supplies are simple, linear circuits, using monolithic three-lead regulator chips (7812s and 7912s). The 5-volt supply on the old CoCos and Multipaks is linear, but it's complicated. It uses the older LM-723 regulator IC, along with a Darlington transistor array as a pass/power transistor. The 5-volt power supply is protected by a 6.2-volt over-voltage protection zener diode (1N4735) going from the output of the power supply to ground.

The added complexity of the 5-volt supply has proved to be a source of problems on some machines. On older 'D' boards a .33-ohm power resistor (R66) tended to burn out, causing loss of the 5-volt supply. In cases of other power supply malfunctions, the 6.2-volt zener fuses in the act of protecting the rest of the CoCo's circuitry, shunting all power on the 5-volt line to ground. So check that zener first when you find a dead 5-volt supply.

Sometimes when working on the older CoCo or Multipak power supply, I get exasperated with the overly com-

Martin H. Goodman, M.D., a physician trained in anesthesiology, is a longtime electronics tinkerer and outspoken commentator — sort of the Howard Cosell of the CoCo world. Marty is the database manager of RAINBOW's CoCo SIG on Delphi. His non-computer passions include running, mountaineering and outdoor photography. Marty lives in San Pablo, California.

plicated circuit. I saw a few that were blowing out their 723 regulator chips about as fast as I could replace them. Rather than wasting time tracing the problem further, I prefer ripping out all of the components associated with the 5-volt power supply, including the big TO-3 case heat-sunk power transistor. I then drop a TO-3 case 7805 1.5-amp monolithic regulator into the socket and heat sink formerly occupied by that power transistor.

A few trace cuts and jumpers bring proper input, output and ground lines to the regulator, and hanging a couple of 2.2 mfd anti-oscillation tantalum caps on the input and output of the 7805 completes the fix. The new power supply runs cooler and is far simpler to fix should it develop problems later.

A similar power supply is used on the CoCo 2, but much of the regulator circuitry is now inside the SALT chip (Supply and Level Translator). This is a custom IC, and available only from Tandy national parts. It handles 5-volt power regulation, RS-232 level translation and cassette input. The earliest American CoCo 2s used an early version of the SALT chip that required

external protective 3.9-volt zener diodes on the incoming RS-232 lines, but the newer American CoCo 2s and all Korean KoKo 2s use a newer version of the SALT chip that has the diodes internally. Because the SALT chip contains all this circuitry, replacing it with standard components would require

the capacitor and cleaning the circuit board cured the problem.

One commonly reported problem with CoCo power supplies is cold solder joints, particularly at the junction of the transformer and its associated satellite circuit board. Check that board very carefully in cases of computers with


“Recently I heard about a gray CoCo power supply that began to sizzle and smoke when the computer was turned on.”

not only a standard regulator IC, but a lot of other components as well.

Recently I heard about a gray CoCo power supply that began to sizzle and smoke when the computer was turned on. Careful inspection revealed a leaking 220 mfd power filter cap. The juices from that cap were shorting out parts of the 12-volt supply — and the 12-volt supply is required on old CoCos in order for the video to work. So in addition to smoking and sizzling, that machine had lost its video. Replacing

intermittent or flaky 5-volt supplies. If in doubt, just remelt the solder on all connections there. Be especially sure the CoCo's AC plug is out when you do so. If the CoCo is plugged in when you solder on that board, you risk a potentially lethal shock.

That reminds me of my favorite technical repair instructions: “Step 6: To avoid lethal shock hazard, be sure to do Step 5 before Step 4.”



The Handicappers! For the Color Computer From Federal Hill Software

Use your **Color Computer** to improve your performance at the track! Separate programs for **Thoroughbreds, Harness horses and Greyhounds** rank the horses or dogs in each race. Handicap a race in minutes, even if you've never handicapped before!

All the data you need is readily available in the thoroughbred *Racing Form*, harness or dog track program. We even provide diagrams showing you where to find the information you need! Data entry is quick and easy. Our manual shows you how to bet, when to bet and when to sit out—one of the real secrets of good handicapping.

Throughbred, Harness or Greyhound Handicapper, \$39.95 each on tape or disk. Any two, just \$59.95, all three only \$79.95. Tape requires 16K memory, Disk 32K. Will run on CoCo-3. You can buy a more expensive handicapper, but you can't buy a better one!



Federal Hill Software
8134 Scotts Level Rd.
Baltimore MD 21208
Orders 800-628-2828 Ext. 850
Information 301-521-4886



Formaker

clean paperwork for business

"It will give the small or home business professional-looking forms and effortless, errorless totals, accounting for taxes, discounts, shipping and deposits."

The RAINBOW, May 1986

menu driven
customize for your company
on screen instructions
creates: Invoice, quote, purchase order,
mail order, receipt, letter
printer customization
and much, much more

\$49 32K ECB disc

"You have to look good to the customer . . . This program helps . . . by providing neat, well-prepared forms . . ."

The RAINBOW, May 1986



SUPER TUTOR

Makes learning so much FUN . . . that kids think it's a game!



Letter and number recognition. Ages 2 to 6

\$24 32K ECB disc or tape

"If you are looking for a program to teach young children the alphabet, numbers and early vocabulary, SUPER TUTOR may fit the bill."

The RAINBOW, June 1986

Send for more information:

Challenger Software

42 4th Street
Pennsburg, PA 18073
Call (215) 679-8792 (Evenings)

EARS™

Electronic
Audio
Recognition
System


\$99.95

Now Your
Computer
Can Listen
To You!

- SPEECH RECOGNITION
- HANDS OFF PROGRAMMING
- HIGH QUALITY SPEECH REPRODUCTION

EARS Does It All!

INCREDIBLE!

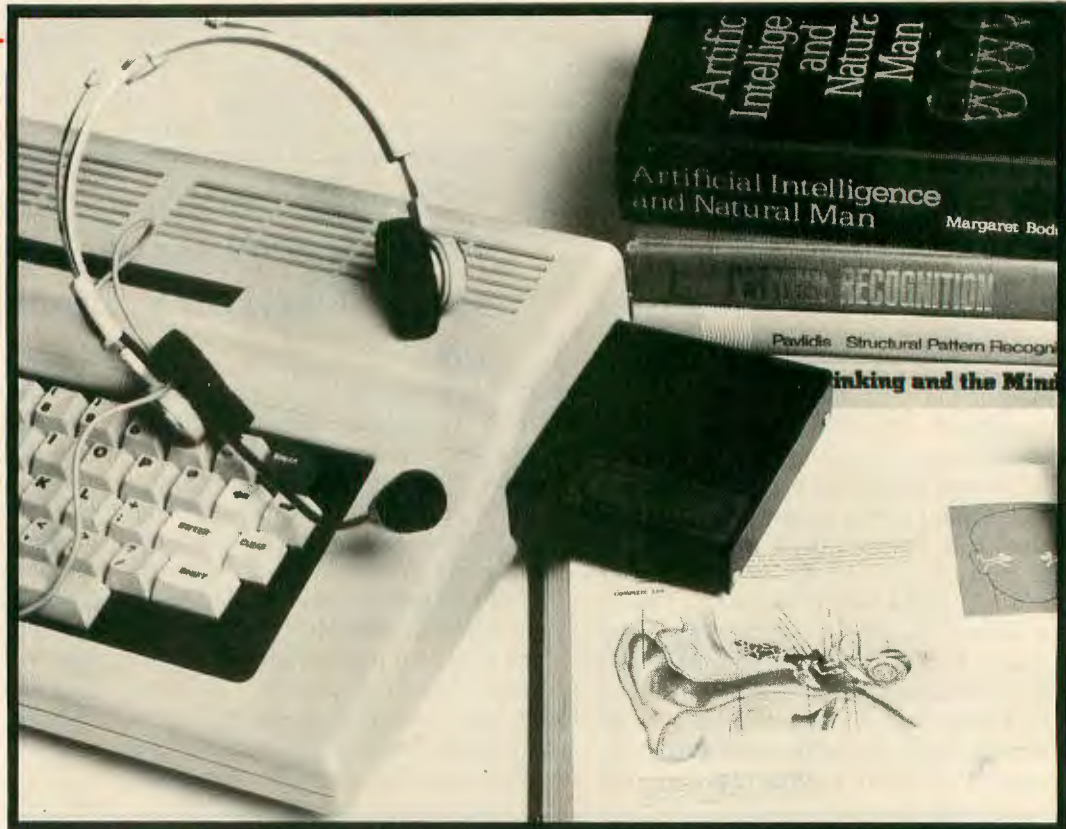

Two Years In the Making. Speech Systems was formed to develop new and innovative speech products. After 2 years of intensive Research and Development, we have created a truly sophisticated speech recognition device. Recognition rates from 95% to 98% are typical. Until now, such a product was outside the price range of the personnel computer market, and even small businesses.

EARS is trained by your voice and capable of recognizing any word or phrase. Training EARS to your particular voice print takes seconds. Up to 64 voice prints may be loaded into memory. You may then save on tape or disk as many as you like so that your total vocabulary is virtually infinite.

Speech and Sound Recognition. EARS is really a sound recognition system, so it really doesn't matter whether you speak in English, Spanish, or French. In fact you do not have to speak at all, you can train EARS to understand sounds such as a musical note or a door slamming.

Hands Off Programming. Imagine writing your own BASIC programs without ever touching the keyboard. Everything that

you would normally do through a keyboard can now be done by just speaking.

Programming EARS Is Easy. LISTEN, MATCH and other commands have been added to BASIC so that programming EARS is a piece of cake! The single BASIC line: 10 LISTEN: MATCH will instruct EARS to listen to you and return the matching phrase.

It Talks. EARS is also capable of high quality speech. We mean REALLY high quality. The speech is a fixed vocabulary spoken by a professional announcer. Speech Systems is currently creating a library of thousands of high quality words and phrases. For a demonstration call (312) 879-6844, you won't believe your ears or our EARS.

DISK OWNERS. EARS will work with any disk system with either a MULTI-PAK or Y-CABLE. Our new Triple Y-CABLE was specifically developed for those wishing to add SUPER VOICE as a third device.

You Get Everything You Need. You get everything you need including a specially designed professional headset style noise

cancelling microphone. The manual is easy to use and understand. Several demonstration examples are included so you don't have to write your own programs unless you want to. EARS will work in any 32K or 64K Color Computer.

SUPER VOICE \$20 OFF

Imagine talking to your computer and it talking back to you. When you need an unlimited vocabulary, you can't beat SUPER VOICE. For a limited time, we will give you the SUPER VOICE for \$59.95 with your EARS purchase. Even if you already have another speech unit, here is your chance to buy the best and save \$20.

VOICE CONTROL

Applications for EARS are astounding. Here is our first of many listening programs to come. VOICE CONTROL is a program specifically designed to allow you to control any appliance in your house with your voice and our HOME COMMANDER (sold separately) or the Radio Shack Plug 'N' Power controller. For example, you can control your TV by saying "TV ON" or "TV OFF". . . \$24.95

FREE
BLANK DISK
OR TAPE
WITH EVERY
ORDER



Dealer Inquiries
Invited



Speech Systems

38W255 DEERPATH ROAD
BATAVIA, ILLINOIS 60510
(312) 879-6880 (TO ORDER)

We accept CASH, CHECK, COD, VISA and MASTER CARD orders.
Shipping and handling US and Canada \$3.00
Shipping and handling outside the US and Canada \$5.00
COD charge \$2.00
Illinois residents add 6 1/4% sales tax

CALL ANY DAY TO ORDER. ALSO ORDER BY MAIL

'SUPER VOICE' T.M.

COCO'S MOST ADVANCED
SPEECH SYNTHESIZER.

**IT TALKS, SINGS AND
MORE.**

only . . . \$79.95

WITH EARS PURCHASE

only . . . \$59.95



SUPER VOICE is no ordinary speech synthesizer. It uses Silicon Systems, Inc. SSI-263, the most advanced speech/sound chip available. SUPER VOICE is not only capable of highly intelligible speech, sound effects, and singing over a 6 octave range, but now we have turned SUPER VOICE into a monophonic Super Music Synthesizer with our PIANO KEYBOARD.

IT TALKS. A free TRANSLATOR text-to-speech program makes writing your own talking program as easy as SAYING "HELLO."

SUPER VOICE works in any 32K or 64K computer. A disk system requires a Y-Cable or Multi-Pak.

**Here are the facts;
the decision is yours.**



**SAVE
\$24.95**

**FREE
SUPER TALKING HEADS**

Paul and Pauline, our talking heads program is normally \$24.95. Until Dec. 15 we will include them with each SUPER VOICE order.

	SUPER VOICE	REAL TALKER	RS SPEECH CARTRIDGE	VOICE-PAK
Synthesizer Device	SSI-263	SC-01	SP-256	SC-01
Speaking Speeds	16	1	1	1
Volume Levels	16	1	1	1
Articulation Rates	8	1	1	1
Vocal Tract Filter Settings	255	1	1	1
Basic unit of Speech	64 phonemes, 4 durations each	64 phonemes	64 allophones, 5 pause lengths	64 phonemes
Pitch Variations	4096 (32 absolute levels with 8 inflection speeds)	4	1	4



Dealer Inquiries
Invited



We accept CASH, CHECK, COD, VISA and MASTER CARD orders.
Shipping and handling US and Canada \$3.00
Shipping and handling outside the US and Canada \$5.00
COD charge \$2.00
Illinois residents add 6 1/4% sales tax

**1 MEGABYTE
COLORAMA (312) 879-6811 (24 HR. BBS)**
CALL ANY DAY TO ORDER. ALSO ORDER BY MAIL OR BBS.

**38W 255 DEERPATH ROAD
BATAVIA, ILLINOIS 60510
(312) 879-6880 (TO ORDER)**

Introducing


Lyra™

The Musical
Coco Max™

IF YOU
CAN POINT,
YOU CAN COMPOSE

PULL
DOWN
MENUS

ICONS!

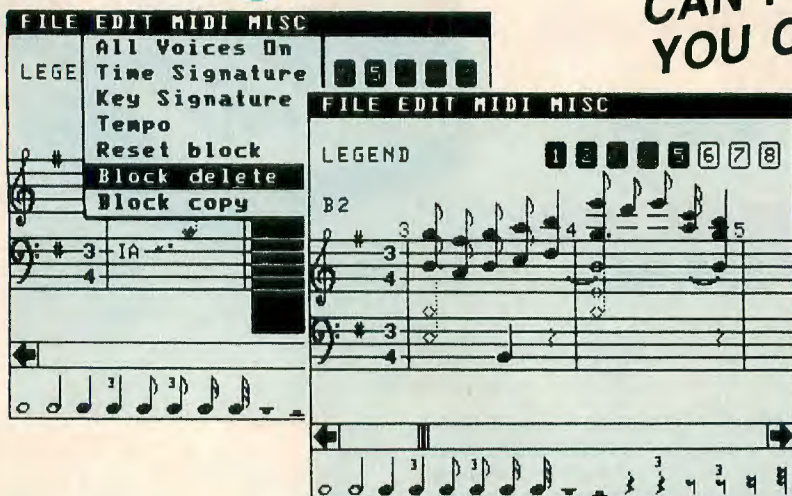

A MUST
FOR MIDI
USERS

LYRA is the most powerful music composition program we have seen on any computer. We don't mean just the COCO, we really mean any computer. Whether you are a novice trying to learn music or a professional musician with MIDI equipment you will find LYRA a powerful tool. You

see, we wrote LYRA for musicians that hate computers. If you want proof, purchase a LYRA demo for \$7.95. We will apply the demo price to your purchase. MIDI output requires the LYRA MIDI cable (#MC158) or COCO MIDI Seq/Editor (#CM147).

- ✓ Ultra Easy to use, just point with joystick or mouse and click.
- ✓ Compose with up to 8 completely independent voices.
- ✓ Room for over 18,000 notes. (This is not a misprint!)
- ✓ Super Simple Editing Supports:

Note insert	Block insert
Note delete	Block delete
Note change	Block copy
- ✓ Output music to:

TV Speaker	Monitor Speaker
STEREO PAK	ORCHESTRA 90
SYMPHONY 12	COCO MIDI S/E
MIDI Synth	MIDI Drum Machine
- ✓ Output up to 4 voices without additional hardware.

- ✓ Output all 8 voices using either SYMPHONY 12 or one or more MIDI synthesizers and drum machines.
- ✓ Output any voice on any of the 8 MIDI channels.
- ✓ Transpose music to any key.
- ✓ Modify music to any tempo.
- ✓ Automatically inserts bar for each measure as you compose.
- ✓ Key signature lets you specify sharps and flats only once, LYRA will do the rest.
- ✓ Plays MUSICA 2 files using LYRA CONVERT (#LC164).
- ✓ Each voice may be visually highlighted or erased.
- ✓ Each measure is numbered for easy reading.

- ✓ Solo capability
 - ✓ Block edits are highlighted.
 - ✓ Tie notes together for musical continuity.
 - ✓ Name of note pointed to is constantly displayed.
 - ✓ Jump to any point in the score instantaneously.
 - ✓ Memory remaining clearly displayed, however you will have plenty of memory even for the most demanding piece.
 - ✓ Help menu makes manual virtually unnecessary.
 - ✓ LYRA is 100% software, no need for extra hardware unless you want more power.
 - ✓ Music easily saved to tape or disk.
 - ✓ Requires 64K and mouse or joystick.
- LYRA (Disk only) #LY122 \$54.95**

LYRA OPTIONS

These LYRA options are **not** required. They are provided for those wishing additional flexibility.

LYRA CONVERT

A program to convert MUSICA 2 files to LYRA files.
(T or D) #LC164 **\$14.95**

LYRA STEREO ENHANCER

Gives the LYRA stereo output when used with the STEREO PAK or ORCHESTRA 90.
(T or D) #LS149 **\$14.95**

LYRA MIDI CABLE

A cable to connect your computer to your MIDI synthesizer.
#MC158 **\$19.95**

LYRA SYMPHONY 12 ENHANCER

Lets LYRA play all 8 voices through SYMPHONY 12.
(T or D) #LS177 **\$19.95**

STEREO PAK

Plugs into the COCO ROM cartridge slot allowing easy connection to your stereo system.
#SP193 **\$39.95**

SYMPHONY 12

A real hardware music synthesizer, lets LYRA play all 8 voices in stereo.
(T or D) #SY149 **\$69.95**

COCO MID Seq/Editor

A professional quality MIDI interface for MIDI synthesizers.
(Disk only) #CM147 **\$149.95**

MUSIC LIBRARY

A collection of over 800 songs. When used with CONVERT, it gives an incredible LYRA library. Each volume 100 songs.
(T or D) #MLXXX **\$29.95**

COCO MAX is a trademark of Colorware.
ORCHESTRA 90 is a trademark of Radio Shack.


We accept CASH, CHECK, COD, VISA and MASTER CARD orders.
Shipping and handling US and Canada \$3.00
Shipping and handling outside the US and Canada \$5.00
COD Charge \$2.00
Illinois residents add 6 1/4% sales tax.

Speech Systems

**38W255 DEERPATH ROAD
BATAVIA, ILLINOIS 60510
(312) 879-6880**

Introducing

COCO MIDI 2

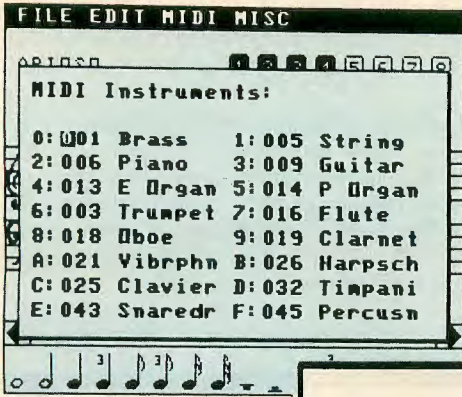

**LYRA
COMPATIBLE!**



**MORE
FEATURES!**

**MORE
POWER!**

Now your COCO can talk to your MIDI music synthesizer. Whether you have a Korg, Roland, Casio, Yamaha, or Moog, it doesn't matter as long as it's MIDI equipped. Choose from our

entry level MUSICA MIDI system that plays MUSICA files or our Professional COCO MIDI 2 system.

- ✓ Supports 16 Track recording and playback.
- ✓ Adjustable tempo.
- ✓ Over 45 Kbytes available (Over 15,500 MIDI events possible).
- ✓ Record to any track.
- ✓ Low Level track editing.
- ✓ LYRA editing. (one voice per track).
- ✓ Playback from any number of tracks.
- ✓ Quantizing to 1/16, 1/32, 1/64 intervals.

- ✓ Filter out MIDI data:
 - Key pressure
 - Control Change
 - Channel Pressure
 - Program change
 - System Message
 - Pitch wheel
- ✓ Graphic Piano Keyboard Display in both record and playback mode.
- ✓ Adjustable Key (Transposition).
- ✓ Save recording to disk for later playback or editing.
- ✓ Syncs to drum machine as MASTER or SLAVE.

- ✓ Sequencer features.
- ✓ 100% machine code.
- ✓ "Musician Friendly" Menu Driven.
- ✓ Metronome

✓ Many songs included.
Includes MIDI hardware interface, 2 MIDI cables, detailed manual, and software. Requires 64K CoCo, Y-Cable or Multi-Pak.
COCO MIDI 2 (disk only) #CM147 . \$149.95
DOUBLE Y-CABLE #DY181 \$28.95
TRIPLE Y-CABLE #TY173 \$34.95

DX LIBRARIAN™

Save and load voice parameters for the Yamaha DX series of synthesizers (DX-7, DX-100, DX-21 etc.). Save sounds individually or as a group letting you load the entire synthesizer in seconds.

Comes with professionally developed voices for the DX-7 worth 10 times the price. Requires COCO MIDI hardware interface.
DX LIBRARIAN (Disk only) #DX143 \$39.95

CASIO LIBRARIAN

Save and load voice parameters for any Casio synthesizer (CZ-101, CZ-1000, CZ-5000 etc.) You can save from the: presets, cartridge,

memory or buffer. Requires COCO MIDI hardware interface.
CASIO LIBRARIAN (Disk only) #CL169 \$39.95

MUSICA MIDI™

MUSICA MIDI takes any MUSICA 2 music file and plays it through your MIDI synthesizer. We offer you over 800 tunes from our MUSIC LIBRARY series (sold separately) or create your own music

using MUSICA 2. Includes: documentation, plenty of music, and the cable to connect between the COCO and your synthesizer.
MUSICA MIDI Complete (Disk Only) #CM126 \$39.95

MIDI KEYBOARD

If you own the Casio CZ-101 or similar MIDI synth, you know that the mini keys and the short 3 or 4 octave keyboard is limiting. MIDI KEYBOARD when used with our full size 5 octave keyboard

gives you the flexibility you need. Comes with cable to connect the COCO to your MIDI synth.
MIDI KEYBOARD (Disk only) #MK167 \$29.95

NEW!



CHRISTMAS FANTASIA

We got so many compliments last year for Christmas Fantasia Volume 1, we added a second all new version.


Christmas Fantasia is a collection of traditional Christmas music combined with beautiful high resolution Christmas scenes. Christmas Fantasia picks one of more than a dozen Christmas scenes and music selections from tape or disk, displays the picture and plays the music. Upon completion, another scene and piece of music is loaded and played. The Christmas scenes are beautiful. One shows a chapel nestled in a valley with **snow actually falling**. The low price is our way of saying "SEASONS GREETINGS" from Speech Systems. 64K required.

Volume 1 (Tape or Disk) #CF125 \$19.95
Volume 2 (Tape or Disk) #CF126 \$19.95


MUSICA 2

\$29.95
Tape or Disk

- When in stereo mode, music is played through our STEREO PAK (purchased separately).
- Loudness of each voice may be individually specified.
- Memory available is constantly displayed.
- Voice waveshapes may be exchanged between voices at any point.
- Tempo may be specified and may even be altered as the music plays.
- Flats and sharps supported.
- Billions of timbre combinations.
- High resolution graphic display, looks just like sheet music.
- MUSICA 2 is 100% software, no need for hardware unless you want music produced in STEREO. In that case, the STEREO PAK may be purchased separately. It's a must for the audiophile!
- Repeat bars allow repeating of music without re-inserting music a second or third time.
- 30 page manual describes all.
- Requires 64K.

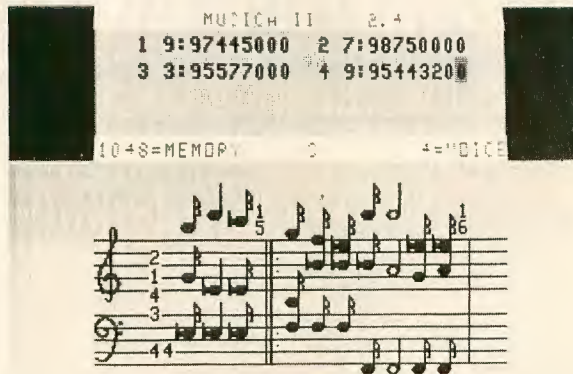

• Output music to your printer (Gemini 10X, Epson, R.S. printers).

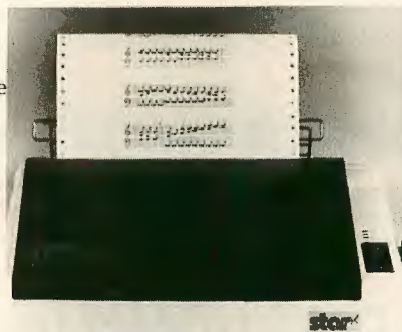

- Allows you to specify key signature.
- Voice timbre (waveshape) may be altered by specifying harmonic content just like stops on an organ.
- During editing, voice being inserted is displayed.
- Each measure is numbered for easy reading of music.
- Measure bars aid in reading and developing music.
- Each voice may be visually highlighted for easy identification.
- 4 Voices produced simultaneously.
- Input notes from Coco keyboard, joystick, or Piano Keyboard.
- Play music from your own BASIC program.
- Block copy music for easy music development.
- 100% machine language so it is lightning fast.
- Vibrato effect easily produced.
- With STEREO PAK, voices may be switched between left and right speakers as music plays.
- Durations include: whole, half, quarter, eighth, sixteenth, thirty-second, sixty-fourth, and triplet.

MUSIC LIBRARY™

The MUSIC LIBRARY series consists of 8 volumes: 100 through 800 each sold separately. Each contains over 100 four voice music selections with a playing time of over 3 hours each. The disk version is shipped on 5 full disks. When coupled with STEREO PAK, the music is reproduced with unsurpassed realism.

A JUKEBOX program is included to allow you to select specific songs or automatically play each. These songs are ready to go, you don't need MUSICA 2 or a knowledge of music. MUSICA 2 users may customize each song. Each volume sold separately, specify *tape or disk*. #MLXXX \$29.95
 List of 800 songs #LS800 \$3.00

MUSIC LIBRARY 100

Stage, Screen, & TV
 Music of the 70's
 Music of the 60's
 Music of the 50's
 Old Time Favorites


Classical
 Christmas (popular)
 Christmas (traditional)
 Patriotic
 Polka Party

- MUSIC LIBRARY 200** (another 100 selections)
- MUSIC LIBRARY 300** (another 100 selections)
- MUSIC LIBRARY 400** (another 100 selections)
- MUSIC LIBRARY 500** (another 100 selections)
- MUSIC LIBRARY 600** (another 100 selections)
- MUSIC LIBRARY 700** (another 100 selections)
- MUSIC LIBRARY 800** (another 100 selections)

Entire Library
30 Hours of
Music!
40 disks
or
25 tapes

Lyra™

MEETS SYMPHONY 12™

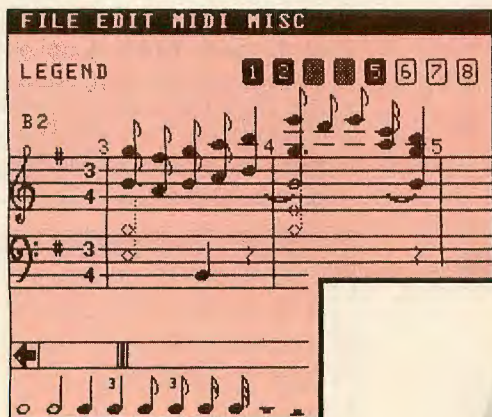

12 SIMULTANEOUS VOICES

4 NOISE GENERATORS

STEREO & MONO

SOUND EFFECTS

SPECIAL COMBINATION OFFER!



If you want to compose music, experiment, or just listen to music, LYRA is the tool you need. LYRA represents the new state-of-the-art super user friendly software. Pull down menus and icons make composing music as easy as pointing with a joystick or mouse and clicking. LYRA is capable of 8 individually controlled voices. You may take advantage of the 8 voice power of LYRA using external MIDI synthesizers or SYMPHONY 12. We believe that LYRA and SYMPHONY 12 was a match made in heaven. For a limited time, when you purchase both, we will include free the LYRA SYMPHONY 12 CONNECTION, a \$19.95 value.

STEREO AND MONO. By connecting SYMPHONY 12 to your home stereo system, music is produced in stereo, 6 voices from each channel. However, you don't need to have a stereo system, all 12 voices also come out of your TV or monitor.

SOUND EFFECTS. SYMPHONY 12 is a sophisticated sound generator. 12 voices and 4 noise generators give you incredible sound effect capability. We have included gun shot, explosion, racing car and more.

SYMPHONY 12. You get over a dozen music and sound effect selections and complete documentation. Software is shipped on Tape or Disk.

PIANO KEYBOARD. For those wishing to turn SYMPHONY 12 into a real polyphonic synthesizer we offer a full size 61 note piano keyboard.

Tape users using both SYMPHONY 12 and the PIANO KEYBOARD will require a Y-CABLE. Disk systems require a Triple Y-CABLE or MULTI-PAK.

SYMPHONY 12 (T or D) #SY149 .. \$69.95

LYRA SYMPHONY 12 ENHANCER

#LS177 \$19.95

PIANO KEYBOARD #PK185 \$169.95

DOUBLE Y-CABLE #DY181 \$28.95

TRIPLE Y-CABLE #TY173 \$34.95

GUITAR CHORD BOOK

This program, written by a guitar instructor of 17 years, displays in high resolution graphics the exact fingering for over 100,000 chord combinations. You may even tune your guitar to the computer and play along.

Whether you are a beginning guitar student or an advanced player, you will find this quick reference to guitar chords invaluable.

32K Disk only #GC153 \$29.95

MUSIC THEORY

COURSE 1

This course covers all the basics from music notation & duration, key signatures, tempo, to an introduction of the keyboard. This is an entry level course recommended as a prerequisite for Course 2.

32K Disk only. #MT101 \$49.95

COURSE 2

A more advanced course that deals with: Major and Harmonic Minor scales, interval spelling, Triad (Chord) theory, Inversions, Dominant 7th chords, and ear training of the intervals.


32K Disk only #MT102 \$49.95




A money-saving greeting card generator for giving holiday cheer

From Our Home to Yours

By Ilene Fortin

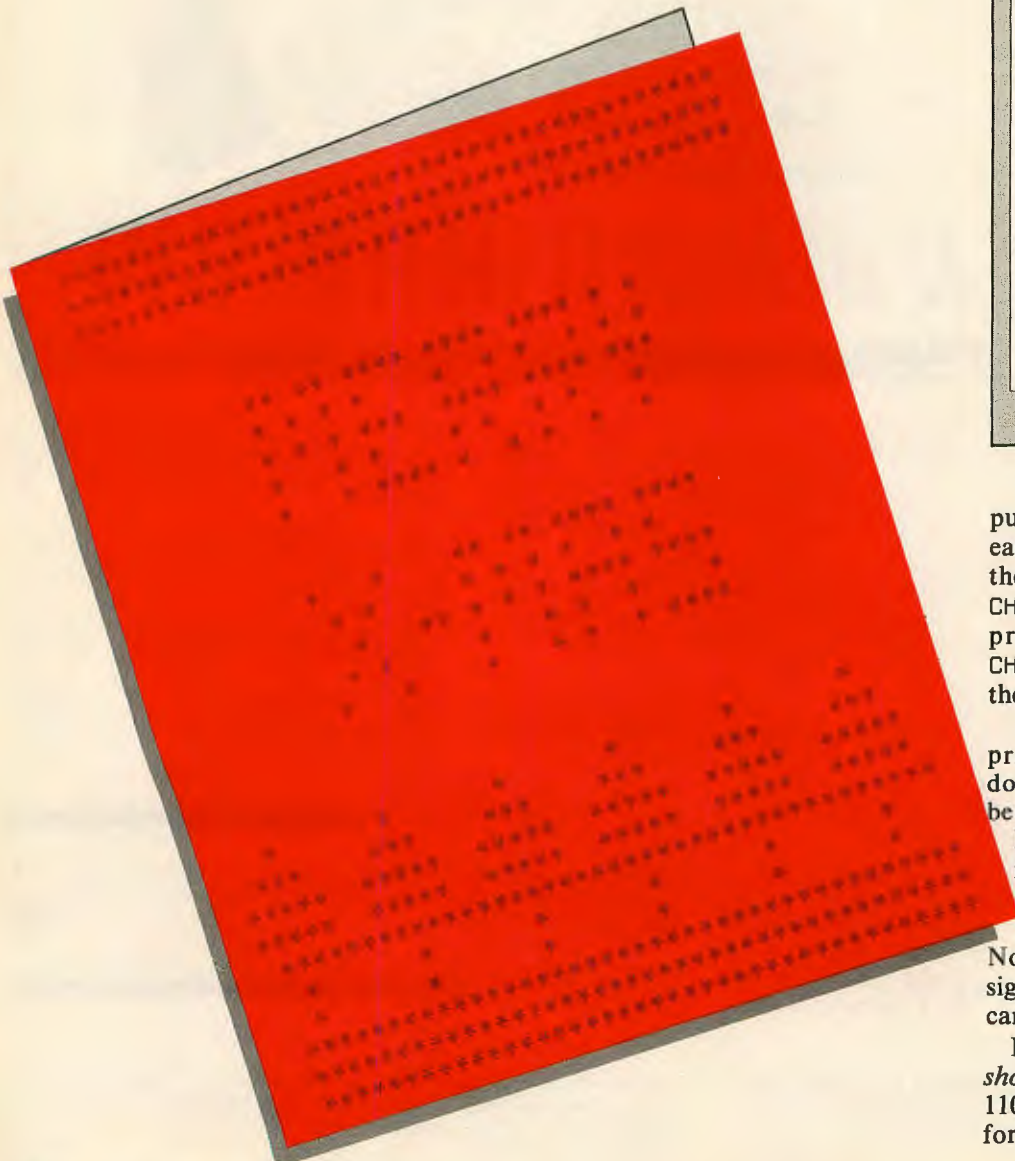

Well folks, it appears that the holiday season is nearly upon us once again. It's time to renew old acquaintances with a card or letter, and you can be sure the cost of greeting cards has gone up since last year. This year, however, you needn't turn your hard-earned dollars over to the card company. Let CoCo write your cards for you. You may not win an art scholarship with this design, but it comes from the heart and your friends will appreciate hearing from you. They will also be amazed at what your computer can do for you.

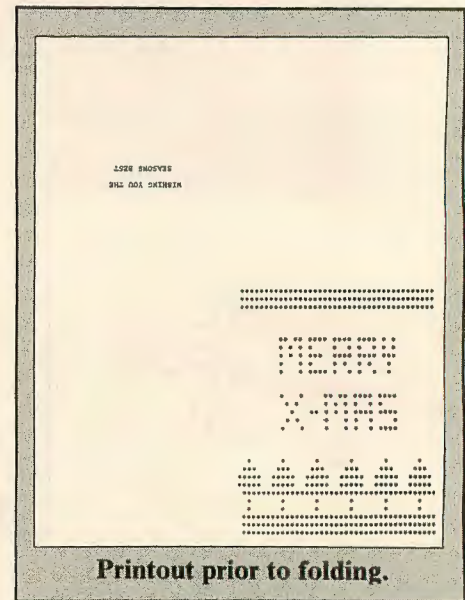

Printout prior to folding.

Cardshop runs on a 16K ECB computer with a Line Printer VIII. It is easily transportable to other printers, as the only character control codes are CHR\$(17), which puts the printer in the proportional character set, and CHR\$(19), which returns the printer to the regular character set.

Don't be alarmed when you see your printer print the card cover upside down. Once your card is folded, it will be rightside up again (see diagram).

I didn't allow for entering the sender's name because, in my opinion, a card is much more personal when this is done in your own handwriting. Nothing can beat the sincerity of a signature. However, if you so choose, it can easily be added.


I have used four subroutines in *Cardshop*. They begin at lines 1000, 1050, 1100 and 1150. These subroutines are for any lines that are used more than

once. This probably wasn't necessary, but subroutines do eliminate a lot of repetition.

The card cover is drawn in lines 30 to 80. Note how STRING\$ is used directly in the statement in Line 30 and as a variable in Line 40. STRING\$ is indispensable when drawing in the text mode, and is explained very well in *Going Ahead With Extended Color BASIC*.

The message menu is in lines 90 to 120. Here you will find a novel use of INSTR. It allows one keystroke selection without having to convert the letter pressed to ASCII.

Lines 150 to 250 contain the preprogrammed messages. Lines 300 to 350 allow you to enter your own message. The formula in Line 330 measures the length of your message and centers it properly.

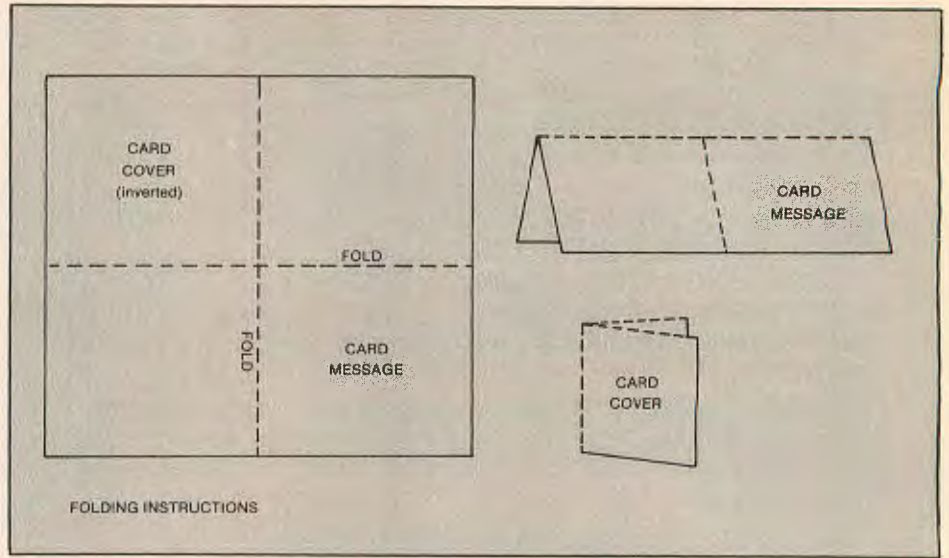

(You may direct questions about this program to the author at 1410 Limberlost Road, London, Ontario, Canada N6G 2V6. Please enclose an SASE when writing.)

The listing: CARDSHOP

```

0 *****
1 ***      CARDSHOP      **
2 ***      BY           **
3 ***      ILENE FORTIN **
4 ***      SEPT. 1985   **
5 ***1410 LIMBERLOST RD.**
6 ***      LONDON, ONT. **
7 ***      N6G 2V6     **
8 *****
10 CLS:PRINT"MERRY CHRISTMAS":PR
INT:PRINT"I AM READY TO PRINT CA
RDS.":PRINT"IS YOUR PRINTER READ
Y?":PRINT"IF SO, JUST PRESS <P>."
"
20 I$=INKEY$:IF I$<>"P"THEN20
25 CLS:PRINT@202,"PRINTING"
30 GOSUB1000:GOSUB1050:GOSUB1050

```

```

:PRINT#-2,STRING$(40,42):GOSUB11
00:GOSUB1100
40 A$=STRING$(3,42):B$=STRING$(4
,32):PRINT#-2,TAB(2);A$;B$;A$;B$
;A$;B$;A$;B$;A$;B$:GOSUB1050:
FORX=1TO3:PRINT#-2:NEXT
50 PRINT#-2,TAB(8);"**** * * *
* * * *":PRINT#-2,TAB(8);"
* * * * * * * *":PRINT#-2
,TAB(8);"**** * * * * * * *
:PRINT#-2,TAB(11);"* * * * *
* *":PRINT#-2,TAB(8);"**** *
*** * * * * * * *
60 PRINT#-2:PRINT#-2
70 PRINT#-2,TAB(9);"* * * * *
**** * *":PRINT#-2,TAB(9);"
* * * * * * * *":PRINT#-2,
TAB(8);"**** * * * * * * *
":PRINT#-2,TAB(8);"* * * * *
* * * *":PRINT#-2,TAB(8);"

```

**MAILING LIST
DATA INFORMATION PROGRAM**

More than just another See Rainbow Reviews
mailing list program August '86, pg. 149

Requires 16K or 64K Tape or 64K Disk System

Price: \$29.95

CROCKETT SOFTWARE

P.O. Box 1221
St. Ann, MO 63074
(314) 441-9278

We welcome:

Checks
C.O.D. (Add \$3.00)



```

*****
* Want a battery-operated Color 3? *
* You'll need: *
* * * * *
* CMOS 63B09E CPU $49.50 *
* CMOS 63B21 PIA $19.50 *
* * * * *
* CMOS Conversions *
* 480 Oakdale Rd NE *
* Suite 3 *
* Atlanta GA 30307 *
* * * * *
* Send money orders only. *
*****

```


A Great Holiday Gift Idea!

RAINBOW Binders

Distinctive, Durable RAINBOW Binders

THE RAINBOW is a vital resource to be referred to again and again. Keep your copies of THE RAINBOW safe in our quality, distinctive binders that provide complete protection.

These attractive red vinyl binders showcase your collection and ensure your RAINBOWS are in mint condition for future use. Each binder is richly embossed with the magazine's name in gold on the front and spine. They make a handsome addition to any room.

Put an End to Clutter

Organize your workspace with these tasteful binders. Spend more time with your CoCo and eliminate those frustrating searches for misplaced magazines.

A set of two binders, which holds a full 12 issues of THE RAINBOW, is only \$13.50 (plus \$2.50 shipping and handling).

Special Discounts on Past Issues

To help you complete your collection of THE RAINBOW, we're offering a special discount on past issues of the magazine.

When you place an order for six or more back issues of THE RAINBOW at the same time you order binders, you are entitled to \$1 off the regular back issue price. To order, please see the "Back Issue Information" page in this issue.

Know Where to Look

You may purchase the "Official And Compleat Index To THE RAINBOW" for \$1 when you purchase a set of binders. This comprehensive index of RAINBOW's first three years (July 1981 through July 1984) is usually priced at \$2.50.



For greater convenience, order RAINBOW Binders through the shopping area of the CoCo SIG of Delphi!

_____ **YES.** Please send me _____ set(s) of RAINBOW binders

Take advantage of these special offers with your binder purchase:

_____ Save \$1 off the single issue cover price for back issues. Minimum order of 6 magazines. Please enclose a back issue order form from a recent issue indicating magazines wanted.

_____ Purchase the "Official and Compleat Index to THE RAINBOW" for \$1. (Regular price \$2.50.)

(These offers good only with the purchase of a RAINBOW binder set)

Name _____

Address _____

City _____ State _____ ZIP _____

My check in the amount of _____ is enclosed. (In order to hold down costs, we do not bill.)

Charge to: VISA MasterCard American Express

Account Number _____ Expiration Date _____

Signature _____

Mail to: **Rainbow Binders, The Falsoft Building, P.O. Box 385, Prospect, KY 40059.**

Binders are \$13.50 per two-binder set plus \$2.50 shipping and handling. If your order is to be sent via U.S. mail to a post office box or foreign country, please add \$2. Kentucky residents add 5% sales tax. U.S. currency only, please. In order to hold down non-editorial costs, we do not bill.

For credit card orders call (800) 847-0309, 8 a.m. to 5 p.m. EST

All other inquiries call (502) 228-4492.



*A seasonal song fest to
warm your heart*

Go Tell It on the CoCo

By Arron Branigan



Tis the season to be jolly, and to that end I'd like to introduce *Winter Wonderland*. This program presents three yuletide graphics scenes merged into one program. *Winter Wonderland* begins with a selection menu. The first choice is the Nativity scene. It includes the manger, Mary, Joseph and a shepherd with his crook. To the left stands a cow. A star twinkles for a while and the computer plays eight Christmas songs: "Away In a Manger," "O Little Town of Bethlehem," "O Come All Ye Faithful," "What Child Is This?," "Angels We Have Heard on High," "God Rest Ye Merry Gentlemen," "Jingle Bells" and "Winter Wonderland." Between each song there is a pause and the stars twinkle for a bit.

The second choice draws a Christmas tree, complete with presents. Then you'll hear "O Christmas Tree." The third choice draws a snowman and plays that old favorite, "Frosty the Snowman."



After a picture is completely drawn, the menu can be called up by pressing R, but only when the music is not playing.

The entire listing may be typed in as one long program, or each program module may be typed in separately. The program in its entirety, or, even the Nativity program alone, requires 64K of memory. However, the Christmas tree and snowman programs, if run separately, require only 16K.

If you want to use the program modules separately, delete the lines indicated in the remark lines, and delete lines 10 through 110.

(You may direct questions about this program to the author at 105 Briarfield Cove, Jacksonville, AR 72076, 501-982-6067. Please enclose an SASE when writing.) □

Arron Branigan is a technical sergeant in the U.S. Air Force and is pursuing a bachelor's degree in computer applications at Arkansas State University. He enjoys programming his computer and singing country and western music.

140	128	2260	168
390	160	2390	14
650	213	2490	105
830	140	3170	244
1020	147	3360	133
1250	53	3490	165
1500	210	4000	174
1670	29	4280	165
1830	186	4450	211
1980	254	4620	76
2100	27	END	83

The listing: WINTER

```

10 *****
20 '* CALLING MENU FOR THREE *
30 '* CHRISTMAS PROGRAMS *
40 '* BY: ARRON W. BRANIGAN *
50 *****
60 CLS(RND(8)):PRINT@32, "
*****
* CALLING MENU FOR THREE *
* CHRISTMAS PROGRAMS *
* BY: ARRON W. BRANIGAN *
*****"
70 PRINT@224, "
*****
* (1)-NATIVITY SCENE *
* (2)-CHRISTMAS TREE *
* (3)-SNOWMAN *
* MAKE SELECTION ? *
*****
":SEL$=INKEY$
80 PLAY"T255;L255;O5;10;1;O4;10;
1;O3;10;1;O2;10;1;O1;10;1;L2;T2"
90 IF SEL$=""THEN70:ELSESEL=VAL(
SEL$)
100 IF SEL<1OR SL>3 THEN 70
110 IF SEL=1THEN 120:ELSEIFSEL=2
THEN3060:ELSEIFSEL=3THEN4050
120 *****
*
130 '* NATIVITY+CHRISTMAS MUSIC
*
140 '* PROGRAM #1
*
150 '* BY: ARRON W. BRANIGAN
*
160 *****
*
170 PCLEAR 4
180 PMODE 3,1
190 PCLS
200 SCREEN 1,0
210 PCLS 3
220 LINE (0,0)-(256,193),PSET ,B
230 FOR X=1 TO 300
240 PSET (RND(255),RND(116),1)
250 NEXT X

```

```

260 COLOR 2,1
270 LINE (128,12)-(132,20),PSET
280 LINE (132,20)-(140,24),PSET
290 LINE (140,24)-(132,28),PSET
300 LINE (132,28)-(128,48),PSET
310 LINE (128,48)-(124,28),PSET
320 LINE (124,28)-(116,24),PSET
330 LINE (116,24)-(124,20),PSET
340 LINE (124,20)-(128,12),PSET
350 PAINT (128,28),2,2
360 LINE (112,8)-(120,16),PSET
370 LINE (136,16)-(144,8),PSET
380 LINE (120,32)-(112,40),PSET
390 LINE (136,32)-(148,40),PSET
400 COLOR 4,1
410 LINE (44,96)-(129,76),PSET
420 LINE (129,76)-(208,96),PSET
430 LINE (208,96)-(206,100),PSET
440 LINE (206,100)-(128,80),PSET
450 LINE (128,80)-(46,100),PSET
460 LINE (46,100)-(44,96),PSET
470 PAINT (72,92),8,8
480 LINE (60,98)-(196,168),PSET,
B
490 LINE (64,96)-(192,168),PSET,
B
500 PAINT (128,88),2,8
510 PAINT (128,128),2,8
520 LINE (0,116)-(52,116),PSET
530 LINE (196,116)-(255,116),PSE
T
540 CIRCLE (128,108),110,8,1,.95
,.10
550 CIRCLE (138,108),110,8,1,.95
,.10
560 LINE (214,167)-(236,167),PSE
T
570 LINE (224,68)-(237,68),PSET
580 PAINT (224,163),8,8
590 PAINT (240,100),8,8
600 CIRCLE (212,66),20,1,1
610 PAINT (212,66),1,1
620 CIRCLE(224,54),20,1,1
630 PAINT (226,37),1,1
640 CIRCLE (240,60),20,1,1
650 PAINT (252,60),1,1
660 CIRCLE (224,54),20,8,1,.27,.
60
670 LINE (108,152)-(148,152),PSE
T
680 LINE (0,0)-(256,193),PSET,B
690 LINE (148,152)-(140,164),PSE
T
700 LINE (140,164)-(116,164),PSE
T
710 LINE (116,164)-(108,152),PSE
T

```

```

72Ø PAINT (124,16Ø),3,8
73Ø FOR X=1 TO 41
74Ø LINE (X+1Ø7,RND(5)+148)-(X+1
Ø7,RND(5)+152),PSET
75Ø NEXT X
76Ø LINE (14Ø,152)-(14Ø,14Ø),PSE
T
77Ø CIRCLE (123,14Ø),4,8,1,.5Ø,.
75
78Ø CIRCLE (13Ø,136),8,8,1
79Ø CIRCLE(136,14Ø),4,8,1,.75,1
8ØØ LINE (118,152)-(118,14Ø),PSE
T
81Ø PAINT (128,144),1,8
82Ø PAINT (128,132),3,8
83Ø LINE (118,151)-(13Ø,139),PSE
T
84Ø LINE (124,151)-(13Ø,143),PSE
T
85Ø LINE (168,132)-(168,126),PSE
T
86Ø LINE (134,151)-(13Ø,143),PSE
T
87Ø LINE (176,168)-(176,128),PSE
T
88Ø LINE (17Ø,138)-(158,124),PSE
T
89Ø LINE (162,168)-(166,136),PSE
T
9ØØ LINE (17Ø,134)-(158,121),PSE
T
91Ø LINE (14Ø,152)-(13Ø,136),PSE
T
92Ø LINE (168,125)-(164,12Ø),PSE
T
93Ø CIRCLE (168,12Ø),6,8,1,.5,1
94Ø LINE (172,12Ø)-(176,128),PSE
T
95Ø PAINT (172,156),5,8
96Ø LINE (148,168)-(16Ø,112),PSE
T
97Ø CIRCLE (156,112),5,8,1,.5,1
98Ø LINE (7Ø,168)-(74,16Ø),PSET
99Ø LINE (74,16Ø)-(86,162),PSET
1ØØØ LINE (78,16Ø)-(88,14Ø),PSET
1Ø1Ø LINE -(96,132),PSET
1Ø2Ø CIRCLE (1ØØ,134),8,4,1,.5,.
Ø5
1Ø3Ø LINE (1Ø6,136)-(98,14Ø),PSE
T
1Ø4Ø LINE -(97,144),PSET
1Ø5Ø LINE (95,14Ø)-(93,144),PSET
1Ø6Ø LINE -(1ØØ,144),PSET
1Ø7Ø LINE -(1Ø4,14Ø),PSET
1Ø8Ø LINE -(1Ø4,144),PSET
1Ø9Ø LINE -(1ØØ,148),PSET
11ØØ LINE -(88,148),PSET
111Ø LINE -(93,138),PSET
112Ø LINE (96,148)-(88,156),PSET
113Ø LINE -(94,168),PSET
114Ø LINE -(74,164),PSET
115Ø LINE -(72,168),PSET
116Ø PAINT (84,156),3,8
117Ø PAINT (1ØØ,136),3,8
118Ø LINE (76,1Ø4)-(18Ø,1Ø4),PSE
T
119Ø LINE -(192,96),PSET
12ØØ LINE (18Ø,1Ø4)-(18Ø,168),PS
ET
121Ø LINE (64,96)-(76,1Ø4),PSET
122Ø LINE -(76,168),PSET
123Ø LINE (116,164)-(14Ø,168),PS
ET,BF
124Ø LINE (94,164)-(16Ø,164),PSE
T
125Ø LINE (192,168)-(18Ø,164),PS
ET
126Ø LINE -(176,164),PSET
127Ø REM ***COW***
128Ø LINE (24,156)-(Ø,156),PSET
129Ø LINE -(Ø,14Ø),PSET
13ØØ CIRCLE (8,141),8,8,1,.5Ø,.7
5
131Ø LINE (8,134)-(28,13Ø),PSET
132Ø LINE -(36,132),PSET
133Ø LINE (4Ø,144)-(36,13Ø),PSET
134Ø LINE -(48,13Ø),PSET:LINE -(
44,144),PSET:LINE -(4Ø,144),PSET
135Ø LINE (46,141)-(44,156),PSET
136Ø LINE -(28,152),PSET
137Ø LINE -(16,152),PSET
138Ø LINE (24,156)-(24,152),PSET
139Ø LINE (36,14Ø)-(4Ø,153),PSET
14ØØ LINE -(28,152),PSET
141Ø CIRCLE (42,116),25,2,.5,.15
,.38
142Ø PSET (39,133,2):PSET (45,13
3,2)
143Ø PAINT (2Ø,144),8,8
144Ø CIRCLE (8,152),15,3,1,.75,1
145Ø CIRCLE (36,15Ø),15,3,1,.5Ø,
.25
146Ø COLOR 2,1
147Ø LINE (42,132)-(42,138),PSET
148Ø REM ***TWINKLING STAR***
149Ø COLOR 2,3
15ØØ LINE (112,8)-(12Ø,16),PRESE
T
151Ø LINE (136,16)-(144,8),PRESE
T
152Ø READ A,B
153Ø IF A=999 THEN RESTORE :READ
A,B
154Ø LINE (12Ø,32)-(112,4Ø),PRES

```

```

ET
155Ø PRESET (A,B)
156Ø LINE (136,32)-(148,4Ø),PRES
ET
157Ø PSET (A,B,2)
158Ø LINE (112,8)-(12Ø,16),PSET
159Ø LINE (136,16)-(144,8),PSET
16ØØ LINE (12Ø,32)-(112,4Ø),PSET
161Ø LINE (136,32)-(148,4Ø),PSET
162Ø G=G+1:IF G=1ØØ THEN P=P+1:O
N P GOSUB 17ØØ,177Ø,185Ø,194Ø,2Ø
4Ø,213Ø,222Ø,233Ø:IF P=8 THEN P=
Ø
163Ø IF G=125 THEN G=Ø
164Ø A$=INKEY$:'***DELETE THIS L
INE IF ENTERING ONLY 1 PROGRAM**
*
165Ø IF A$="R" THEN RUN:'***DELE
TE THIS LINE IF ENTERING ONLY 1
PROGRAM***
166Ø GOTO 149Ø
167Ø DATA 1Ø,5Ø,2ØØ,4Ø,46,76,96,
24,244,3Ø,1Ø,1Ø,18Ø,5Ø,2Ø,4Ø,22Ø
,4Ø,254,2Ø
168Ø DATA 16Ø,2Ø,148,4Ø,1ØØ,2Ø,1
ØØ,6Ø,32,4Ø

```

```

169Ø DATA 999,999
17ØØ REM **AWAY IN THE MANGER**
171Ø FOR X=1 TO 2
172Ø PLAY "V27;L4;O4;C;L4.;C;L8;
O3;B-;L4;A;L4.;A;L8;G;L4;F;P3Ø;F
;E;D;L2;C;L4;P3Ø;C;L4.;P3Ø;C;L8;
D;L4;C;P3Ø;C;G;E;D;C;F;L2;A;L4;O
4;C;P3Ø;L4.;C;L8;O3;B-;L4;A;L4.;
A;L8;G;L4;F;P3Ø;F;E;D"
173Ø PLAY "L2;C;L4;P3Ø;C;L4.;B-;
L8;A;L4;G;A;G;F;G;D;E;L2;F"
174Ø NEXT X
175Ø PLAY "L1;F"
176Ø RETURN
177Ø REM ***O LITTLE TOWN OF***
***BETHLEHEM ***
178Ø FOR X=1 TO 2
179Ø PLAY "V27;O2;L4;A;P6Ø;A;P6Ø
;A;G+;A;O3;C;O2;B-;D;G;F;L8;E;F;
L4;G;C"
18ØØ PLAY "L2.;A;L4;A;P6Ø;A;P6Ø;
A;O3;D;C;P6Ø;C;O2;B-;D;G;F;L8;E;
F;L4;A;G"
181Ø PLAY "L2.;F;L4;A;P6Ø;A;P6Ø;
A;G;F;L2;E;L4;P6Ø;E;P6Ø;E;D;E;F;
G"

```

★ ★ ★ ★ ★ SELECTED SOFTWARE ★ ★ ★ ★ ★
★ LOW PRICES ★ FAST SERVICE ★ FREE SHIPPING ★

SOLDERLESS UPGRADE KITS

With easy-to-follow instructions

64K FOR E BOARD	\$39.95
64K FOR F BOARD	\$29.95
64K FOR COCO2* (ALL MODELS)	\$29.95
EXTENDED BASIC CHIP	\$34.95

*All Korean models require one solder joint.
Please specify model # with order.

NOTE: ALL ICs used in our kits are first quality 150 NS
prime chips and carry one full year warranty.

BASIC ROMs DISASSEMBLY

COLOR BASIC UNRAVELLED	\$17.95
EXTENDED BASIC UNRAVELLED	\$17.95
DISK BASIC UNRAVELLED	\$17.95
ALL 3 BOOKS	ONLY \$39.95
ULTRA 80C DISK EDITOR ASSEMBLER	\$29.95
BUG OUT & THE ORACLE (M.L. Monitor)	\$14.95
ALL 5 ITEMS	ONLY \$59.95
500 POKES, PEEKS, 'N EXECS	\$16.95
200 POKES, PEEKS, 'N EXECS	\$9.95
UTILITY ROUTINES (VOLUME 1)	\$19.95
WITH ROUTINES ON TAPE OR DISK	\$36.95
ASSEMBLY LANGUAGE PROGRAMMING (TEPCO)	\$16.95
ALL 10 ITEMS	ONLY \$119.95

UTILITIES & APPLICATIONS

	TAPE	DISK
DYNACALC		\$69.95
TELEWRITER 64	\$39.95	\$49.95
TELEPATCH II		\$24.95
PRO-COLOR-FILE 2.0		\$49.95
TOM MIX MAS ASSEMBLER		\$67.95
AUTOTERM	\$31.95	\$39.95
PEN PAL 2.1		\$74.95
ADOS		\$27.95
THE PEPPER W/SOURCE	\$24.95	\$26.95
DISK UTILITY 2.1		\$19.95
SUPER BACKUP UTILITY		\$44.95
GRAPHICOM		\$21.95
UTILITY ROUTINES VOL. 1		\$21.95
UTILITY ROUTINGS VOL. 2		\$27.95
SUPER TAPE/DISK TRANSFER		\$21.95
DISK TUTORIAL (2 DISKS)		\$34.95

COCO MAX WITH TAPE	\$64.95
COCO MAX II WITH DISK	\$74.95
Y-CABLE	24.95
DS-69A DIGISECTOR	\$139.95
HUL-57 KEYBOARD	\$69.95
INTRONICS EPROM PROGRAMMER	\$139.95
DATARASE	\$39.95
ROMPACK P.C. BOARD W/CASE	\$9.95
VIDEO PLUS IIU	\$34.95

GAMES

	TAPE	DISK
WRESTLE MANIAC	\$26.95	\$26.95
BOUNCING BOULDERS	\$26.95	\$26.95
THE GATES OF DELIRIUM	\$35.95	\$35.95
GANTELET	\$26.95	\$26.95
MISSION F-16 ASSAULT	\$26.95	\$26.95
PAPER ROUTE	\$26.95	\$26.95
P51 MUSTANG	\$26.95	\$29.95
WORLDS OF FLIGHT	\$26.95	\$29.95
WIZARD'S CASTLE		\$21.95
DRAGON BLADE (PRICKLY-PEAR)		\$26.95

PACKAGE SPECIALS

SELECTED SOFTWARE PAC: Galagon, Cubix Froggie, Lancer & Lunar Rover Patrol (All 32K M.L.)	\$34.95 TAPE OR DISK
SPACE PAC: 10 M.L. Space Games (Mostly 16K)	\$21.95 TAPE OR DISK
ADVENTURE PAC: 5 Adventure Games (Mostly 32K)	\$19.95 TAPE OR DISK
EDUCATIONAL PAC: 6 Educational Games (16K + 32K)	\$19.95 TAPE OR DISK
TREASURY PAC: A collection of 30 games (4K - 32K)	\$29.95 TAPE OR DISK

WEBCOR MODEM* & AUTOTERM**
\$64.95 (DISK ADD \$5.00)
COCO CABLE \$12.95

*300 Baud Direct Connect. Power Adapter Included.
**Latest Version.

WE PAY SHIPPING in the United States, Canada & Mexico.
Overseas please add 10%. (MN Residents add 6% sales tax.)
We accept Visa, Mastercard, check or money order. U.S.
funds only for foreign orders. C.O.D. please add \$2.00.

Send to: **SELECTED SOFTWARE**

P.O. Box 32228, Fridley, MN 55432
24 HOUR ORDER LINE 612-757-2439
INFORMATION 612-757-1026 (11 A.M.-5 P.M. C.S.T.)
24 HOUR SHIPPING

```

182Ø PLAY "L2.;A;L4;P6Ø;A;P6Ø;A;
P6Ø;A;G+;A;O3;C;O2;B-;D;O3;D;C;O
2;F;L4.;A;L8;G;L2.;F"
183Ø NEXT X
184Ø RETURN
185Ø REM **O COME ALL YE FAITHFU
L**
186Ø FOR X=1 TO 2
187Ø PLAY "V27;O2;L4;F;L2;P6Ø;F;
L4;C;F;L2;G;C;L4;A;G;A;B-"
188Ø PLAY"L2;A;L4;G;F;L2;P6Ø;F;L
4;E;D;E;F;G;A;L2;E;L4.;D;L8;C"
189Ø PLAY "L1;P6Ø;C;L2;O3;C;L4;O
2;B-;A;L2;B-;A;L4;G;A;F;G"
190Ø PLAY "L4.;E;L8;D;L4;C;F;P6Ø
;F;E;F;G;L2;F;L4;C;A;P6Ø;A;G;A;B
-"
191Ø PLAY "L2;A;L4;G;A;B-;A;G;F;
L2;E;L4;F;B-;L2;A;L4.;G;L8;F;L2.
;P6Ø;F"
192Ø NEXT X
193Ø RETURN
194Ø REM **WHAT CHILD IS THIS**
195Ø FOR X=1 TO 2
196Ø PLAY "V27;O2;L4;G;L2;B-;L4;
O3;C;L4.;D;L8;E;L4;D;L2;C;L4;O2;
A;L4.F;L8;G;L4;A"
197Ø PLAY "L2;B-;L4;G;L4.;P6Ø;G;
L8;F+;L4;G;L2;A;L4;F+;L2;D;L4;G;
L2;B-;L4;O3;C;L4.;D;L8;E;L4;D"
198Ø PLAY "L2;C;L4;O2;A;L4.;F;L8
;G;L4;A;L4.;B-;L8;A;L4;G;L4.;F+;
L8;E;L4;F+;L2.;G;P6Ø;G"
199Ø PLAY "O3;F;L4.;P6Ø;F;L8;E;L
4;D;L2;C;L4;O2;A;L4.;F;L8;G;L4;A
;L2;B-;L4;G"
200Ø PLAY "L4.;G;L8;F+;L4;G;L2;A
;L4;F+;L2.;D;O3;F;L4.;P6Ø;F;L8;E
;L4;D"
201Ø PLAY "L2;C;L4;O2;A;L4.;F;L8
;G;L4;A;L2;B-;L4;G;L4.;F#;L8;E;L
4;F+;L2.;G;P6Ø;G"
202Ø NEXT X
203Ø RETURN
204Ø '**ANGELS WE HAVE HEARD **
*****ON HIGH*****
205Ø FOR X=1 TO 2
206Ø PLAY "V27;O2;L4;B;P6Ø;B;P6Ø
;B;O+;D;L4.;P6Ø;D;L8;C;L2;O-;B;L
4;P6Ø;B;A;B;O+;D;L4.;O-;B;L8;A;L
2;G"
207Ø PLAY "L4;B;P6Ø;B;P6Ø;B;O+;D
;L4.;P6Ø;D;L8;C;L2;O-;B;L4;B;A;B
;O+;D;L4.;O-;B;L8;A;L2;G"
208Ø PLAY "O+;D;L8;E;D;C;O-;B;O+
;L2;C;L8;D;C;O-;B;A;L2;B;O+;L8;C
;O-;B;A;G;L4.;A;L8;D;L2;P6Ø;D"
209Ø PLAY "L4;G;A;B;O+;C;O-;L2;B
;L4;A;P4;O+;L2;D;L8;E;D;C;O-;B;L
2;O+;C;L8;D;C;O-;B;A"
210Ø PLAY "L2;B;L8;O+;C;O-;B;A;G
;L4.;A;L8;D;L2;P6Ø;D;L4;G;A;B;O+
;C;;L2;O-;B;A;L1;G"
211Ø NEXT X
212Ø RETURN
213Ø '**GOD REST YE MERRY ***'
** GENTLEMEN ***'
214Ø FOR X=1 TO 2
215Ø PLAY "O2;L4;D;P6Ø;D;A;P6Ø;A
;G;F;E;D;C;D;E;F;G"
216Ø PLAY "L2.;A;L4;D;P6Ø;D;A;P6
Ø;A;G;F;E;;D;C;D;E;F;G"
217Ø PLAY "L2.;A;L4;P6Ø;A;B-;G;A
;B-;O+C;D;O-;A;G;F;D;E;F"
218Ø PLAY"L2;G;L4;F;G;L2;A;L4;B-
;A;P6Ø;A;G;F;E;L2;D;L8;F;E;L4;D"
219Ø PLAY "L2;G;L4;F;G;A;B-;O+C;
D;O-;A;G;F;E;L2.;D"
220Ø NEXT X
221Ø RETURN
222Ø '****JINGLE BELLS****'
223Ø FOR X=1 TO 2
224Ø PLAY "T5;O4;L4;C;P6Ø;C;A;G;
F;L2.;C;L8;P6Ø;C;P12Ø;C;L4;P6Ø;C
;A;G;F"
225Ø PLAY "L2.;D;P6Ø;L4;D;P6Ø;D;
B-;A;G;L2.;E;L4;O+;C;D;C;O-;B-;G
;L2.;A;L4;C"
226Ø PLAY "P6Ø;C;A;G;F;L2.;C;L8;
C;P12Ø;C;P6Ø;L4;C;A;G;F;L2.D;L4;
P6Ø;D;P6Ø;D;B-;A;G;O+;C;P6Ø;C;P6
Ø;C;P6Ø;C;D;C;O-;B-;G;L1;F"
227Ø FOR Y=1 TO 2
228Ø PLAY "L4;A;P6Ø;A;P6Ø;L2;A;L
4;P6Ø;A;P6Ø;A;P6Ø;L2;A;L4;P6Ø;A;
O+;C;O-;F;G;L1;A;L4;B-;P6Ø;B-;P6
Ø;B-;P6Ø;B-;P6Ø;B-;A;P6Ø;A;L8;P6
Ø;A;P12Ø;A"
229Ø IF Y=1 THEN PLAY "L4;A;G;P6
Ø;G;A;L2;G;O+;C;O-" ELSE PLAY "L
4;O+;C;P6Ø;C;O-;B-;G;L1;F;T2"
230Ø NEXT Y
231Ø NEXT X
232Ø RETURN
233Ø '***WINTER WONDERLAND***
234Ø PLAY "T3;O3;L8;F;P6Ø;F;P6Ø;
F;G;P6Ø;G;P6Ø;L4;G;L8;P6Ø;G;L8;A
;P6Ø;A;P6Ø;A;B-;L4.;P6Ø;B-;L8;P6
Ø;B-"
235Ø PLAY "O+;C;P6Ø;C;P6Ø;C;D;P6
Ø;D;L4;P6Ø;D;P6Ø;L8;D;C;P6Ø;C;P6
Ø;C;O-;B-;L2;P6Ø;B-"
236Ø PLAY "L8;A;P6Ø;A;P6Ø;A;O+;D
;P6Ø;D;L4;P6Ø;D;P6Ø;L8;O-;F;P6Ø;

```



```

F;P6Ø;F;A;P6Ø;A;L4;P6Ø;A;L8;P6Ø;
A"
237Ø PLAY "L4;G;L2.;F;P1;L8;F;P6
Ø;F;P6Ø;F;G;P6Ø;G;P6Ø;L4.;G"
238Ø PLAY "L8;A;P6Ø;A;P6Ø;A;B-;P
6Ø;L2;B-;L8;O+;C;P6Ø;C;P6Ø;C;D;P
6Ø;D;L4.;P6Ø;D"
239Ø PLAY "L8;C;P6Ø;C;P6Ø;C;O-;B
-;P6Ø;L2;B-;L8;A;P6Ø;A;P6Ø;A;O4;
D;P6Ø;D;L4;P6Ø;D;L8;P6Ø;D"
24ØØ PLAY "O-;F;P6Ø;F;P6Ø;F;A;P6
Ø;A;P6Ø;L4;A;L8;P6Ø;A;L4;G;L2.;F
;L4;P3"
241Ø FORX=1 TO 2
242Ø PLAY "O+;L8.;C;P6Ø;L16;C;L2
.;P6Ø;C;L8.P6Ø;C;L16;P6Ø;C;O-;L4
;A;O+;L2;C;L8.;P6Ø;C;L16;P6Ø;C"
243Ø PLAY "L2.;C;L8.;P6Ø;C;L16;P
6Ø;CL4;O-;B-;O+;L2;C;P16;L8;C;E;
P6Ø;E;P6Ø;E;D;L4.;D;L8;P6Ø;D"
244Ø PLAY "C;P6Ø;C;P6Ø;C;O-;B-;L
2;B-;L8.A;P6Ø;L16;A;P6Ø;L8.;A;L1
6;P6Ø;A;L8.;G;P6Ø;L16;G;L8.;P6Ø;
G;L16;P6Ø;G;L2.;F"
245Ø IF E=1 THEN RETURN
246Ø NEXT X
247Ø PLAY "P4;L8.;E;L16;P6Ø;E;L8
.;O+;C+;L16;P6Ø;C+;O-;L8.;F+;L16
;F+;L8.;O+;D;L16;P6Ø;D;L4;C+;L2.
;O-;A"
248Ø PLAY "L8.;E;L16;P6Ø;E;L8.;O
+;C+;L16;P6Ø;C+;O-;L8.;F+;L16;P6
Ø;F#;L8.;P6Ø;O+;D;L16;P6Ø;D;L2;C
+;L8;C+;P8"
249Ø PLAY "O-;L8.;G;L16;P6Ø;G;L8
.;O+;E;L16;P6Ø;E;O-;L8.;A;P6Ø;L1
6;A;O+;L8.;F;P6Ø;L16;F;L4;P6Ø;E;
;L2;C;L4;P6Ø;C"
25ØØ PLAY "L8.;E;P6Ø;L16;E;O-;L8
.;A;P6Ø;L16;A;O+;L8.;D;P6Ø;L16;D
;O-;L8.;G;P6Ø;L16;G;L2;O+;C;L4;C
;O-"
251Ø E=1:GOSUB 242Ø:E=Ø
252Ø PLAY "T2"
253Ø RETURN:'***END PROGRAM #1**
3ØØØ '*****
3Ø1Ø '* CHRISTMAS TREE & *
3Ø2Ø '* CHRISTMAS TREE MUSIC *
3Ø3Ø '* PROGRAM #2 *
3Ø4Ø '* BY: ARRON W.BRANIGAN *
3Ø5Ø '*****
3Ø6Ø PCLEAR 4
3Ø7Ø PMODE 3,1
3Ø75 RESTORE:FORX=1TO32:READA:NE
XTX:'**DELETE THIS LINE IF LOADI
NG ONLY 1 PROGRAM**
3Ø8Ø PCLS
3Ø9Ø SCREEN 1,Ø
31ØØ FOR X=1 TO 15Ø
311Ø C=RND(8):IF C=1 OR C=5 OR C
=4 OR C=8 THEN 311Ø
312Ø CIRCLE (RND(144)+6Ø,RND(148
)+14),4,C
313Ø NEXT X
314Ø DRAW "BM128,12;G1Ø;R4;G15;R
8;G2Ø;R12;G25;R16;G3Ø;R2Ø;G35"
315Ø DRAW "R15Ø"
316Ø DRAW "H35;R2Ø;H3Ø;R16;H25;R
12;H2Ø;R8;H15;R4;H1Ø"
317Ø DRAW "BM126,147;D3Ø;G1Ø;R22
;H1Ø;U3Ø"
318Ø PAINT (1,1),2,8
319Ø LINE (Ø,Ø)-(256,192),PSET,B
32ØØ LINE (128,Ø)-(128,12),PSET:
LINE (124,4)-(132,4),PSET
321Ø COLOR 3,1
322Ø LINE (84,172)-(1Ø4,186),PSE
T,BF
323Ø COLOR 4,1
324Ø LINE (154,172)-(174,186),PS
ET,BF
325Ø COLOR 2,1
326Ø LINE (94,172)-(94,186),PSET
327Ø LINE (164,172)-(164,186),PS
ET
328Ø LINE (84,179)-(1Ø4,179),PSE
T
329Ø LINE (154,179)-(174,179),PS
ET
33ØØ READ A,B,C
331Ø IF A=999 THEN 335Ø
332Ø CIRCLE (A,B),4,4
333Ø CIRCLE (128,12),1Ø,4,1,.1Ø,
.23
334Ø GOTO 33ØØ
335Ø FOR X=1Ø TO 15Ø STEP 1Ø
336Ø CIRCLE (128,12),X,2,1,.1Ø,.
43
337Ø NEXT X
338Ø COLOR 8,1
339Ø LINE (Ø,Ø)-(256,192),PSET,B
34ØØ DATA 128,62,2,92,1Ø8,8,138,
58,3,132,1Ø8,3,88,14Ø,3,13Ø,14Ø,
2,12Ø,135,3,11Ø,125,4
341Ø DATA 119,88,2,118,1Ø8,2,128
,1Ø8,4,1Ø8,98,2,128,98,4,138,9Ø,
3,17Ø,14Ø,2,16Ø,13Ø,3
342Ø DATA 16Ø,14Ø,5,128,32,2,128
,63,3,128,39,5,124,39,2,152,76,3
,152,86,3
343Ø DATA 999,999,999
344Ø PLAY "V27;L4;O3;D;L8.;G;L16
;P6Ø;G;L4;P6Ø;G;A;L8.;B;L16;P6Ø;
B;L4;P6Ø;B;P6Ø;B;L8;A;B;O+;L4;C;

```

```

O-;F+"
345Ø PLAY "A;G;D;L8.;G;L16;P6Ø;G
;L4;P6Ø;G;A;L8.;B;L16;P6Ø;B;L4;P
6Ø;B;P6Ø;B"
346Ø PLAY "L8;A;B;L4;O+;C;O-;F+;
A;G;O+;D;L8;P6Ø;D;O-;B;O+;L4.;E;
L8;D"
347Ø PLAY "P6Ø;D;C;P6Ø;L4.;C;L8;
P6Ø;C;P6Ø;C;O-;A;O+;L4.;D;L8;C;P
6Ø;C;O-;B;P6Ø;L4;B;D"
348Ø PLAY "L8.;G;L16;P6Ø;G;L4;P6
Ø;G;A;L8.;B;L16;P6Ø;B;L4;P6Ø;B;P
6Ø;B;L8;A;B;O+;L4;C;O-;F+;A;G"
349Ø FOR T=1 TO 1Ø
35ØØ A=Ø :B=1:C=1
351Ø FOR X=1 TO 14Ø STEP 1Ø
352Ø FOR Y=A TO C STEP 8
353Ø A$=INKEY$:IF A$="R" THEN RU
N: '***DELETE THIS LINE IF ENTERI
NG ONLY 1 PROGRAM***
354Ø PSET (128+Y,12+X,3):PSET(12
8+Y+1,12+X,3)
355Ø PSET (128+Y,12+X+1,3):PSET(
128+Y+1,12+X+1,3)
356Ø PSET (128+Y+2,12+X,3):PSET
(128+Y,12+X+2,3)
357Ø PSET (128+Y+1,12+X+2,3)
358Ø PSET (128+Y,12+X,2):PSET (1
28+Y+1,12+X,2)
359Ø PSET (128+Y,12+X+1,2):PSET
(128+Y+1,12+X+1,2)
36ØØ PSET (128+Y+2,12+X,2):PSET(
128+Y,12+X+2,2)
361Ø PSET (128+Y+2,12+X+2,2)
362Ø PSET (128+Y+2,12+X+1,2)
363Ø NEXT Y
364Ø A=A-4:C=C+4
365Ø NEXT X
366Ø NEXT T
367Ø GOTO 344Ø
368Ø GOTO 368Ø: '***END PROGRAM#2*
*
4ØØØ '*****
4Ø1Ø '* THE SNOWMAN *
4Ø2Ø '* PROGRAM #3 *
4Ø3Ø '* BY: ARRON W.BRANIGAN *
4Ø4Ø '*****
4Ø5Ø PCLEAR 4: CLEAR 255
4Ø6Ø X=1Ø
4Ø7Ø PMODE 4,1
4Ø8Ø PCLS
4Ø9Ø SCREEN 1,1
41ØØ LINE (1Ø,1Ø)-(251-5,188-5),
PSET,B
411Ø FOR Y=1 TO 3
412Ø X=X*1.5
413Ø CIRCLE (128,X*4),X*2,,.5
414Ø PAINT (128,X*4),1,1
415Ø NEXT Y
416Ø X=1Ø
417Ø FOR Y=1 TO 3
418Ø X=X*1.5
419Ø CIRCLE (128,X*4),X*2,Ø,.5,1
,.5
42ØØ NEXT Y
421Ø CIRCLE (128,63),2,Ø
422Ø CIRCLE (12Ø,57),2,Ø
423Ø CIRCLE (136,57),2,Ø
424Ø CIRCLE (128,63),1Ø,Ø,.5,.15
,.4Ø
425Ø CIRCLE (128,84),2,Ø
426Ø CIRCLE (128,1Ø4),2,Ø
427Ø CIRCLE (128,128),2,Ø
428Ø CIRCLE (128,148),2,Ø
429Ø CIRCLE (128,47),1Ø,Ø,.2
43ØØ DRAW "BM119,47;C1;U2Ø;B;R18
;D2Ø"
431Ø CIRCLE (128,27),8,1,.2
432Ø FOR T=1 TO 8
433Ø CIRCLE (128,27+T*2),8,1,.2,
1,.15
434Ø NEXT T
435Ø CIRCLE (128,47),25,Ø,.2,1,.
5
436Ø DRAW "BM88,8Ø;C1;G2Ø;R21;CØ
;R2Ø;E3;R4;D2;L2;R2;D2;L2;R2;D2;
L2;R2;D2;L2;R2;D2;D5Ø;R2;U65;R5;
U15;L3;D7;U7;L3;D7;U7;L3;D7;U7;L
3;D15;R5;D15;L2;L4;H3;L16;C1;H4;
F4;L3Ø;H5;E21;R12"
437Ø PAINT (86,8Ø),1,1
438Ø DRAW "BM165,78;R5;E1Ø;U2;R5
;E5;U7;E5;H5;E5;H2;F2;G5;F5;E1Ø;
G2;E3;H2;F2;G3;E2;G1Ø;R1Ø;E4;R4;
E4;R4;E4"
439Ø DRAW "BM1Ø,76;C1;R235"
44ØØ DRAW "BM3Ø,82;U2Ø;R4;D2Ø;R3
;L1Ø"
441Ø CIRCLE (25,53),1Ø
442Ø PAINT (25,53),1,1
443Ø CIRCLE (38,53),1Ø
444Ø PAINT (38,53),1,1
445Ø CIRCLE (31,43),1Ø
446Ø PAINT (31,43),1,1
447Ø CIRCLE (25,53),1Ø,Ø
448Ø CIRCLE (38,53),1Ø,Ø,1,.65,1
449Ø CIRCLE (42,97),15,1,.5,.25,
.Ø1
45ØØ CIRCLE (63,117),35,1,.5,.8Ø
,.65
451Ø PAINT (15,16Ø),1,1
452Ø CIRCLE (128,135),67.5,Ø,.5,
.83,.15
453Ø CIRCLE (128,135),67.5,Ø,.5,

```

```

.35,.6
454Ø CIRCLE (128,9Ø),45,Ø,.5,.83
,.5Ø
455Ø LINE (52,1Ø2)-(8Ø,76),PRESE
T
456Ø LINE (Ø,Ø)-(256,192),PRESET
,B
457Ø DRAW "BM26,82;CØ;R3;U5;D5;R
6;U5;D5;R3"
458Ø CIRCLE (3Ø,152),3Ø,Ø,.5,.18
,.29
459Ø DRAW "C1;BMØ,Ø;F1Ø;BM255,Ø;
G1Ø;BMØ,192;E1Ø;BM255,192;H1Ø;CØ
"
46ØØ DRAW "BM62,165;R5;E3;R1Ø;F4
;E5;R2;F6;E2;R3;E4;R8;F3;R7;E5;F
2;R5;E5;R5;F6;R15;E2;F4;R3;F5;E2
;R2;E2;R2;E2;R2;E2;R2"
461Ø DRAW "BM172,84;R3;B;U5;B;R5
;R3;B;R1Ø;R5;B;D1Ø;E1;F1;R1;E2;F
1;R1;B;D2Ø;E1Ø;R4;G12;H2;F2;E12;
R7;H1;L7;R7;F1;F12;L3;G3;L2;H3;L
3;H3;G3;L2;G3;H5;L5;B;U5Ø;C1;E2;
R1;E2;R1;E2;R2;E2;F2;R3;F2;R2;F2
;R2;F2;R2;F2;R2;F2;R2;F2;R2;B;U5
;B;L7;L2;G2;H3;G2;H4;G3;L3;G2"
462Ø DRAW "H3;G2;L3;H4;G3;L3;G3;
L2;G3;L2;G3;L2;G3;L2;B;R15;B;D5;

```

```

E3;R3;E2;R2;E2;R2;E3"
463Ø PAINT (212,56),1,1
4635 GOSUB 466Ø
464Ø A$=INKEY$:IF A$="" THEN 464
Ø:'***IF ENTERING ONLY 1 PROGRAM
CHANGE THIS LINE TO READ. 464Ø
GOTO 464Ø
465Ø IF A$="R" THEN RUN:'***DELE
TE THIS LINE IF ENTERING ONLY 1
PROGRAM***
466Ø '***FROSTY THE SNOWMAN***
467Ø F$="L2O2GL4EL8FL4GL2O3CL4O2
BL8O3CL4DCO2BAGGBO3L8CL4DCO2BAL4
G;O3CO2EL8GAL4GF"
468Ø F1$="EFL2G":F2$="EDL2C"
469Ø S$="L2GL4AAO3CL8CO2L4BAGEFA
GFEL2EL4DDFFAAO3L2CCL8DL4CCO2BAL
2G"
47ØØ T$="L4GL8GGL4GGAL8GGL4GGAGE
GL2D"
471Ø L$="L8BO3CL4DCO2BAGO3CO2L2E
L8GAL4GFL2EO3DL1C"
472Ø PLAY "T5;XF$;XF1$;XF$;XF2$;
XS$;XF$;XF2$;XT$;XL$;"
4725 RETURN
473Ø '***END PROGRAM #3**

```

...COMPARE & CHOOSE EITHER THE OWL XTRA OR OWL'S ENHANCED NAME BRAND COMPATIBLE!!!
A FULL COMPATIBLE OR A 1200 AT LESS THAN A 1000 PRICE!!!

ALL COMPUTERS LISTED INCLUDE 256K & PARALLEL PORT EXCEPT THE TANDY 1000 SX WHICH IS 384K.

OPTIONS | STANDARD FEATURES


ITEM	OWL XTRA	OWL'S ENHANCED TANDY®1200 HD	TANDY®1000 SX*
BASE PRICE	\$695.	\$795.	\$1195.
SERVICE AVAILABILITY	OWL-WARE OR ANY COMPUTER REPAIR CENTER	OWL-WARE, ANY COMPUTER STORE & RADIO SHACK STORES	RADIO SHACK STORES ONLY
MONITOR CARD WARRANTY	COLOR OR HIGH RES MONO 12 MO PARTS 4 MO LABOR	COLOR OR HIGH RES MONO 4 MO PARTS 4 MO LABOR	COLOR 3 MO PARTS 3 MO LABOR
PRICE TO INCREASE MEMORY TO 640K	\$49.	\$89.	\$130.
FLOPPY DRIVES	1 STD 2nd \$90.	1 STD 2nd \$90.	2 STD
KEYBOARD	STD-AT STYLE	STD-AT STYLE	NOT INDUSTRY STD
EXPANSION SLOTS	8 TOTAL-8 LONG	5 TOTAL -6 LONG	5 TOTAL-0 LONG
HARDWARE COMPATIBILITY MAX 1/2 HGT DRIVES	TOTAL -4-	TOTAL -4- **	ONLY PARTLY -2-
DMA CHIP	STD	STD	OPTIONAL (SUPPLIED WITH MEMORY UPGRADE)
OPTIONS SERIAL PORT & CLOCK	\$59.	\$59.	\$80. (NO CLOCK)
HARD DRIVES 10/20/30 MEG 20 MEG HARD CARD	\$295./ \$409./ \$509. / \$595.	\$180./ \$419./ \$519. / \$619.	\$489./ \$795. / NA / NA NOTE: OWL-WARE CARD \$619.
MONITOR / MONOCHROME COLOR	\$95. / \$325.	\$95. / \$325.	\$130. / \$460. NOTE: MSDOS STD (NO MANUAL)
MSDOS & BASIC TURBO SPEED OPTION	2.1 / \$65. 3.2 / \$95. \$65.	2.1 / \$65. NA 3.2 / \$95.	3.2 STD STD

1 YR. Warranty

PA Residents Include 6% Sales Tax
 CALL (215) 682-8855 For Info.

MORE SPECIALS

M.C. & VISA Accepted

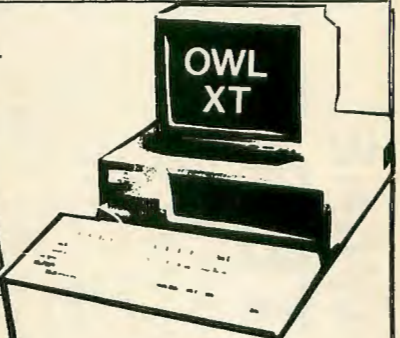

****TANDY®1200 HD normally equipped with full height drives**
***Details on 1000 SX from Radio Shack full catalog / prices & details may change**
TANDY is a registered trademark of Tandy Radio Shack Inc.



OWL-Services
 P.O. Box 116
 Mertztown, PA
 19539

CALL FOR LATEST PRICES
(800) 245-6228

NEW

OWL-WARE WINCHESTER BASIC

**ANNOUNCING... the Development of a Major Breakthrough in
HARD DRIVE SYSTEMS for the COLOR COMPUTER!!!**

Several months ago OWL-WARE introduced the Finest OS9 Hard Drive System for the Color Computer. Now we are about to introduce the only RSDOS Interface System worthy of our computer, OWL-WARE Winchester Basic. For the first time you have available a true Winchester System, although there are 10 directories made available to BASIC, the only limit to size of any file is the size of your drive. On a 10 meg drive you could have a 8 meg file on directory 5 and a 1 meg file on directory 8 and small files everywhere. You turn the computer on and you can immediately access your drive from BASIC or any language using commands you already know. You do not have to know or use OS9 to use OWL-WARE WINCHESTER BASIC, but if you do, all files saved from RSDOS are available to OS9. All files generated from OS9 can be made available to RSDOS by copying to the WINCHESTER BASIC directories. There are no partitions to wall you into, only one operating system, but nothing forces you to use an operating system you don't like.

Call for further details and availability on this breakthrough product!!!

Prices WITH
DRIVE
BELOW

ONLY... **\$50.** WITHOUT
DRIVE **\$75.**

OS-9 HARD DRIVE SYSTEMS

Disk Access is at Least... *8 Times Faster than Floppy Drives.*

Control up to 2 Drives. EACH with Continuous Massive Memory!!! Complete OS-9 Hard Drive System Includes... Software, Hard Drive, Controller and L.R. Tech Interface.

NOTE: OS-9 and RS DOS... "This may prove to be the perfect mating of
NEW PRICING!!! NEW both systems." RAINBOW (May 86)

\$599. \$629. \$729. \$859.

10 MEG 15 MEG 20 MEG 30 MEG

OWL-WARE
is pleased to announce
an exclusive arrangement
to Distribute the L.R. TECH
Hard Drive Interface and Software. DEALERS INQUIRES INVITED



Interface &
Software Only \$119.

NOTE: Interface is not Interrupt Driven Like Our Competition. Therefore, the System Clock does not Lose Time During Hard Drive Access.


INSTALL IN ANY SLOT OF MULTI-PAK OR USE Y CABLE.

CREATE BEAUTIFUL PICTURES WITH


MASTER ARTIST

- * Convenient, on-screen menu
- * Accepts input from X-PAD, TOUCH-PAD, MOUSE or JOYSTICK
- * Magnification mode
- * Draw with custom paintbrushes
- * Easy free-hand sketching
- * "Paint" command
- * 10 colors at a time
- * Pictures are ready for use in BASIC programs
- * Lettering in any size
- * Screen dump to Color Ink-Jet or other Tandy printers

64K DISK \$29.95

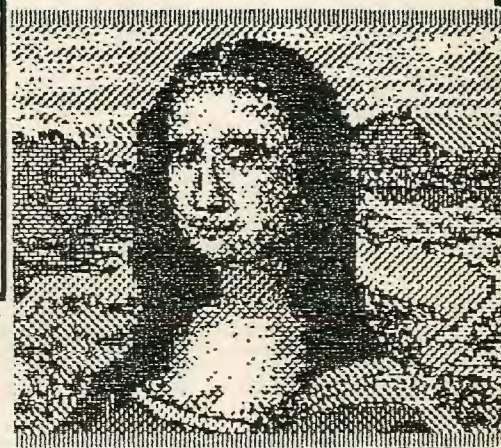

VIEW 3-DIMENSIONAL OBJECTS FROM ANY ANGLE WITH

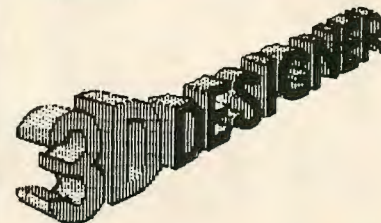

- * Convenient, on-screen menu
- * Supports input from X-PAD, TOUCH-PAD, MOUSE or JOYSTICK
- * Built-in screen dump to Tandy printers
- * Calculate dimensions for you from just a rough sketch
- * Plots or calculates lines and arcs
- * On-screen sketching mode

64K DISK \$29.95

OWL-WARE'S TOLL FREE ORDER LINE (800) 245-6228



DISK DRIVES

TECHNICAL ADVICE
(215) 682-6855

All Prices Include
Case and Power
Supply

SHhhh... Ask about the WISPER DRIVE!!!

DRIVE 0 \$179. to \$239.

...Call for SPECIAL PRICES on Drive 0,1,2,3 Combos.

DRIVE 1 \$109. to \$145.

Single
Double
Quad

PRINTER SALE

STURDY Smith Corona FASTEXT 80

80 CPS with 6 print spacings,
graphics and extended character
set. Includes serial to parallel
printer interface.

ONLY... \$179.

HALF HEIGHT DRIVE UPGRADE KIT FOR NEW RS SYSTEM

Why only double capacity
when you can triple in the same
case. KIT INCLUDES: double sided
drive to fit in your case, includes
hardware and chip to run double
sided Takes only 5 minutes

1 YR. WARRANTY
ONLY... \$119.

All drives are new and fully
assembled. We ship

**FULLY TESTED and CERTIFIED
DRIVES at NO ADDED CHARGE!**

CHINON and Other Brands known
as the highest quality made.

STATE-OF-THE-ART
TECHNOLOGY

We have RSDOS, JDOS,
OWL DOS, ADOS available on
ROM. Call about Double Sided
or Special Needs.

TOLL FREE
ORDER LINE
(800) 245-6228

Call for
LATEST
PRICES!!!

See
Special
Bundled
Software
with
Disk Drive
Purchase!

WARRANTIES
90 day - 1 YEAR



M.C. & VISA Accepted

OWL-WARE
P.O. Box 116-D
Mertztown, PA.
19539

PA Res Include 6% Tax
PA (215) 682-6855

OWL TIP: In answer to your questions:
Our drives also work on the CoCo 3.
Ours have gold contacts and provide
more storage per buck

OWL-WARE Software Bundle
Disk Tutorial Utilities 2 Games

DISK TUTOR

LEARN EVERYTHING ABOUT DISK BASIC
FROM THIS MACHINE LANGUAGE
PROGRAM. THE TUTOR TAKES YOU STEP
BY STEP THROUGH THE LESSONS AND
CORRECTS YOUR MISTAKES A MULTI-
LESSON TUTORIAL THAT WILL GIVE YOU
QUICK, PAINLESS KNOWLEDGE OF DISK
BASIC (THIS PROFESSIONALLY WRITTEN
TUTOR IS EASILY WORTH THE BUNDLE'S
TOTAL PRICE).

OWL DOS

AN OPERATING SYSTEM THAT GIVES
25% FASTER DISK ACCESS AND ALLOWS
USE OF DOUBLE SIDED DRIVES.
CORRECTS FLOATING POINT NUMBER
ERROR.

COPY-IT

QUICKLY COPIES SELECTED PROGRAMS
FROM DISK. USE WILD CARD OPTION
SEARCH TO SELECT GROUPS OF
PROGRAMS FOR COPY (NOT FOR PRO-
TECTED PROGRAMS)

VERIFY

VERIFIES READING EACH SECTOR. BAD
SECTORS ARE LISTED ON THE SCREEN.

2 GAMES

2 GAMES FROM OUR STOCK.
BOTH HAVE SOLD FOR OVER \$17. EACH.
**IF SOLD SEPARATELY OVER
\$125.00 WORTH OF SOFTWARE!!!**


only \$27.95
(or even better)

\$6.95 with
DISK DRIVE PURCHASE!!!



The Solitary Endeavor

By Tudor P. Jones

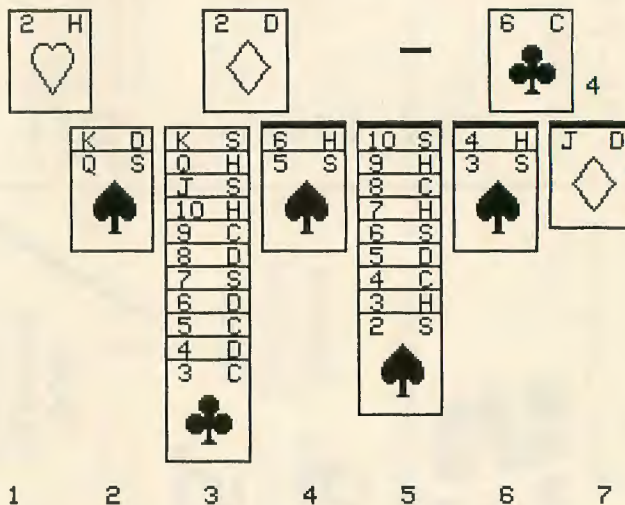

Solitaire is a computer version of the old standby favorite card game whose object is to put shuffled playing cards back into order.

Twenty-eight cards are dealt to the columns to start the game, and others are turned from the remainder, or display, and added to the columns or stacks as they appear. If they cannot be legally entered onto the columns or stacks, then they have to be left in the display until they are exposed once again.

The bottom card on any column may be moved either to its appropriate stack to continue the sequence, or to the bottom of another column. The visible display card can also be moved to its stack, or to the bottom of any column, but only in accordance with the usual rules. The columns must be in descending sequence and alternating color (diamond or heart on a club or spade).

One card is dealt face up by the computer to begin Column 1, and six more face down in a row, to begin columns 2 to 7. Another card is dealt face up on Column 2, and five more face down on columns 3 to 7. This is con-

tinued until there are seven piles of cards increasing in number from one to seven from left to right, with only the top card of each pile exposed.

As each ace becomes available, it should be moved to begin the stacks above the columns. Each stack is built up in suit and sequence to the king.

The 24 remaining cards are turned over three at a time. The third card is visible in the display. The number alongside the display indicates which card is visible.

After making any opening moves that are possible, press the space bar to turn over the next three cards. When all of the cards have been dealt this way to the display, another press of the space bar turns all of them over, and deals the top three cards of those remaining, with the third card being visible in the display, and available for play.

Press the down arrow and a column number to move a card from the display to that column. Any illegal move generates a NO message. The left arrow moves a card from the display to the stacks. Press the up arrow and column number to move a card from the bottom of a

column up to the stacks. The right arrow plus two column numbers (from and to) moves a card or cards from column to column. A whole column, or part of a column, may be moved to another following the descending/alternating rule.

When a column is cleared to reveal the top of a face-down pile, the top card of this pile is turned over by the computer. The heavy line over a column indicates that unexposed cards are lying beneath the top card.

When a pile has been cleared to leave a space, it can only be filled with a king or a column of cards built on a king.

As in regular solitaire, the game can not always be completed. Sometimes, the cards are shuffled so it is impossible for the four stacks to be finished. Failure, therefore, is not always a sign of bad play. On the other hand, some games may be lost through bad play that would otherwise have come out.

(Questions about this program may be directed to Mr. Jones at 2338 Ryder Street, Ottawa, Ontario, Canada K1H 6X6, 613-731-3365. Please enclose an SASE when writing.)

Tudor Jones, of Ottawa, Ontario, is a land surveyor, and in his spare time writes survey-oriented software.

140	97
210	89
300	231
450	110
630	180
790	193
990	57
1140	164
END	241

The listing: SOLITAIRE

```

1Ø CLS: CLEAR: DIM DECK(52), COL(7, 2
Ø), C$(4), S$(4), N$(14), YC(7), STAC
K(4): R=RND(-TIMER): GOSUB 121Ø: GOT
Ø19Ø
2Ø N$=INKEY$: IF N$="" THEN 2Ø ELSE R
ETURN
3Ø LINE(238, 9)-(25Ø, 32), PRESET, B
F: N1=INT(D/1Ø): N2=D-N1*1Ø: IF N2=
1 THEN N2=14
4Ø IF N1=1 THEN N1=14
5Ø IF N1=Ø THEN 6Ø ELSE DRAW"BM238,
32; XN$(N1); BR4XN$(N2); ": RETURN
6Ø DRAW"BM238, 32; XN$(N2); ": RETUR
N
7Ø IF CARD<14 THEN RANK=CARD: SUIT
=1: RETURN
8Ø IF CARD<27 THEN RANK=CARD-13: S
UIT=2: RETURN
9Ø IF CARD<4Ø THEN RANK=CARD-26: S
UIT=3: RETURN
1ØØ RANK=CARD-39: SUIT=4: RETURN
11Ø LINE(XC, YC)-(XC+11, YC+1), PSE
T, B: RETURN
12Ø LINE(2ØØ, Ø)-(232, 39), PRESET,
BF: RETURN
13Ø LINE(XC, YC)-(XC+32, YC+39), PR
ESET, BF: RETURN
14Ø LINE(XC, YC)-(XC+32, YC+39), PS
ET, B: POKE2ØØ, XC+5: POKE2ØØ, YC+8: D
RAW"XN$(RANK); ": POKE2ØØ, XC+24: PO
KE2ØØ, YC+8: DRAW"XS$(SUIT); ": POKE
2ØØ, XC+17: POKE2ØØ, YC+32: DRAW"XC$(
SUIT); ": IF SUIT=2 OR SUIT=4 THEN
PAINT(XC+11, YC+22), Ø, Ø
15Ø RETURN
16Ø IF COL(F, 1)=Ø OR COL(F, 2)=Ø THE
N17Ø ELSE RETURN
17Ø LINE(XC, 43)-(XC+32, 44), PRESE
T, B: RETURN
18Ø XC=165: YC=1: GOSUB13Ø: DRAW"BM
174, 2Ø; U6F4D2U6BR5R2FD4GL2HU4E":
FORN=1TO5ØØ: NEXT: GOSUB13Ø: GOTO28
Ø
19Ø CLS: PRINT@1Ø, "'SOLITAIRE'": P
RINT@35, "PRESS:-": PRINT@64, "SPAC

```

```

EBAR TO DISPLAY NEXT CARD. DOWN
ARROW & COLUMN NO. TO MOVE C
ARD FROM DISPLAY TO COLUMN.": PRI
NT@16Ø, "LEFT ARROW TO MOVE FROM
DISPLAY TO TOP STACK."
2ØØ PRINT@224, "UP ARROW AND COLU
MN NO. TO MOVE CARD FROM COLU
MN TO TOP STACK RIGHT ARROW AND C
OLUMN NUMBERS TO MOVE CARDS
FROM COL TO COL": PRINT@352, "'Q'
TO QUIT AT ANY TIME. MOVE
ALL CARDS TO TOP STACKS TO W
IN."
21Ø PRINT@453, "(DECK BEING SHUFF
LED)."
22Ø FORI=1TO4: STACK(I)=Ø: NEXT: FO
RI=1TO7: YC(I)=45: FORJ=1TO2Ø: COL(
I, J)=Ø: NEXT: NEXT
23Ø FORI=1TO52: DECK(I)=I: NEXT: FO
RI=1TO51: J=RND(52): N=DECK(J): DEC
K(J)=DECK(I): DECK(I)=N: NEXT: PRIN
T@453, "PRESS <ENTER>." : G
OSUB2Ø
24Ø PMODE4, 1: COLORØ, 1: PCLS(1): SC
REEN1, 1
25Ø DRAW"BM14, 19Ø; XN$(14); ": J=14
: FORI=2TO7: POKE2ØØ, 19Ø: J=J+38: PO
KE2ØØ, J: DRAW"XN$(I); ": NEXT
26Ø J=Ø: K=24: FORI=1TO7: J=J+1: FOR
N=1TO J: K=K+1: COL(I, N)=DECK(K):
DECK(K)=-1: NEXT: NEXT: XC=-36: YC=4
5: FORI=1TO7: CARD=COL(I, I): GOSUB7
Ø: XC=XC+37: GOSUB14Ø: IF I=1 THEN N
EXT ELSE LINE(XC, 43)-(XC+32, 44),
PSET, B: NEXT
27Ø CARD=DECK(3): GOSUB7Ø: XC=2ØØ:
YC=Ø: GOSUB14Ø: D=3: GOSUB3Ø
28Ø XC=165: YC=1: GOSUB13Ø: IF STAC
K(1)+STACK(2)+STACK(3)+STACK(4)=
52 THEN 3ØØ ELSE XC=166: YC=15: GOSUB
11Ø
29Ø GOSUB2Ø: IF N$="Q" THEN 1Ø ELSE I
F N$=CHR$(32) THEN 32Ø ELSE IF N$=CH
R$(1Ø) THEN 53Ø ELSE IF N$=CHR$(9) TH
EN 76Ø ELSE IF N$=CHR$(94) THEN 39Ø EL
SE IF N$=CHR$(8) THEN 119Ø ELSE GOTO2
9Ø
3ØØ DRAW"BM9Ø, 11Ø; F4NE4D6BR1ØH2U
6E2R4F2D6G2NL4BR9H2U8BR8D8G2NL3B
R3BE1ØD7F3E2F2E3U7BR7D1ØBR7U1ØF8
D2U1Ø": GOSUB2Ø: GOTO19Ø
31Ø REM START OF 'SPACE BAR'
32Ø DRAW"BM167, 13; E4NL4NH4NU4NE4
NR4NF4D4": XC=2ØØ: YC=Ø: GOSUB13Ø
33Ø IF DECK(1)=-1 THEN 18Ø
34Ø D=D+3: IF DECK(D)>Ø THEN 37Ø
35Ø D=D-1: IF DECK(D)>Ø THEN 37Ø
36Ø D=D-1: IF DECK(D)<Ø THEN D=Ø: X

```

```

C=200:YC=0:GOSUB130:GOTO330
370 CARD=DECK(D):GOSUB70:XC=200:
YC=0:GOSUB140:GOSUB30:GOTO280
380 REM START OF 'UP ARROW'
390 DRAW"BM170,13;U5L2E4F4L2D5L4
":XC=183:YC=15:GOSUB110
400 GOSUB20:IF N$="Q"THEN280ELSE
IF N$<"1"OR N$>"7"THEN400
410 F=VAL(N$):IF COL(F,1)=0THEN1
80
420 IF F=1THEN F=14
430 I=20:DRAW"BM186,13;XN$(F);":
IF F=14THEN F=1
440 I=I-1:IF COL(F,I)=0THEN440EL
SE CARD=COL(F,I):GOSUB70
450 IF RANK<>STACK(SUIT)+1THEN18
0
460 STACK(SUIT)=STACK(SUIT)+1:XC
=SUIT*38-24:YC=0:GOSUB130:GOSUB1
40
470 XC=F*37-36:YC=YC(F):GOSUB130
480 COL(F,I)=0:IF YC(F)>45THEN Y
C(F)=YC(F)-9
490 GOSUB160
500 IF COL(F,1)=0THEN YC=45:GOSU
B130:GOTO280
510 CARD=COL(F,I-1):GOSUB70:YC=Y
C(F):GOSUB140:GOTO280
520 REM START OF 'DOWN ARROW'
530 DRAW"BM172,13;H4R2U5R4D5R2G4
":IF DECK(1)=-1THEN180
540 CARD=DECK(D):GOSUB70:IF RANK
<>1THEN610
550 GOSUB 120
560 STACK(SUIT)=STACK(SUIT)+1:XC
=SUIT*38-24:YC=0:GOSUB130:GOSUB1
40
570 IF D=0THEN370
580 I=D:D=D-1:CARD=DECK(D):GOSUB
70:XC=200:YC=0:GOSUB30:IF D>0THE
N GOSUB140
590 IF DECK(I+1)=-1THEN DECK(I)=
-1:GOTO280
600 DECK(I)=DECK(I+1):I=I+1:GOTO
590
610 XC=183:YC=15:GOSUB110
620 GOSUB20:IF N$="Q"THEN280ELSE
IF N$<"1"OR N$>"7"THEN620
630 F=VAL(N$):IF F=1THEN F=14
640 DRAW"BM186,13;XN$(F);":IF F=
14THEN F=1
650 IF RANK=13AND COL(F,1)<>0THE
N180
660 IF RANK=13 AND COL(F,1)=0THE
N GOSUB120:COL(F,1)=DECK(D):XC=F
*37-36:YC=YC(F):GOSUB140:GOTO570
670 C1=RANK:S1=SUIT:I=20
680 IF COL(F,1)=0THEN180
690 I=I-1:IF COL(F,I)=0THEN690

```

```

700 CARD=COL(F,I):GOSUB70:N=SUIT
+2:IF N>4THEN N=N-4
710 IF N=S1 OR SUIT=S1 THEN 180
720 IF C1<>RANK-1 THEN 180
730 GOSUB120
740 YC(F)=YC(F)+9:XC=F*37-36:YC=
YC(F):GOSUB130:COL(F,I+1)=DECK(D
):CARD=DECK(D):GOSUB70:GOSUB140:
GOTO570
750 REM START OF 'RIGHT ARROW'
760 DRAW"BM167,11;U4R5U2F4G4U2L5
":XC=183:YC=15:GOSUB110
770 GOSUB20:IF N$="Q"THEN280ELSE
IF N$<"1"OR N$>"7"THEN770
780 F=VAL(N$):IF F=1THEN F=14
790 DRAW"BM186,13;XN$(F);":IF F=
14THEN F=1
800 XC=165:YC=30:GOSUB110
810 GOSUB20:IF N$="Q"THEN280ELSE
IF N$<"1"OR N$>"7"THEN810
820 T=VAL(N$):IF T=1THEN T=14
830 DRAW"BM169,28;XN$(T);":IF T=
14THEN T=1
840 J=20:IF COL(T,1)=0THEN1060
850 J=J-1:IF COL(T,J)=0THEN850
860 CARD=COL(T,J):GOSUB70:HRANK=
RANK:HSUIT=SUIT:HVC=YC(F):HJ=J:I
=20
870 I=I-1:IF I=0THEN180
880 IF COL(F,I)=0THEN870
890 CARD=COL(F,I):GOSUB70:IF HRA
NK=RANK+1 THEN 920
900 I=I-1:IF I=0THEN180
910 HVC=HVC-9:IF HVC=36THEN180EL
SE890
920 N=SUIT+2:IF N>4THEN N=N-4
930 IF N=HSUIT OR SUIT=HSUIT THE
N 180
940 HI=I:YC(F)=HVC
950 J=J+1:COL(T,J)=COL(F,I):COL(
F,I)=0:I=I+1:IF COL(F,I)>0THEN95
0
960 I=HI:XC=F*37-36:IF COL(F,1)=
0THEN LINE(XC,45)-(XC+32,183),PR
ESET,BF
970 GOSUB160
980 IF HVC>45THEN YC(F)=HVC-9
990 LINE(XC,HVC)-(XC+32,183),PRE
SET,BF:I=20
1000 I=I-1:IF I=0THEN YC(F)=45:Y
C=45:GOSUB130:GOTO1030
1010 IF COL(F,I)=0THEN1000
1020 CARD=COL(F,I):GOSUB70:YC=YC
(F):GOSUB140
1030 J=HJ:YC(T)=YC(T)-9:XC=T*37-
36
1040 IF COL(T,J)=0THEN280
1050 YC(T)=YC(T)+9:CARD=COL(T,J)
:GOSUB70:YC=YC(T):GOSUB130:GOSUB

```



```

140:J=J+1:GOTO1040
1060 I=20:HVC=YC(F)
1070 I=I-1:IF I=0THEN180
1080 IF COL(F,I)=0THEN1070
1090 CARD=COL(F,I):GOSUB70:IF RA
NK=13 THEN 1120
1100 I=I-1:IF I=0THEN180
1110 HVC=HVC-9:IF HVC=36THEN180E
LSE1090
1120 YC(T)=45:YC(F)=45:HI=I:J=0:
XC=F*37-36:LINE(XC,45)-(XC+32,18
3),PRESET,BF:XC=T*37-36:YC=45
1130 J=J+1:COL(T,J)=COL(F,I):COL
(F,I)=0:CARD=COL(T,J):GOSUB70:GO
SUB140:I=I+1:IF COL(F,I)=0THEN11
40ELSE YC(T)=YC(T)+9:YC=YC(T):GO
SUB130:GOTO1130
1140 XC=F*37-36:I=HI-1:IF COL(F,
1)=0THEN YC=45:GOSUB130:GOSUB170
:GOTO280
1150 IF COL(F,2)=0THEN GOSUB170
1160 CARD=COL(F,I):GOSUB70:YC=YC
(F):GOSUB140
1170 I=I+1:IF COL(F,I)=0THEN280E
LSE COL(F,I)=0:GOTO1170
1180 REM START OF 'LEFT ARROW'
1190 DRAW"BM171,13;H4E4D2R5D4L5D
2":IF DECK(1)=-1THEN180
1200 CARD=DECK(D):GOSUB70:IF RAN

```

```

K=STACK(SUIT)+1THEN550ELSE180
1210 N$(0)="BUU4ER2FD4GL2H":
N$(1)="U4E2F2D2L3R3D2":
N$(2)="BU5ER2FDGL2GD2R4":
N$(3)="BR3L2HBU4ER2FDGLRFDG":
N$(4)="BR3U6G3DR4":
N$(5)="BR3L2HBU5R4L4D2R3FD2G":
N$(6)="BR3L2HU4ER2FBD2BL3R2FDG"
1220 N$(7)="BU6R4DG3D2":
N$(8)="BR3L2HUEHUER2FDGL2R2FDG":
N$(9)="BUFR2EU2L3HUER2FD4":
N$(10)="R2LU5LRUBR5R2FD4GL2HU4E"
:N$(11)="UDR3U6L2R4":
N$(12)="BR1HU4ER2FD4GLBUF2":
N$(13)="U6BR4G3F3":
N$(14)="R2LU6DLRBRBD5"
1230 S$(1)="U6D3R4U3D6":
S$(2)="BR3EGL2HU4ER2FBF":
S$(3)="U6R3FD4GL3":
S$(4)="BU1FR2EUHL2HUER2F"
1240 C$(1)="HUH2UH2UH2UHU3EUE2R3
F2E2R3F2DFD3GDG2DG2DG2DG":
C$(2)="L3ER2HU5G3L3H2U3E2R3FEH2U
3E2R3F2D3G2FER3F2D3G2L3H3D5F2L2"
:C$(3)="H3UH2UH3E3UE2UE3F3DF2DF3
G3DG2DG3":
C$(4)="L2EU7G3L2H2U4EUE7F7DFD4G2
L2H3D7FL2"
1250 RETURN

```

● **COLOR BANKBOOK** \$19.95

● **BUSINESS BANKBOOK
SYSTEM ONE
FOR ONE DISK DRIVE** \$49.95
**SYSTEM TWO
FOR TWO DISK DRIVES** \$49.95

● **DCR FILE** \$19.95

● **SUPERDISK UTILITY** \$ 9.95
SEE REVIEW IN MAY '86
RAINBOW PAGE 191

● **RADIOLOG** \$ 9.95
SEE REVIEW IN MAY '86
RAINBOW PAGE 209

● **CODE PRACTICE** \$ 9.95
ORDERS OR INFORMATION

**CALL 1-800-628-2828
EXTENSION 552**

ALL PROGRAMS INCLUDE MANUALS
REQUIRE 32K AND 1 DISK DRIVE.
ADD \$2.00 SHIPPING & HANDLING
FLORIDA RES. ADD 5% SALES TAX

**SUNRISE
SOFTWARE**



8901 NW 26 ST DEPT R
SUNRISE, FL 33322



TANDY COMPUTER DISCOUNTS

COLOR COMPUTERS

26-3127 64k color comp	140.00
26-3131 1st disk drive	269.95

PRINTERS

26-1276 DMP 105	160.00
26-1277 DMP-430	580.00
26-1280 DMP-130	269.00

MODEL 4 and MSDOS COMPUTERS

25-1050 Tandy 1000 EX	650.00
25-1051 Tandy 1000 SX	950.00
25-01011 Plus expansion board	155.00
25-1005 2nd drive mod 1000	145.00
25-1020 VM-4 Monochrome monitor	110.00
26-1070 mod 4D 64k 2dr.	920.00

**We Carry the Complete Line of Tandy
Computer Products at Discount Prices**

**CALL FOR A FREE PRICE LIST 800-257-5556
IN N.J. CALL 609-769-0551**

WOODSTOWN ELECTRONICS

Rt. 40 E. WOODSTOWN, N.J. 08098



Formatting Text Presentations to Suit Yourself

By Joseph Kolar
Rainbow Contributing Editor

Ready for more punishment? In this tutorial, we shall finish the demo program we began the last time around. You were asked to do some homework. If you did it, give yourself an A.

Load in your homework assignment. Refer to Listing 1 and key in lines 900 to 1999. If you just arrived on the scene, or neglected to do your homework, key in the entire listing. Run it.

The result is quite attractive. It is an interesting, alternate way to place lots of text on a screen. It takes some effort but once you understand the system, you will find it easy to use this technique. The ultimate viewer will find it relaxing to read along without being asked for any hands-on input, such as press this or do that. In fact, I call it the read along gambit.

List lines 910 and 920. Variables A\$ and B\$ contain strings of text that fill the balance of the text panel. Creating the actual sentences is the most difficult task. You must compose sentences that say what you want said and yet fit into the constraints of the text page or panel.

Here are some factors to take into consideration. There are 219 characters/spaces in A\$. The maximum that I

Florida-based Joseph Kolar is a veteran writer and programmer and specializes in introducing beginners to the powers of CoCo.

could have produced in this particular instance is 245. You can check it out if you are in the right part of the program, without using any program line number, by asking CoCo to print `L=LEN(A$)`.

Sometimes it is necessary to reword a sentence/paragraph to shorten it. At other times, it may be convenient to break it up into shorter bites. There are no hard and fast rules except the dictates of the situation. You must use the invisible vertical line gambit to format the text.

You must have a very good idea where you plan to locate the strings. You can do this by trial and error. If you do not feel comfortable with this method, feel free to try this next technique. Add the following lines:

```
930 PRINT@128,A$
931 PRINT@352,B$
932 GOT0932
```

Press CLEAR and type RUN900

Adjust the PRINT@ locations as necessary. Alter the contents/length of any sentence to give it a better fit. This is called your layout. After finalizing your layout, make a note of the A\$ and B\$ locations. Did you notice how abruptly the text was presented? Obviously, it will require a lot of time to read the text. (More on this phase later.)

Delete lines 930 to 932. Other problems and considerations may crop up

and will be confronted as we encounter them. Now that we have a good idea of the contents and appearance of the text panel, we can use the read along gambit, using LEFT\$ to create the routine that will work our will on CoCo.

List lines 940 to 1000. By trial and error, we determined that a time lapse of 50 units between the placement of each succeeding letter would afford us sufficient time to read the text as it is thrown onto the screen. (Feel free to use some other value, but be consistent throughout the program.)

Note in Line 940, `T=0`, etc., my typo error. Good-natured CoCo saved the day by reading it as `T=0`, etc.

Here is a fun thing! Temporarily insert 941 PRINTT; to prove that CoCo sees `T=0`, and type RUN900. Question: Why did CoCo print T up in the corner and then print T of the balance of A\$, underneath?

Study the placement of this line and the solution will come to you. TRON is helpful. Delete Line 941 and type TROFF.

List lines 940 to 1000. A\$ was put on first, using the location that you selected from your layout. It was done as explained in the last tutorial. B\$ was put on next, also in a nested loop, where Line 1000 is equivalent to lines 960 and 970.

Refer to last month's tutorial if you are encountering difficulty recalling what the two similar routines do.

Could we mask Line 970 and add :NEXT at the end of Line 960? Take time out to see what CoCo does.

List lines 940 to 1005. Add :GOTO900 at the end of Line 100, and add 1001 GOTO 1001 and 1010 GOTO1010 in order to bypass part of the program and still retain the heading in the first panel. Now run it.

The last string, B\$, was too long for the screen and CoCo was forced to scroll up in order to get to the next blank space. Scrolling upward pushed the name up and off the screen. The address remained. This did not look very professional.

One solution was to remove the remaining heading from the text panel. Line 1005 was one quick way to do it. Nothing was printed in the leftmost locations in the two top rows concerned. Delete Line 1001 and run.

It could have been centered vertically a little better. Care to have a go? I will later on because it irritates me.

Delete Line 1010. Insert 1125 GOTO 1125. Watch the last part of the action. Now run. List lines 1005 to 1125.

I placed the program section separators, lines 1100 and 1300, in what seems to be the wrong places. They really should be just before the CLS lines. This is a real-live, hand-crafted program, with insertions and deletions, and to give it a feeling of spontaneity I decided to show warts and all. Remember, you are expected to rearrange the program lines to suit yourself.

Line 1110 kept the display panel on the screen for 1500 units (alter this value to suit), and then the screen was blanked out to prepare for the next panel. Run it. Delete Line 1125 and list lines 1130 to 1140.

The second panel had two batches of text. Using the same line formulations as in lines 980 to 1000, this text is centered for better appearance, then programmed in two segments.

Rekey 100 NEXT. Add 6 GOTO 1120 and 1120 GOTO 1220.

Suppose you wanted a breather after C\$ was placed on the screen to absorb what was written? Instead of a pause loop, you could add a bunch of spaces at the end to enlarge C\$.

List Line 1130. Edit this line by moving the closing quote mark until it is under the 's' in "screen." Run it.

CoCo will have to cycle through all these additional blanks, because T is now increased to include all these spaces. They take time to loop through

and, in effect, you get an extra pause without the addition of a conventional pause line. Run again.

You can adjust it by adding or removing these trailing spaces. Press BREAK. Now, edit Line 1140, and add some trailing blanks. Mask Line 1210 and delete Line 1220. Now run it.

You can see that the extra time CoCo needs to cycle through T multiplied by the number of trailing spaces, replaces the run-of-the-mill pause routine in Line 1210.

You were issued a challenge in D\$. It wasn't demonstrated, but I am sure it can be done. Work on it later!

Rekey 6 GOTO 1130. Remove any trailing blanks in lines 1130 and 1140. Unmask Line 1210. Insert 1135 GOTO1300 and 1350 GOTO 1350. Now run.

Did you see what we did? We restored some lines to their original state and we bypassed the heading and the rest of the first panel. We picked up C\$ and bypassed the second panel. List lines 1300 to 1340.

If you mask Line 1305 and pull out +X\$ in lines 1320 and 1330, you may understand this better. Make these suggested changes and run.

The text runs nicely across the screen, albeit backward, and it is kind of confusing until it is completely displayed. I thought it might look more dignified if it was led by an arrow, since there were a few unused spaces on the last row where it settled into its final home.

List lines 1300 to 1340. Unmask Line 1305. A small string, X\$, was created four units long. Restore +X\$ in Line 1320. The length was increased by four, in the new string, C\$+X\$. Restore +X\$ in Line 1330. This meant that we have an enlarged string to display and, as we are starting from the right end of the string, our guiding arrow would lead the sentences as they flowed onto the screen. Run to make sure.

We don't need the arrow any more. In fact, it is an affront to our artistic sensibilities. We don't waste any time, and remove it forthwith. Line 1405 does the job. The location was chosen by trial and error. Delete Line 1350.

Trial and error does not mean that you throw up your hands and take a wild guess. No! You take a reasonable guess. What follows is how my mind ticks, if ever so slowly.

The target location was at the end of the eighth row. The ninth row begins with Location 256. I backed up a few

Enfin... en français



Here is an exciting... provoking computer drama at its best. Virginia WynnGate is dead.

You, the reknowned Inspector Leprow, must find her murderer. It's up to you and it won't be easy. You will have to interrogate witnesses, analyze lab reports, study the autopsy findings and correlate all your information in order to trap the criminal.

If you possess enough tenacity, talent and intuition you might solve the mystery. If not... call Scotland Yard.

Author: Serge Provencher
Hardware: Tandy 64 K, extended BASIC, one disk drive, color monitor
Available in French only.

Our other programs for TANDY 1000:

DACTYLO
Author: Odette Lavigne
Type: Tutorial
Available in French and in Spanish

BALISTIQUE
Author: Charles Camirand
Type: Simulation
Available in French

BANQUIERS
Authors: Michel and Robert Lyons
Type: Tutorial
Available in French, in English and in Spanish



342 Sherbrooke east,
Montreal, QC,
Canada,
tel.: 514.288.5506

L'AFFAIRE WYNNGATE

DISK DRIVE SPECIALS

CONTROL & 2 DRIVES

ONLY \$249

Price includes 2 TEAC 40 track, double density drives with case, power supply, cable and disk controller by HDS or J&M (specify RS or JDOS)

OPTIONS:

- ADOS ROM (for HDS) ADD \$30
- J&M switchable controller with JDOS and printer port (JFD-CP) ADD \$30
- J&M switchable controller with RS and JDOS and printer port (JFD-CP) ADD \$40
- 2 Drives with case & power supply \$149
- Cable for dual drive above \$19.95

DISK CONTROLLERS

- HDS DISK CONTROLLER with RS 1.1 ROM (same options as above) ONLY \$99
- J&M SWITCHABLE DISK CONTROLLER with JDOS & PRINTER PORT ONLY \$129
- J&M ORIG. CTRL. w/JDOS ONLY \$99
- RSDOS ROM VERSION 1.1 ONLY \$19.95
- RSDOS 1.1 with disk ctrl purchase \$10

REAL TIME CLOCK

Features: OS9 DRIVER INCLUDED
AUTOMATIC LEAP YEAR & DAYLIGHT SAVINGS TIME - COMPATIBLE WITH ALL RS COLOR COMPUTERS - BATTERY BACKUP

Compatible with all known plug-in packs. To use it with another plug-in pack without using a Multi-PAK, order the Y-cable below. Completely assembled, tested and ready to plug in and use, with programs included to set, read, and display the Time/Date on the screen or print it on your printer.
RTC-10 NOW \$49.95

ROM/PROJECT CASES

3 piece unit with hardware. NOW \$5.00
PC BOARDS for 27XX type proms for above case. NOW \$3.75

CALL FOR QUANTITY DISCOUNTS
LARGER CASES ALSO AVAILABLE

COCO CABLES

All have GOLD plated contacts.

MULTI-PAK EXTENDER CABLE - 40 conductor, 6" to 15" (specify).

— STOP THOSE LOST CONTACT BLUES. — ONLY \$19.95

Y-CABLE - 40 conductor, 1 ft. long. Lets you connect 2 compatible plug-in packs without a MULTI-PAK INTERFACE. ONLY \$23.95

DISK PACK EXTENDER CABLE - 40 conductor, 2 ft. long. Not for use with Multi-PAK. ONLY \$20.95

DISK DRIVE EXTENDER CABLE - 34 conductor, 2 ft. long. ONLY \$16.95

CUSTOM FLAT CABLES - Call
Custom Computer Products

3528 Locust Ave.
Wantagh, N.Y. 11793
(516) 783-7426

ccp

ADD \$3.00 PER ORDER FOR SHIPPING & HANDLING
ADD \$8.00 FOR S & H ON DISK DRIVE ORDERS
FOR C.O.D. INCLUDE AN ADDITIONAL \$3.00
N.Y. RESIDENTS MUST INCLUDE SALES TAX
LIMITED SUPPLY ON SOME ITEMS

digits to 250 and tried it out. When it was tested, I saw I knocked off the period. An adjustment was made.

As an aside, many moons ago, you were asked to make a training aid for yourself, on part of which, you were advised to make a PRINT@ list of the starting locations of each row. I made mine and refer to it constantly. It is no big effort to look on top of my TV for the guide. You don't think for a minute that I remember all the nuts and bolts in CoCo's vast storehouse of knowledge?

Delete Line 6 and add 11 GOTO 1410. We move our starting offset to begin after CLS, so we could start in the middle of the third panel. Delete Line 1135 and run.

Line 1415 gave us a pause. Not too long. The last string, C\$, had been redisplayed correctly, if not orthodoxly, so there wasn't much incentive to study it further. We had just located the arrow on the line above, so it wasn't mind-bending to pick up the correct location of the next program line, A\$. The last panel, being well-formatted and well-centered, called for an abrupt end at Line 1999.

"These last cosmetic improvements separate the men from the boys."

Delete Line 11 and run to make sure it is working properly. The last paragraph, A\$ (Line 1410), was located just below the unorthodoxly presented top paragraph, C\$, to bind it in firmly and present the whole panel as a preconceived unit. To wit: It gives it a natural, flowing appearance and neat change of pace, first proceeding in one direction and then augmented, from the opposite direction.

Finishing a program always causes a quandary for the author. When is it really finished? A program is never finished. There is always something that can be polished to make it better.

It reminds me of an artist completing an oil painting in three days. Then he dabs a little here and a bit there for over three months, never quite satisfied with the result. When it is hanging in an art gallery, he can still spot areas where he could touch it up. It is never finished!

So, too, with this demo, I could make changes. However, at some point, unperfected though it may be, I have to say that this is it.

That is not to say that you can't continue to modify it. For instance, two changes could be made in the last panel. In Line 1330, change 64 to 32 and in Line 1405, change 251 to 251-32 or 219.

The first panel bugs me. With the period in Line 920, CoCo is ornery and scrolls up, destroying the heading. Two solutions come to mind — omit the punctuation mark or revise B\$. However, the text is exactly what I want to say and the only change I would tolerate is to change THE to OUR. This doesn't affect the length of B\$ — and I want my period! Neither, do I want to give up the blank row under the header.

GOES TO PROVE could be changed to PROVES, but the former has a sense of a continuing, repeated action. Thus, for me, there is no choice. Being stuck with panel one, I don't like the unbalanced, vertical centering. Despite the short holding pause at Line 1110, it could be scrolled up one row for a neater effect. Adding 1001 PRINT solves that problem.

These last cosmetic improvements separate the men from the boys. As you run through this program, you will find something that I overlooked that offends your sensibilities. By all means, feel free to incorporate your improvements so it gets your stamp of approval.

Since the backward presentation is unreadable, why not speed it up? Change Line 1305 by inserting a space in front of the closing quote mark. To Line 1320, add STEP2. Give it a long pause at Line 1415, from 500 to 1500.

We might just as well double-time it off the screen. Add the following lines:

```
1406 Y$="<--- ":FOR Z= 1 TO
1500:NEXT
1407 FOR A= LEN(C$+Y$) TO 0
STEP-2
1408 PRINT@64, RIGHT$(C$+Y$,A)
1409 FOR Z= 1 TO 50:NEXTZ,A
```

This spoils our final display. Help me to recenter the last A\$ display.

It is so easy to go off on tangents. Did you change Line 1430 from 256 to 128?

One more tangent, and that's it! Add 1412 CLS8 and run. Add ; at end of Line 1430 and run. Shades of tutorials past.

We had fun. Bit by bit, we digested a lot of useful information. Next month, we shall conclude this study and write lots of text to demonstrate another method you will enjoy using. □

210	216
600	149
920	87
1150	86
END	13

The listing: DEMO

```

Ø '<LISTING1> DEMO
5 CLEAR 5ØØ
1Ø CLS
2Ø A$="BETTY ANN WHITE"
3Ø B$="824 NE 56 ST.
4Ø C$="SEATTLE, WASHINGTON"
41 PRINT@8,LEFT$(A$,5);:FORZ=1TO
2ØØ:NEXTZ
42 PRINT MID$(A$,6,5);:FORZ=1 TO
2ØØ:NEXTZ
43 PRINTRIGHT$(A$,5)
44 FOR Z= 1 TO 5ØØ:NEXT
45 CLS
46 '***
47 A$="JOSEPH KOLAR"
5Ø FOR T= Ø TO LEN(A$)
6Ø PRINT@9, LEFT$(A$,T)
7Ø PRINT@41,LEFT$(B$,T)
8Ø PRINT@7Ø, LEFT$(C$,T)
9Ø FOR Z= 1 TO 51:NEXT
1ØØ NEXT
1Ø1 FOR Z= 1 TO 5ØØ:NEXT
1Ø2 GOSUB 2ØØØ
1Ø3 PRINT@9,A$
1Ø4 FOR Z= 1 TO 5ØØ:NEXT
11Ø L=LEN(A$)
12Ø FOR A=L TO Ø STEP-1
13Ø PRINT@3Ø-A," "RIGHT$(A$,A)
14Ø FOR B=1 TO 51:NEXT
15Ø NEXTA
16Ø '***
21Ø A$="JOSEPH KOLAR"
22Ø L=LEN(A$)
23Ø FOR A=Ø TO L
24Ø PRINT@213-A," "+LEFT$(A$,A)
25Ø FOR B=1 TO 2ØØ:NEXT
26Ø NEXT A
27Ø FOR Z=1TO5ØØ:NEXT
3ØØ FOR A=L TO Ø STEP-1
31Ø PRINT@2Ø2,RIGHT$(A$,A)
32Ø FOR B=1 TO 2ØØ:NEXT
33Ø NEXT A
34Ø '***
4ØØ A$="BETTY ANN WHITE"
41Ø FOR T= Ø TO LEN(A$)
42Ø PRINT@8,LEFT$(A$,T)
43Ø FOR Z= 1 TO 5Ø:NEXT
44Ø NEXT
45Ø FOR Z= 1 TO 1ØØØ:NEXT
46Ø '***
49Ø L=LEN(A$)
5ØØ FOR A=L TO Ø STEP-1
51Ø 'PRINT@8,RIGHT$(A$,A)
511 PRINT@8,LEFT$(A$,A)
52Ø FOR Z=1 TO 2ØØ:NEXT
53Ø NEXT A
535 FOR Z= 1 TO 5ØØ:NEXT
54Ø '***
6ØØ A$="JIMY OWEN WHITE"
6Ø5 PRINT@8,A$
6Ø6 FOR Z= 1 TO 5ØØ:NEXT
61Ø 'FOR T= LEN(A$) TO Ø STEP-1
611 FOR T=Ø TO LEN(A$)
62Ø PRINT@8,LEFT$(A$,T)
63Ø FOR X= 1 TO 2ØØ:NEXT
64Ø NEXT T
65Ø FOR Z= 1 TO 5ØØ:NEXT
66Ø '***
7ØØ A$="BETTY ANN WHITE"
71Ø FOR T=Ø TO 15
72Ø PRINT@8,RIGHT$(A$,T)
73Ø FOR X=1 TO 2ØØ:NEXT
74Ø NEXT T
75Ø FOR Z= 1 TO 5ØØ:NEXT
8ØØ '***
81Ø B$="JIMY OWEN WHITE"
811 L=LEN(B$)
82Ø FOR A= Ø TO L
83Ø PRINT@22-A," "+LEFT$(B$,A)
84Ø FOR X= 1 TO 2ØØ:NEXT
85Ø NEXT A
86Ø FOR Z=1TO5ØØ:NEXT
9ØØ '*****
91Ø A$=" THIS PROGRAM WAS CREAT
ED TO FOOL AROUND WITH SOME OF
THE CAPABILITIES OF THE <LEF
T$> AND <RIGHT$> FUNCTIONS OF TH
E COCO. AS A CHANGE OF PACE, T
HIS TEXTYOU ARE READING, WAS PLA
CED ON THIS DISPLAY USING <LEFT
$>."
92Ø B$=" IT JUST GOES TO PROVE
THAT THERE IS MORE THAN ONE W
AY TO DO ALMOST ANYTHING WHEN
IT COMESTO PROGRAMMING THE BELOV
ED COCO."
94Ø FOR T= 0 TO LEN(A$)
95Ø PRINT@128, LEFT$(A$,T)
96Ø FOR Z=1 TO 5Ø:NEXT
97Ø NEXT
98Ø FOR T=Ø TO LEN(B$)
99Ø PRINT@352, LEFT$(B$,T)
1ØØØ FOR Z= 1 TO 5Ø:NEXTZ,T
1ØØ5 PRINT@Ø,"":PRINT@32,""

```

```

1100 '***
1110 FOR Z= 1 TO 1500:NEXT
1120 CLS
1130 C$=" A SECOND DISPLAY PANE
L WAS ADDED TO SHOW ONE WAY T
O AVOID <INPUT PRESS 'ENTER'> R
OUTINES. THIS WAS DONE, AGAIN,
TO SHOW HOW TO USE AN ALTERNATE
WAY TO GET THE TEXT TO THE SCR
EEN."
1140 D$=" CAN YOU CHANGE THE RO
UTINE TO UTILIZE <RIGHT$> INSTEA
D OF <LEFTS> TO PUT THIS TEX
T ONTO THE SCREEN? TRY IT AND
SEE IF YOU CAN COME UP WITH A
WORKABLE ROUTINE!"
1150 FOR T=0 TO LEN(C$)
1160 PRINT@64, LEFT$(C$,T)
1170 FOR Z= 1 TO 50:NEXTZ,T
1180 FOR T=0 TO LEN(D$)
1190 PRINT@256, LEFT$(D$,T)
1200 FOR Z=1 TO 50:NEXTZ,T
1210 FOR Z=1 TO 500:NEXT
1300 '***
1305 X$="---->"

```

```

1310 CLS
1320 FOR A=0 TO LEN(C$+X$)
1330 PRINT@64,RIGHT$(C$+X$,A)
1340 FOR Z=1 TO 50:NEXTZ,A
1400 '***
1405 PRINT@251,""
1410 A$=" NOT VERY PRACTICAL!
BUT THAT IS ONE OF THE PERILS OF
CREATIVEEXPERIMENTATION. THE B
EGINNER GETS TO DO LOTS OF USEL
ESS THINGS, BUT IT IS STILL
LOTS OF FUN!"
1415 FOR Z= 1 TO 500:NEXT
1420 FOR T=0 TO LEN(A$)
1430 PRINT@256,LEFT$(A$,T)
1440 FOR Z= 0 TO 50:NEXTZ,T
1999 GOTO 1999
2000 '
2010 FOR X= 1 TO 10
2020 PRINT@9," WRONG!"
2030 FOR Z= 1 TO 20:NEXT
2040 PRINT@12," "
2050 FOR Z= 1 TO 40:NEXT
2060 NEXTX
2070 RETURN

```

THE SOFTWARE HOUSE



DATAMATCH 'FLIPPYS'

DS/DD-2 NOTCHES-2 ID HOLES
10/\$9.95 100/\$95.00



PROGRAMMER'S DISKS

DS/DD 10/\$8.00 100/\$75.00

ALL DISKS COME WITH TYVEK SLEEVES, LABELS, W.P.TABS

COLOR RIBBONS: Red, Green, Blue, Brown

GEM/OKI 4/\$10.00

EPSON 4/\$24.00

APPLE/NEC 4/\$24.00

*We Wish You all a
Joyful Holiday Season*

Della & Myrna Cox

ALL ITEMS 100% GUARANTEED!

Add \$2.50 S/H in U.S.A - Canada Add \$3.50

Michigan Residents Add 4% Sales Tax

Send check or money order payable to:

THE SOFTWARE HOUSE

9020 Hemingway, Redford, MI 48239

(313) 937-3442



Send Card Number and Exp. Date
Min. Charge Order \$20.00




GRAF PLOT

NEW! - THE BEST JUST GOT BETTER!

GRAF PLOT DEMO:
\$5.00 DISK & TAPE
REFUND W/PURCHASE
"A GREAT PACKAGE
GETS EVEN BETTER"
- RAINBOW

30 DAY
UNCONDITIONAL
MONEY-BACK
GUARANTEE!!

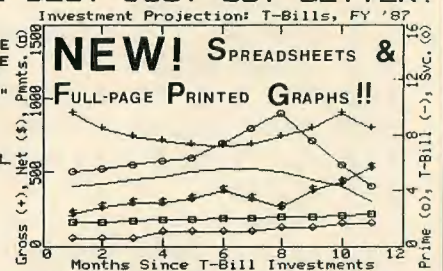

NEW! SPREADSHEETS & FULL-PAGE PRINTED GRAPHS!!

- * AUTOMATICALLY LOADS DATA FROM MOST POPULAR SPREADSHEETS.
 - * 291 GRAPHING SYMBOLS AND UNLIMITED OVERLAY OF DATA.
 - * AUTOMATICALLY SCALES AND LABELS ALL THREE OF THE AXES.
 - * CALCULATES MATH FUNCTIONS, INTEGRALS AND MOVING AVERAGES.
 - * FULLY AUTOMATIC, MENU DRIVEN W/ COMPLETE ERROR TRAPPING.
 - * FULL-PAGE SCREENPRINTS ON ANY PRINTER: SPECIFY WITH ORDER.
- REQUIRES 32K EXT. BASIC: TAPE - \$40.00 DISK - \$45.00

NEW!! *Picture Perfect* NEW!!
PRINTER UTILITY

UNIVERSAL SCREENPRINT PROGRAM

- * GET "PICTURE PERFECT" FULL-PAGE PRINTOUTS EVERY TIME!
- * "PERFECTLY SIMPLE" TO OPERATE - "SIMPLY PERFECT" RESULTS!
- * "PERFECTLY COMPATIBLE" WITH ALL DOT MATRIX PRINTERS!
- * GET "PERFECT CONTROL" OF: HEIGHT, WIDTH, POSITION, BAUD RATE, DOT DENSITY, NEGATIVE IMAGES, ETC.
- * THE "PERFECT SOLUTION" TO YOUR GRAPHICS PRINTING NEEDS!
- * COMPATIBLE WITH GRAPHICOM AND COCO MAX PICTURES!

◆ ONLY \$25.00 ON DISK OR TAPE ◆

BUY BOTH PROGRAMS & SAVE \$10.00

CALL NOW FOR FREE INFORMATION (415) 547-7557, OR WRITE:

HAWKES RESEARCH SERVICES: 859 STANFORD AVE, OAKLAND, CA 94608
YOUR PERSONAL CHECK IS WELCOME! SHIPMENT WITHIN 48 HOURS!
ADD \$3.00 SHIPPING ON ALL ORDERS. CA. RESIDENTS ADD SALES TAX

The CoCo ROS, Part One

Add excitement to computing with your own Robot Operating System

By Dennis H. Weide

Last year at the New Mexico state fair, I had the opportunity to see a computer exhibit that had an IBM-compatible computer connected to a robot arm. The arm was controlled by BASIC's LPRINT command (PRINT#-2 in the CoCo) which could be executed from the keyboard or from a BASIC program. These commands were sent to an interface unit as big as the computer itself where they were processed into signals that the arm could use. After a few minutes of experimentation, I was able to program the arm to pick up small objects and move them. I inquired about the price of the robot arm and interface, and was told that it cost more than \$5,000.

It was a little out of my price range, so I decided to build something that resembles a robot of sorts and interface it to the CoCo. I had no idea where to begin so I just started reading everything I could find on the CoCo.

After a lot of research and experimentation, I came up with what I call the CoCo ROS (Color Computer Robot Operating System). While it is

Dennis Weide is a communications technician for AT&T communications in Albuquerque, New Mexico, where he programs AT&T and IBM PCs. He enjoys making toys and teaching computer programming.

somewhat primitive, it gives those people interested in experimenting with their CoCo and robotics a chance to do so without spending a fortune.

or don't have much experience in circuit building, you may want to wait until you've read and studied all three parts of this article before you begin.

Figure 1: Robotic Toy List

Name	Manufacturer	Price
Capsela 2000	Play Jour	\$89.95
Robotix R-1500	Milton Bradley	\$49.95
Robotix R-2000	Milton Bradley	\$59.95
Digger Dan's Site Crane	Revell	\$29.99
Digger Dan's Colossal Crane	Revell	\$42.99
Erector Set	Ideal	\$31.97
Robostrux	Tomy	\$19.99
Chatbot	Tomy	\$59.99
Verbot	Tomy	\$59.99
Omnibot	Tomy	\$279.99
Omnibot 2000	Tomy	\$499.00

What's a ROS?

The CoCo ROS is a hardware circuit you build and a machine language program I've written to program it. It plugs into the cartridge port, but can be used with the multipack interface.

The circuit board plugs into the CoCo ROM port and allows you to connect other equipment to the CoCo. Many such circuits have already been designed and built, but I think you'll find this one is easier to program and it allows more I/O ports than most of the others. If you're new to computers

The ROS software consists of one BASIC program for cassette functions and one machine language program for writing, testing, modifying and executing the ROS program you write. The machine language program was written using *Deft* PASCAL and the compiled version will be available on RAINBOW ON TAPE for those who don't have *Deft* PASCAL.

ROS Defined

By now, you're probably asking what the ROS can do. Well, the ROS allows you to interface peripheral (external)

equipment to the CoCo and program the computer to control external functions. There are many robot construction kits and radio-controlled toys currently on the market that can be controlled from your computer. Model railroad buffs will find the ROS a suitable computer-controlled system for use with their railroad layouts. The ROS is not designed for use with radio-controlled equipment using proportional controls.

Figure 1 is a partial list of some of the kits and toys that can be interfaced to the CoCo using ROS. I chose the Robotix R-2000 construction kit from the Milton Bradley Company over the others because it had gripper arms and four-gear, reversible motors. In about 30 minutes, I built a robot arm for testing the system. The kit is actually a toy and accuracy of movement leaves a lot to be desired, but I was able to overcome the limitations of the kit by adding microswitches to the robot arm and connecting them to the inputs on the circuit board. I'd be interested to hear about your successes (and failures) with ROS.

Let's Get Started

Next month, I'll introduce you to the interface circuit and give you tips on how to build it. And in the last installment I'll show you the software and explain how to program the robot you build. For now, let's look at how to build a simple logic tester that'll be useful for testing the ROS circuit when you build it.

While the ROS circuit is not difficult

or complicated to build, you'll need to test it thoroughly after you build it to ensure there are no wiring errors.

Figure 2 is a schematic diagram of a simple logic tester that's both inexpensive and easy to construct. It uses a 74LS240 Octal Buffer/Line Driver IC which is fully TTL and CMOS compatible. If you're experienced with digital circuit design, you'll notice that many other ICs could have been used in place of the one chosen. Feel free to try other types for your logic tester. I chose the 74LS240 because it's used extensively in the ROS circuit and can handle 40 milliamps of current, enough to drive the LEDs. The LEDs are the bi-color type that change color according to the direction of current flow through them.

Because the ROS circuit is digital, we're only concerned with high and low states when testing it. When the logic tester is connected to the circuit under test, the LED lights, indicating whether the point under test is high or low. Because of the simplicity of the tester,

If the red LED stays on, remove the probe from the circuit under test and open S1. This causes a high on the input to the test circuit and the green LED lights. If the point under test is low, the red LED lights. You'll have to switch S1 back and forth to verify the test results. If the point under test doesn't change the color of the LED after switching S1, then it's open.

I recommend you use a socket for the IC so you can easily replace it if the need ever arises. When you build the logic tester, decide in advance what type of case you're going to use to house it. I used a round plastic tube for the housing and a blunted cross stitch needle for the input probe. Be sure to make a good electrical connection on the input probe to prevent erroneous indications. You can use one of Radio Shack's micro-test clips (#270-370) instead of the probe, or you can make a one-piece, hand-held tester. Wiring isn't critical but be sure to use a .1 mfd capacitor across the +5-volt supply lead to prevent switching errors.

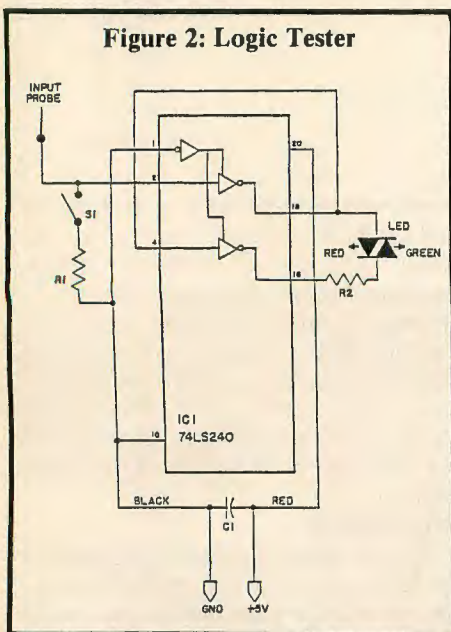


Figure 2: Logic Tester

switch S1 is used to condition the input probe before reading. When the tester is connected to a +5-volt power source and switch S1 is open, the green LED should light. Closing S1 should change the LED to red. If your tester colors are reversed, reverse the polarity of the LED to correct the problem. If you can't find the right type of LED, use two LEDs connected in parallel but be sure only one conducts at a time. Resistor R2 is used to limit current through the LED.


To use the tester, connect the red lead to +5 volts and the black lead to ground of the circuit under test. Close S1 so that the red LED is on. Resistor R1 holds the input at ground potential until an incoming high overrides it. If the point under test is high, the green LED lights.

Figure 3: Logic Tester Parts List

Designation	Part	Quantity	Price
IC 1	74LS240	1	.69
C1 .1mfd	* 272-1432	1	.49
R1 470 ohm	* 271-1317	1	5/.39
R2 10 ohm	* 271-1301	1	5/.39
LED	XC5491	1	4/1.00
Clip lead	* 270-370	2	2/1.39
	Input Probe	1	N/A
	Case	1	N/A
S1 SPST	* 275-406	1	2/.69
	Misc. 30 gauge & hookup wire		N/A
	Note: * Denotes Radio Shack parts		

The parts I used for the logic tester can be purchased from almost any electronic supply store, but may be expensive. I purchased all my parts from a mail-order parts house (Jameco Electronics, 1355 Shoreway Road, Belmont, CA 94002) and saved a substantial amount of money. The only problem is that the minimum order is \$20. Figure 3 is the parts list showing prices at Jameco. If you're going to build the ROS circuit, wait until next month to see the parts list. You'll be able to place one order for all parts.

That's it for this month. If you have any questions or comments, you can write to me at 14201 Marquette N.E., Albuquerque, NM 87123. Please include a self-addressed, stamped envelope if you want a reply.

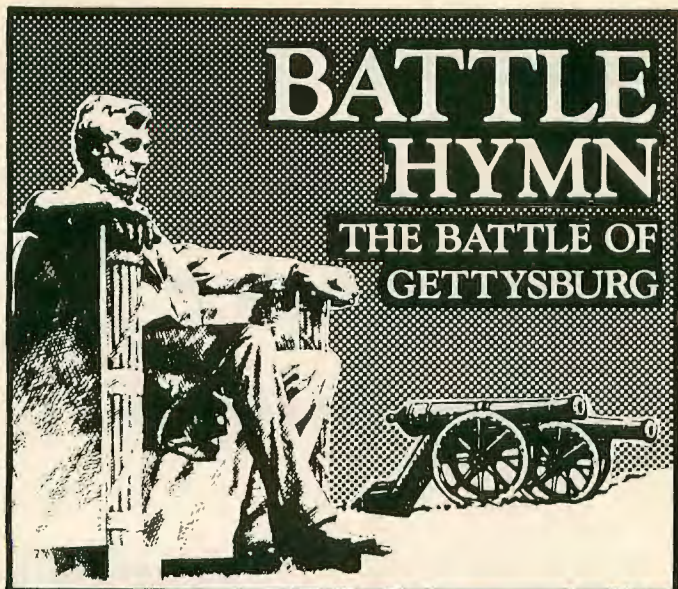

64K Disk or Tape **BATTLE HYMN — The Battle of Gettysburg**


Player controls Lee's army of 11 divisions (39 individual) brigades including 3 cavalry (Stuart) and 3 artillery (Alexander) and must capture 5 victory objectives to win decisively. It's all here, from Culp's Hill to Little Round Top, from Pickett's charge to Hood's heroic victory at Devil's Den.

Play starts on the second day of the battle with Johnson, Early and Rodes facing an unreinforced Union line running from Culp's Hill down to Cemetery Hill and east. Player has early size advantage but must act quickly as Union reinforcements are seen arriving, and must form the line and charge up hill over a great distance. Where is Stuart?

Brigades must be turned to march or fire. Union troops must reload after firing.

Player may limber or unlimber cannon; must watch his fatigue factors and prevent troops from routing. The object is to force the flank and pin the enemy in a cross fire. Easier said than done. Very historic, with an Ark Royal touch.

Hi res graphics; machine language. Game save. Play takes 3-5 hours. **\$29.00**

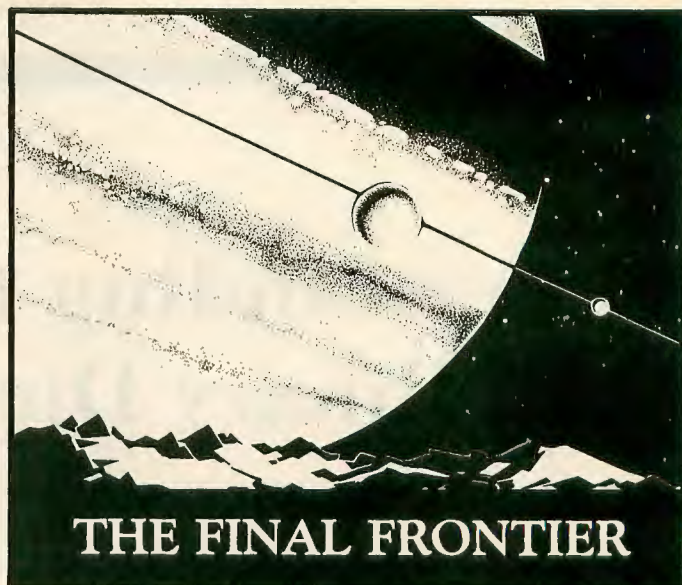


32K Disk Only **THE FINAL FRONTIER**

You have been chosen as commander in a struggle to gain control of an unexplored section of the galaxy. Your foe: an alien race called VOLSUNG. Here in the distant future, when space travel has become commonplace, on uncharted star systems you hope to find the raw materials which are vital to your industry and construction of a fleet of space craft.

Starting with limited ships and resources, you must quickly search, locate and bring needed systems under your influence, before the aliens can gain a foothold and threaten your expansion.

A star system can support industry, mining, energy or farming. You must decide on how to concentrate your efforts to maintain a balance to best serve your needs for developing your civilization and producing new space craft. Spacecraft that you will surely need when you and the alien VOLSUNGS eventually collide in a titanic struggle for the control of the Final Frontier.

100% hi res, total machine language, disk based. **\$25.00**

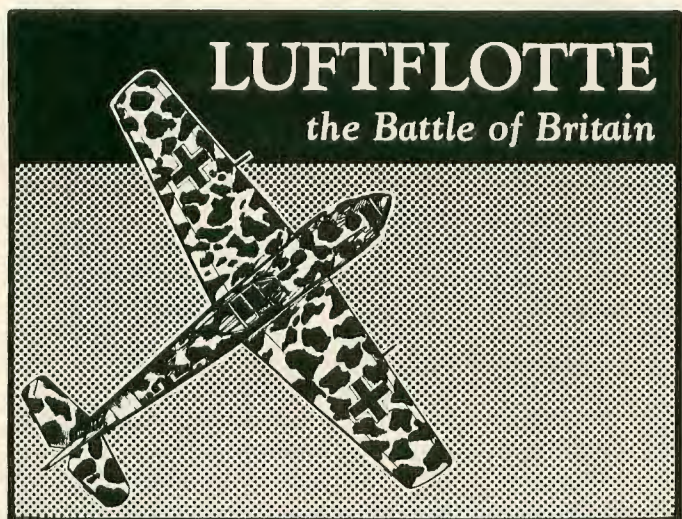

32K **LUFTFLOTTE — The Battle of Britain**

Player takes the German side and tries to succeed where Goering and the entire Luftwaffe failed: destroy Britain's will to fight from the air.


A mammoth game, Luftflotte has it all. Twenty-four British cities producing one of six war materials: petroleum, armaments, aircraft, shipping, morale, electronics; 26 air bases, 18 low radar sites, 17 high radar sites all forming a complex web of inter-communication and defense. Can you break the web?

Player controls 3 Luftflottes of over 2000 individual planes including Stuka, Junkers, Dornier and Heinkel bombers; Me110 and Me109 fighters. Player may launch bomb runs, recon missions, strafing sorties or transfers: up to five flights per Luftflotte.

Player watches as his flights head for London or Bath or Glasgow or lorad site 'j' or . . . It's up to you. There are 85 individual targets in the game.

Hi res screen shows aerial combat, bombing and strafing missions and supplies brief information. Watch targets and planes explode! Semigraphic strategic map of England and targets. For conclusive information, view the intelligence screen to see everything. Unless, of course, you prefer playing EXPERT in which case you'll be flying blind as the real Germans did not so long ago.

Playing time: 3-6 hours. Game save. Machine language. **\$29.00**

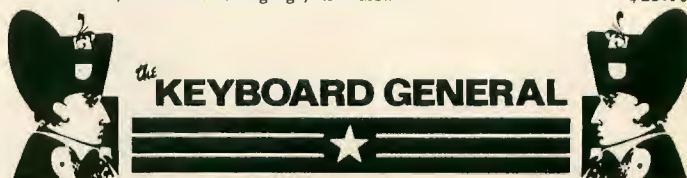

Isn't it time for a newsletter/magazine that talks about the games you've been playing? An in-depth resource of playing hints, strategies and tactics? Wouldn't it be nice to whip the computer?

The *Keyboard General* is published bi-monthly. We'll publish your letters; your game plays, your thoughts and ideas. You'll hear from us, our program authors. You'll learn gaming, playing and programming hints, and perhaps discover new ways to assault that village or attack that flank.

Every month we'll feature a Company Commander replay; discussion of new and old products, and letters from you. There will be special discounts and promotions offered only subscribers of the *Keyboard General*.

Don't miss out! The *Keyboard General* is filling a great need in the software industry: a publication dedicated to discussing those programs you've been playing. Subscribe today, and find out how to beat the computer! **\$15.00 year subscription**

ARK ROYAL GAMES

P.O. Box 14806
Jacksonville, FL 32238
(904) 786-8603



Prices include shipping to U.S., APO's, and Canada. COD's (USA only) add \$3.75. Florida residents add 5% sales tax. All orders shipped within 24 hours. Programs require Color Computer (Tandy Corp.). Be sure to state system when ordering.



Understanding the Computer With Binary Dice Conversions

By Steve Blyn
Rainbow Contributing Editor

There usually comes a time when a child will ask how a computer works. You could be the one nearby when this question is asked, and you may regard this as an unlucky position to be in. This month's column and accompanying program is meant to give you some ideas about the topic, and help you resist the temptation to say, "Who cares, as long as it works."

A computer's native, or real, language is binary. This is the number system that uses only zeros and ones. A computer needs only the two numbers of the binary system to do its work because everything it reads ultimately gets translated into zeros and ones. An instruction read as a zero tells the computer to turn the circuit "off." An instruction read as a one tells the computer to turn the circuit "on."

The two digits, zero and one, are called bits. The word "bit" comes from the term Binary digIT. Computers translate instructions into a series of bits (zeros and ones) each time they read an instruction. Every letter, number and symbol gets translated into a series of eight bits. This is referred to as a "byte."

For example, the letter 'B' is translated into 01000010. Students will rightfully ask why we don't read and write programs in binary notation. A good reason is that it is not our normal

way of doing math. We use higher level languages and our regular base 10 numbers. Computers contain compilers, which then convert our programs into the binary notation.

Here is a game to help introduce children to binary numbers. All the letters in the word RAINBOWS are associated with the numbers 0 to 7.

R	A	I	N	B	O	W	S
0	1	2	3	4	5	6	7

Have the children form new words from these number-letter associations.

0	—	1	—	3	=	RAN
6	—	5	—	3	=	???
7	—	1	—	6	=	???

Children may then be encouraged to create their own puzzles. Explain to the students that computers operate in a manner something like this game.

A process similar to the game takes place inside a computer to interpret and store information. Computers use base 2 numbers. Each one stands for a power of two. Computers read bytes which usually contain eight bits of information. Each bit is a power of two. The table below shows the base 10 value of the powers.

The way to convert a binary number into our usual decimal representation is to add the value of all columns containing one and ignore all zeros.

The lowest number would be all eight columns containing zero (all in the "off" position), 00000000. The value would, of course, be zero.

The highest number would be all eight in the one or "on" position. The value would be 255, the highest number that can be contained in one byte of information.

The binary number shown in the previous diagram is 01001101. It is converted to the usual base 10 number by computing the sum of $64 + 8 + 4 + 1$ which is 77. This byte represents the letter 'M'.

This month's program allows children to practice converting base 2 numbers to our regular base 10 numbers. The game is in the form of eight binary dice. A binary die is a regular shaped die with only zeros or ones on its face. If you would like to make a set, they can easily be made from sugar cubes. A dark pencil or felt tipped marker can be used to write on the cubes.

Lines 130 to 220 print a simulation of

Table: Base 10 and base 2 equivalents

2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0	power of two
128	64	32	16	8	4	2	1	base 10
0	1	0	0	1	1	0	1	base 2

Steve Blyn teaches both exceptional and gifted children, holds two master's degrees and has won awards for the design of programs to aid the handicapped. He owns Computer Island and lives in Staten Island, New York.

a roll of each of the eight dice. They randomly display a zero or a one. Above the dice are the values in base 10 (decimal) they represent. The student merely adds the values of the ones to obtain the answer.

The computer figures out the answer in lines 240 to 310. The answer is variable J. Lines 340 and 350 check the user's answer (C) against the real answer

(J). The correct answer is displayed when the user's answer is incorrect. After five tries, a score is given by Line 400. The child may either press E to end the program or G to go on and begin again.

As a follow-up activity to the program, children may try converting given base 2 numbers back into base 10 and then looking up their corresponding

character strings (CHR\$). The code values for CHR\$ may be found at the back of the manual that came with your computer. The values for the capital letters range from A=65 to Z=90.

We hope that we have provided you with some ideas to enliven the explanation of this fairly dry topic. As always, we at Computer Island appreciate hearing from our readers. □

The listing: BINARY

```

10 REM"STEVE BLYN,COMPUTER ISLAN
D,STATEN ISLAND,NY
20 REM"BINARY DICE CONVERSIONS"
30 DIM VA(8)
40 Q=Q+1:IF Q=6 THEN 400
50 A$=STRING$(32,255)
60 CLS5:S=158:D=1:J=0
70 PRINT@6,"CONVERT TO BASE 10";
80 PRINT@38,"ENTER TO ROLL DICE"
;
90 EN$=INKEY$
100 IF EN$=CHR$(13) THEN 110 ELSE
E 90
110 PRINT@96," 128 64 32 16
8 4 2 1"
120 PRINT@128,A$;:PRINT@192,A$;
130 FOR D=1TO 8
140 S=S+4
150 FOR T=1TO5:PRINT@S,CHR$(128)
;:SOUND100,1
160 R=RND(2)
170 IF R=1 THEN V=48 ELSE V=49
180 IF R=2 THEN VA(D)=1 ELSE VA(
D)=0
190 PRINT@S,CHR$(V);
200 SOUND 100,1
210 NEXT T
220 NEXT D
230 REM" VARIABLE J WILL KEEP CO

```

UNT OF THE CORRECT BASE 10 ANSWE R."

```

240 IF VA(1)=1 THEN J=J+128
250 IF VA(2)=1 THEN J=J+64
260 IF VA(3)=1 THEN J=J+32
270 IF VA(4)=1 THEN J=J+16
280 IF VA(5)=1 THEN J=J+8
290 IF VA(6)=1 THEN J=J+4
300 IF VA(7)=1 THEN J=J+2
310 IF VA(8)=1 THEN J=J+1
320 PRINT@320,"":PRINT@320," WHA
T IS THE BASE 10 VALUE";
330 INPUT C
340 IF C=J THEN PRINT@394,"CORRE
CT !";:PLAY"O3L50CEGCEGGFEDC":RT
=RT+1
350 IF C<>J THEN PRINT@384,"SORR
Y,THE CORRECT ANSWER IS";J
360 PRINT@452,"PRESS ENTER TO GO
AGAIN";
370 EN$=INKEY$
380 IF EN$=CHR$(13) THEN 400 ELSE
IF EN$="E" THEN 390 ELSE 370
390 CLS:END
400 CLS8:PRINT@96,"YOUR SCORE IS
"RT"OUT OF 5 CORRECT";
410 REM"THE SCORECARD"
420 PRINT@256,"PRESS 'E' TO END
OR 'G' TO GO ON";
430 EN$=INKEY$
440 IF EN$="E" THEN 390 ELSE IF
EN$="G" THEN RUN ELSE 430

```

ORDER PHONE (416) 456-0032

Call or Write! For your free catalogue, more info or give us suggestions! Duck Productions, 18 Rowe Court, Brampton, Ontario, Canada L6X 2S2 Please add \$2.00 for handling. Ontario residents add 7% provincial tax Watch our catalogue for discounts, hints and tips and chance to win software.



DUCK QUALITY COMPUTER PRODUCTS PRODUCTIONS



Micro • Fire the ultimate secret weapon.

Have you beat your thumbs more than the aliens? This is a great rapid fire circuit that's easily installed on any joystick. Has no computer side effects. Comes with complete instructions and calibration program for adjustment to taste. \$19.95 (\$24.95 CDN.)

Class Monitor Dual monitor driver

The best monitor driver for any Coco. It drives any composite, colour or monochrome monitors. Complete with dual audio outputs for immediate access of either or both monitors. Simple installation instructions. \$31.50 (\$39.50 CDN.)

Laser Mazer master puzzle of reflection

Captain, Starfleet wants Regula One protected from intruder attack. A battle of wits, pitted against six cloaked Romulan vessels lurking in the quadrant. Can you find and engage them in time? A master puzzle of reflection for your sensors. Identify the locations of physical mass in space and command your attack. Misjudgement is a deadly option. Adventure in thoughtware for only \$24.95 (\$29.95 CDN.)



Battle to D-Day The multiple player adventure

Can you change the course of history? General, your mission is to locate and secure the Third Reich's emergency command post before the allied landing on Normandy. Think through obstacles, battle after battle to find the entrance code. Then command your assault! Battle against time! Battle against three opponents. Adventure in thoughtware for only \$29.95 (\$38.95 CDN.)

Keeping Track more than a disk manager.

If you own more than two disks you'll love Keeping Track. A manager menu of nine utilities that do it all! The real highlight is "D", the directory/autostart. It's a continuous access I.D. directory that loads and executes any program with a single keystroke. All programs fully documented. \$29.95 (\$38.95 CDN.)

Map 'n Zap semi automatic disk repair

The layman's step by step kit for directory and grain table repair. Locates errors, maps out disk contents to screen or printer, backs up any flawed disk and prompts built in disk zap for repair. Complete with full tutorial on Coco's disk input / output access operation. \$19.95 (\$24.95 CDN.)

Code Buster machine language disassembler

Three terrific programs to explore machine language. Screen or printer accurate disassembly of binary code. Simple prompted procedure with some instruction to dissect and understand your ROMs. Fully documented for only \$19.95 (\$24.95 CDN.)

Derringer Software.

Max Fonts New for CoCo Max

Now you can have up to 72 fonts for creating dazzling type-set titles and special displays!

**3 SETS OF 24 FONTS
WHICH ARE OUT OF THIS WORLD!**

\$24⁹⁵ each 3/\$64⁹⁵

Written by Wally Bayer and Mike Shawaluk

Max Edit

©1985 Snard Enterprises

A FONT EDITOR FOR COCO MAX

- Edit current fonts
- Create new fonts
- Design symbol fonts
- Comes with pre-defined fonts
- CoCo Max I & II compatible

\$19⁹⁵

(Disk Only)

Written by: Michael W. Shawaluk
CoCo Max® is a registered trademark of Colorware.

CoCo's Best & Fastest Spreadsheet

**RS-DOS
VERSION**

FOR 64K
DISK SYSTEMS

DYNACALC[®]

- 51 x 24 Display with Lower Case
- Super-fast Smart Screen Refresh
- Auto-Repeat Keyboard Driver
- Fast 16-Digit Arithmetic with Scientific Functions
- Two-way communications with PRO-COLOR-FILE
★ Enhanced ★

Serving the Color Computer for 4 Years.

PRO-COLOR-FILE

© 1984 by Derringer Software, Inc.

ENHANCED 2.0

- 60 Data Fields for each record
- 1020 spaces available per record if needed
- Maximizes multiple drive operation
- 28 equation lines (+ - * /)
- IF-THEN-ELSE logic test in equations
- Full Screen editing on up to 4 data entry screens
- Key click and auto key repeat
- Stores custom designed report formats
- Obtain totals, averages, or summaries for any field
- Output reports to printer, screen, or disk file
- Send data out to a DYNACALC compatible file
- Separate label generator for up to 10 across labels
- Pre-define up to 16 indexes for searching/reporting file
- Sorts 750 records in under 5 minutes
- User defined selection menus
- Repeated tasks performed with one keystroke
- Comes with 75 pages of documentation in a 3 ring binder
- Supported by a national users group
- Full time programmer support
- Supplied on an unprotected disk

\$59⁹⁵

PRO-COLOR-FORMS 2.0

© 1984 by Derringer Software, Inc.

PRO-COLOR-FORMS will access data files created with PRO-COLOR-FILE and merge them with a letter or place them on pre-printed forms.

- STORE UP TO 6 FORMATS • USER DEFINED PAGE SIZE
- SUPPORTS SPECIAL PRINTER CONTROL CODES • RIGHT JUSTIFICATION • PASSWORD PROTECTION • MERGES WITH GRAPHICS FROM MASTER DESIGN OR TELEGRAPHICS •

PRO-COLOR-DIR

© 1984 by Derringer Software, Inc.

PRO-COLOR-DIR will read your directories and create a master data file that can be accessed by PRO-COLOR-FILE for sorting and reporting. 1000 + records can be stored on one diskette with valuable information about each program.

You can obtain hard copies of the information and create labels of the filenames for placing on the diskette itself.

- DISK ID NAME • FILENAME/EXT • TYPE OF FILE
- DATE CREATED • DATE UPDATED • NUMBER OF GRANS ALLOCATED • NUMBER OF SECTORS ALLOCATED AND USED • MACHINE LANGUAGE ADDRESSES •

\$29⁹⁵

FOR BOTH

DYNACALC[®]

SPREAD SHEET FLEXIBILITY

(Includes Dynagraph, Sidewise)

\$79⁹⁵

Telewriter-64[™]

WORD PROCESSOR POWER

\$59⁹⁵

CoCo Max II

GRAPHICS SUPERIOR

\$79⁹⁵

@ SUMMARY

© 1985 Derringer Software, Inc.

If you use your spreadsheet program to keep track of your expenses then @SUMMARY can help you analyze those expenses. For example, if you indicate a "Category" for each expense then @SUMMARY will produce a report that shows a total for each category, the highest amount, the lowest amount and the average amount. In addition, @SUMMARY can produce a hi-res line graph or bar graph of the analysis and allow you to place titles on the graph. A hardcopy of the graph can also be generated as well as saved to disk.

The analysis can be saved in a "data file" which can be loaded into DYNACALC or read in by @SUMMARY for future additions to the analysis. If you use other Spreadsheets such as ELITE*CALC then you have added a graphing feature to your spreadsheet applications. The analysis can also be saved in an ASCII file which can be read by word processors for inclusion in a report.

@SUMMARY is compatible with any spreadsheet program that can generate an ASCII text file of worksheets.

Specify RS-DOS
or OS9*

(disk only) **\$19⁹⁵**

*OS9 version does not
have Hi-Res graphing
and requires Basic09.

DYNACALC* is a registered trademark of Computer Systems Center
ELITE*CALC is a trademark of Elite Software
OS9 is a registered trademark of MICROWARE and MOTOROLA.

SIDEWISE

© 1984 by Derringer Software, Inc.

Add a new "twist" to your printer's capabilities!

SIDEWISE makes your printer do something you never thought possible—print side ways!

SIDEWISE will read in any ASCII text file and print it out side ways using a Radio Shack, Epson, Okidata, C-Itoh or Gemini printers having dot-graphics ability.

SIDEWISE OS9 is compatible with DYNACALC OS9 and requires Basic09

SIDEWISE OS9 **\$39⁹⁵**
(Disk only)

SIDEWISE RS-DOS **\$24⁹⁵***

* RS-DOS version included FREE with DYNACALC*

OS9 is a registered trademark of MICROWARE and MOTOROLA.

TELEGRAPHICS

© 1984 by Derringer Software, Inc.

PRINT HI-RES GRAPHICS USING TELEWRITER-64!

Use CoCo Max, Graphicom or other graphics programs to create letter heads and print them while using Telewriter-64.

Telegraphics interfaces with Radio Shack, Epson, Gemini, C-Itoh and Okidata printers having dot-addressable graphics. A simple modification to Telewriter-64 will allow you to exit Telewriter via the DISK I/O MENU and print out the graphic without affecting any of your text in the buffer.

This is the same feature that is included in our MASTER DESIGN program. Since we felt you don't need to buy two graphics editing programs, we have made this feature available at a reduced price.

\$24⁹⁵

(Available Only On Disk)

NO OTHER DISCOUNTS APPLICABLE

MASTER DESIGN

© 1984 by Derringer Software, Inc.

Generates lettering in hi-res graphics that can be different sizes, skinny, bold, textured, drop shadowed, raise shadowed or tall. Also interfaces with the Telewriter-64 word processor for printing hi-res displays with your letters.

Take full advantage of all the extended BASIC hi-res graphic commands including boxes, circles, lines, copy displays and utilize GET and PUT features. Added commands include mirror reflection, turn displays backwards or upside down. Squish displays, create dot patterns for shading or diagonal lines.

The Letterhead Utility allows you to access hi-res graphics from Telewriter-64, your own BASIC programs or PRO-COLOR-FORMS.

Interfaces with dot matrix printers having dot addressable graphics.

\$29⁹⁵

See reviews in:
July '84 Rainbow, Oct. '84 Hot CoCo

Derringer Software, Inc.

PO Box 5300, Florence, SC 29502-5300

To place an order by phone, call: (803) 665-5676

10 AM and 5 PM EDT

Check, Money Order, VISA or MasterCard


South Carolina residents add sales tax.

Include \$3.00 for UPS Shipping - \$5.00 U.S. Mail - \$9.00 Air Mail

Canadian Distributor-Kelly Software

Australian Distributor-Computer Hut Software

XTEAM & OS-9



BOTH WINNERS

CoCo 3
SUPPORTED

XTERM

OS-9 Communications program.

- Menu oriented
- Upload/download. Ascii or XMODEM protocol
- Execute OS-9 commands from within XTERM
- Definable macro keys
- Works with standard serial port, RS232 PAK, or PBJ 2SP Pack, Includes all drivers.
- Works with standard screen. XSCREEN, or WORDPAK 80 column board.

\$49.95 with source **\$89.95**

XMENU

Creates a menu driven environment for OS-9.

- Create your own menus
- Works with standard screen, XSCREEN, WORDPAK, O-PAK

\$29.95 with source **\$59.95**

XSCREEN

OS-9 hi-res screen

- 51/64/85 chars per line
- Easy menu operation

\$19.95 with source **\$39.95**

XDIR & XCAL

- Hierarchical directory
- Full sorting
- Complete pattern matching
- OS-9 calculator
- Decimal, Hex, Binary
- +, -, *, /, AND, OR, XOR, NOT

\$24.95 with source **\$49.95**

XDIS

OS-9 disassembler

\$34.95 with source **\$54.95**

XWORD

OS-9 word processing system

- Works with standard text screen, XSCREEN, WORDPAK, or O-PAK
- True character oriented full screen editing
- Full block commands
- Find and Replace commands
- Execute OS-9 commands from within
- Proportional spacing supported
- Full printer control, character size, emphasized, italics, overstrike, underline, super/sub-scripts
- 10 header/footers
- Page numbering in decimal or Roman numerals
- Margins and headers can be set different for even and odd pages

\$69.95 with source **\$124.95**

XMERGE

Mail merge capabilities for XWORD

\$24.95 with source **\$49.95**

XSPELL

OS-9 spelling checker, with 20000 and 40000 word dictionaries

\$39.95

XTRIO

XWORD/XMERGE/XSPELL

\$114.95 with XWORD/XMERGE source **\$199.95**

XED

OS-9 full screen editor

\$39.95 with source **\$79.95**

AND FOR RS DOS ...

SMALL BUSINESS ACCOUNTING

This sales-based accounting package is designed for the non-accounting oriented businessman. It also contains the flexibility for the accounting oriented user to set up a double entry journal with an almost unlimited chart of accounts. Includes Sales Entry, transaction driven Accounts Receivable and Accounts Payable, Journal Entry, Payroll Disbursement, and Record Maintenance programs. System outputs include Balance Sheet, Income Statement, Customer and Vendor status Reports, Accounts Receivable and Payable Aging Reports, Check Register, Sales Reports, Account Status Lists, and a Journal Posting List.

\$79.95

INVENTORY CONTROL/SALES ANALYSIS

This module is designed to handle inventory control, with user defined product codes, and produce a detailed analysis of the business' sales and the sales force. One may enter/update inventory data, enter sales, run five sales analysis reports, run five inventory reports, set up product codes, enter/update salesman records, and update the SBAP inventory.

\$59.95

PAYROLL

Designed for maintaining personnel and payroll data for up to 200 hourly and salaried employees with 8 deductions each. Calculates payroll and tax amounts, prints checks and maintains year-to-date totals which can be automatically transferred to the SBA package. Computes each pay period's totals for straight time, overtime and bonus pay and determines taxes to be withheld. Additional outputs include mailing list, listing of employees, year-to-date federal and/or state tax listing, and a listing of current misc. deductions. Suited for use in all states except Oklahoma and Delaware.

\$59.95

These programs are user friendly and menu driven. Sample transactions are included. Each package features a hi-res screen. Each requires a printer, a minimum of 32k and at least 1 disk drive.

ACCOUNTS RECEIVABLE

Includes detailed audit trails and history reports for each customer, prepares invoices and monthly statements, mailing labels, aging lists, and an alphabetized customer listing. The user can define net terms for commercial accounts or finance charges for revolving accounts. This package functions as a standalone A/R system or integrates with the Small Business Accounting package.

\$59.95

ACCOUNTS PAYABLE

Designed for the maintenance of vendor and A/P invoice files. The system prints checks, voids checks, cancels checks, deletes cancelled checks, and deletes paid A/P invoices. The user can run a Vendor List, Vendor Status report, Vendor Aged report, and an A/P Check Register. This package can be used either as a standalone A/P system or can be integrated with the Small Business Accounting Package.

\$59.95

MICROTECH CONSULTANTS INC.

1906 Jerrold Avenue
St. Paul, MN 55112

Dealer Inquiries Invited
Author Submissions accepted
OS-9 is a trademark of Microware



Ordering Information

Add \$3.00 shipping & handling, MN residents add 6% sales tax.
Visa, Mastercard, COD (add \$2.50), personal checks.


(612) 633-6161



Display up to 24 program names on a neat disk label

Where Is It?

By Brian Biggs

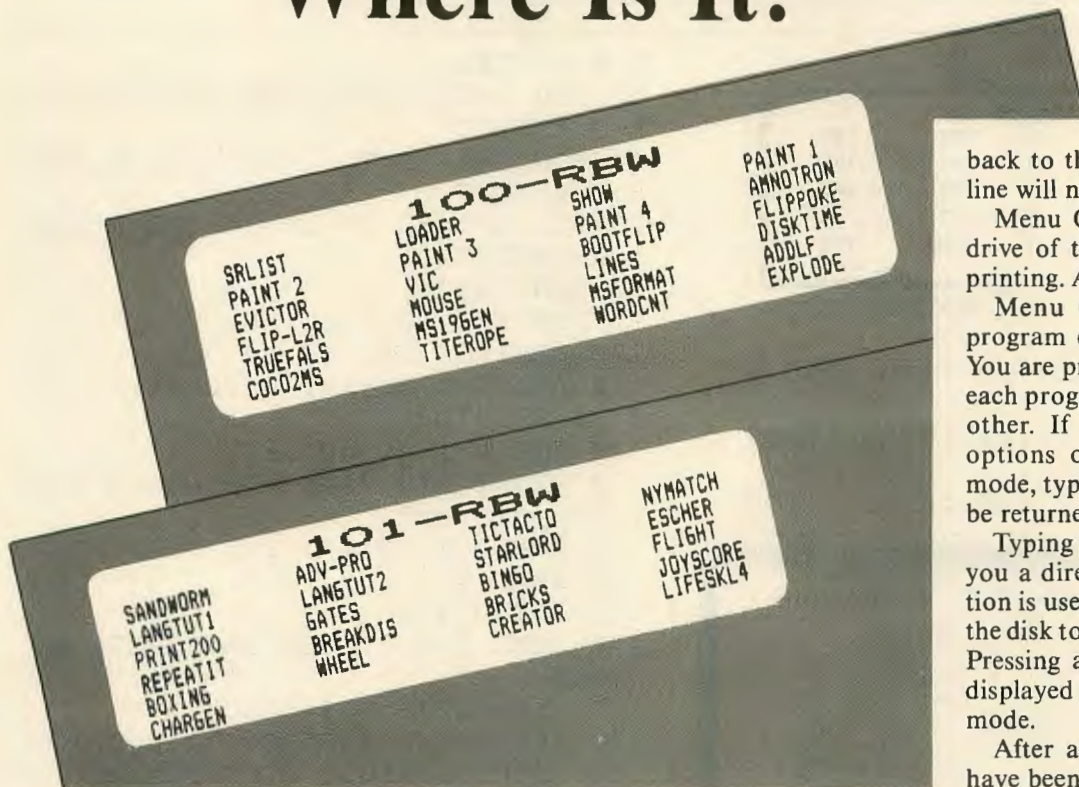

back to the main menu and the status line will not change.

Menu Option 3 lets you change the drive of the disk whose label you are printing. All drives (0 to 3) are available.

Menu Option 4 takes you to the program entry mode of *Disk Labeler*. You are prompted to enter the name of each program on the disk, one after the other. If you want to change menu options or abort the program entry mode, type R and press ENTER. You will be returned to the main menu.

Typing D and pressing ENTER gives you a directory of the disk. This function is used to get program names from the disk to enter them into *Disk Labeler*. Pressing any key after the directory is displayed returns you to program entry mode.

After all the programs on one disk have been entered, press P and ENTER. The screen will display the label with the program names printed in three columns. This three-column format must be used because of the size of the CoCo's screen, but the names will be printed in four columns on the label. If all the names are correctly spelled, press Y, and printing begins. Otherwise, press N and you are returned to the program entry mode.

After printing is over you are asked if you want to print the same label again. This function is used to line up the labels in the printer without having to type in all the program names again. If you do not want to print the same label again, type N and you will be returned to the main menu. To leave *Disk Labeler*, select main menu Option 5 and you can exit.

Disk Labeler is quite useful as written but, as is the case with *most programs*, it was written to be modified. One thing that could be added is a subroutine to

Do you list the directory of disk after disk to find the program you're looking for? Do your disks sit in a box, out of order, or even worse, on the floor in a pile? If so, *Disk Labeler* can help.

Disk Labeler numbers your disks and prints up to 24 program names on 3½-by-15/16-inch, one-across mailing labels.

To get started, type in the listing, save a copy, and run the program. The title screen appears and you are reminded to set the printer to 9600 baud. To change the baud rate, simply poke a different value into Location 150 in Line 170 using the table in Figure 1.

Figure 1

600 baud	POKE 150,87
1200 baud	POKE 150,41
2400 baud	POKE 150,18
4800 baud	POKE 150,7

If the printer is not on, the program pauses until it is turned on, otherwise you see the main menu. The status section shows the current setup for printing. You can change disk number and disk code by pressing 1 and 2, respectively. The disk code can be any three-letter code that suits your needs.

Both the disk number and disk code must be three characters long. If they are less than or greater than three characters, *Disk Labeler* will automatically go back to the main menu. If you have already selected 1 or 2 from the menu and want to leave the contents the same, just press ENTER and you will go


Brian Biggs is a junior at Westland High School in Galloway, Ohio. He enjoys baseball, swimming, working with his CoCo and reading THE RAINBOW.

Figure 2

CHR\$(27) "E"	---	Emphasized print
CHR\$(27) "G"	---	Double-strike print
CHR\$(27) "C" CHR\$(6)	---	Set page length to 6
CHR\$(14)	---	One line expanded print
CHR\$(15)	---	Condensed print
CHR\$(27) "A" CHR\$(9)	---	Set line feed to 9/72 inch
CHR\$(13)	---	Carriage return
CHR\$(12)	---	Form feed
CHR\$(27) "@"	---	Reset printer
CHR\$(7)	---	Sound printer bell

alphabetize all programs entered, or a subroutine to read the programs directly from disk. I wrote *Disk Labeler* for a Star SG-10 printer. If you want to change the codes, an explanation of the printer codes I used, in the order they appear in the program, can be found in Figure 2.

Any modifications you have made or any questions you have can be sent to me at 3555 Rolling Hills Lane, Grove City, OH 43123. Or call (between 7 p.m. and 10 p.m.) (614) 878-1081. Please include an SASE if you want a response. □



The listing: LABELER

```

1Ø CLEAR1ØØØ
2Ø CLS:FOR P=1157 TO 1179:READ A
:POKE P,A:NEXT
3Ø FOR P=1189 TO 12Ø5:READ A:POK
E P,A:NEXT
4Ø FOR P=1289 TO 13Ø1:READ A:POK
    
```

```

E P,A:NEXT
5Ø FOR P=1327 TO 133Ø:READ A:POK
E P,A:NEXT
6Ø FOR P=1413 TO 1435:READ A:POK
E P,A:NEXT
7Ø FOR P=1455 TO 1458:READ A:POK
E P,A:NEXT
8Ø DIM G$(24)
9Ø FOR X=1 TO 1ØØØ:NEXT
1ØØ CLS:FOR X=1 TO 1Ø
11Ø PRINT@225,"SET 96ØØ BAUD RAT
E ON PRINTER"
12Ø FOR P=1 TO 5Ø:NEXT
13Ø PRINT@225,"set 96ØØ baud rat
e on printer"
14Ø FOR P=1 TO 5Ø:NEXT
15Ø NEXT X
16Ø GOSUB 8ØØ
17Ø POKE 15Ø,1:'SET BAUD RATE TO
96ØØ
18Ø N1$="123":N2$="ABC"
19Ø CLS:PRINT STRING$(32,"=");
2ØØ PRINT"status: DISK NUMBER
";N1$:PRINT" DISK CODE
";N2$:PRINT" CURREN
T DRIVE ";D:PRINT STRING$(32,"=
");
21Ø PRINT@224,"1)CHANGE DISK NUM
BER":PRINT"2)CHANGE DISK CODE":P
RINT"3)CHANGE DRIVE":PRINT"4)ENT
ER PROGRAMS":PRINT"5)QUIT"
22Ø A$=INKEY$:IF A$="" THEN 22Ø
23Ø IF A$="1" THEN GOSUB 83Ø:PRI
NT@423,,:INPUT"NEW DISK NUMBER";
B$:IF LEN(B$)<>3 OR B$="" THEN 1
9Ø ELSE N1$=B$:GOTO 19Ø
24Ø IF A$="2" THEN GOSUB 83Ø:PRI
NT@423,,:INPUT"NEW DISK CODE";B$
:IF LEN(B$)<>3 OR B$="" THEN 19Ø
ELSE N2$=B$:GOTO 19Ø
25Ø IF A$="3" THEN PRINT@423,,:I
NPUT"NEW DRIVE";D:IF D<Ø OR D>3
THEN 25Ø ELSE 19Ø
26Ø IF A$="4" THEN GOTO 33Ø
27Ø IF A$="5" THEN PRINT@423,"AR
    
```

ADOS ENHANCED, EPROM-ABLE DISK BASIC

Now, you can supercharge Basic with an impressive array of extra features WITHOUT sacrificing compatibility! ADOS is compatible with virtually 100% of commercial software. Customizing utilities are provided to allow user-defined command abbreviations, baud rate, step rate, tracks per disk (35 or 40), support of double-sided drives, and more. After customizing ADOS, you can have it burned into an EPROM that plugs into the Disk Basic ROM socket, or just use it in RAM as a 64K disk utility. (EPROM + burning will cost about \$20—we provide information concerning how you can have this done.) Features include: • repeat and edit of the last direct-mode command • 26 definable control-key abbreviations • automatic line-number prompts • DOS command • lowercase command entry (a line complement to a Lowerkit or PBJ WordPak) • COPY (filename) to (drive number) • AE error override option • RAM command (64K) • RUN command • text echoing to printer • ML monitor • text file scan • enhanced directory • error trapping • hires text utility included (42, 51, or 64 characters per line)

"I COULD NOT FIND ANY SOFTWARE THAT WOULD NOT RUN UNDER ADOS."
THE RAINBOW, December 1984

"I LOVE ADOS!... A GENUINELY FIRST RATE PRODUCT."
Color Micro Journal, February 1985

"I WON'T PART WITH MY ADOS EPROM FOR ANYTHING... NO COMPATIBILITY PROBLEMS."
Hot CoCo, May 1985

Disk \$27.95

THE PEEPER ML PROGRAM TRACER

Monitor machine-language programs AS THEY ARE RUNNING! Peeper actually timeshares with the target program, giving FULL CONTROL as ML programs run. Switch instantly between watching regular program output and Peeper's trace of registers and stack on screen or printer. Inspect memory in any of 26 display modes. Execution speed can be varied from full speed to the barest crawl, or halted entirely, as programs run. Single-stepping, breakpoints, memory or register examine/change. Relocatable, supports 64K user (16K required). See February '85 review.

Disk \$23.95 Tape \$21.95 Assembler source listing Add 3.00

FASTAPE THE NEXT BEST THING TO A DISK DRIVE

Fastape allows cassette I/O at 3000 baud—TWICE NORMAL SPEED. It uses the high-speed (POKE 65495,0) mode, and makes it convenient to stay in this mode throughout. Features automatic adjustment of cassette and printer parameters when speed mode is changed. Control-key functions for many Basic commands and for changing speed modes. Compatible with all file types, and can be used with Telewriter 64 and many other tape utilities. (16K required) See July '83 review.

*Tape... \$24.95 \$11.95 (NEW DISCOUNT PRICE!)

SPECTROSYSTEMS



11111 N. Kendall Drive,
Suite A108
Miami, Florida 33176
(305) 274-3899 Day or
Even

No delay on personal checks

Please add \$2.00 shipping. Sorry, no credit cards or COD's

FOLLOWING PROGRAMS ARE SAME PRICE AS U.S. IN CANADIAN FUNDS

- AUTOTERM TAPE \$39.95
- AUTOTERM DISK..... \$49.95
- THE UN-DISK..... \$34.95

MICROTECH

- SMALL BUSINESS \$79.95
ACCOUNTING
- ACCOUNTS RECEIVABLE... \$59.95
- ACCOUNTS PAYABLE..... \$59.95
- INVENTORY CONTROL.... \$59.95

MICROTECH OS-9

- XTERM..... \$49.95
- XWORD..... \$69.95
- XTRIO \$114.95

(All other Microtech programs)

PRICKLY PEAR SOFTWARE

- HALL OF THE KING I & II ... \$39.95
- DARKMOOR HOLD..... \$29.95
- DRAGON BLADE..... \$29.95
- RTD TRIO \$49.95

(All other Prickly Pear programs)

- TELEWRITER 64 TAPE..... \$69.95
- TELEWRITER 64 DISK..... \$84.95
- TELEWRITER 64 &..... \$99.95
TELEPATCH

BOB VAN DER POEL UTILITIES

- TELEPATCH..... \$27.95
- TELEWRITER 64..... \$14.95
CHARACTER SET EDITOR
- TELEPATCH &..... \$34.95
CHARACTER SET EDITOR
- RAINBOW MAGAZINE..... \$14.95
INDEX SYSTEM WITH ALL
RAINBOW DATABASE INCLUDED
- ULTRA LABEL MAKER..... \$14.95
- GREAT DISK UTILITIES! ... \$14.94
SEE FEB. 86 RAINBOW PAGE 214

TOM MIX SOFTWARE

- WORLDS OF FLIGHT \$41.95
TAPE
- WORLDS OF FLIGHT \$46.95
DISK
- P51 TAPE \$41.95
- P51 DISK..... \$46.95
- DRAGON SLAYER DISK ... \$34.95

(We carry all other Tom Mix and Nova Soft products)

We are Canada's largest Software Distributor for the Color Computer



- ADOS..... \$39.95
- THE PEEPER..... \$29.95
- COCO GRAPHICS..... \$41.95
DESIGNER
- UP GRADES FOR COCO ... \$21.95
GREETING CARD

DERRINGER SOFTWARE

- MAX EDIT \$27.95
- MAX FONTS \$34.95 per font
- ALL THREE FONTS..... \$89.95
- PRO COLE FILE..... \$69.95
- SIDEWISE..... \$27.95
- SIDEWISE OS-9..... \$41.95

(We carry all other Derringer products)

**NEW COCO III SOFTWARE FROM
COMPUTERWARE!**

- COLOR CONECTION IV ... \$69.95
- COLOR SCRIBE II..... \$69.95
- THE MAGIC OF ZANTH.... \$49.95
- RETURN OF JUNIOR'S \$49.95
REVENGE

(We manufacture all of computerware's great products)

- NEW ROBOT ODYSSEY ... \$49.95
- ALL MARKDATA GRAPHIC ... \$34.95
ADVENTURES TAPE
DISK..... \$39.95
- SPACE PAC FROM..... \$27.95
SPECTRAL 10 MACHINE LANGUAGE
SPACE GAMES TAPE
DISK..... \$31.95
- ARCADE PAC FROM \$24.95
SPECTRAL 5 QUALITY ARCADE
GAMES TAPE
DISK..... \$28.95
- WIZARD CASTLE DISK \$27.95

SPECTRUM PROJECTS

- COCO CHECKER TAPE \$27.95
OR DISK
- DISK UTIL 2.1 \$34.95
- MULTI PAC CRACK..... \$34.95
- COCO VIDEO TITLER..... \$27.95
- THE OS-9 SOLUTION..... \$54.95
- THE FONT GENERATOR... \$54.95

HARDWARES

- 64K UPGRADES FOR..... \$59.95
KOREAN COCO II
- VIDEO DOUBLE DRIVERS ... \$49.95
FOR COCO I
- VIDEO DOUBLE DRIVERS ... \$49.95
FOR COCO II

ORDER FORM

Name _____

Address _____

City _____ Province _____

Postal Code _____ Phone _____

Yes send me your FREE catalog. Also send me the following programs.

Item	Quantity	Price
_____	_____	_____
_____	_____	_____

VISA _____ MasterCard _____ Shipping _____

Card # _____ Total _____

Exp. _____

Signature _____ Add \$2.00 Shipping



Kelly Software Distributors Ltd.
P.O. Box 608, Station 'T' Calgary,
Alberta T2H 2H2
Tel : (403)236 2161

```

E YOU SURE (Y/N)?:GOTO 29Ø
28Ø GOTO 22Ø
29Ø A$=INKEY$:IF A$="" THEN 29Ø
30Ø IF A$="N" THEN 19Ø
31Ø IF A$="Y" THEN CLS:PRINT"THA
NK YOU FOR USING THIS PROGRAM":E
ND
32Ø GOTO 29Ø
33Ø FOR N=1 TO 24
34Ø CLS:PRINT@12,N1$;"-";N2$
35Ø PRINT@37,"ENTER THE PROGRAM
NAMES":PRINT
36Ø PRINT@97,"<P>RINT <R>ESTART
<D>IRECTORY":PRINT
37Ø PRINT" PROGRAM #";N;:INPUT G
$(N)
38Ø IF G$(N)="P" THEN 43Ø
39Ø IF G$(N)="R" THEN GOSUB 84Ø:
GOTO 19Ø
40Ø IF G$(N)="D" THEN 73Ø
41Ø IF LEN(G$(N))>8 THEN PRINT"TO
OO LONG (LIMIT:8 CHARACTERS)":GO
TO 37Ø
42Ø NEXT N
43Ø CLS:PRINT@12,N1$;"-";N2$:PRI
NT:PRINT
44Ø T=65
45Ø FOR Q=1 TO N-1
46Ø PRINT@T,G$(Q):T=T+11
47Ø IF Q=3 OR Q=6 OR Q=9 OR Q=12
OR Q=15 OR Q=18 OR Q=21 OR Q=24
THEN T=T-1
48Ø NEXT Q
49Ø PRINT:PRINT
50Ø PRINTTAB(5)"IS THIS OK (Y/N)
?";
51Ø A$=INKEY$:IF A$="" THEN 51Ø
52Ø IF A$="Y" THEN 56Ø
53Ø IF A$="N" THEN 33Ø
54Ø GOTO 51Ø
55Ø 'START PRINTING
56Ø GOSUB 8ØØ
57Ø CLS:PRINT@236,"PRINTING"
58Ø PRINT#-2,CHR$(27)"E"CHR$(27)
"G"CHR$(27)"C"CHR$(6);
59Ø PRINT#-2,CHR$(14);;" "N1$
;"-";N2$;

```

```

60Ø PRINT#-2,CHR$(15);CHR$(27)"A
"CHR$(9)
61Ø FOR Q=1 TO N-1
62Ø PRINT#-2,G$(Q),
63Ø IF Q/4=INT(Q/4) THEN PRINT#-
2,CHR$(13);
64Ø NEXT Q
65Ø PRINT#-2,CHR$(12);
66Ø PRINT#-2,CHR$(27)"@";
67Ø PRINT#-2,CHR$(7);
68Ø PRINT@225,"PRINT SAME LABEL
AGAIN (Y/N)?"
69Ø A$=INKEY$:IF A$="" THEN 69Ø
70Ø IF A$="Y" THEN 56Ø
71Ø IF A$="N" THEN GOSUB 84Ø:GOT
O 19Ø
72Ø GOTO 69Ø
73Ø CLS:DIRD:PRINTTAB(9)FREE(D);
"GRANS FREE";:EXEC44539:GOTO 34Ø
74Ø DATA68,73,83,75,96,76,65,66,
69,76,69,82,96,1Ø4,8Ø,82,79,71,8
2,65,77,83,1Ø5
75Ø DATA7Ø,79,82,96,83,71,1Ø9,11
3,112,96,8Ø,82,73,78,84,69,82
76Ø DATA66,89,96,66,73,76,76,96,
83,69,77,8Ø,7Ø
77Ø DATA113,121,12Ø,117
78Ø DATA13,15,4,9,6,9,5,4,32,2,2
5,32,2,18,9,1,14,32,2,9,7,7,19
79Ø DATA49,57,56,54
80Ø PE=PEEK(65314)AND1
81Ø IF PE=Ø THEN RETURN ELSE PRI
NT@486,"PRINTER NOT ON LINE!";
82Ø GOTO 8ØØ
83Ø PRINT@483,"MUST BE 3 CHARACT
ERS LONG";:RETURN
84Ø FOR X=1 TO 24:G$(X)="":NEXTX
:RETURN

```

Hint . . .

Relief for the Eyes

Here is a print font for the DMP-105 printer that prints in large dark letters for the seeing impaired.

```

10 PRINT#-2,CHR$(27);CHR$(14)
20 PRINT#-2,CHR$(27);CHR$(23)
30 PRINT#-2,CHR$(27);CHR$(31)

```

To end the Large Print mode:

```

40 PRINT#-2,CHR$(27);CHR$(15)
50 PRINT#-2,CHR$(27);CHR$(19)
60 PRINT#-2,CHR$(27);CHR$(32)

```

Randy Daniels
Carrie Mills, IL

NEW FOR CHRISTMAS MEGA SOUND

RECORD ANY SOUND OR MUSIC ON YOUR COOD.RECORD KITT.CYLONS.AUTOBOTS
PHASERS.SOUNDTRACKS OR YOUR OWN VOICE WITH EXCELLENT REPRODUCTION
USE MEGA SOUND TO EXAMINE AND ALTER THE RECORDING FOR USE IN YOUR
OWN BASIC PROGRAMS-- 16/64K ECP TAPE OR DISK \$49

STOP BURN

ELIMINATE THE FEAR OF BURN-IN ON YOUR TV OR MONITOR SCREEN
STOP BURN AUTOMATICALLY DARKENS VIEWING SCREEN DURING YOUR ABSENCE
16/64K TAPE OR DISK \$17

INQUIRIES/COODS (8PM TILL 8PM) (216) 823-4221 OR 8486 FOR INFO
MEGA SOUND DEMO TAPE--SEND \$3.50
INCLUDE \$2.50 FOR SHIPPING (COODS ADD \$2).MAIL CHECK OR M/O TO


LUCAS INDUSTRIES 2000

14720 CEDAR ST.N.E.
ALLIANCE.OHIO 44601

Fantasy Clip Art Disk


Gnomes, elves, dragons and more...
More than thirty clips for Cocomax...

ALL NEW!!!

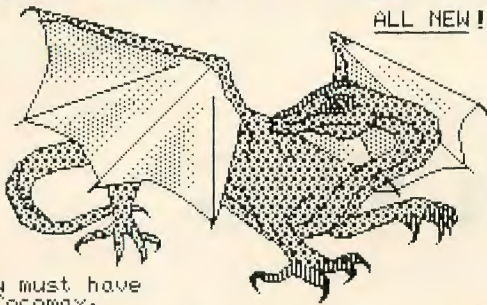

You must have
Cocomax* 64K EXB disk.....\$14.95

Put Some Motion in Your Graphics!

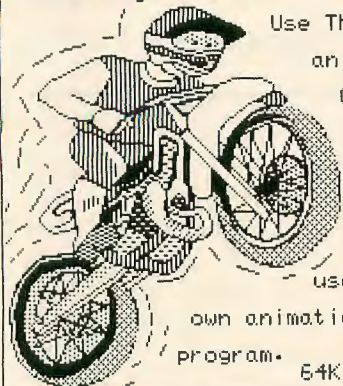

Use The Motion Picture,
an animation tool.

Create up to
eight frames
of animation.


Includes a
program you can
use to show your
own animation from a Basic
program. 64K EXB Disk \$34.95

MORETON BAY SOFTWARE

Oriental Gallery I

Twenty new full-screen pictures from a
talented graphic artist...all ready to
print or use with your graphic editor.

ALL NEW!!!

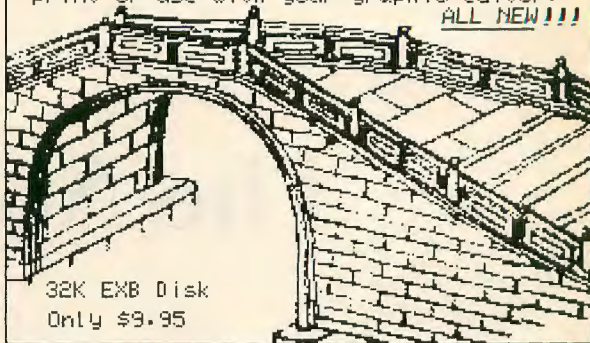

32K EXB Disk
Only \$9.95

What's Hot for the Winter?

Try this
Las Vegas
slot machine
simulation. Try

HotSlot™

COPYRIGHT 1985

tight or loose odds.
A simulation or, if
you want, an arcade
game to test your reflexes.



32K EXB
Tape or Disk (please specify) \$24.95

A SUPER COLOR PRINTER The OKIMATE 20 AT A SUPER LITTLE PRICE!

Prints ten characters to the inch,
twelve characters fifteen characters to the inch.
Italics. Italics. Italics.


Underline^{Superscript} Subscript

Small. Light weight. Quiet.
Prints up to 80 characters per second.
Prints four color graphics. Includes
disk software for black and white, two
color and four color screen dumps of
Color Computer hi res graphics.
Okimate 20, Plug 'n' Print,
paper, black and color ribbon,
instructions, and software.

Parallel \$240.00
\$10.00 Shipping

The only color Okimate
20 Screen Dump Now
Available for the CoCo.

(Price subject to change)

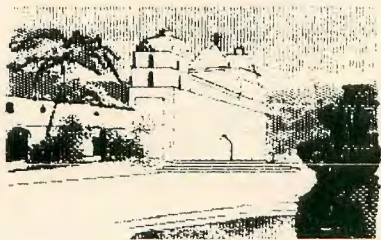

MISSION Santa Barbara founded 1786

DOUBLE DRIVER I

The BEST monitor driver available.
Color composite, monochrome and
audio output. For original CoCo D, E
and F boards. \$24.95.

MONO II


Mono II for Color Computer 2. An
excellent monochrome monitor driver
hat has audio output also. Specify
model needed.

\$24.95.



DOUBLE DRIVER II

Finally a monitor driver for
the Color Computer II that
lets you use a monochrome
and a color monitor
simultaneously. We're proud
of this new driver. The six
transistor circuit provides op-
timal signal mixing and signal
gain. Excellent monochrome
output and better quality
resolution in the color ouput



than any driver we have
seen. Audio output also. Fits
all models of the Color Com-
puter II. \$29.95.

THE COCO-SWITCHER

A QUALITY PIECE OF HARDWARE

The CoCo Switcher allows you to hook up
three peripherals to your RS-232 jack. Con-
nect your modem, printer and any other
RS-232 compatible peripheral to the CoCo
Switcher. An LED on the CoCo Switcher
shows if your computer is on or off at a glance,
The LED flickers when transmitting or receiv-
ing data.

\$39.95 plus \$2.00 shipping and handling



MORETON BAY SOFTWARE



A Division of Moreton Bay laboratory

316 CASTILLO STREET
SANTA BARBARA
CALIFORNIA 93101
(805) 962-3127



Ordering information

Send \$2.00 shipping and handling per order. We ship
within 1 working day on receipt of order. Blue Label
Service available. California residents add 6% sales tax.

The No-Switch VDG

By Tony DiStefano
Rainbow Contributing Editor

Two months ago I introduced you to the new VDG-T1. It came installed in the CoCo 2 B series. I guess I shouldn't say "new" any more; the CoCo 3 is out. I have ordered mine and, as you might well guess, I will turn the screw on it and see what is under the hood. I'm sure I will be able to come up with some hardware ideas on what we can do with this new CoCo 3. If any of you have a hardware idea for the new computer, jot it down and send it to "Turn of the Screw Wish List," care of RAINBOW at the Falsoft building. Meanwhile, back to the ol' CoCo 2.

The VDG-T1 has a lot of nifty changes to make it better. But these changes are not very accessible. The changes are hidden away deep inside CoCo. I wrote on how to dig these changes out so that you could make use of them. These changes included lowercase letters, inverse screen and a colored border. I discussed a couple of ways to access these. One was in software and the other was in hardware. The software way is a pain at best. You have to insert a BASIC line every time you printed to the screen. If you have a machine language program, forget it, the software just will not work.

The hardware way is a little better. You have three switches and set them up the way you want. The only problem is that the switches interfere with the graphics modes. So when you use graphics, you have to switch the three switches back to their original position. Again, what a pain. If you have a program that switches back and forth between graphics and text, you either

have to play "flip the switches," or not bother with them at all and set them to their default settings. If that is the case, why put them in, in the first place? Don't despair, this month I'll show you how to eliminate the switches and still have the best of the VDG-T1.

First, let me review what the three pins and switches do. The three pins in question are pins 27, 29 and 30. The Motorola specifications manual for the MC6847T1 states that these pins are named GM2, GM1 and GM0 respectively. These three pins have dual purposes. There is another pin on this VDG known as the A/G Pin (Pin 35). This pin is an input. It controls whether the VDG is in Alpha/Numeric mode or in one of the many graphics modes. When this

pin is logic state 0, or low, the VDG is in the Alpha/Numeric or text mode. When the pin is high it is in the graphics mode. This is the dual mode that other three pins can go into. In the graphics mode (A/G = HI) these three pins tell the VDG what graphics mode you want. For example, you can be in the 128-by-64 pixel resolution mode or the 256-by-192 pixel resolution. Table 1 shows all the different graphics combinations available with this VDG.

In the text mode (A/G LO) the three pins in question control in which text mode the VDG will display the text characters. For example, true upper- and lowercase characters, inverse lowercase characters, green border or black border. Table 2 is a description of how

Table 1

GM0	GM1	GM2	Description	
0	0	0	64 by 64	4 Color
0	0	1	128 by 64	2 Color
0	1	0	128 by 64	4 Color
0	1	1	128 by 96	2 Color
1	0	0	128 by 96	4 Color
1	0	1	128 by 192	2 Color
1	1	0	128 by 192	4 Color
1	1	1	256 by 192	2 Color

Table 2

Pin No.	Pin Name	Logic Level	Function
30	GM0	Low	Inverse Lowercase characters.
30	GM0	High	True Lowercase characters.
29	GM1	Low	Normal green screen.
29	GM1	High	Inverse black screen.
27	GM2	Low	Black border.
27	GM2	High	Colored border.

Tony DiStefano is a well-known early specialist in computer hardware projects. He lives in Laval Ouest, Quebec.

The Ultimate Color Computer

Enhancements
for Productivity
from HJL Products

*★ Now at all-time
Low prices!*



Now available for all models, including CoCo 3

To achieve maximum productivity with your Color Computer, you have to make it as easy as possible to get information into and out of the system.

This is why we developed the HJL family of high-performance enhancements for ALL MODELS of the Color Computer.

The Keyboard - \$79.95

The overwhelming favorite of serious Color Computer users worldwide, the HJL-57 keyboard has the smooth, consistent feel and reliability you need for maximum speed with minimum input errors. Includes 4 Function Keys and sample function key program. Installs in just a few minutes with no soldering.

The Numeric Keypad - \$89.95

The NumberJack is a self-contained, cable-connected keypad for heavy-duty number-crunchers. Besides the number keys, it has all the cursors, symbols and math keys, including autoshifted (one-touch) ADD and MULTIPLY. Comes complete with 3-foot cable and all necessary connectors for quick and easy installation without soldering.

The Monitor Adapter - \$25.95

This universal driver works with all monochrome monitors, and is easily installed without clips, jumpers or soldering (except in some later CoCo 2s with soldered-in video chips). Here's crisp, clear, flicker-free monitor output with all the reliability you've come to expect from HJL Products.

The Monitor - \$89.95

The GoldStar high-resolution amber monitor brings you the monochrome display that's preferred by most computer professionals today. Once you've used it you'll never connect your computer to a TV set again. The 12-inch diagonal CRT has an etched non-glare faceplate. (Requires adapter sold above)

The BASIC Utility - \$25.95

Quick Basic Plus, a high-performance programming utility, can be used with any color computer that has four function keys. 26 pre-defined BASIC statements, 10 user-defined macros at a time (you can save as many sets of macros as you like), automatic line-numbering, word wrap, global search,

and instant screen dump to printer, make this software the BASIC programmer's dream come true. Comes with re-legendable 3-way reference chart. Specify disk or cassette.

The HJL Warranty

Every HJL product comes with a full, one-year warranty and the exclusive HJL 15-day unconditional guarantee (except software).

Pick a Pair & Save 15%

Now, for a limited time, we'll give you 15% off the price of any two or more products shown here. Just mention this ad when you order.

Call Now, Toll Free

1-800-828-6968

In New York 1-800-462-4691
International calls: 716-235-8358



PRODUCTS

Div. of Touchstone Technology Inc.

955 Buffalo Road • P.O. Box 24954
Rochester, New York 14624

Ordering Information: Specify model (Original, F-version, or CoCo 2 Model Number). Payment by C.O.D., check, MasterCard, or Visa. Credit card customers include complete card number and expiration date. Add \$2.00 for shipping, 3.50 to Canada; except monitors (call for shipping charges before ordering monitors). New York state residents add 7% sales-tax. **Dealer Inquiries invited**

Help Us Battle the High Cost of Disk Drives



**NOW . . .
V-PRINT**
A utility to print
directory on paper
\$9.95



New Lower Price Un-DISK Drives ~~\$49.95?~~ **\$34.95**

You Bet! There are empty spaces in your 32K and 64K CoCo. The Preble VDOS Un-DISK helps you fill them up with PROGRAMS!

- Un-DISK uses your computer's extra memory like a fast disk drive.
- Un-DISK can store BASIC and MACHINE LANGUAGE programs.
- Un-DISK is INVISIBLE. Yup! Un-DISK does *not* interfere with normal Color Computer Operation.
- Un-DISK appears only when you type the magic word VDOS.
- Un-DISK comes with comprehensive instructions which you may not need because:
- Un-DISK is self-prompting and easy to use!
- Un-DISK is provided on cassette.
- Un-DISK is faster than a slow clumsy DISK DRIVE and best of all . . .
- Un-DISK is CHEAPER than a DISK DRIVE!
- Un-DISK will work even if you already own a disk but WHY BUY A DISK AT ALL?
- Un-DISK *should* be in the library of every serious CoCo user even if you own a disk says Frank J. Esser, independent reviewer for RAINBOW Magazine!

OK sure, disk drives ARE NICE. I own one. But if your finances are limited, the Un-DISK can give you much of the power of the mechanical drive. Even if you already own a disk the Un-DISK can work like a super fast extra disk.

EXTRA . . . EXTRA . . . EXTRA . . . EXTRA . . . Additional Power For \$14.95


Only with VDUMP for the Un-DISK!

- VDUMP lets you make a cassette backup copy of everything stored in the Un-DISK.
- VDUMP lets you save 5, 10, 15 or more programs on a single cassette tape file.
- VDUMP lets you switch Un-DISKS. With a single load operation replace a group of financial programs with a set of children's programs. (The new VDUMP tape overwrites the old.)
- VDUMP can allow you to save a whole lot of RAINBOW ON TAPE in a SINGLE file.
- VDUMP is the perfect companion to the Preble VDOS Un-DISK.

Available from Doctor Preble's Programs, naturally! Bringing you fine Color Computer Products Since 1983!

The Preble VDOS Un-DISK **\$34.95**
The Preble VDUMP \$14.95
Shipping & handling
U.S. and Canada \$1.50
or \$5.00 to other foreign points

VISA and MasterCard accepted

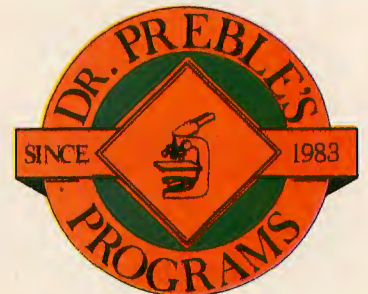

Order From:
Dr. Preble's Programs
6540 Outer Loop
Louisville, KY 40228
(502) 966-8281

Canadians may order from Kelly Software

the three pins affect the text display on your screen.

The three control pins and the A/G pin are all inputs. To control them, the CoCo uses four pins on a PIA (Peripheral Interface Adapter). By now we are all familiar with the idiosyncrasies of Color BASIC. It controls these pins according to the old 6847 VDG, not the T1 VDG. Two articles ago I told you how to use switches to get around this. In last month's article I showed you how to hook up the T1 VDG to an old CoCo. This time I'll use an electronic switch to do the same switching action. With this modification, you won't have to fiddle with switches. It's compatible with all software. This modification will work with any CoCo that has the new T1 chip installed. The main part you will need is a TTL logic chip, the number is SN74LS157. Unfortunately, it is not available at your local Radio Shack store, but you can get it at any good electronics shop.

This chip is a quad 2-to-1 data selector. For each of the four gates, there are two inputs (A and B) and one output (Y). It also has a control line. The way it works is that when the control line is low, the output Y is the same level as the A input and disregards what is at input B. When the control line is high, the output Y is the same level as the B input and disregards what is at input A. Can you see it coming? We can use this chip to control the three pins of the T1 VDG and use the A/G line to control the selector chip.

Look at the schematic in Figure 1. It shows the wiring to this modification. I disconnected the three output pins of the PIA (that connects to the VDG). These three pins now go to the B input on three of the four gates on the selector chip. The outputs of these three gates go to the VDG. The fourth gate is not used. I have also connected the control pin of the selector chip to the A/G pin of the VDG. When the CoCo is in the graphics mode, this pin is high. This makes the control pin on the selector chip high also. When the control pin is high, the Y output will follow the B input. Given that the PIA pins are connected to the B inputs, when the control pin is high, it is as if the selector chip were not even there.

Now, when the CoCo is in text mode, the A/G pin is low. Since the control pin of the selector chip is connected to the A/G pin (in the text mode), the control pin is low. What happens when the control pin of our selector is low? The Y outputs follow the A inputs. What did

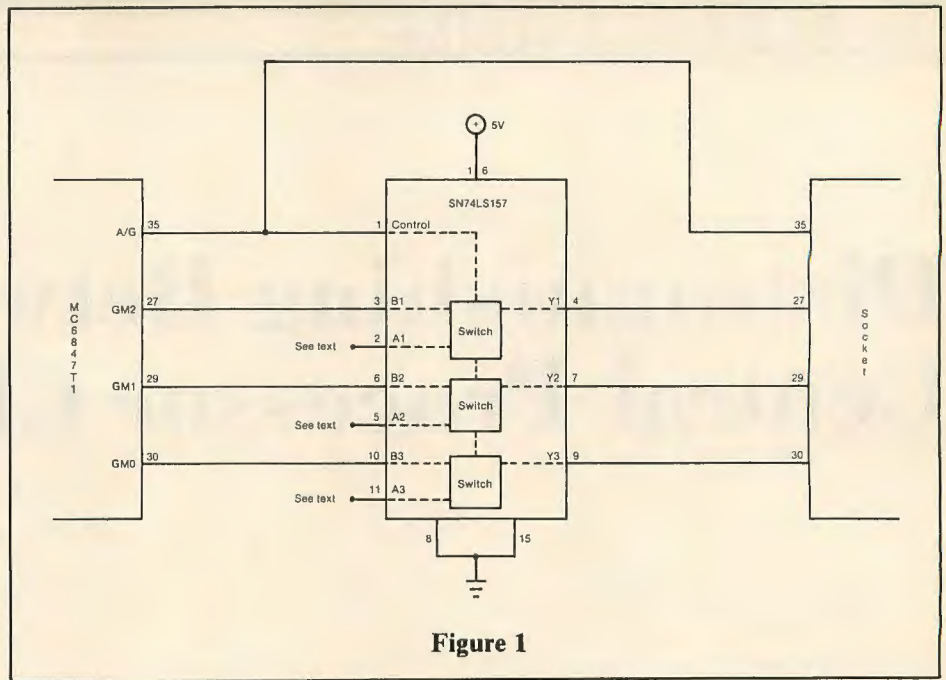


Figure 1

you connect the A inputs to? Well, that all depends on how you want the text mode to look. Each of the three pins does something different. For example, the pin that connects to Pin 30 controls true lowercase characters or inverse lowercase characters. Table 2 shows what each pin does.

When you have picked which mode you want, you have to connect the A input to match that mode. When that mode requires a low, you have to connect that A input to ground or Pin 8 on the selector chip. When that mode requires a high, you have to connect that A input to 5 volts or Pin 16 on the selector chip.

The construction of this modification is typical of my projects. You need all the regular tools. Some people don't like to cut and solder directly on chips and PC boards. In that case you will need a 40-pin socket. I used a socket on this one. I hollowed out the center of it and used the space to put the selector chip in. If you don't want to use a socket, just piggy-back the selector chip

on top of the VDG. If you use a socket, pry up pins 27, 29 and 30 so they do not go back into the socket. Use the empty pinhole as the connection to the PIA. If you don't use a socket, cut VDG pins 27, 29 and 30 and pry them up. Make sure you cut the pin high enough so you can solder to the stub that is left; it is the connection to the PIA. Either way, make sure you don't cut A/G Pin 35. Even though we are using this pin, the VDG still needs it too. Remember, the Y outputs of the selector chip go to the VDG, and the B inputs come from the connection that used to go to the VDG.

If you made last month's mod that puts the new VDG into the older CoCo, make sure you don't break any wires. If you used a socket to do it, you can use the same socket in last month's project for this one. You save a socket.

Well, that's it. When all the connections are done, close up the computer and try it. Check to make sure that all the modes work and that the text mode is the mode you want.

CORRECTIONS

"Esch-A-Sketch" (August 1986, Page 75): Eric White has written to correct a packed line in *Escher*. Using the extend option of the EDIT command, add the following characters to Line 280:

TO 450

so that the last statement in the line is GOTO 450.

For quicker service, Corrections will be posted on Delphi as soon as they are available in the Info on Rainbow topic area of the database. Just type DATA at the CoCo SIG prompt and INFO at the Topic? prompt.

Distinguishing Between Central Processor Chips

By Marty Goodman
Rainbow Contributing Editor

• *What is the difference between the 6809E central processor chip used in the CoCo 1 and 2 and the 68B09E used in the CoCo 3? What is the difference between the 6809 and the 6809E?*

Don Hitko
(DD)
Burton, MI

The 6809E found in the CoCo 1 and 2 was rated by Motorola to run at no more than 1-MHz clock speed. Motorola also made versions of that same chip called 68A09E and 68B09E rated to run at 1.5- and 2-MHz clock speeds respectively. Most 6809Es will run at speeds higher than 1 MHz, but the reliability

of such operation is not vouched for by Motorola. In some of the later models of the old CoCo 1 and 2, Tandy used the 68A09E instead of the 6809E. Other than speed rating, the chips are identical.

The 6809 family also is divided into two sub-families of chips: those that require external sources for their separate 'E' and 'Q' clock signals, (designated by the added letter 'E'), and those that generate clock signals themselves with merely a crystal added. The 'E' series is the one used in the Color Computer family. The non 'E' series of 6809s are typically used in smaller, dedicated applications. For example, as part of the "smarts" of Radio Shack's CGP-220 ink-jet printer.

(the two 7416 chips) and now the controller works fine.

Art Flexser
(ARTFLEXSER)
Miami, FL

The control of drive spindle motor is not affected by the 1793 controller chip. This control is mediated by a 7416 (inverting open collector buffer) numbered U2 on the circuit board. (There is a second 7416 chip, called U3, used in another part of the circuit that has nothing to do with the motor on circuit). Further back, there is a 14174B (CMOS Hex D flip flop) (U8) used to create the port at FF40, which is used for motor control and drive select. All of these chips are socketed.

You were very lucky. On U3, only three of the six gates are actually used by the disk controller, and the gate used for motor control in U2 is one of the unused gates in U3. This explains why your swap resulted in a working controller. I recommend you replace both of the 7416 chips, because I would hold suspect any chip that had one bad gate and be reluctant to use it long even if the other gates appear to work. Also, I recommend replacing both 7416 chips

Martin H. Goodman, M.D., a physician trained in anesthesiology, is a longtime electronics tinkerer and outspoken commentator — sort of the Howard Cosell of the CoCo world. Marty is the database manager of RAINBOW's CoCo SIG on Delphi. His non-computer passions include running, mountaineering and outdoor photography. Marty lives in San Pablo, California.

• *My old CoCo 1 controller has been behaving erratically over the last few weeks. The drive motors seem to go on of their own accord at times. Recently when I powered up the machine the drives were always on. They still would do proper disk access. I replaced the 1793 controller chip and the problem persisted. Then I exchanged U2 with U3*

with 7406 chips. The 7406 chip is identical to the 7416 chip in its pin out, and in its logical function, but it is rated to sink up to 30 volts, while the 7416 is rated to sink only up to 15 volts.

● *I just got a Chinon half-height, double-sided disk drive. When I insert a disk into it and shut the door, it spins for a couple of seconds. Is this OK?*

Mark Camp
(MARKCAMP)

The automatic spinning after disk insertion is an intentional feature added to some of the newer half-height "smart" disk drives for the purpose of seating the disk in the drive. Such drives often also spin the disk as you take it out and leave the drive spinning a few seconds after your drive select light goes out.

● *I have heard there is a problem using the CoCo 3 with existing multipack interfaces. I own an old gray multipack and an ancient disk controller (that requires 12 volts). What do I need to do to make these work with the CoCo 3?*

Mike Himowitz
(MHIMOWITZ)
Baltimore, MD

Because of a bug in the PAL chip on the multipack, the slot-select port address ghosts from FF7F to FF9F. If you have the old gray multipack or if you have one of the old, large, white-cased

multipacks, you will probably be able to fix it by ordering a replacement PAL chip from Tandy. Ask your local Radio Shack store to order part number AXX - 7123 from National Parts. Say it is for the multipack, Catalog No. 26-3024. The price for the chip is \$7.50.

● *I have a 64K CoCo and want to hook it up to a monitor. How do I do this? What type of monitor should I buy? I am primarily interested in using my CoCo as a word processor.*

Nicolas Bardino
Whiting, NJ

First you need to install a device often called a "video driver." This device creates the signal needed to drive such a monitor.

Monitors used on the CoCo 1 and 2 come in two different varieties: composite video monochrome and composite video color monitors. The monochrome monitors usually come in either green or amber screen varieties. If you are doing text processing, I recommend you not buy a color composite monitor. They produce nearly unreadable text screens. Get a monochrome composite monitor and the driver needed to make it work. The result will be a crisp text screen, even in 64-column mode. The only way to judge any brand of monitor is to look at the display it produces on your CoCo. Manufacturers' specs are worthless for determining which monitor will look better. Every "computer grade" composite monochrome monitor I have

seen produces a reasonably clear image on the CoCo, so it is nearly impossible to go wrong regardless of which brand of monitor you buy.

For those of you about to buy a CoCo 3, note that 80-column text can be resolved on analog RGB monitors that are supported by the CoCo 3. But even on an expensive RGB color monitor, text will not look fully as clear as it will on a monochrome monitor. So if you plan to use the CoCo 3 mostly for text, you might want to consider buying a monochrome composite monitor. The CoCo 3 has a composite video output that will drive a monochrome monitor, though you may have to tell OS-9 and other software that you are using a monochrome monitor in order to get the image to look quite right.

Your technical questions are welcomed. Please address them to CoCo Consultations, THE RAINBOW, P.O. Box 385, Prospect, KY 40059.

We reserve the right to publish only questions of general interest and to edit for brevity and clarity. Due to the large volume of mail we receive, we are unable to answer letters individually.

For quicker response time, your questions may also be posted in the FORUM section of RAINBOW's CoCo SIG on Delphi. In FORUM, type ADD and address your questions to the username MARTYGOODMAN. Marty is on most every evening to respond to FORUM messages. Other CoCo SIG members may also reply to questions posted in this public message area. Please be sure to leave your name and address in any FORUM questions, since those of wide interest will be selected for publication in this column.

PRINTERS!

NEW! Okidata 192+ (Par. or Ser.)	\$370
NEW! Okidata 193 (Parallel)	\$540
NEW! Okidata 193+ (Serial)	\$610
Okimate 20 Color Printer	\$135
Fujitsu 2100 (80 col.)	\$410
Fujitsu 2200 (132 col.)	\$520
Toshiba 321 (Par. or Ser.)	\$510
Qume Letterpro 20 (Letter Qual.)	\$445
Silver Reed 420 (Daisy Wheel)	\$240
Silver Reed 600 (Daisy Wheel)	\$575

(Add \$10 Shipping for Printers)

ACCESSORIES!

Taxan 12" Green Monitor	\$125
Taxan 12" Amber Monitor	\$135
Table Top Printer Stand w/Slot (80 col.)	\$30
Table Top Printer Stand w/Slot (132 col.)	\$45
Stand w/Diskette Storage (80 col.)	\$47
Stand w/Diskette Storage (132 col.)	\$57

Other Printers, Monitors, and Accessories for CoCo and IBM upon request.

\$15 off Interface with purchase of printer.

Find your cheapest published price and we'll beat it!!!

DISK DRIVE SYSTEMS!

ALL 1/2 HEIGHT DOUBLE SIDED

Drive 0 (addressed as 2 drives!)	\$235
Drive 0,1 (addressed as 4 drives!)	\$350

All above complete with HDS controller, cable, & drive in case with power supply

Bare Double Sided Drives	\$109
Dual 1/2 Height Case w/Power Supply	\$49
Double Sided Adapter	\$25
HDS Controller, RS ROM & Instructions	\$99
25 CDC DS/DD Diskettes	\$32 & \$3 s/h

We use the HDS controller exclusively. Can use 2 different DOS ROM's. Shipping Costs: \$5/drive or power supply, \$10 max.

Co Co Serial Cables 15 ft.—\$10. Co Co/RS-232 Cables 15 ft.—\$20.

Other cables on request. (Add \$300 shipping)

SP-2 INTERFACE for EPSON PRINTERS:

- 300-19,200 BAUD rates
- Fits inside printer — No AC Plugs
- Optional external switch (\$500 extra) frees parallel port for use with other computers
- \$49⁹⁵ (plus \$300 shipping)

SP-3 INTERFACE for MOST OTHER PRINTERS:

- 300-19,200 BAUD rates
- External to printer — No AC Plugs
- Built in modem/printer switch—no need for Y-cables or plugging/unplugging cables
- \$64⁹⁵ (plus \$300 shipping)

Both also available for IBM, RS-232 and Apple IIC computers.

CNR ENGINEERING
P.O. Box 293
Raritan, NJ 08869
(201) 722-1055

PIPELINE

PERSONALITY FOR DISKS Personalize your disks with typeset and printed labels. The new labels from Decision Graphics measure 1 by 4 inches and allow up to four lines of text. The labels let you keep track of your disks. You will know at a glance whether or not the disk belongs to you. The labels are priced at \$12.50 per hundred. *Contact Decision Graphics, Inc., P.O. Box 2776, Littleton, CO 80161, (303) 796-0341.*

NEW CATALOGS Radio Shack has announced its three new computer catalogs — the *1987 Tandy Computer Catalog*, the *1987 Radio Shack Software Reference Guide* and the *1987 Radio Shack Educational Software Reference Guide*. The catalogs are now available free of charge at more than 7,000 Radio Shack stores, Computer Centers and participating dealers nationwide. The *Tandy Computer Catalog* features 176 new items, including our favorite Color Computer 3. The software reference guides are excellent sources of Radio Shack and third-party products for Tandy computers.

OS-9 TIDBITS Microware has announced that Thomson SIMIV of Paris, France, has licensed OS-9/68000 for the software nucleus of the recently announced European Education Standard microcomputer system. Three major European electronic companies have previously signed an agreement to

cooperate in the development of a European standard for 16-bit microcomputers incorporating OS-9/68000.

Also, Force Computers GmbH has signed a license with Microware Systems Corporation for the distribution of the OS-9/68000 Operating System. Under the agreement, Force will be able to offer OS-9 to new and existing users of its VME-based 68000 processor boards and peripherals.

These announcements reflect OS-9's rapidly increasing acceptance as the standard operating system for 68000-based personal computers. We've known it all along with our CoCos.

BOOKS, BOOKS, BOOKS Howard W. Sams & Co. has kept its tradition of providing technical material to computer experimenters, hobbyists and professionals. Publications recently released include *Computer Connection Mysteries Solved* and *Experiments In Artificial Intelligence for Microcomputers*.

Computer Connection Mysteries Solved covers topics such as the RS-232 interface, cabling, monitoring and testing gadgets. Retail price for the 272-page manual is \$15.95.

Experiments in Artificial Intelligence for Microcomputers covers game-playing problems, problem solving, computer analysis of arguments and natural language processing as well as several other topics. Retail price for this 176-page work is \$14.95. *Sams books are available through bookstores, computer retailers and electronic distributors, or directly from Sams by calling (800) 428-SAMS.*

PURGE THE SURGE New from Networx is Wire Cube Plus, a surge suppression device designed to protect both computers and modems. This device includes a single AC outlet and a phone line connection in one box, which is designed to be plugged into the wall. Energy is absorbed by a two-stage silicon/MOV transient suppressor. The device's two-stage silicon/gas tube for tip-gnd and ring-gnd prevents disruption of modem operation by shunting harmful energy on modem lines to ground. Price for the Wire Cube Plus is \$39.95. *Contact Networx, 203 Harrison Place, Brooklyn, NY 11237, (718) 821-7555.*

SPEAKING OF MODEMS Practical Peripherals is now offering a stand-alone 1200 bps modem, the Practical Modem 1200 SA, which is fully Hayes-compatible, includes auto-answer/auto-dial capabilities, supports virtually all communications software and includes an upgrade path for a programmable enhancement card. The enhancement card, soon to be released, can be used for buffering, programmable protocol conversion, security, time/date logging and other functions that can be programmed or downloaded from a host computer. Features of the Practical Modem 1200 SA include semi-permanent storage of up to 10 telephone numbers, menu-driven configuration, pulse or tone dialing and a volume-controlled speaker. Two modular jacks accommodate voice and data calls. Price for the Practical Modem 1200 SA is \$239. *Contact Practical Peripherals, 31245 La Baya Drive, Westlake Village, CA 91362, (818) 991-8200.*

GREAT COCO III PRODUCTS

SECRETS REVEALED

An introduction to the Color Computer III !!!
Compares differences between the CoCo I/II and the NEW CoCo III.

GIME chip specs

New Ext. Basic 2.0 cmds

New Memory Map

128K Memory Tester

\$14.95

C III GRAPHICS

It's here! A drawing program for the CoCo III using the new Enhanced graphic features. Requires 128K CoCo III w/Disk
Analog RGB monitor recommended.

Uses 320x192 graphics

16 of any 64 colors

Save & Load 32K screens

Dual joystick button

\$19.95

Buy 'em both for

\$29.95

The Spectrum Projects Holiday BONUS COUPON

SAVE 5% SAVE 5%
ON ALL ORDERS
OVER \$100

SAVE 5% SAVE 5%

Offer Expires 1/15/87 - No other discounts can be applied.



COMING SOON.....

COCO III 512K UPGRADE - ENHANCED COCO III DOS

All orders plus \$3.00 S/H (Foreign \$5.00) - COD add \$2.00 extra - NYS Residents add Sales Tax

SPECTRUM PROJECTS
PO BOX 264
HOWARD BEACH NY 11414

COD ORDER HOT LINE 718-835-1344



SPECTRUM PROJECTS

SOFT AND HARD WARES FOR COLORFUL COMPUTING



COMMUNICATION

COLORCOM/E - A complete smart terminal package! Upload, Download, Hi-Res (51X24) screen, 300/1200 Baud, Offline Printing. 32/64K Disk* - \$39.95
 *- Now with **DELPHI** & **Compuserve** XMODEM support! Download ML! **COMPUSERVE** Starter Kit \$14.95



WORD PROCESSING

TELEWRITER-64 - Three Hi-Res screens, true lowercase char's right justify, full screen editor. Tape \$49.95 Disk \$59.95
TELEPATCH - A TW-64 enhancer!!! True block move, Overstrike & TSPool mode, Type Ahead Buffer
FASTER Disk I/O 64K Disk \$19.95



MODEMS

1200 BAUD
\$129.95**
 Hayes compatible! Super for the **DELPHI** & **Compuserve** CoCo Sig! 300/1200 Baud, Auto-dial/answer
 ** Requires Modem cable \$19.95

SEIKOSHA

SP-1000A


- 100 cps draft
 - 20 cps NLQ
 - Friction and tractor
 - Front panel Controls
 - 1.5 K buffer
- \$219.95**



PRINTERS

GEMINI NX-10 - 120 cps, tractor-frict feed, NLQ mode, 5K buffer Front Panel Controls! - \$249.95
KAMELEON - Low cost Parallel Ptr Interface! 600/9600 Baud \$49.95
PBH-64 - A combo Parallel Ptr interface & 64K Print Buffer! **COMPUTE** while you **PRINT** \$149.95

KEYBOARDS


RS 26-3016 Low Profile CoCo Keybd. Fits all CoCoII's, "F" & TDP-100's WAS \$39.95 NOW \$19.95
Adapter for D/E CoCoI's - \$9.95

MONITORS



Monitor Stand \$24.95

MONOCHROME MONITORS
 80x24 Hi-Res screens! \$89.95
Universal Video Driver - Works w/all monitors & CoCos! - \$29.95
 13" **COLOR** Monitors\$169.95

*Accepts RGB TTL & composite video inputs
 also! Much more versatile than the Tandy CM-8!
 Works w/Tandy 1000 & other computers !!!



CoCo nuts roasting near an open fire

Holiday Hearth

*'Twas a few days before Christmas and all through the den
Not a key was in motion — a lack of ideas again.
When what to my wondering eyes should appear
But a pint-sized computer and a program, oh dear!
Through the pages and pages of numbers I race
And . . . thank you, dear Rainbow . . . a Christmas Fireplace!*

By Eugene Vasconi

Christmas Fireplace is a warm addition to your holiday cheer and uses a graphics technique put forth by John Fraysse in the October 1983 RAINBOW [Page 18]. Part one of the program creates the basic graphics scene while part two holds the animation loop of four fires, light patterns and the music.

You will need to create two separate programs, then load the first one and run it. Without losing memory, load the second program and run it. (The CoCo will retain anything created on the graphics pages even when a new program is loaded.)

The part of the program that was most fun was keeping the music going while the fireplace roars along. I accomplished this by using data statements and a PLAY command that inserted one note of the song between every flip of the pages. With the proper delay, it sounds like a continuous tune.

Stoke up your CoCo, nestle up to the TV and stay warm over the holidays!

(Questions about this program may be directed to the author at 12474 Starcrest #204, San Antonio, TX 78216, 512-496-5783. Please enclose an SASE when writing.) □

Eugene Vasconi is a commercial helicopter pilot in San Antonio, Texas. His computer interests include graphics, music and education. He has been a CoCoer for five years.

A SPECTRUM PROJECTS SHOPPING LIST

SPECIAL 64K RAM CHIPS \$19.95

SUPER CHIP -SALE- ...

6821 Standard PIA ~~\$9.95~~\$4.95
 Basic ROM 1.1 Chip ~~\$19.95~~\$7.95
 6847 VDG Chip ~~\$19.95~~\$9.95
 6809E CPU Chip ~~\$19.95~~\$9.95
 CoCo III/Multipak "NEW" PAL chip ..\$19.95
 Orig SAM Chip (6883) ~~\$29.95~~\$19.95
 Basic ROM 1.3 (Newest version) ...\$19.95
 68766 (Fits all Basic ROMS) EPROM \$19.95
 Disk ROM 1.1 (Needed for CoCoIII) \$29.95
 New SAM Chip w/heatsink (74LS785) \$29.95
 Ext Basic 1.1 ROM - NEW LOW PRICE \$29.95
 CoCo First Aid Kit - includes two PIA's,
 6809E CPU & SAM Chips ~~\$59.95~~\$39.95
 EPROM Eraser - 3 min erasure time \$49.95
 EPROM Prgmr - 2716's up to 27512 ! Super
 fast programming-See 4/86 review \$149.95

COCO LIBRARY...

A History of the CoCo / 1980-1986 ..\$3.95
 New! 200 MORE Pokes,Peeks 'N Execs \$9.95
 Basic Programming Tricks Revealed.\$14.95
 CoCo Memory Map\$16.95
 500 Pokes, Peeks 'N Execs\$16.95
 Basic 09 Tour Guide\$19.95
 Assembly Language Programming\$19.95
 Color Basic Unraveled\$19.95
 Extended Basic Unraveled\$19.95
 Disk Basic (1.0/1.1) Unraveled ...\$19.95
 New! CoCo II Service Manual*\$24.95
 CoCo III Service Manual\$39.95
 Official MICROWARE OS9 Manual Set \$49.95
 The Complete Rainbow Guide to OS9.\$19.95
 W/Two Disk Package of demo pgms ..\$49.95
 Color/Extended/Disk Basic Unraveled -
 Complete disassembly of the CoCo ROMS!
 Complete 3 Book Set - Save \$10! ..\$49.95

MORE GOOD STUFF...

DELUXE JOYSTICK - Now only\$29.95
 Computize "Y" Box - More positive
 connections than a "Y" Cable\$29.95
 PBJ WORDPAK-RS - Newest version ! HiRes
 80x24 display (See Oct'86 review) \$99.95
 Micro Works DS-69A Digitizer\$149.95
 512K Color Computer 3\$369.95
 * - Specify CoCo II Catalogue Number

All orders plus \$3.00 S/H (Foreign \$5.00)
 COD add \$2.00 extra
 NYS Residents add Sales Tax

COCO CABLES AND...

Printer/Modem 15' Extender Cable ..\$14.95
 Tired of unplugging devices from your
 RS232 port? Try a RS232 "Y" Cable.\$19.95
 Disk Drive Cable (34pin - 34pin) ..\$19.95
 Modem Cable - 6ft (DB25-DB25)\$19.95
 Joystick/Mouse 10' Ext Cable\$19.95
 Dual Disk Drive Cable (3-34pin) ..\$24.95
 CoCo III Analog RGB monitor cable \$24.95
 15" Multi-Pak/Rom Pak Extender - Move
 your Multi/ROM Paks further away ..\$27.95
 40 Pin Dual "Y" Cable - Hook up a Disk
 w/Voice, Word Pak, CoCo Max,etc ..\$29.95
 Triple RS232 Switcher - Now select one
 of any three RS232 peripherals ...\$39.95
 40 Pin Triple "Y" Cable - Hook up any 3-
 Voice/Word/RS232/Digitizer PAKs ..\$39.95
 Special! 4 Drive Disk Cable\$49.95

OTHER GOOD STUFF...

C-10 tapes in any quantity49 cents
 5 1/4" Diskettes, any quantity .79 cents
 OS-9 Quick Reference Guide\$3.95
 VHS T-120 Video Tapes\$7.95
 Rompak w/Blank PC Brd-27xx series ..\$9.95
 Video Clear - This cable will reduce TV
 interference created by CoCo!\$19.95
 The Magic Box - Load Mod I/III Basic
 program tapes into the CoCo\$24.95
 DOS Switcher - Select from any two DOSs
 (Disk 1.0 1.1, JDOS) in J&M ctrlr ..\$29.95
 Orig CoCoI "D" Rev motherboard. Includes
 all chips (SAM, CPU, PIA's, VDG) except
 RAM and Ext Basic ! Spare Parts ! \$39.95
 256K RAM Chips (Set of 8)\$39.95
 Model 100 8K Upgrade\$39.95
 HJL-57 Keyboard - Save \$7.00!!! ..\$72.95
 _____ Specify Model/Revision Board _____
 HDS Controller w/1.1 ROM(SAVE\$20) \$79.95
 Amdek Drive System w/controller ..\$239.95

SPECTRUM PROJECTS

PO BOX 264

HOWARD BEACH NY 11414

**COD ORDER HOT LINE
718-835-1344**



COLORFUL UTILITIES



COCO CHECKER *

Something possibly wrong with your CoCo??? CoCo CHECKER is the answer!! Will test your ROMs, RAMs, Disk Drives & Controller, Printer, Keyboard, Cassette, Joysticks, Sound, PIAs, VDG, Internal Clock Speed, Multi-Pak Interface and more!! 16K TAPE/DISK **\$21.95** (see Jan '85 Rainbow Review)

MULTI-PAK CRAK

Save ROMPAKs to your 64K Disk system using the RS Multi-Pak Interface. Eliminate constant plugging in of ROMPAKs now by keeping all your PAK software on disk. Includes POKEs for "PROBLEM" ROMPAKs- including the NEW 16K PAKS! (Demon Attack, Dragons Lair, etc) 64K DISK **\$24.95**



TELEPATCH II

All the FEATURES of TELEPATCH plus the classically proportioned characters of the WIZARD (\$19.95) font w/TRUE lowercase descenders! Get BOTH & SUPERCHARGE your TW-64 for only **\$29.95**

SPIT 'N IMAGE

A super upgrade from Disk Omni Clone! Back everything up! This amazing program handles "non standard" disks with ease. We haven't found any disk yet that it can't handle. Don't ever be caught without a backup again! Lowest price too! Beats most "copy protection" programs! 32K DISK **\$29.95**

COCO SCREEN DUMP

The best screen dump program for the Panasonic, Epson & Gemini printers ever! Have the option of standard or reverse images w/regular or double sized proportional pictures. 600-9600 Baud too! A must for Graphicom and CoCo Calendar users. 16K TAPE/DISK **\$21.95** (see Nov '84 Rainbow Review)

DISK UTILITY 2.1*

A multi-featured tool for USER FRIENDLY disk handling. Utilize a directory window to selectively sort, move, rename and kill file entries. Lightning fast Disk I/O for format, copy and backup. Examine contents of files, the Granule Table, plus the size, load addresses and entry points of all programs. Single command execution of both Basic and ML programs. 32K/64K DISK **\$24.95** "Disk Utility has proven itself very quickly at my house" - Ed Eilers Oct '84 Rainbow Review pg. 220

SPECTRUM FONT GENERATOR

Now you can write files using any CoCo Word Processor (Telewriter-64, VIP Writer, etc.) and convert them to special Highly Detailed character sets! Some of the character sets supported are Italics, Old English, Futuristic and Block. A character set editor is included to create custom sets or modify existing ones! Supports most dot-matrix printers! DISK **\$29.95** (see Dec '85 Rainbow Review)

SPECTRUM DOS

Add 24 NEW Disk commands with 2 Hi-Res screens! Supports 40 track & Double-Sided drives, 6 ms stepping, auto disk search, error trapping & "EPROMABLE". 64K DISK ~~\$49.95~~ New LOW price!! **\$24.95**

SCHEMATIC DRAFTING PROCESSOR

Save time and design pro looking diagrams using a 480X540 pixel worksheet w/6 viewing windows. Over 30 electronic symbols w/10 definable symbols. (Even Logic gates & Multipin chips!) Print hard copy and save to disk. 64K DISK ~~\$49.95~~ New LOW price!!! **\$29.95** (see Jan '84 Rainbow Review)



THE MEMORY MANAGER

Now you can use the SECOND 32K memory bank of your 64K CoCo as a SUPERFAST Ramdisk! Also CHAIN a long Basic program from the first bank into the second or LOAD Basic programs into both 32K banks and RUN from either bank! USER FRIENDLY & completely MENU DRIVEN. 64K DISK **\$29.95**

COCO CHECKBOOK

Use your CoCo to keep track of your checking and savings accounts! Printout individual personal checks! 32K/64K TAPE **\$19.95** DISK **\$29.95** (see April'85 pg. 210 & Oct'85 pg. 197 Rainbow Reviews)



THE ULTIMATE GRAPHIC ADVENTURE

Wizard's Castle is a graphic adventure game with deadly creatures, magic spells and traps of all types which are RANDOMIZED at the beginning of each session so that no 2 adventures will be the same! REAL TIME ACTION keeps the game's characters interacting even though you may be waiting to make a move. Includes three skill levels, 60 Hi-Res screens & Game Save Feature. 64K DISK **\$24.95**

BUY ANY 5 PROGRAMS
GET A DOUBLE SIDED
DRIVE FOR \$199.95
NO OTHER DISCOUNTS CAN BE APPLIED

*NOW AVAILABLE BY EXPRESS ORDER AT
YOUR LOCAL RADIO SHACK STORE!!!
ASK TO SEE THE RADIO SHACK
DEMO DISKS - FC#0249 & FC#0919!!!



COLORFUL UTILITIES



COCO GRAPHIC DESIGNER

Create custom greetings for any occasion: Birthdays, Anniversaries, Holidays, etc. Also BANNERS & SIGNS! Includes "GRABBER" utility - capture Hi-Res CoCo screens for your GRAPHIC LIBRARY! Easy to use & comes with a set of pre-drawn graphics. Includes a screen & font editor. 32K DISK **\$29.95**

COCO VIDEO TITLER

Start your VCR tapes with dazzling title frames followed by professional countdown to black fade-outs! Use a title page editor with several sizes of text & background colors! 32K DISK **\$24.95**



VIP WRITER ENHANCER

Make all your programs that use ASCII files (TW-64, Mikeyterm, etc.) compatible with VIP WRITER files! Automatically fixes TEXT CASE and CONTROL CHARACTER problems. DISK INTRO PRICE **\$19.95**

64K DISK UTILITY PACKAGE

Take advantage of an expanded 64K machine. Make an additional 8K of RAM available by relocating the Ext Basic ROM from \$8000 to \$D800. Copy ROMPAKS to disk (even "protected" PAKS) and create a 32K SPOOL buffer for printing. DISK **\$24.95** (see July '83 Rainbow Review)

TAPE/DISK UTILITY

A powerful package that transfers tape to disk and disk to tape automatically. Does an automatic copy of an entire disk of programs to tape. Ideal for Rainbow On Tape to disk. Also copies tape to tape & prints tape & disk directories. TAPE/DISK **\$24.95** (see Sept '83 Rainbow Review)



SUPER DUPER UTILITIES

Finally! At last! A "SUPER DUPER" utility software package all rolled up into ONE!!! Includes such great utilities as: CoCo Disk Zap, Disk Encryption, Disk Mailing List, EZ Disk Master, Graphics ZOOM, Banner Creator, Function KEYS, Super INPUT/LINEINPUT, Basic Program PACKER, Alpha Directory, Basic SEARCH and much, much more!!! 32K DISK **\$29.95** (see June '86 Rainbow Review)

COCO CALENDAR

Get organized for '86 TODAY with the CoCo Calendar! Designed for recording the entire year's occassions and daily appointments so you can plan ahead. You can store HUNDREDS of entries and our GRAPHIC Calendar will show all MEMOS! 32K DISK **\$19.95** (see Mar '86 Rainbow Review)

THE OS-9 SOLUTION

NOW, a program that creates a "USER FRIENDLY" environment within OS-9! The OS-9 SOLUTION replaces 19 of the old "USER HOSTILE" commands with single keystroke, menu driven commands. No more typing in complex long pathnames or remembering complicated syntaxes! Set all XMODE parameters at the touch of keys! ~~\$39.95~~ New LOW price!!! **\$24.95** (see Sept '85 Rainbow Review)

COCO-UTIL

Now you can have the power to easily transfer Radio Shack Color Computer disk files to your MS-DOS machine - including the Tandy 1000 & IBM PC!!! You can also transfer MS-DOS files to your CoCo disk, even format CoCo disks! CoCo-Util will save you countless hours of retyping! No need to move your computer or printer anymore! Requires 128K MS-DOS computer w/2 disk drives - **\$29.95**



➔ SOFTWARE BONANZA PACKAGE ➔

Create an instant library of Spectrum Projects TOP Colorful Utility software. Select any of the following 12 programs to customize your own SPECTACULAR SOFTWARE BONANZA! CoCo Checker, Multi-Pak Crak, CoCo Screen Dump, Disk Utility 2.1, Spectrum Font Generator, Tape/Disk Utility, Fast Dupe II, 64K Disk Utility, Spectrum DOS, CoCo Calendar, Schematic Drafting Processor, OS-9 Solution, Basic Plus, EZ Base or Blackjack Royale (a \$300 plus value) for only **\$99.95!!!**



MIKEY-DIAL

When used with any Hayes compatible modem & Deluxe Program Pak, adds to Mikeyterm 4.0 the ability to Autodial 22 numbers from a menu & load a set of 3 MACROS for each directory choice. Also EASY redial & changing of MODEM settings by command menu. DISK **\$19.95** (See Dec'86 Review)

All orders plus \$3 S/H (Foreign \$5)

COD add \$2 extra

NYS Residents add Sales Tax

COD ORDER LINE 718-835-1344

SPECTRUM PROJECTS INC
PO BOX 264
HOWARD BEACH NY 11414

```

24 .....131
48 .....112
72 .....248
END .....101


```

Listing 1: XMASFIRE

```

1 CLS(4):PRINT@98,"THIS IS THE F
IRST PART OF THIS PROGRAM. IT I
S CREATING THE GRAPHICS FOR
PART TWO. WHEN YOU GET THE <
OK> PROMPT, JUST CLOAD THE SEC
OND PROGRAM OVER THIS ONE. ";
2 PMODEL,1:PCLS:GOTO98
3 LINE(48,180)-(208,80),PSET,B
4 LINE(60,180)-(196,88),PSET,B
5 LINE(84,184)-(172,172),PSET,BF
6 LINE(86,172)-(174,160),PSET,BF
7 LINE(84,162)-(172,152),PSET,BF
8 LINE(82,174)-(86,162),PSET,BF
9 LINE(66,66)-(190,10),PSET,B
10 LINE(68,64)-(188,12),PSET,B
11 DRAW"BM84,56;L8U8R8"
12 DRAW"BM88,56;U8D4R8D4U8"
13 DRAW"BM100,56;U8R8G4L4R4F4"
14 DRAW"BM124,28;U8R8G4L4R4F4"
15 DRAW"BM136,28;U8R8G4L4R4F4"
16 DRAW"BM114,56;R4L2U8L2R4"
17 DRAW"BM124,56;R8U4L8U4R8"
18 DRAW"BM172,56;R8U4L8U4R8"
19 DRAW"BM140,56;U8L4R8"
20 DRAW"BM148,56;U8F4E4D8"
21 DRAW"BM160,56;U8R8D4L8R8D4"
22 DRAW"BM100,28;U8F4E4D8"
23 DRAW"BM120,28;L8U4R4L4U4R8"
24 DRAW"BM148,20;F4D4U4E4"
25 LINE(256,15)-(232,48),PSET
26 LINE-(240,52),PSET
27 LINE-(226,80),PSET
28 LINE-(236,80),PSET
29 LINE-(220,80),PSET
30 LINE-(234,106),PSET
31 LINE-(216,136),PSET
32 LINE-(252,136),PSET
33 LINE-(252,196),PSET
34 REM PRESENTS
35 LINE(252,144)-(248,168),PSET,
B
36 LINE(252,168)-(246,176),PSET,
B
37 LINE(240,176)-(232,164),PSET,
B
38 LINE(252,180)-(232,176),PSET,
BF
39 LINE(232,184)-(216,164),PSET,
B
40 LINE(228,164)-(220,148),PSET,
B
41 CIRCLE(240,148),6
42 LINE(8,72)-(12,80),PSET
43 LINE-(32,72),PSET
44 LINE-(28,64),PSET
45 LINE-(8,72),PSET
46 LINE(12,80)-(22,128),PSET
47 LINE(32,72)-(40,128),PSET
48 CIRCLE(14,134),10,,1,.4,.9
49 CIRCLE(8,132),5,,1,.5,.9
50 LINE(2,136)-(6,142),PSET
51 CIRCLE(14,138),8,,1,.2,.4
52 LINE(18,146)-(38,136),PSET
53 CIRCLE(34,132),6,,1,.8,.25
54 PAINT(12,4),3,4
55 PAINT(28,108),4,4
56 PAINT(250,88),2,4
57 PAINT(240,148),4,4
58 PAINT(228,172),3,4
59 PAINT(108,104),2,4
60 DRAW"BM82,172;C3;R88"
61 DRAW"BM84,160;C3;R86"
62 CIRCLE(250,15),3,5:CIRCLE(235
,46),3,5:CIRCLE(230,75),3,5
63 CIRCLE(225,100),3,5:CIRCLE(22
0,133),3,5:CIRCLE(240,120),3,5
64 FORX=3TO7STEP2
65 Y=X+1
66 PCOPY 1TO X:PCOPY 2TO Y
67 NEXTX
68 PMODEL,1
69 FOR X=68TO188 STEP24
70 CIRCLE(X,4),2,4
71 CIRCLE(X,72),2,5
72 NEXTX
73 FORX=12TO68STEP24
74 CIRCLE(60,X),2,4
75 CIRCLE(196,X),2,2
76 NEXTX
77 PMODEL,3
78 FORX=76TO188STEP24
79 CIRCLE(X,4),2,5
80 CIRCLE(X,72),2,4
81 NEXTX
82 FOR X=20TO68STEP24
83 CIRCLE(60,X),2,2
84 CIRCLE(196,X),2,4
85 NEXTX
86 PMODEL,5
87 FORX=84TO188STEP24
88 CIRCLE(X,4),2,2
89 CIRCLE(X,72),2,5
90 NEXTX
91 FORX=28TO68STEP24
92 CIRCLE(60,X),2,2
93 CIRCLE(196,X),2,1
94 NEXTX
95 PMODEL,7
96 PCOPY 3 TO 7:PCOPY 4 TO 8
97 END
98 PCLEAR8:GOTO3

```



Listing 2: XMASDRVR

```

1 CLS(8):PRINT@97,"NOW IMAGINE I
T'S CHRISTMAS EVE AND OUTSIDE T
HE SNOW IS GENTLY FALLING. YOU'
RE WARM AND COZY IN YOUR LIVIN
G ROOM WAITING FOR SANTA TO
BRING THAT NEW DISC DRIVE AN
D PRINTER! ";
2 PRINT@391,"MERRY CHRISTMAS ";
3 FOR M=1TO5000:NEXTM
4 PMODEL,1:CLR200
5 DRAW"BM88,150;C3;U42E8F4D40E8U
12E8F8D8F4E4U16E8U8E4F4D40F4R4E1
2F4D14L84"
6 PAINT(90,145),4,3
7 PMODEL,3
8 DRAW"BM88,150;C3;E16U26E4U10E4
D52R8U4E4U8E8F4D24E8F8D4R8U16E4F
4D16L80"

```



```

9 PAINT(93,148),4,3
10 PAINT(163,148),4,3
11 PMODEL,5
12 DRAW"BM88,150;C3;H4E8U8F4D12R
12U48E8F4D36G4D8F4R12E8U4E4U4F4D
8F4U48F4D8F4D28E8D20L84"
13 PAINT(90,148),4,3
14 PMODEL,7
15 DRAW"BM88,150;C3;U24F4D12E8D1
2R12U8E4U44F4D16F4D28F4R16U8E4U4
0F4D48R8E8F4D8L84"
16 PAINT(90,148),4,3
17 DIMA$(64),B$(11)
18 FOR A=1TO64
19 READ A$(A)
20 NEXTA
21 FOR B=1TO11
22 READ B$(B)
23 NEXTB
24 Y=0:Z=0:ZZ=0:QQ=0:XX=0

```

```

25 FOR X=1TO8STEP2
26 SCREEN1,1
27 PMODEL,X
28 IF XX=11 THEN GOTO35
29 Y=Y+1:Z=Z+1
30 IF Z>110 THEN GOTO34
31 PLAY"L10;XA$(Y);"
32 IF Y=64 THEN Y=0
33 GOTO 36
34 XX=XX+1:PLAY"L10;XB$(XX);":GO
TO36
35 FOR PP=1TO30:QQ=QQ+1:NEXTPP
36 NEXTX
37 IF QQ>2000 THEN GOTO24
38 GOTO25
39 DATA L60;04CEGO5C,P10,04;L60;
CEGO5C,P10,04;B,A,G,F,E,E,E,P10,
P10,P10,P10,P10,L40;CEGO5C,P10,0
4;L40;DFA,P10,G,F,E,D,C,P10,05;A
,P10,G,P10,E,P10
40 DATA L60;04;CEGO5C,P10,04C,P1
0,L60;DFA,P10,C,D,L60;EGB,P10,G,
A,B,P10,P10,A,L60;CE-A-,P10,A-,P
10,B-,A-,G,F,L60;CEG,P10,L60;CEG
,P10,G,F,E,D
41 DATA L60;04;CEGO5C,04A,G,P10,
L60;CEGO5C,P10,P10,P10,04D,P10,L
40;03CEGO4CEGO5C

```

'KEEP-TRAK' General Ledger Reg. \$69.95—ONLY \$24.95
 "Double-Entry" General Ledger Accounting System for home or business: 16k, 32k, 64k. User-friendly, menu-driven. Program features: balance sheet, income & expense statement (current & 'YTD'), journal, ledger, 899 accounts & 2350 entries on 32k & 64k (710 accounts & entries on 16k) (disk only). Version 1.2 has screen printouts. Rainbow Reviews 1.1 - 9/84 : 1.2-4/85

"OMEGA FILE" Reg. \$69.95—ONLY \$19.95
 Filing data base. File any information with Omega File. Records can have up to 16 fields with 255 characters per field (4080 characters/record). Sort, match & print any field. User friendly menu driven. Manual included (32k/64k disk only). Rainbow Review 3/85, Hot CoCo 10/85

BOB'S MAGIC GRAPHIC MACHINE
 Can generate BASIC code to use in your programs. Easy drawing and manipulation of circles, ellipses, boxes, lines and ARCS. Single joystick operation with on line HELPS at all times. Allows text on the graphics screen & movement of objects on the screen. Can be used as a stand-alone graphics editor. Instruction Manual. **GRAPHICS EDITOR.Reg. \$39.95—ONLY \$19.95** for disk or tape. 64k ECB. Rainbow Review 7/85, Hot CoCo 9/85 "The graphics bargain of the year"


'KEEP-TRAK' Accounts Receivable. (Avail. 10/01/85).
 Features: auto interest calculation, auto ageing of accounts, installment sales, total due sales, explanation space as long as you need, detailed statements, 'KEEP-TRAK' General Ledger tie in, account number checking, credit limit checking & more. User friendly/menu driven. Includes manual. **\$39.95** or **\$49.95** General Ledger & Accounts Receivables. (Disk Only).

'COCO WINDOWS' Available 10/31/85
 With hi-res character display and window generator. Features an enhanced key board (kicks) and 10 programmable function keys. Allows the user to create multiple windows from basic. Includes menu driven printer setup and auto line numbering. Four function calculator. with memory. The above options can be called anytime while running or writing in BASIC. APPLE PULL YOUR DRAPES, YOU DON'T WANT TO SEE THIS. **\$19.95** (disk or tape) includes manual.

CALL TOLL FREE
1-800-942-9402

THE OTHER GUY'S SOFTWARE (Add \$2.50 for postage & handling)
 P.O. Box H, 55 N. Main C.O.D., Money Order, Check in U.S. Funds
 Logan, UT 84321 (801) 753-7620 (Please specify if J&M controller)

The CoCo Gallery

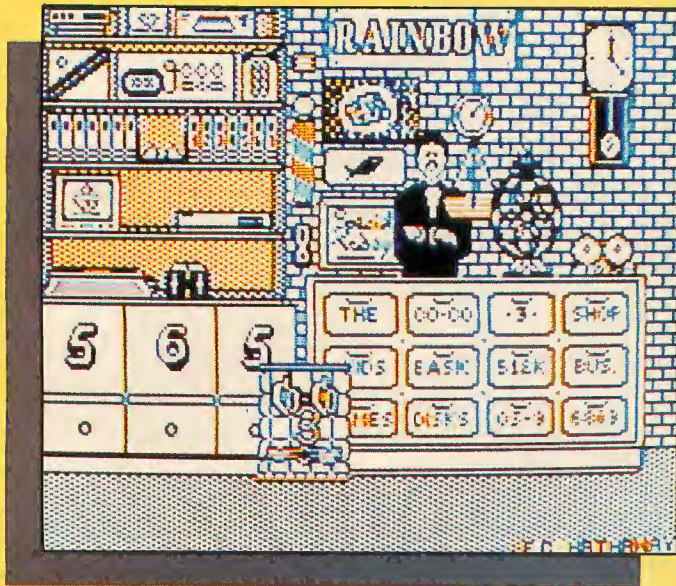

1st
PRIZE

Strictly CoCo
Edwin Hathaway
Glendale Heights, IL

Edwin takes top honors this month with his impression of what a country store filled with CoCo accessories could look like here in Prospect, Kentucky. It took approximately 15 hours to create this pictorial with *CoCo Max*, and Edwin feels this one is his best, so far.

Cowboy
Kevin S. Jessup
Lawrence, IN

Kevin has had his Color Computer since 1982, and uses it mainly for applications. He is the president of the Indy Color Computer Club, is married and has two children. Kevin used *McPaint*, along with *Pixel-Paint* and *Graphicom Part II*, to help create this western image.

2nd
PRIZE



3rd
PRIZE

X-Mas
George Aloia
Margate, FL

"Ho, ho, ho, and a Merry Christmas" is the message from George. George is the president of Broward County Color Computer Club and created this holiday scenery with *CoCo Max*, just in time for our December issue.





Christmas Morning

Ryan Devlin

Louisville, KY

This pictorial comes from right here in Kentucky, just a stone's throw away from RAINBOW headquarters. Ryan is 14 years old and enjoys the theater and computers. *Christmas Morning* was created with BASIC and, as you can tell, Ryan is already thinking about the holiday season.

HONORABLE

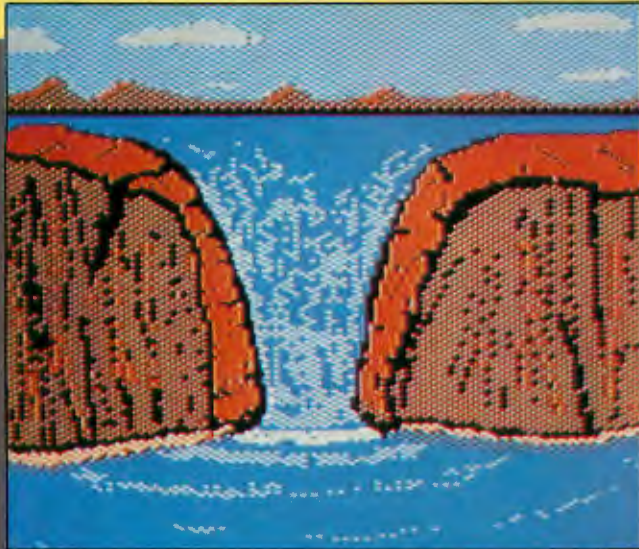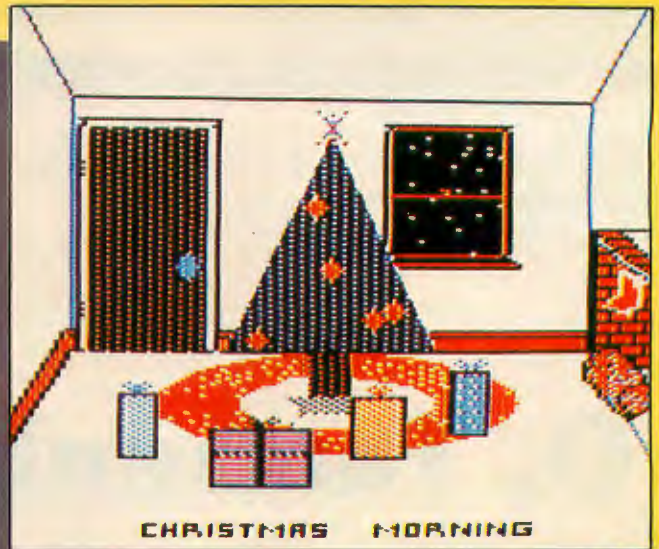

Waterfall

Ken Miller

Yardley, PA

Reminding us (or some of us), about the wonderful vacation spent on a tropical island, is this beautiful waterfall which was created with *CoCo Max*. Ken is a Senior at Pennsbury High School and is planning to go to college to major in computer science.

HONORABLE

Football

Steven E. Baker

Hattiesburg, MS

With the football season now upon us, Steven used BASIC to grace the gallery with these two football players in motion. Steven is the president of a small vertical-market software development company and has had his *CoCo* for three years.

HONORABLE



SHOWCASE YOUR BEST!

You are invited to nominate original work for inclusion in upcoming showings of "CoCo Gallery." Share your creations with the CoCo Community!

Be sure to send a cover letter with your name, address and phone number, detailing how you created your picture (what programs you used, etc.) and how to display it. Also, *please* include several facts about yourself, the more the better.

Don't send us anything owned by someone else; this means no game screens, digitized images from TV programs or material that's already been submitted elsewhere. A digitized copy of a picture that appears in a book or magazine is *not* an original work.

We will award a first prize of \$25, a second prize of \$15 and a third prize of \$10. Honorable mentions will also be given.

Jody Doyle, Curator

Send your entry on either tape or disk to:
CoCo Gallery
THE RAINBOW
P.O. Box 385
Prospect, KY 40059
Attn: Jody Doyle



A lovely tree to enjoy plus a quickie yuletide graphics tutorial

O, Tannenbaum

By Becky F. Matthews

At last, a Christmas tree Simulation! Your CoCo supplies the tree and lots of ornaments including balls, bells, stars, lights, icicles, candy canes and tinsel. The ornament icons are arranged on either side of the graphics screen. The Christmas tree is in the center of the screen. Use the right joystick to select and place ornaments on the tree using the point-and-click method. First, point the joystick so the cursor is positioned over the ornament icon wanted. Then click the joystick button to select that ornament. Now point the joystick to position the cursor where you would like to have the ornament, and click the button to put it there.

There are two special icons that do not represent ornaments, the Oops icon and the Musical Note icon. Clicking on the Oops icon removes the last ornament placed. Clicking on the Musical Note icon plays a Christmas tune. To trim your tree, load TRIMTREE and run. To save your decorated tree to tape, press the S key. To load a previously saved tree, press the L key.

There are several examples in this listing of using a FOR-NEXT loop to simplify graphics programming. Lines 130 to 150 draw three small Christmas

Becky Matthews has a degree in music education from the University of Mississippi. She and her husband David have three CoCos and two CoCo cats.



trees on the title page. Originally, there was only one small tree drawn with A equal to 175. With the addition of a FOR-NEXT loop, one tree was easily changed into three trees. The loop first sets A to 165 where the first small tree is drawn. The next time the loop is executed, A is 175 and the second tree is drawn 10 spaces (STEP 10) to the right of the first tree. The third and final time through the FOR-NEXT loop, A is equal to 185, the position of the third small tree. The same method is utilized in lines 260 and 270 where the three small trees are colored with random graphics characters.

The title page is drawn on the text screen. On this screen there are 32 horizontal screen locations. Therefore, to draw a straight vertical line, a FOR-NEXT loop with STEP 32 is used. In lines 290 and 300 this is done to make colorful word borders. To see how much these two lines add to the attraction of the title page, press BREAK, type EDIT 290, press ENTER, type I ' (apostrophe) and press ENTER (to end the editing). Edit Line 300 in the same way, then run

the program and see the difference in the title page. To return these lines to their original state, press BREAK, type EDIT 290, press ENTER, then press the D key once (to delete one character, the apostrophe), then press ENTER. Edit Line 300 the same way.

In programming graphics, look for a repetitive pattern as a possible place to use a FOR-NEXT loop. We have seen examples of this with the three small trees and the word borders. Another example is the outline of the large Christmas tree (Line 570). To draw the right side of the tree starting at the top, first a line is drawn toward the lower-right screen corner, then a line is drawn to the left. Looking at the large tree, you can see that this pattern is repeated six times. Instead of typing 12 different LINE statements, a FOR-NEXT loop is used. Each time through, X is incremented by 10 and Y is incremented by 25. The left side of the tree is drawn the same way (lines 640 to 670), except X is decremented by 10 each time.

Another example of a repetitive graphics pattern begins with Line 730.

There are 16 green ornament boxes drawn in two vertical rows, one row on each side of the screen. Line 740 sets the horizontal position for the first row of boxes (X=8) and the second row (X=227). Line 750 increments the vertical position Y by 22 each time the loop is executed to position eight boxes in each row. To make a screen full of green boxes type EDIT 740, press ENTER, type X (to extend the line or to get to the end of it quickly), press the left arrow twice (to erase the 1 and the 9), type 4 and press ENTER. The end of Line 740 should now read STEP 24. Now type RUN and after the title screen there will be 100 green boxes instead of 16! To change Line 740 back to normal, press BREAK, type EDIT 740, press ENTER, type X, press the left arrow once (to erase the 4), type 19 and press ENTER. The end of Line 740 should read STEP 219. Try experimenting with FOR-NEXT loops next time you program graphics.

(Questions about this program may be directed to the author at P.O. Box 339, Antioch, TN 37013-0339. Please enclose an SASE for a reply.) □

20023	1180235
37097	139038
57091	164076
770121	END26
98053		

The listing: TRIMTREE

```

10 *****TRIMTREE*****
20 *****BY BECKY MATTHEWS*****
30 *****TITLE AND INSTRUCTIONS
40 DIMZ(10)
50 CLS4
60 PRINT@43,"TRIM THE";:PRINT@7
5,"CHRISTMAS";:PRINT@107," TREE
! ";
70 PRINT@323,"POINT AND CLICK WI
TH YOUR";
80 PRINT@355,"RIGHT JOYSTICK TO
CHOOSE ";
90 PRINT@387,"AN ORNAMENT, THEN
POINT ";
100 PRINT@419,"AND CLICK AGAIN T
O PLACE ";
110 PRINT@451,"IT ON THE CHRISTM
AS TREE.";
120 *****DRAW LITTLE TREES
130 FOR A = 165 TO 185 STEP 10
140 PRINT@A," ";:PRINT@A+31,"
";:PRINT@A+62," ";:PRINT@A+9
6," ";
150 NEXT A

```

```

160 *****GOSUB PLAY TUNE
170 GOSUB1640
180 PRINT@483,"PRESS ANY KEY WHE
N READY.";
190 *****WAIT LOOP
200 *****JINGLE BELLS SOUND EFFECT
210 SOUND 255,1:SOUND 254,1
220 *****LITTLE TREES
230 T1 = RND(112)+143:T2=RND(112
)+143:T3=RND(112)+143:T4=RND(112
)+143
240 T$=CHR$(T1)+CHR$(T2)+CHR$(T3
)+CHR$(T4)+CHR$(T1)
250 *****COLOR LITTLE TREES
260 FOR A = 165 TO 185 STEP 10:P
RINT@A,CHR$(T1);:PRINT@A+31,CHR$
(T2)+CHR$(T3)+CHR$(T4);:PRINT@A+
62,T$;:PRINT@A+96,CHR$(T2);
270 NEXT A
280 *****COLOR WORD BORDERS
290 FOR Y = 42 TO 106 STEP 32:PR
INT@Y,CHR$(T1);:PRINT@Y+10,CHR$(
T1);:NEXTY
300 FOR Y = 322 TO 482 STEP 32:P
RINT@Y,CHR$(T1);:PRINT@Y+26,CHR$
(T1);:NEXTY
310 A$=INKEY$:IF A$="" THEN 200
320 *****GOSUB DRAW TREE
330 GOSUB570
340 *****GOSUB DRAW ORNAMENTS
350 GOSUB730
360 X=18:Y=18:GOSUB790:Y=40:GOSU

```

Education Breakthrough

New interactive CoCo software makes learning easy, fun. Kids love it!

Available now — an 18 Volume Library with 144 programs. Educational Software for kids from 6 to 18.

Parents are depending more and more on supplemental education for their children. Educators know that the most effective teaching is done one-to-one. Through individual attention and self-paced progress, students learn more and retain more.

BETTER THAN A PRIVATE TUTOR

The Compass Education Software LOOK/LISTEN/LEARN approach is the next best thing to a private tutor. Unlike other educational software the Compass Library also *talks* to the student — not in synthesized speech, but in a real human voice. With on-screen textual information and attention-getting graphics, students of all ages actually enjoy learning!

SELF-PACED FOR BETTER RETENTION

The lessons advance only after the student has correctly answered the questions throughout the programs assuring that the material has been thoroughly absorbed.

SIMPLE EQUIPMENT REQUIREMENTS

All you need is the TRS-80* Color Computer (any model), computer cassette recorder and TV set. Once the cassette is loaded you need only enter two simple commands . . . and then press any key to start the lesson.

Of course you can stop the lesson at any point to study information on the screen. Just push the pause button on the cassette player. Push it again and lesson resumes.

To answer questions throughout the lesson simply press the appropriate number on the computer keyboard, type in the correct answer, or follow other easy instructions. And go back and review, just rewind the cassette. It's that simple.

CHOOSE FROM 18 Volumes

There is not sufficient space in this advertisement to list all lesson titles, but here is a sample:

MATHEMATICS

In today's advanced, HiTech world, understanding and working with numbers is essential. Compass has developed three comprehensive series of math programs. From basic numerals for the very young, to algebra and higher mathematics for the older child. In between, there are programs for everything from addition and subtraction to practical everyday percentage problems.



MATH/FRACTIONS
Grades 4 to 8

Volume 1

- MF 1 — Numerator, denominator, bar
- MF 2 — Multiplication of fractions
- MF 3 — Factors and prime numbers
- MF 4 — Reducing fractions, reciprocals
- MF 5 — Reducing fractions, lowest terms
- MF 6 — Proper fractions, mixed numbers
- MF 7 — Multiplication-division of fractions
- MF 8 — Addition-subtraction of fractions

Volume 2

Eight lessons: MF-9 to 16

MATH/BASIC ALGEBRA

For all grades

Volume 1

Eight lessons: MBA-1 to 8

Volume 2

Eight lessons: MBA-9 to 16

MATH/NUMBERS

Volume 1

Eight lessons: MN-1 to 8

Volume 2

Eight lessons: MN-9 to 16

SELF DEVELOPMENT

Writing effectively means communicating effectively. Through the writing series of lesson students of all ages will develop basic skills needed to turn thoughts and ideas into expressive words and phrases.

RULES OF WRITING

For all grades

Volume 1


Eight lessons: RW-1 to 8

Volume 2

Eight lessons: RW-9 to 16

LANGUAGE ARTS

A practical education begins with good reading skills and is continued with increased vocabulary comprehension and, of course, spelling. Your child will learn that reading is fun while they are also learning when to use "to," "too," and "two," and how to spell when building a vocabulary.



THE MAGIC OF SPELLING
Grades 4 to 8

Volume 1

- MS 1 — Plurals: branches, rodeos, valleys
- MS 2 — Plurals: houses, brushes, candies
- MS 3 — Plurals: babies, pianos, leaves
- MS 4 — Suffixes: boxed, referred, writing
- MS 5 — Suffixes: paid, quickly, extremely
- MS 6 — Suffixes: said, confusion, school's
- MS 7 — Homonyms: two, too, to; their, there
- MS 8 — Homonyms: our, are, hour; ate, eight

Volume 2

Eight lessons: MS-9 through 16

VOCABULARY COMPREHENSION

Grades 3 to 5

Volume 1

Eight lessons: VC-1 through 8

Volume 2

Eight lessons: VC-9 through 16

DEVELOPING READING COMPREHENSION

For all grades

Volume 1

Eight lessons: DRC-1 to 8

Volume 2

Eight lessons: DRC-9 to 16

SCIENCE SCIENCE/PHYSICS

Volume 1

Eight lessons: SP-1 to 8

Volume 2

Eight lessons: SP-9 to 16

HISTORY AMERICAN HISTORY

Volume 1

Eight lessons: AH-1 to 8

Volume 2

Eight lessons: AH-9 to 16

So there it is . . . no-nonsense subject matter presented in a way that maximizes understanding and retention.

SPECIAL PRICING

York 10 has been able to obtain a supply of these programs for a one-time **sale price of \$49.95 per volume**. The regular price is \$79.95 per volume. Order now. If you're not completely satisfied, simply return the materials to us in good condition within 30 days and we'll cheerfully refund the purchase price. Write or call for free information.

To order, send your check or money order for **\$49.95** (CA residents add sales tax) for each volume you wish, plus **\$3.50** shipping and handling (any quantity). For immediate shipment, call the number below and charge your VISA or MASTERCARD.



*TRS-80 is a registered trademark of The Tandy Corporation.


```

B82Ø:Y=62:GOSUB85Ø:Y=82:GOSUB88Ø
:Y=1Ø4:GOSUB92Ø
37Ø Y=126:GOSUB96Ø:Y=146:GOSUB1Ø
ØØ:X=12:Y=164:GOSUB1Ø3Ø
38Ø X=236:Y=18:GOSUB1Ø6Ø:Y=4Ø:GO
SUB1Ø9Ø:Y=62:GOSUB112Ø
39Ø Y=84:GOSUB115Ø:Y=1Ø6:GOSUB11
8Ø:Y=126:GOSUB121Ø
4ØØ Y=15Ø:GOSUB124Ø:GOSUB 127Ø
41Ø '*GOSUB JOYSTICK ROUTINE
42Ø GOSUB 176Ø
43Ø '*CLICK ROUTINE
44Ø IF X < 8 OR X > 248 THEN 41Ø
45Ø IF Y < 1Ø OR Y > 182 THEN 41
Ø
46Ø IF X >28 THEN 13ØØ
47Ø IF Y > 9 AND Y < 27 THEN D =
1
48Ø IF Y > 31 AND Y < 49 THEN D
= 2
49Ø IF Y > 53 AND Y < 71 THEN D
= 3
5ØØ IF Y > 75 AND Y < 93 THEN D
= 4
51Ø IF Y > 97 AND Y < 115 THEN D
= 5
52Ø IF Y > 119 AND Y < 137 THEN
D = 6
53Ø IF Y > 141 AND Y < 159 THEN
D = 7
54Ø IF Y > 163 AND Y < 181 THEN
17ØØ
55Ø SOUND 2ØØ,1
56Ø GOTO 14ØØ
57Ø '*TREE SUB
58Ø PMODE3,1:PCLS3:SCREEN1,Ø
59Ø COLOR1,4
6ØØ Y=15:FOR X = 128 TO 18Ø STEP
1Ø
61Ø LINE(X,Y)-(X+16,Y+25),PSET:L
INE-(X+1Ø,Y+25),PSET
62Ø Y=Y+25
63Ø NEXT X
64Ø Y=15:FOR X = 128 TO 72 STEP
-1Ø
65Ø LINE(X,Y)-(X-16,Y+25),PSET:L
INE-(X-1Ø,Y+25),PSET
66Ø Y=Y+25
67Ø NEXT X
68Ø LINE(68,165)-(19Ø,165),PSET
69Ø PAINT(118,5Ø),1,1
7ØØ LINE(124,165)-(132,185),PSET
,BF
71Ø LINE(1ØØ,185)-(156,191),PRES
ET,BF
72Ø RETURN
73Ø '*ORNAMENTS BOXES SUB
74Ø COLOR 1:FOR X = 8 TO 227 STE

```

```

P219
75Ø FOR Y = 9 TO 182 STEP 22
76Ø LINE(X,Y)-(X+2Ø,Y+18),PSET,B
F
77Ø NEXT Y:NEXT X
78Ø RETURN
79Ø '*RED BALL SUB
8ØØ CIRCLE(X,Y),5,4:PAINT(X,Y),4
,4
81Ø RETURN
82Ø '*BLUE BALL SUB
83Ø CIRCLE(X,Y),5,3:PAINT(X,Y),3
,3
84Ø RETURN
85Ø '*YELLOW BALL SUB
86Ø CIRCLE(X,Y),5,2:PAINT(X,Y),2
,2
87Ø RETURN
88Ø '*RED BELL SUB
89Ø COLOR4:CIRCLE(X,Y),5,4,1,.52
,.99:LINE(X-2,Y)-(X-4,Y+6),PSET:
LINE-(X+4,Y+6),PSET:LINE-(X+2,Y)
,PSET
9ØØ PAINT(X,Y),4,4:PSET(X,Y+8,4)
91Ø RETURN
92Ø '*BLUE BELL SUB
93Ø COLOR3:CIRCLE(X,Y),5,3,1,.52
,.99:LINE(X-2,Y)-(X-4,Y+6),PSET:
LINE-(X+4,Y+6),PSET:LINE-(X+2,Y)
,PSET
94Ø PAINT(X,Y),3,3:PSET(X,Y+8,3)
95Ø RETURN
96Ø '*YELLOW BELL SUB
97Ø COLOR2:CIRCLE(X,Y),5,2,1,.52
,.99:LINE(X-2,Y)-(X-4,Y+6),PSET:
LINE-(X+4,Y+6),PSET:LINE-(X+2,Y)
,PSET
98Ø PAINT(X,Y),2,2:PSET(X,Y+8,2)
99Ø RETURN
1ØØØ '*ICICLE SUB
1Ø1Ø COLOR2:LINE(X,Y-1)-(X,Y+9),
PSET
1Ø2Ø RETURN
1Ø3Ø '*OOPS SUB
1Ø4Ø N$="BM"+STR$(X)+", "+STR$(Y)
:DRAW"C3;XN$;D6R4U6NL4BR4D6R4U6N
L4BD1ØL4D3R4D3L4BL8U6R4D4L4"
1Ø5Ø RETURN
1Ø6Ø '*RED AND YELLOW STAR SUB
1Ø7Ø N$="BM"+STR$(X)+", "+STR$(Y)
:DRAW"C4;XN$;NU6ND6NL6NR6C2NE4NF
4NG4NH4"
1Ø8Ø RETURN
1Ø9Ø '*YELLOW STAR SUB
11ØØ N$="BM"+STR$(X)+", "+STR$(Y)
:DRAW"C2;XN$;NU6ND6NL6NR6NE4NF4N
G4NH4"
111Ø RETURN

```

```

112Ø '*RED LIGHT SUB
113Ø CIRCLE(X,Y),3,4:PSET(X,Y,2)
114Ø RETURN
115Ø '*BLUE LIGHT SUB
116Ø CIRCLE(X,Y),3,3:PSET(X,Y,2)
117Ø RETURN
118Ø '*YELLOW LIGHT SUB
119Ø CIRCLE(X,Y),3,2:PSET(X,Y,4)
120Ø RETURN
121Ø '*CANDY CANE SUB
122Ø COLOR4:CIRCLE(X,Y),5,4,1,.5
2,.99:LINE(X+2,Y)-(X+2,Y+7),PSET
123Ø RETURN
124Ø '*YELLOW TINSEL SUB
125Ø FORT=ØTØ1:CIRCLE(X,Y-T),6,2
,.5,Ø,.5:NEXTT
126Ø RETURN
127Ø '*MUSIC NOTE SUB
128Ø DRAW"BM236,176C3L2U2R2D2U1Ø
F4"
129Ø RETURN
130Ø '*CLICK CHECK 2
131Ø IF X < 226 THEN 140Ø
132Ø IF Y > 9 AND Y < 27 THEN D
= 9
133Ø IF Y > 31 AND Y < 49 THEN D
= 1Ø
134Ø IF Y > 53 AND Y < 71 THEN D
= 11
135Ø IF Y > 75 AND Y < 93 THEN D
= 12
136Ø IF Y > 97 AND Y < 115 THEN
D = 13
137Ø IF Y > 119 AND Y < 137 THEN
D = 14
138Ø IF Y > 141 AND Y < 159 THEN
D = 15
139Ø IF Y > 163 AND Y < 181 THEN
GOSUB 164Ø ELSE SOUND 2ØØ,1
140Ø '*CLICK TO PLACE
141Ø '*GOSUB JOYSTICK ROUTINE
142Ø GOSUB 176Ø
143Ø IF X < 48 THEN 43Ø
144Ø IF Y < 1Ø OR Y > 182 THEN 4
1Ø
145Ø IF X > 21Ø OR D = Ø THEN 41
Ø
146Ø SOUND 25Ø,1
147Ø X2=X:Y2=Y:GET(X2-1Ø,Y2-9)-(
X2+1Ø,Y2+9),Z,G
148Ø IF D = 1 THEN GOSUB 79Ø
149Ø IF D = 2 THEN GOSUB 82Ø
150Ø IF D = 3 THEN GOSUB 85Ø
151Ø IF D = 4 THEN GOSUB 88Ø
152Ø IF D = 5 THEN GOSUB 92Ø
153Ø IF D = 6 THEN GOSUB 96Ø
154Ø IF D = 7 THEN GOSUB 1ØØØ
155Ø IF D = 8 THEN GOSUB 1Ø3Ø
156Ø IF D = 9 THEN GOSUB 1Ø6Ø
157Ø IF D = 1Ø THEN GOSUB 1Ø9Ø
158Ø IF D = 11 THEN GOSUB 112Ø
159Ø IF D = 12 THEN GOSUB 115Ø
160Ø IF D = 13 THEN GOSUB 118Ø
161Ø IF D = 14 THEN GOSUB 121Ø
162Ø IF D = 15 THEN GOSUB 124Ø
163Ø GOTO41Ø
164Ø '*PLAY TUNE SUB
165Ø PLAY"V31L1T5ØØ4CL8FP1FP1FP1
L1Ø1FP1P1P1"
166Ø PLAY"L1Ø4GL8AP1AP1AP1L1Ø1AP
1P1P1"
167Ø PLAY"Ø4L1AL8GP1AP1B-P1L1Ø2C
P1P1"
168Ø PLAY"Ø4T25L1EGL2FP1Ø1F"
169Ø RETURN
170Ø '*OOPS SUB
171Ø IF X2=Ø AND Y2=Ø THEN 41Ø
172Ø PUT(X2-1Ø,Y2-9)-(X2+1Ø,Y2+9
),Z,PSET
173Ø PLAY"V3ØT155Ø2BAGFEDCØ1BAGF
EDC"
174Ø X2=Ø:Y2=Ø
175Ø GOTO41Ø
176Ø '*JOYSTICK CURSOR AND CLICK
SUB
177Ø A=JOYSTK(Ø):B=JOYSTK(1)
178Ø X=A*4:Y=B*3:L=PPOINT(X,Y):R
=PPOINT(X+2,Y)
179Ø S=L+3:PSET(X,Y,S):PSET(X+2,
Y,S):PSET(X,Y,L):PSET(X+2,Y,R)
180Ø B$=INKEY$:IF B$="S" THEN 18
4Ø
181Ø IF B$="L" THEN 191Ø
182Ø P=PEEK(6528Ø):IFP<>254ANDP<
>126THEN177Ø
183Ø RETURN
184Ø '*CSAVE SUB
185Ø CLS:PRINT"SAVE TREE":PRINT:
PRINT
186Ø INPUT"ENTER NAME FOR TREE";
A$:PRINT:PRINT"PRESS A KEY WHEN
CASSETTE READY."
187Ø B$=INKEY$:IF B$="" THEN 187
Ø
188Ø CLS3:PRINT "SAVING "A$;
189Ø CSAVEM A$,&H6ØØ,&H1DFF,Ø
190Ø PMODE3,1:SCREEN1,Ø:GOTO41Ø
191Ø '*CLOAD SUB
192Ø CLS:PRINT"LOAD TREE":PRINT:
PRINT
193Ø PRINT"PRESS A KEY WHEN CASS
ETTE READY."
194Ø B$=INKEY$:IF B$="" THEN 194
Ø
195Ø PMODE3,1:SCREEN1,Ø:CLOADM:G
OTO41Ø

```

Mind-tingling action!

THE SECOND RAINBOW BOOK OF

ADVENTURES

Twenty-four of the most challenging Adventure games ever compiled await you in this latest offering from The Rainbow Bookshelf. Journey through time, fight World War III, win the heart of a beautiful and mysterious princess. Experience the titillations of the most rugged Adventurer without ever leaving your seat.

Order The Second Rainbow Book of Adventures and among the 24 program listings you'll receive are:

Yellow Submarine — Meet the Beatles and attempt to outlast the Blue Meanies while enjoying some of the Fab Four's all-time musical hits.

Ring Quest — Regain possession of a magical ring and save a kingdom.

Time Tripper — Lost in another dimension.

Chief Inspector — Who killed B.L. Brown?

Sir Randolf Returns — The sequel to a favorite from our first Adventure book.

Silverton House — Where's the money been stashed?

Ice Princess — Just one glance at this beauty will steal your heart.

Experience other traditional and contemporary challenges from these winning authors: Mark Fetherston, Jeff Crow, Larry Lansberry, J.C. Jackson, Robert W. Mangum II, Robert Poppe, David Taylor, Gregory Clark, Steve Skrzyziarz, David L. Dawson, Curtis Boyle, Bruce K. Bell, Pat Pugliano, Pat and John Everest, Mike Fahy, Scott Settembre, Darin Anderson, Robert L. Thomas, Terrance Hale, Paul Hensel, Philip Courie, Michael Dennison and Robert Dickau.

The Second Rainbow Book of Adventures sells for only \$13.95!

THREE BONUS PROGRAMS

WHEN YOU BUY THE SECOND RAINBOW ADVENTURES TAPE!

That's right. You'll receive a total of 27 fantastic Adventures when you get the Second Rainbow Adventures tape. The three bonus games are Castle Thuudo, by Carmen D. Michele; Halls of Dungeon Death, by Eric and Mark Riel; and Caves of Kalakh, by Jane Fisher — programs with listings too lengthy to include in the book. Save yourself hours of typing listings. Load these great Adventures into your computer and run them!

The Second Rainbow Adventures Tape is only \$13.95.

The tape is an adjunct and complement to the book. Even if you buy the Second Rainbow Adventures Tape, you'll need the book for the introductory material and loading instructions.

Keep your Rainbow Bookshelf up-to-date!

See Page 179 for additional Rainbow Bookshelf offerings.



For greater convenience, order the Second RAINBOW Book of Adventures and Adventures Tape through the shopping area of the CoCo SIG of Delphi!



Please send me
The Second Rainbow
Book Of Adventures
for \$13.95*

Please send me
The Second Rainbow
Adventures Tape
for \$13.95

Name _____

Address _____

City _____ State _____ ZIP _____

My check in the amount of _____ is enclosed.*

Please charge to my: VISA MasterCard American Express

Account Number _____ Exp. Date _____

Signature _____

**Mail to: The Second Rainbow Book of Adventures,
The Falsoft Building, P.O. Box 385, Prospect, KY 40059**

To order by phone (*credit card orders only*) call 800-847-0309,
8 a.m. to 5 p.m. EST. For other inquiries call 502-228-4492.

*Add \$1.50 shipping and handling per book. Outside the U.S., add \$4. Allow 6-8 weeks for delivery. Kentucky residents add 5% sales tax for book and tape. In order to hold down costs, we do not bill. U.S. currency *only, please*.



The Rainbow Bookshelf™



WE'RE BRINGING THE COCO

RAINBOW'S BROADENING ITS SPECTRUM

THE RAINBOW and the Delphi Information Utility have joined together to allow CoCo owners all over the world to connect with one another!

Delphi is a full-service information utility. It offers everything from up-to-the-minute news stories from The Associated Press to electronic mail services. But, *best of all*, it now has a **special forum for Color Computer owners, and it's operated by the people who bring you THE RAINBOW each month.**

The CoCo Special Interest Group (SIG) features a variety of services, including an open forum where you can send and receive messages from Color Computer owners all over the world. It also has several databases to which you can upload your favorite programs and from which you can download programs written by other CoCo enthusiasts. Some of these databases are BASIC programming, OS-9 and home applications.

When setting up your account with Delphi, if you do not have a credit card or prefer not to use it, Delphi requires that you send \$20 to give your account a positive balance. This will be refunded after your first free hour if you choose to no longer use the system or it will be applied to future connect charges. If you do not maintain a positive balance, you will be charged \$3.50 each month for direct billing.

PEEK INTO THE RAINBOW

The CoCo SIG's conference feature allows you to meet electronically with other members of the CoCo Community. You can join conferences with notables such as Dale Puckett, Cray Augsburg, Marty Goodman, Don Hutchison, Jim Reed, Lonnie Falk and others — on a regular basis. Conference schedules will appear in THE RAINBOW each month. Be sure to check online announcements for changes and additions.

THE OTHER SIDE OF THE RAINBOW

On Delphi, you also are able to buy RAINBOW ON TAPE — order a whole set, or download an individual program immediately. You can also renew your RAINBOW subscription, make a fast and easy order for software or hardware from a multitude of vendors, or inquire about products on the CoCo SIG.

We also have a number of **programs that you can download** and use, just for the cost of the time you spend transferring them. There'll also be **corrections for RAINBOW articles**, helpful hints and many other useful features.

FREE LIFETIME MEMBERSHIP

THE RAINBOW is offering subscribers a **free lifetime subscription to Delphi** — a \$24.95 value — and a free hour of connect time — a \$7.20 value at either 300, 1200 or 2400 Baud — so you can sample Delphi and the RAINBOW CoCo SIG. That's right. Your subscription to THE RAINBOW entitles you to this \$32.15 value as a **free bonus!**

If you're not a RAINBOW subscriber, just enter your order when you sign on with Delphi and you'll get the same great deal! For our \$31 subscription fee, you'll get the finest Color Computer magazine ever, a free lifetime subscription to Delphi and a free hour of connect time.

SAVE EVEN MORE

Want to save even more? While you're online you can order, for only \$29.95, a deluxe package which includes the Delphi membership, the *Delphi Handbook and Command Card* (\$21.95) and a total of three hours of connect time (\$21.60).

Delphi provides us all with **Immediate CoCo Community**. Check it out today. After all, you can sample it for free!

Problems? Call Delphi:
(800) 544-4005
(617) 491-3393

DELPHI

TYPE: GROUP COCO



COMMUNITY TOGETHER

How to reach RAINBOW's Color Computer SIG . . .

There are several ways to connect to Delphi and THE RAINBOW's CoCo SIG. In most cities you will not even have to pay long distance charges; you can use special data communications networks like Telenet, Tymnet and the Canadian Datapac network.

First, set your terminal program to operate at either 300 or 1200 Baud (depending on the modem you have), and also select either 7 bits with even parity or 8 bits with no parity, and one stop bit. (If one combination doesn't work, try another.)

Decide which network you should use. There is no surcharge for Telenet or Tymnet. Canadian residents using Datapac will be charged an additional \$12 (U.S.) per hour.

On Telenet: The Uninet network has now merged with Telenet. To get the Telenet number for your area, call (800) 336-0437. After you call your local access number and make connection, press the ENTER key twice. When the "TERMINAL=" prompt appears, press ENTER again. When the "@" prompt appears, type C DELPHI and press ENTER.

On Tymnet: Call (800) 336-0149 to get the Tymnet number for your area. After you dial your designated number and connect, you will see either "garbage" or a message saying "please type your terminal identifier." At this point, even if the screen is garbled, simply press 'A'. When "please log in:" appears, type DELPHI and press ENTER.

From Canada (on Datapac): Call Delphi Customer Service at (617) 491-3393 to get the Datapac number for your area. After you connect, press the period key (.) and ENTER (use two periods if you're using 1200 Baud). Type SET 2:1, 3:126 and press ENTER. Now type p 1 3106, DELPHI; and press ENTER. Delphi's new rates indicate an additional \$12 hourly surcharge for evening use of Datapac, which means a total of \$18 (U.S.) for connect time.

From other countries: Many countries have their own data networks that can connect to either Telenet or Tymnet. Check with the telephone authorities in your country for details on how to sign up for this service. When you have an account set up, you can reach Delphi with a "host code" of 312561703088 through Telenet, or 310600601500 through Tymnet. (You'll have to pay the toll charges for this connection.)

Type in Your Username

If you're already a subscriber to THE RAINBOW, at the "USERNAME:" prompt, type RAINBOWSUB and press

ENTER. At the "PASSWORD:" prompt, type your individual subscription number from the mailing label of your latest issue of THE RAINBOW. (If there are one or more zeros at the beginning of this number, include them.)

If you don't already have a subscription, at the "USERNAME:" prompt, type RAINBOWORDER and press ENTER. At the "PASSWORD:" prompt, type SENDSUB and press ENTER. Have your MasterCard, VISA or American Express card ready, because you'll be led through a series of questions that will enable us to put your RAINBOW and Delphi subscriptions into effect. In an effort to hold down non-editorial costs, we do not bill for subscriptions.

If you make a typing error, just press ENTER and start over. Remember that at any point, when you're on Delphi, you can type HELP to get help on how to use the system. To get off the system just type BYE.

If you find that you're unable to log on to Delphi and enter the CoCo SIG after following these instructions, call us during afternoon business hours at (502) 228-4492. We'll be glad to offer assistance.

Come Visit Us! Type: GROUP COCO

After you sign in, you'll be prompted to set up your own, personal "user name" — Delphi is a friendly service, no numbers to remember — and you'll be asked a number of questions so Delphi can set up your account. You'll also be assigned a temporary password. No time is assessed against your free hour of service while you answer these questions.

Delphi will tell you that your account will be ready after 6 p.m. the same day if you sign up before noon (Eastern time zone.) If not, your account will be ready at 6 p.m. the next day. Once an account is opened, *each RAINBOW subscriber will be credited with an hour of free time!*

When you log back in, use your chosen username and your temporary password to access the system. At that point, you will meet Max, who will help you configure things and will change your temporary password into your own *personal* password. This is the password you will use for subsequent sessions — or until you change it.

After Max bids you goodbye, you'll wind up at the Delphi Main Menu; type in GROUP COCO and **join us on the CoCo SIG!**



Santa needs your help to fly his magical nighttime mission



Up on the Rooftop

By J. D. German

If you're looking for a Christmas present that will get your youngsters interested in the computer, this program may be just what Santa ordered. *Here Comes Santa* is a Christmas graphics game with a built-in, personalized gift tag. Actually, it's not a game in the usual sense, since there is no scoring or clock to play against. But it is fun — so much fun that you may have trouble getting the kids to give up the computer when it's your turn.

Here Comes Santa is a BASIC graphics animation in which your child controls Santa and his reindeer as they fly through a star-filled sky and land in front of houses below. Santa's altitude is controlled either with a joystick or from the keyboard with the up- and

J. D. German works in Albuquerque, N.M., as an analyst for the Strategic Defense Initiative "Star Wars" program. He has written several articles for Color Computer magazines and has authored educational programs for the CoCo.

down-arrow keys. Either way, the reindeer and sleigh behave according to the laws of physics, having to overcome momentum to change their flight path.

The overall program structure is designed to keep the graphics animation as fast as possible. The animation routine is located at the front end of the program and time-consuming statements within the animation loop (lines 90 to 450) were kept to a minimum. In spite of this, Santa flew a little slower than I would have liked, so I added the speed-up poke as Line 65. If your computer won't respond to the speed-up poke, you may want to remove one or two of the animated background objects to buy some speed. These objects (houses, trees, etc.) are put in place as arrays B1 through B4 in lines 90, 100, 230 and 240. You can skip the DRAW statements (lines 550 to 600) for any deleted objects to save some typing time. Another alternative is to give up the moving star background PSET with lines 110 and 250. The lines that generate the stars (lines 660 and 670) and the lines that move the stars (lines 400 through 440) can also be eliminated.

Lines 1, 2 and 63990 are included to work around the infamous PCLEAR bug

in the older versions of the Extended BASIC ROM. If your computer doesn't suffer from that abominable affliction, you can leave out those three lines.

Lines 10 through 60 display a Christmas greeting and play a few bars of appropriate music. Line 40 produces a red and green personalized gift card that remains on the screen while the program creates the animated objects. Change the names in that line to match your own children's names. To center the new names on the screen, change the value of the PRINT@ statement in this line. The new value can be calculated by counting the number of letters and spaces in the name, dividing by two, and adding the result to 32.

After the high-speed poke in Line 65, the program skips to the drawing routine beginning with Line 470. This is where all of the animated figures are initially drawn and painted. After each is completed, a GET statement stores the figure in memory as an array. I tried to minimize the amount of typing, so I left out the optional semicolons between most of the DRAW parameters. I also saved some typing by defining one legless reindeer, RD\$, in Line 490, then adding two different leg positions in Line 500 to provide the galloping animation for the reindeer. The remainder of the DRAW statements produce four figures: a house, an apartment, a church with a pine tree beside it and a large, lighted Christmas tree.

Once the figures have been drawn and

stored, the initial positions of the figures and the stars are produced. To keep the program from getting boring, I added some randomizing functions to the position calculations. Lines 610 through 650 randomly select the order of the four figures and add a random component to the spacing between them. Lines 660 and 670 place the stars at random locations in the sky, while Line 680 starts Santa's sleigh and reindeer at a different altitude each time the program is run.

Finally, Line 690 sets the PLAY parameters for the hoofbeat clicks before Line 700 sends the program into the flying routine loop starting at Line 90.

The animation is achieved by paging back and forth between two screens. While one screen is being displayed, the other is having the figures cleared and set to a new position. The two program blocks that perform this function, lines 90 through 220 and lines 230 through 450, are identical except for the locations of the figures, so I'll just describe the first block.

The scene construction begins with placement of the four ground-level background figures (stored in arrays B1 through B4) in lines 90 and 100. Line 110 sets the stars in place, while lines 120 and 130 put Santa's sleigh and reindeer in place. These figures are added last so they will overlay the other figures and

appear to be in front of them. As a final touch to the animation, Line 140 adds the click of tiny hoofbeats whenever the reindeer are on the ground.

Once the scene placement is complete, the positions of Santa and the background figures are updated for the following scene. Line 150 begins this process by making the next position of each reindeer equal to the last position of the reindeer in front of it. This gives the team of reindeer an undulating flight path that adds to the realism. The next two lines, 160 and 170, provide the new altitude position for the lead reindeer (Rudolph, of course). Here you have a choice between joystick control or keyboard control. In this listing, Line 160 is preceded by an apostrophe, so it is not seen by the program, and Line 170, the keyboard control line, drives Rudolph up and down in response to the up- and down-arrow keys. If you would rather use the right joystick, delete the apostrophe in Line 160 and delete Line 170. You must also make the same changes in lines 300 and 310.

The second half of lines 160 and 170 contain the trick to making Santa and his reindeer obey the laws of physics. When the up arrow (or up joystick) is held, the reindeer acquire momentum, as variable DV, in the upward direction. To turn them around to the downward direction, you must hold the down-

arrow key (or down joystick) long enough to overcome that momentum, since DV will only change by +/-2 with each position update. Line 190 limits DV to a maximum absolute value of 6, and Line 200 adds DV to Rudolph's present position while ensuring that he cannot fly off the screen.

Finally, Line 210 stops the reindeer if they are all on the ground and the down arrow is pressed. To resume flight, just press the up arrow. After Line 220 "turns the page," the entire cycle is repeated with the second set of reindeer hoof positions.

Here Comes Santa began with a comment from my wife, Patty, about how much fun kids could have with a Christmas computer game. If you enjoy writing or tinkering with animated programs, *Here Comes Santa* is a good one to work with. You could make the house or apartment look like your own, add an airplane for Santa to dodge, or put a Christmas star in the sky. Whatever you do with it, I hope your family enjoys this program as much as mine has. As the jolly old elf himself once said, "A merry Christmas to all, and to all a good night!"

(Questions about this program may be directed to the author at P.O. Box 652, Cedar Crest, NM 87008, 505-281-1719. Please enclose an SASE for a reply.) □

11070
210230
340216
50070
56046
6100
END157

The listing: SANTA

```

1 GOTO 63990
2 GOTO 10
3 CLEAR 500:PCLEAR 8:GOTO 2
5 '*****
*
*   HERE COMES SANTA CLAUS
*
*       BY J. D. GERMAN
*
6 '*   CREATIVE
*     TECHNICAL
*     CONSULTANTS
*
*       P.O. BOX 652
*     CEDAR CREST, NM 87008
*****

```

```

10 CLS 4:POKE 65494,0
20 PRINT@109,"MERRY";
30 PRINT@171,"CHRISTMAS";
40 PRINT@233,"CHRIS & JAMIE";
50 PLAY"L2T803;CAL4GGL2FCAL4GGL2
FCA#L4A#A#L2AL1A#"
60 PRINT@483,"I'M THINKING - PLE
ASE WAIT";
65 POKE 65495,0:'HIGH SPEED POKE
70 GOTO 470
80 '** FLYING ROUTINE **
90 PUT(X1,168)-(X1+34,191),B1,PS
ET:PUT(X2,168)-(X2+34,191),B2,PS
ET
100 PUT(X3,168)-(X3+34,191),B3,P
SET:PUT(X4,168)-(X4+34,191),B4,P
SET
110 PSET(I1,J1,2):PSET(I2,J2,2):
PSET(I3,J3,2):PSET(I4,J4,2):PSET
(I5,J5,2)
120 FORI=1TO5:PUT(55+20*I,Y(I)-1
1)-(73+20*I,Y(I)),RB,PSET:NEXT I

```

```

:PSET(77,Y(1)-8,4):PSET(77,Y(1)-
7,4):PSET(79,Y(1)-8,4):PSET(79,Y
(1)-7,4)
13Ø PUT(18Ø,Y(6)-19)-(221,Y(6)+2
),SL,PSET:SCREEN1,Ø
14Ø IF Y(1)=19Ø THEN PLAY"A"
15Ø FORI=1TO5:Y(7-I)=Y(6-I):NEXT
16Ø 'X=JOYSTK(Ø):Y=JOYSTK(1):DV=
DV+INT((Y-26)/13):'>>>JOYSTICK V
ERSION ONLY<<<
17Ø IF PEEK(342)=247 THEN DV=DV+
2 ELSE IF PEEK(341)=247 THEN DV=
DV-2:'>>>KEYBOARD VERSION ONLY<<
<
18Ø POKE342,Ø:POKE341,Ø
19Ø IF DV>6 THEN DV=6 ELSE IF DV
<-6 THEN DV=-6
20Ø Y(1)=Y(1)+DV:IF Y(1)<2Ø THEN
Y(1)=2Ø ELSE IF Y(1)>19Ø THEN Y
(1)=19Ø:DV=Ø
21Ø IF Y(1)=19Ø AND Y(6)=19Ø AND
PEEK(342)=247 THEN 21Ø
22Ø PMODE3,5:PCLS3
23Ø PUT(X1+4,168)-(X1+38,191),B1
,PSET:PUT(X2+4,168)-(X2+38,191),
B2,PSET
24Ø PUT(X3+4,168)-(X3+38,191),B3
,PSET:PUT(X4+4,168)-(X4+38,191),
B4,PSET
25Ø PSET(I1+4,J1,2):PSET(I2+4,J2
,2):PSET(I3+4,J3,2):PSET(I4+4,J4
,2):PSET(I5+4,J5,2)
26Ø FORI=1TO5:PUT(55+2Ø*I,Y(I)-1
1)-(73+2Ø*I,Y(I)),RA,PSET:NEXT I
:PSET(77,Y(1)-8,4):PSET(77,Y(1)-
7,4):PSET(79,Y(1)-8,4):PSET(79,Y
(1)-7)
27Ø PUT(18Ø,Y(6)-19)-(221,Y(6)+2
),SL,PSET:SCREEN1,Ø
28Ø IF Y(1)=19Ø THEN PLAY"E"

```

```

29Ø FORI=1TO5:Y(7-I)=Y(6-I):NEXT
30Ø 'X=JOYSTK(Ø):Y=JOYSTK(1):DV=
DV+INT((Y-26)/13):'>>>JOYSTICK V
ERSION ONLY<<<
31Ø IF PEEK(342)=247 THEN DV=DV+
2 ELSE IF PEEK(341)=247 THEN DV=
DV-2:'>>>KEYBOARD VERSION ONLY<<
<
32Ø POKE342,Ø:POKE341,Ø
33Ø IF DV>6 THEN DV=6 ELSE IF DV
<-6 THEN DV=-6
34Ø Y(1)=Y(1)+DV:IF Y(1)<2Ø THEN
Y(1)=2Ø ELSE IF Y(1)>19Ø THEN Y
(1)=19Ø:DV=Ø
35Ø X1=X1+8:IF X1>217 THEN X1=Ø
36Ø X2=X2+8:IF X2>217 THEN X2=Ø
37Ø X3=X3+8:IF X3>217 THEN X3=Ø
38Ø X4=X4+8:IF X4>217 THEN X4=Ø
39Ø X5=X5+12:Y5=Y5+4:IF X5>217 A
ND RND(2Ø)=1 THEN X5=Ø:Y5=RND(14
Ø)
40Ø I1=I1+8:IF I1>255 THEN I1=Ø
41Ø I2=I2+8:IF I2>255 THEN I2=Ø
42Ø I3=I3+8:IF I3>255 THEN I3=Ø
43Ø I4=I4+8:IF I4>255 THEN I4=Ø
44Ø I5=I5+8:IF I5>255 THEN I5=Ø
45Ø PMODE3,1:PCLS3:GOTO9Ø
46Ø '** DRAW ROUTINE **
47Ø PCLEAR8:PMODE3,1:PCLS3
48Ø DIM RA(5),RB(5),SL(23),XX(1Ø
5),XY(2),B1(15Ø),B2(15Ø),B3(15Ø)
,B4(15Ø),AP(8ØØ)
49Ø RD$="BM4,6;C2R2BD1R2BR4R2BU1
R2BD2BL4L2D1L2R4D1L2D1R1L1L2D1L9D
1R9D1L1D1R3BL12L1BR2BU1R1BU1BR4C
4U2L1D2"
50Ø DRAW RD$+"BM1Ø,16C2R1BR11R1"
:GET(4,6)-(22,17),RA,G:PCLS3:DRA
WRD$+"BM6,16C2R1D1L1BR9R2U1L1":G
ET(4,6)-(22,17),RB,G:PCLS3:'REIN
DEER

```

```

51Ø DRAW"BM1Ø,16;C1R4D1L1D2R1D1R
1ØU4R21D3L2D2L2D2L31U2L2U2L2U1R2
U1R2BD7BL3L3D2R1D1R1D1R39L4U1L1B
L1BU1L1BU1L1BU1L2BD1L1BD1L1BD1L1
BD1L1U1L1BU1BL1L1BU1L1BU1L2BD1L
1BD1L1BD1L1":PAINT(27,18),4,1
52Ø DRAW"BM34,15;C2;R4U1L4U1R4U1
L4BL5BD3C4R6U1L6U1R6U1L6U1R6BD4B
R1C2R5U1L5U1R5BU1BL1C1L3U1R3U1L3
U1R3"
53Ø DRAW"BM23,2Ø;C2L7U6D5R2C4R5U
1L8BL2C2U1BR2C4R8U1L4C2U1R4U1L4C
4U1C2R4U1L3C4U1R3U1L3R3U2C2U1"
54Ø GET(4,7)-(45,28),SL,G:PCLS3:
'SLEIGH
55Ø DRAW"BM2,191;C2;U14L2U1R2U1R
2U1R2U1R2U1R2U1R2U1R2U1R2D1R
2D1R2D1R2D1R2D1R2D1R2D1R2D1L

```

One-Liner Contest Winner . . .

This program creates a cash register, which is great for those fall garage sales.

The listing:

```

Ø FORX=1TO99999:CLS:PRINT@41,"CA
SH REGISTER":INPUT"PRICE:";P:INP
UT"CASH TENDERED:";CT:PRINT:PRIN
T"YOU GET:";PRINT" ";CT-P;"$
BACK IN CHANGE":RT=P+RT:INPUTD:I
FD<1THENNEXT X:ELSE PRINT"YOU MO
VED $";RT;" WORTH OF":PRINT"MERCH
ANDISE!!"

```

Russ Rosen
Cardiff, CA

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)


```

2D14L28;BM26,172;C4;U4R2D4R2D2U6
;BM8,184;C2;D4R2U4;BM22,184;D4R2
U4":PAINT(4,188),1,2:GET(Ø,168)-(
(34,191),B1,G:PCLS3:'HOUSE
56Ø DRAW"BM2,191;C2;U13L2R32U1L3
2U1R32L2D15L28;BM8,175;C4;U3R2D3
R2U3;BM24,187;C2;U4R2D4":PAINT(8
,188),4,2:DRAW"BM6,187;C3;U4R2D4
;BM16,187;U4R2D4":GET(Ø,168)-(34
,191),B2,G:PCLS3:'APARTMENT
57Ø DRAW"BM2,191;C2;U8L2U2R2U2R2
U2R2U4R2U4L2R2U2R1D2R2L2D4R2D4R2
D2R2D2R2D2L2D8L13":PAINT(8,188),
2,2:DRAW"BM6,186;C3;D4R2U4R2D4;B
M26,191;C1;U1L6R13L2U1L8R1U1R5U1
R2L8R2U1R4L2U1U1R2L5R2U1U1":PAIN
T(26,19Ø),1,1
58Ø GET(Ø,168)-(34,191),B3,G:PCL
S3:'CHURCH
59Ø DRAW"BM14,191;C1;U2L12U1L2R2
U1R2U2L2R2U1R2U2L2R2U1R2U2L2R2U1
R2U2L2R2U1R2U2L2R2U1R2U2L2R2U2R2
D2R2L2D2R2D1R2L2D2R2D1R2L2D2R2D1
R2L2D2R2D1R2L2D2R2D1R2L2D2R2D1R2
L2D1L24":PAINT(8,188),1,1:'TREE
6ØØ PSET(14,168,2):PSET(16,173,3
):PSET(12,176,4):PSET(14,178,2):
PSET(18,181,4):PSET(8,18Ø,3):PSE

```

```

T(1Ø,183,3):PSET(16,182,2):PSET(
22,185,3):PSET(6,186,4):PSET(4,1
88,2):PSET(12,187,3):PSET(24,188
,4):GET(Ø,168)-(34,191),B4,G:PCL
S3:'TREE LIGHTS
61Ø R=RND(4):ON R GOTO 62Ø,63Ø,6
4Ø,65Ø
62Ø X1=RND(2Ø):X2=X1+38+RND(2Ø):
X3=X2+38+RND(2Ø):X4=X3+38+RND(2Ø
):GOTO 66Ø
63Ø X2=RND(2Ø):X1=X2+38+RND(2Ø):
X3=X1+38+RND(2Ø):X4=X3+38+RND(2Ø
):GOTO 66Ø
64Ø X4=RND(2Ø):X3=X4+38+RND(2Ø):
X2=X3+38+RND(2Ø):X1=X2+38+RND(2Ø
):GOTO 66Ø
65Ø X4=RND(2Ø):X2=X4+38+RND(2Ø):
X3=X2+38+RND(2Ø):X1=X3+38+RND(2Ø
)
66Ø I1=RND(255):I2=RND(255):I3=R
ND(255):I4=RND(255):I5=RND(255)
67Ø J1=RND(17Ø):J2=RND(17Ø):J3=R
ND(17Ø):J4=RND(17Ø):J5=RND(17Ø)
68Ø Z=RND(1ØØ)+5Ø:FOR I=1 TO 6:Y
(I)=Z:NEXT
69Ø PLAY"T255L255O1V3Ø"
7ØØ GOTO 9Ø
6399Ø PMODEØ,1:PCLEAR1:GOTO 3

```

THE BEST SELLING COCO DIGITIZER JUST GOT BETTER ... \$125.00

CoCo 3
Compatible!

GRAPHICOM/VIDEO DIGITIZER

Input directly into Graphicom for easy enhancements, manipulation, stamping, and storage. Accepts composite video signal in (1.0v p-p) from video camera, VCR, video disc player, another computer, or other compatible video sources. View "off air" or "VCR" digitized video at close to real-time (a full 13 frames a second!). "Snapshot" video frames to the digitizer's internal memory. Use with your multi-pak, "Y" box, or a "Y" cable ("Y" Box Cat. No. 162CH available at \$29.95 / "Y" cable Cat. No. 137CH available at \$19.95) Video is input via a RCA phono connector. External controls for HORIZONTAL POSITION, VERTICAL POSITION, HORIZONTAL WIDTH, BRIGHTNESS, and CONTRAST (FUZZ) settings. Don't be fooled by imitations ... this is the GRAPHICOM VIDEO DIGITIZER

REQUIRES 64K COCO, 1 DISK DRIVE, AND 2 ANALOG JOYSTICKS. A FREE GRAPHICOM PROGRAM, AND PICTURE DISK ARE SUPPLIED WITH PURCHASE OF VIDEO DIGITIZER (A \$50 VALUE) ... NEW LOW PRICE! \$125.00

ADD \$5.00 FOR HANDLING • SHIPPED FREE, FEDERAL EXPRESS


Check or M.O.

Computize

INC.
(215) 946-7260 P.O. BOX 207 • LANGHORNE, PA 19047

PA residents
add 6%
sales tax

STAR NX-10 COMPLETE SYSTEM

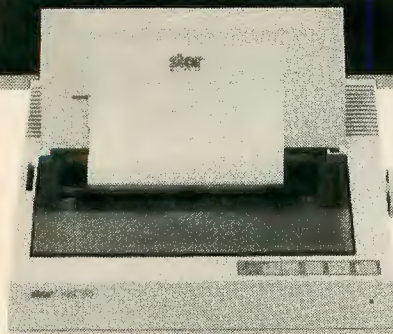

Easy-to-use and ready for the heavy workloads from your TRS-80 Color Computer 1, 2, 3 or PC compatible. Control pitch, margins, NLQ, Italics and more from the Front Control Panel. Stuff the 5K data buffer with your own unique character set or use one of the 11 built in character sets. 1 Year limited warranty serviceable nationwide. Deluxe Users manual. System includes the NX-10 Dot Matrix printer with BLUE STREAK II serial-to-parallel interface and our Software Trio (see below).

SPECS: 120cps Draft, 30cps NLQ, Italics Sub & Superscripts, Emphasized, Doublestrike, Proportional, International, Down Loadable Char., Left, Right, or Center Justification, Underline, Vertically Enlarged 2X/4X, 5, 6, 8, 5, 10, 12, & 17 CPI, Graphics 480-1920 dots/line, Horiz. & Vert. Tabs, Forward or Reverse n/216" Line Feeds, Hex Dump, Friction & Push Tractor, 5K Data Buffer.


\$299⁹⁵ +\$10 Shipping and Insurance
COMPLETE

SEIKOSHA SP-1000AS COMPLETE SYSTEM


Triple Mode Dot Matrix printer with serial interface, cable and our Software Trio (see below). Ready to run single sheet or 4" to 10" tractor paper from your TRS-80 Color Computer 1, 2, or 3. Compatible with your programs that let you control your baud rate, like CoCoMax, VIP, Basic and OS-9 etc. 24 month limited warranty. 76 page users manual.

SPECS: 100cps Draft, 20 cps NLQ, Italics, Sub & Superscripts, Bold, Doublestrike, Proportional, International, Underline, 5, 6, 8.5, 10, 12, & 17 CPI, Graphics 480-1920 dots/line, Horizontal and Vertical Tabs, n/216" Line Feeds, Hex Dump, Friction and Tractor Paper Feed.

\$219⁹⁵ +\$10 Shipping and Insurance
COMPLETE

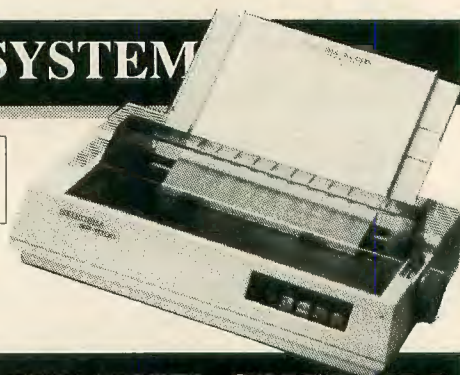

CITIZEN 120D COMPLETE SYSTEM

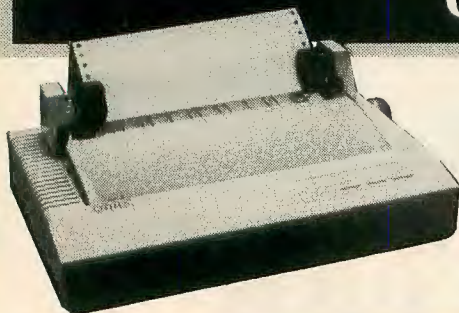

Triple Mode, High performance Dot Matrix printer with serial interface, cable, and our Software Trio (see below). Ready to run with your TRS-80 Color Computer 1, 2, or 3. Load single sheets with one button ease or use the adjustable tractor with rear or bottom feed. Fill the 4K buffer with text and graphics from your favorite programs such as CoCoMax, VIP and Basic at rates up to 9600 baud. 12 month limited warranty. Deluxe users manual.

SPECS: 120 cps Draft, 25 cps NLQ, Italics, Sub & Superscripts, Emphasized, Doublestrike, Proportional, International, User Defined Characters, Left, Right, Center or Full Justification, Underline, Overscore, Reverse Print, Vertically Enlarged 2X, 5, 6, 8.5, 10, 12, 17, & 20 CPI, Graphics 480-1920 dots/line, Horiz. and Vert. Relative & Absolute Tabs, n/216" Line Feeds, Hex Dump, Friction and Tractor, 4K Buffer.


\$229⁹⁵ +\$10 Shipping and Insurance
COMPLETE

BLUE STREAK II Serial to Parallel Interface

Transfer your data from CoCo 1, 2, 3 to your parallel printer with a fury. The Blue Streak can increase your data transmission 4 fold over conventional-compatible interfacing and increase printer throughput. An additional serial I/O port permits port sharing with another serial device without recabling.

SPECS: 300, 600, 1200, 2400, 4800, 9600 Switchover Baud Rates, Power Supply 276-1431A UL Listed, 1 Year Warranty, Input 4 Pin Serial, Output 36 Pin Parallel and 4 Pin Serial, Total Cable Length 54 Inches, Box 4"x2"x1".

\$49⁹⁵ without power +\$2 Shipping and Insurance
\$54⁹⁵ with power +\$2 Shipping and Insurance

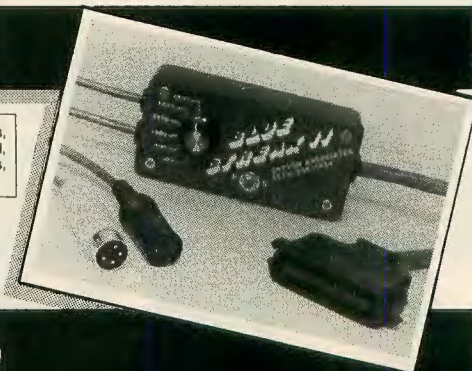

SOFTWARE TRIO

Dragon's
WORD PROCESSOR 2.2
TAPE OR DISK VERSION

A feature packed program that turns your CoCo into an office machine. Create and save letters and documents with the Word processor tailored for your printer.

SUPER GEMPRINT

A FULL 8"X11" SCREEN DUMP PROGRAM

A well-written and documented program written in machine language position independent code. Features include user definable color shading and printing in all 5 Pmodes. Tape transferable to disk. Requires 16K extended color basic.

TYPE SELECTION TUTORIAL PROGRAM

Menu driven program for the CoCo. Teaches and shows the new user the numerous features of their printer. (Specify printer when ordering)

ALL THREE \$19⁹⁵ PROGRAMS

DAYTON ASSOCIATES of W.R. HALL, INC.
DUN & BRADSTREET LISTED
7201 CLAIRCREST BLDG. C
DAYTON, OHIO 45424

OHIO RESIDENTS ADD 6% SALES TAX • C.O.D. ADD \$2.00

TRS 80 Color Computer® Tandy Corp., CoCoMax® Colorware Inc., VIP® Softlaw Corp. All data subject to change without notice.

AUTO-ORDER LINE
1-800-251 STAR
Personal Service
(513) 236-1454



Avatex 1200 Baud Modem Gets You Online With Delphi/ <i>Spectrum Projects, Inc.</i>	132
Assembly Language for the TRS-80 Color Computer Informative Book for Beginners and Advanced Programmers/ <i>Tepco</i>	142
Battle Hymn Historic Simulation of the Battle of Gettysburg/ <i>Ark Royal Games</i>	136
CC3 Draw Paint Pretty Pictures on the CoCo 3/ <i>Spectrum Projects, Inc.</i>	148
COMM-4 Gives CoCo Four RS-232 Ports/ <i>CoCo Devices</i>	134
DMS-3B Digital Memory Scope A Hardware Hacker's Delight/ <i>D&A Research</i>	146
Dragon's Temple Challenging and Entertaining Simulation/ <i>Jade</i>	136
Inside Information Survey of Information Industry/ <i>New American Library</i>	138
Little Letters Helps Children Master Lowercase/ <i>Bob's Software</i>	144
LYRA CoCo Comes to Life With the Sound of Music/ <i>Speech Systems</i>	133
MikeyDial Makes <i>Mikeyterm</i> Even Better/ <i>Spectrum Projects, Inc.</i>	143
Packer Pack BASIC Programs for More Memory/ <i>Bob van der Poel Software</i>	139
TX Word Processor Lots of Word Processor for the Price/ <i>Kolesar</i>	136
White Fire of Eternity Animated Graphics Adventure/ <i>Saguaro Software</i>	135



Now from Falsoft, The RAINBOW MAKER, comes . . .



The magazine for Tandy portable and MS-DOS users

Not only does Tandy produce our favorite CoCo, we think they produce the best and best-priced laptop portable and MS-DOS computers as well. We've found that when satisfied Color Computer users decide to add portability or move to MS-DOS, many stick with Tandy. For these people we publish PCM, The Personal Computer Magazine for Tandy Computer Users.

Each month in PCM, you'll find information and programs for the Tandy 100, 102, 200 and 600 portable computers. And you'll find even more coverage for their MS-DOS machines, the 1000, 1200, 2000 and 3000, along with the great new 1000 EX, 1000 SX and 3000 HL.

FREE PROGRAMS!

We learned from THE RAINBOW that readers want programs to type in, so each month we bring you an assortment of them: games, utilities, graphics, and home and business applications.

BAR CODE LISTINGS AND PROGRAM DISKS!

For portable users, PCM is the only home computer publication in the world that brings you programs in bar code, ready to scan into memory like magic with the sweep of a wand! For those who don't have time to type in listings, we offer a companion disk service with all the programs from the magazine.

TUTORIALS AND PRODUCT REVIEWS!

As if all this weren't enough, we offer regular tutorials on telecommunications and hardware; assembly language, BASIC and PASCAL programming tips; and in-depth reviews of the new software, peripherals and services as they are released. Add it all up and we think you'll find PCM to be the most informative and fun magazine for this market today!

To order by phone (*credit card orders only*) call 800-847-0309, 8 a.m. to 5 p.m. EST. For other inquiries call 502-228-4492.

YES! Please send me a one year (12 issues) subscription to PCM for only \$28.* A savings of 22% off the newsstand price.

Name _____

Address _____

City _____ State _____ ZIP _____

In order to hold down costs, we do not bill.

My check in the amount of _____ is enclosed.

Charge to my: VISA MasterCard American Express

Acct. # _____ Expiration Date _____

Signature _____

For greater convenience, order a PCM Subscription through the shopping area of the CoCo SIG of Delphi!

*Canadian subscribers U.S. \$35. Surface rate elsewhere \$64, airmail \$85. Allow 6 to 8 weeks for first copy. Kentucky residents add 5% sales tax. U.S. currency only, please.

Mail to: PCM, The Falsoft Building, P.O. Box 385, Prospect, KY 40059

RECEIVED AND CERTIFIED

The following products have recently been received by THE RAINBOW, examined by our magazine staff and approved for the Rainbow Seal of Certification, your assurance that we have seen the product and have ascertained that it is what it purports to be.

This month the Seal of Certification has been issued to:

3-D Graphics, a 64K program that allows simultaneous rotation, movement, zoom and animation of 3-D graphics images. An editor is also included that allows the user to create and edit three-dimensional data. *Logicware*, 730 W. McDowell Road, Phoenix, AZ 85007; (602) 821-2465, \$32.95 plus \$3 S/H.

Avatex 1200 Baud Modem, is Hayes compatible and has auto-dial/answer. Requires modem cable. *Spectrum Projects, Inc.*, P.O. Box 264, Howard Beach, NY 11414; (718) 835-1344, \$129.95; cable \$19.95 plus \$3 S/H.

Banner — Roman Type, a 16K program that makes banners for parties, clubs, schools, etc. Seven-inch characters are printed horizontally on the printer so you can make them any length you want. *B. Erickson Software*, P.O. Box 1109, Chicago, IL 60611; (312) 276-9712, \$25.

Basic Spanish, an introductory course for the CoCo. This series of 16 full-length programs covers much of the first semester study of the Spanish language. Both interactive data and audio are on the cassettes, completely synchronized. The 16 lessons, each with an hour of study, are recorded on eight cassettes supplied in a leatherlike album. *Dorsett Educational Systems, Inc.*, Box 1226, Norman, OK 73070; (800) 654-3871, \$99.

Bowling League Secretary Version 1.1, a 64K program to aid in bowling team stats. This new version allows maintenance of separate statistics for men and women in a mixed league. *Tomela*Co*, P.O. Box 2162, Doylestown, PA 18901; (215) 968-4271, \$49.95.

Chess-007, a 32K ECB game requiring two joysticks. High technology comes to the aid of chess players. This game allows you to record any game with multiple variations and lets you review your favorite openings or grandmaster games prior to competition. *ChessTech, Ltd.*, 3080 Trenwest Drive #2, Winston-Salem, NC 27103; (919) 768-2370, disk \$69.95; tape, \$59.95.

CoCo Jokester, a disk full of endless jokes. Radio Shack Sound/Speech Cartridge required. *Thinking Software*, 46-16 65th Place, Woodside, NY 11377; (718) 779-6860, \$24.95.

Full Screen Editor & Varisave, a 64K screen editor for the Color Computer. This program is written in a form that conserves the CoCo's memory — no memory is taken away from what is used to store BASIC programs. *Warren & Associates*, P.O. Box 5120, Virginia Beach, VA 23455; (804) 475-2557, \$25 plus \$1.50 S/H.

Gantelet, a 64K game that two or three people can play at the same time. Travel through many levels in search of an exit to the next level. Avoid the ghosts and other creatures that are out to stop you in your quest. *Diecom Products*, 6715 Fifth Line, Minton, Ontario, Canada L9T 2X8; (416) 878-8358, \$28.95; \$38.95 Cnd.

Mikeydial, adds to *Mikeyterm* the ability to auto-dial 22 numbers from a menu, automatically set the baud rate, and load a different set of three macros for each directory choice. *Spectrum Projects, Inc.*, P.O. Box 264, Howard Beach, NY 11414; (718) 835-1344, \$19.95 plus \$3 S/H.

Presidential Decisions of George Washington, a 32K disk ECB political Simulation. You are presented with ten issues that President Washington had to face, and the object is to make the same decisions. This program is an exercise in critical thinking, packed with interesting historical data. *B5 Software*, 1024 Bainbridge Place, Columbus, OH 43228; (614) 276-2752, \$31.95.

Puzzle Math, a 64K educational program that requires one disk drive. *Puzzle Math* comes complete with 18 Hi-Res graphics pictures that are utilized in the learning process as puzzles. Each picture can be treated as an 8, 12, 16, 24 or 48 piece puzzle. When the student answers a problem correctly, a piece of the puzzle is displayed. The program is targeted for grades 2-5 and is written to handle four levels of difficulty. *SECA*, P.O. Box 3134, Gulfport, MS 39505; (601) 832-8236, \$24.95 plus \$3 S/H.

The Seal of Certification program is open to all manufacturers of products for the Tandy Color Computer, regardless of whether they advertise in THE RAINBOW.

By awarding a Seal, the magazine certifies the product does exist — that we have examined it and have a sample copy — but this does not constitute any guarantee of satisfaction. As soon as possible, these hardware or software items will be forwarded to THE RAINBOW reviewers for evaluation.

— Judi Hutchinson

Go Online With Avatex 1200 Modem

The Avatex 1200 is a small, compact 300/1200 baud selectable modem marketed by Spectrum Projects for the Color Computer.

I have been using my old, trusty Modem I for a few years now and was delighted to get a chance to review the Avatex.

It's very attractive in its beige plastic case that measures 4 7/8 wide by 9 1/4 long by 1 3/4 inches high. It's well-packaged in a colorful carton and is supplied with a wall transformer for the power supply. An easy-to-read, 29-page illustrated booklet is included, along with two loose sheets that deal with technical information and how to hook it up to your CoCo. I hooked it up in less than 10 minutes and immediately went online to Delphi.

What a difference 1200 baud makes! Using *Mikeyterm* and my old 300 baud modem, I was able to easily read the text as it was displayed on the screen, but at 1200 baud the cursor seems to fly across the screen — so fast, in fact, that multiple cursor images seem to appear! Obviously, the beauty of such a fast modem is that you can reduce your online time, thus saving money.

While Spectrum advertises this product as "Hayes compatible," it's not totally compatible since it does not support all of the Hayes commands.

But, this modem is *largely* Hayes compatible and can be used in place of a Hayes in most cases. For example, if you wanted to use this modem for an auto-answer BBS, the only means for software disconnect after the user has logged off is by toggling the DTR line (RS-232 Pin 20) off, then back on to enable it to answer the next call. It will not automatically return to the command mode, therefore toggling the DTR is the only means of hanging up the telephone under computer control. What this means to those of you who want to use this modem for a BBS, is that you will have to use the Deluxe Radio Shack RS-232 Program Pak and suitable software that will enable this toggling (RS-232 Pin 20 low to high). It is also compatible to Hayes in the sense that it uses similar commands and is capable of auto-dial, redial, and auto-answer. If you are like most CoCo users, these are all of the features you need anyway, and this product clearly fills those needs.

Logging onto Delphi is easy using the auto-dial feature. After turning the unit on and selecting 1200 baud, you put the voice/data switch in the data position. I put *Mikeyterm* in the Combat mode and typed: ATDT *telephone number* and pressed ENTER. As soon as connection is made, the screen displays CONNECT 1200. If instead you see NO CARRIER, then your call was not completed either because the line was busy or there was no modem at the number you told the computer to dial. You can automatically redial when you see the no carrier message by simply typing A/. Avatex then redials the last number you entered. If you would rather run the modem at 300 baud, the connect message will simply read CONNECT, so it's an easy reminder that you are not running at optimum speed.

Besides the three push buttons on the front of the modem, there are also eight red rectangular LEDs for indicating power on, terminal ready, send data, receive data, high speed (1200 baud), modem check, test mode and ring indicator (for incoming calls).

These LEDs, combined with an eight-position DIP switch on the back of the modem, enable you to conduct several tests that will assist you in locating operational problems should they occur.

I should also mention that if you want to use this or any other 1200 baud modem on your CoCo, you will need an RS-232 pack and an RS Catalog No. 26-1408 male-to-male cable (DB-25). You can use this modem without the RS-232 pack, but you will be restricted to 300 baud using the "bit banger" four-pin DIN socket on the back of the CoCo. In this case you will need RS Catalog No. 26-3014, which is a four-pin DIN-to-male cable.

I really like this product. It comes with a two-year limited warranty and the price is right, which makes it a real winner in my book. It will provide most CoCo users with all the modem they are likely to want or need, and at such a reasonable price it can be paid for with the money you will save by being online less.

(Spectrum Projects Inc., P.O. Box 264, Howard Beach, NY 11414; 718-835-1344, \$129.95 plus \$3 S/H)

— Jerry Semones

J & R ELECTRONICS

Complete 256K and 512K Memory Expansion Systems
(Hardware, Software and documentation included)
User friendly software, programmer not required

Easy, Solderless Installation

* We have eliminated the necessity to piggyback for 512K versions! *

- RAMDISK** — Fast disk I/O, 35/40 track (two RAM discs with 512K)
 - PCOPYMOD** — More than 40 PMODE 4 screens in memory at once! PCOPY command modified to accept PCOPY 1 to 128. More than 70 PMODE 4 screens and PCOPY 1 to 302 with 512K versions (or 30 PMODE 4 screens with one RAMDISK)
 - SPOOLER** — HUGE printer buffer for off-line storage inside your computer while the printer's busy. Customizable from 30K to over 200K (500K with 512K versions). Buffer can be turned off/on copied using simple PRINT CHR\$ commands.
 - OS9 Ramdisk** — Fast OS-9 disk I/O, 35/40 track single sided or 40 track double sided (512K) Ramdisk under OS9! GOOD'S OS9 Ramdisk (Rainbow 1987) with fully commented source code and install files added by J&R. (Requires OS9 operating system)
- ALL software above is configurable for 256K/512K operation.
Software shipped on disk, add \$10.00 for software on tape. (OS9 RAMDISK not available on tape).
ALL boards below are 256K/512K capable; software & documentation included.
New SAM (74LS785) not included (use your 74LS783), 74LS785 recommended for 2.0 Mhz operation.

Part number	Price	Description
#1001	\$39.95	Banker II bare board (with long pin socket, does not include memory Expansion Board)
#1002	\$69.95	Banker II bare board + parts (does not include Memory Expansion Board)
#1003	\$89.95	Banker II assembled & tested (no memory)
#1004	\$129.95	Banker II (256K, upgradable to 512K) assembled & tested with memory
#1005	\$169.95	Banker II (512K) assembled & tested with memory
#1006	\$15.00	Memory Expansion Board
#1007	\$29.95	Memory Expansion Board + parts
#9000	\$89.95	Down Under Controller. Ram Pack size controller with BDOS Gold plated, high reliability edge connectors, jumpers for 24/28 pin ROM. Compatible with COCO I and COCO II.
#9001	\$35.00	BDOS (Enhanced DOS on 27128 EPROM)
#9002	\$5.00	64K switch
#9004	\$24.95	New SAM 74LS785 (required only for 2.0 Mhz operation)
#9005	\$24.95	*New! PowerBasic — Introductory Price. (Requires RSDOS 1.0 or 1.1 and 256K or 512K Banker) Utilize the extra memory for variable storage and pass variables between programs in different pages of memory. Split a large BASIC program into smaller pieces and GOTO or GOSUB a line in another page of memory... and more features included. (disk only)
#9006	\$10.00	S/W Pac upgrade. 1.XX to 2.XX

To place an order, write to J&R Electronics, P.O. Box 2572, Columbia, MD 21045, OR call (301) 987-9067 — Jesse or (301) 788-0861 — Ray.
HOURS: Weekdays 7 p.m. - 9 p.m.; Sat. Noon-5 p.m. EASTERN TIME.
Add \$4.00 shipping & handling (FOREIGN ORDERS \$7.00), COD charge \$3.00. Maryland residents add 5% state tax.
CHECKS, MONEY ORDERS OR COD'S only please (personal check — 2 weeks for clearance). IMMEDIATE DELIVERY. Give COCO Radio Shack model # (i.e. 26-3136). Disk or Tape when ordering.
QUANTITY DISCOUNT AVAILABLE. For information on shipping or previously placed orders call (301) 788-0861. COCO II 26-31XX owners call (soldering experience may be required).

The CoCo Comes to Life With the Sounds of *Lyra*

As a serious musician who plays only for personal enjoyment, I was elated to receive a package from Speech Systems. I have enjoyed *Musica* and *Musica II*, and now I had a chance to try out the new *Lyra*.

Lyra is an eight-voice music editor for the Color Computer. It allows the user to enter, edit and play music. It gives the newcomer to music an easy way to transcribe from piano books, and it gives the serious musician an excellent tool for composing and trying out new ideas.

The *Lyra* package is based on a point-and-click user interface similar to that offered by more expensive software. Entering notes in a given voice simply requires selecting the desired voice, picking out a note value and placing the note on the staff. All that is required is a joystick. Notes may have lengths from a whole note down to a 32nd note. The tonal range allows pitches from A below the bass staff to E above the treble staff — a range of four and one-half octaves. When you have worked on one voice, just select another and enter the harmony.

Lyra offers several editing features. You can quickly and easily change the time signature, key signature and master tempo by using the pull-down edit menu. You can also mark a block of the musical score for later copying or deleting. Any note can be deleted or changed in the wink of an eye.



The edit window of *Lyra*. Only four voices have been used in the example.

One thing was difficult to get used to. With *Musica*, the user is required to press I to insert a note. On the other hand, *Lyra* is *always* in the insert mode. Just position the cursor between the notes where you want to insert, and press the firebutton. Once you get the hang of this, it becomes quite easy to use.

Several choices for playing your creation are included with *Lyra*. First, you may send music to the TV. Or, you could select the included drivers to send music to a Stereo Pak or an Orchestra 90 Program Pak plugged into a Multi-Pak Interface (MPI). Only four voices are playable via these methods.

One way to hear all eight voices is to use the *Symphony 12 Enhancer* with a *Symphony 12* cartridge in the MPI. I was very satisfied with the resultant sound. The timbre, or harmonic content, is not alterable as it is in *Musica*, but the ability to hear eight voices far outweighs this.

Another method for hearing eight voices is to connect your CoCo to a MIDI synthesizer. Unfortunately, I do not have access to a MIDI, but the options this device offers had my mouth watering, and Christmas isn't that far away. Options include setting up complete instrumentation, changing MIDI velocities and altering MIDI channels. Another feature in the MIDI pull-down menu is the Transpose selection, which works with other output options.

As mentioned before, I received the *Symphony 12 Enhancer* with my review package. This works very well and is simple to install in your *Lyra* system. Just load it in and go! I also received *Lyra Convert*. This package allows one to convert a standard *Musica II* file to *Lyra* format for editing and playing. I tried this on several files and all of them transferred without incident. The only problems associated with this are that tone tables are lost in the *Lyra* format and the version of *Lyra* I had does not support 64th notes. I have been told by Speech Systems that this has been corrected in a more recent version. Also, the *Lyra Convert* documentation warns of this and offers several reasonable solutions.

While *Lyra* does not offer some features that *Musica* users may be used to, I am told we can expect the works on this package as well. The people at Speech Systems have dedicated themselves to providing top-quality sound software and hardware at a good price. They have succeeded.

My overall impression of *Lyra* and the other packages I received is that they are quite good. I thought having four voices with *Musica* was awesome. Then Speech Systems released *Musica II*. Now, hearing eight separate voices come out of my little gray CoCo shows me what creative programming can really do! *Lyra* definitely gets a 95 on a scale of 100. (I reserve the remaining five points for the future.)

(Speech Systems, 38W255 Deerpath Road, Batavia, IL 60510; 312-879-6880, disk only, \$54.95)

— Cray Augsburg

Hint . . .

A Simple Printer Switcher

For those who have more than one printer, and don't like hooking and unhooking the RS-232 cable, try adding a piece of ribbon cable to the RS-232 connector and put another RS-232 plug on the other end to form an RS-232 "Y" cable. Simply turn on and off the printer not needed. I get a warning light on my MDP-200 when I use my Smith-Corona L-1000, but it works great and is a lot easier.

Fred Schmidt
Westminster, CO

COMM-4 Board Gives CoCo Four RS-232 Ports

One of the few deficiencies the CoCo has is its lack of a standard RS-232 port. There is the 5-pin DIN RS-232 port, the so-called "bit banger" port, but it has a non-standard connector and, having been designed as a printer port, it has trouble with speeds above 1200 bits per second.

In order to make up for this, CoCo Devices has introduced the COMM-4 RS-232 interface. The COMM-4 unit is designed to plug into a multipack-type interface. It provides the CoCo with four standard RS-232 communications ports ready to hook up to modems, printers, terminals and any other standard RS-232 equipment.

The COMM-4 unit is about the same size as the disk controller and may be plugged into any slot of the multipack. Installation of the hardware is very simple, because the unit is plugged into any free slot on the multipack. A small cable then runs from the COMM-4 pack to the standard printer/modem port on the CoCo. This cable provides the interrupts needed for the COMM-4 unit to operate. The cable is only about 2 feet long and may be a little short for some arrangements of hardware. I had to slightly re-arrange my setup in order to use it.

Installing this cable means you no longer have use of the standard printer/modem port. You must re-cable whatever device(s) you had plugged into the standard port to the COMM-4's standard RS-232 ports. Having the COMM-4 plugged into the multipack and the cable plugged into the printer/modem port, the hardware installation is complete.


The COMM-4 unit is designed to be used under OS-9. The only support for Disk Extended BASIC provided with the COMM-4 is a short program to allow one of the COMM-4 ports to act as a printer. There is no reason that BASIC drivers couldn't be written to fully use the COMM-4. The documentation provides enough information for a good assembly programmer to write them.

Under OS-9, full device drivers and device descriptors are provided. The software, along with its source code, comes on a non-copy-protected disk provided with the unit. Also included are several script files to ease installation. Instructions are provided to guide a user in installing the COMM-4 software under both OS-9 Version 1.01 and 2.0. Though the instructions are clear and rather easy, they assume that the user has two disk drives. No installation instructions are given for single-drive users.

Aside from not having single-drive installation instructions, the documentation is excellent. It has sections on the theory of the hardware and the software, installation, applications examples, a full schematic of the unit, a complete parts list, an assembly drawing of the PC board and printed listings of the source code to all the software provided with the unit. The manual is written in a clear and straightforward manner. Its style varies depending on the subject being covered. The theory sections are written in a technical style, while a simpler style is used in the instal-

lation and use sections. All the program listings are well-commented and fairly easy to comprehend. There are good examples of device drivers and descriptors for anyone thinking of writing his own device software.

The COMM-4 board worked almost without flaw. I used it to drive a printer, a modem and a second terminal all at the same time and at many different combinations of baud rates and word sizes. The COMM-4 unit worked well except for one program: For some reason, the Kermit protocol program when used with the COMM-4 unit caused the CoCo to spontaneously re-boot when I tried a file transfer.

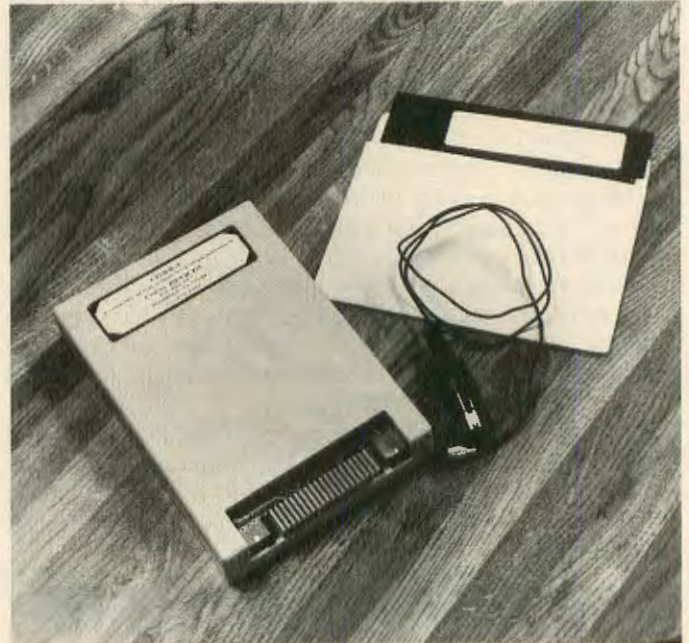

This does not occur when using Kermit with other RS-232 packs. I had no trouble sending or receiving files using an Xmodem type program with the COMM-4 unit. Neither CoCo Devices nor I could come up with a reason for their unit not working with the Kermit program. CoCo Devices is researching this and may have a solution soon.

I had to call CoCo Devices a few times in order to complete this review and I found them to be very friendly and willing to help with my questions. As a matter of fact, a few of my suggestions have been placed in the latest copy of the documentation.

As far as I can tell, the COMM-4 hardware should work with the new CoCo 3. In order to use it under the new OS-9 Level II, a new set of software drivers will have to be written.

The COMM-4 pack is a very good product which provides the CoCo under OS-9 with four standard RS-232 I/O ports. It is easy to install both the hardware and software. The documentation is an example to other manufacturers on how to write documentation. I highly recommend this product unless you have need of the Kermit communications protocol.

(CoCo Devices, Box 667, Seabrook, TX 77532; 713-474-3232, \$99.95. Requires multipack and OS-9 Version 1.01 or 2.0)

— Mark Sunderlin

White Fire of Eternity Heats Up the Desire for Adventure

White Fire of Eternity is a new animated graphics Adventure from Saguaro Software. The graphics are outstanding, made even more so by the use of animation. The Adventure itself has a fairly good plot but a limited vocabulary.

White Fire is supplied on a copy-protected disk — one of the game's negative aspects, especially since it accesses the disk often — and works on any 64K CoCo.

Visually, *White Fire* is quite an achievement. The graphics, done with *CoCo Max*, are excellent, and author Glen R. Dahlgren has added a nice touch by having the pictures slide up into an area of the screen in the shape of a scroll with the words *White Fire* on it. The program has to load each new scene from the disk, causing a few seconds delay whenever it needs a new picture. I found this slightly annoying at first, but got used to it after playing for awhile.



Adding to the graphics is the animation. Moving clouds, billowing smoke and rising bubbles grace the beautiful graphics and add a touch of realism. Not every scene is animated, but enough to give the graphics a "life-like" quality. However, if you are a fast typist, beware! I found that whenever animation was present, the program would miss characters when I typed at my normal speed. "Hunt-and-peckers" or slower typists should have no trouble. On scenes without animation, you can type as fast as you want without suffering any adverse effects.

The scenario, or background, of the Adventure works well. The plot is good, but could be a bit more involved. I would place the Adventure at a medium difficulty level — probably fairly easy for a veteran Adventurer, and possibly a bit hard for someone's first Adventure, but a good challenge for most. The Adventure is not vast, taking place in about 25 "rooms" or areas. Mr. Dahlgren has managed to pack a number of challenges into this area, though, including mazes, puzzles and areas to explore. A game save feature is provided.

White Fire uses the standard two-word command entry, in the form verb noun (for example: TAKE KNIFE, DRINK WATER, MOVE ROCKS). Fishing for the right word to do what you want may take awhile. This is a small point, but there are instances when the game will only recognize one specific word — often one you would not think of. This limitation

could have been overcome by providing a list of recognized verbs or by expanding the vocabulary to include several synonyms for a word.

The few quirks in the Adventure do not affect game play in any great measure, but should have been straightened out before the game was brought to market. For instance, you can cut a branch off the dead tree more than once (although cut as often as you like and you can still take only one branch). Also, once you have unearthed the *knife*, you can use it to carve things even when the knife is not in your possession. (Pretty neat trick, there.) And, the staff seems to have a curious property of becoming invisible when looked at. Still, these quirks are very minor and in no way prevent your solving *White Fire*.

I would advise watching your sanity while playing this game. Getting stuck on a puzzle can, as in most Adventures, be maddening. But with *White Fire*, you're really on your own! No help is ever given, and the game is encoded on the disk, so using a disk zap will not help. This adds to the challenge of solving the game honestly, although if you're really stuck, I did find a way of using a memory zap to look at the Adventure once loaded in memory. *White Fire* is a combination of BASIC and machine language.

The price is, in my opinion, quite fair. To wrap it up, on my 1-5 rating system, *White Fire of Eternity* gets a 4, overall.

(Saguaro Software, 4137 E. Bermuda, Tucson, AZ 85712; 602-881-6786, 64K disk required, \$24.95)

— Eric Tilenius

BACK TO COMPUTING!

<p>Name Brand DISKS \$1.00</p> <p>DS DD w/ Tyvek Sleeves Buy 5 get FREE Case Buy 10—Color Case C-10 Cassettes 59¢</p>	<p>Dot Matrix/Graphics PRINTER \$199</p> <p>Citizen 120D/NLQ Daisy Wheel \$289</p>	<p>SOFTWARE over 180 titles discounted Games up to 50% Books/Others 20% CoCo MaxII w/Y Cable \$95</p>
<p>Composite MONITORS start at \$79</p> <p>12" Green or Amber 12" Sakata HIRES . . \$99 13" Color/Sound . . \$159</p>	<p>5 1/4 40-Track Slim DISK DRIVES \$90</p> <p>DS DD Hi-Tech (U.S.) W/Case/Pwr \$139 Teac DS . . . \$109</p>	<p>Smart Auto MODEMS \$189</p> <p>300/1200 Baud Hayes Comp Free \$30 Cable!</p>
<p>SYSTEMS IBM XT Compatible \$499</p> <p>256K Kit/135W PS/ Enh Keybd/Color/ Flip Case/360K Drive</p>	<p>MISCELLANEOUS Keyboards from \$25 Disk Cases/60 . . \$16 Printer Inff . . . \$40 Video Driver . . . \$24 Power Strip . . . \$16 Swivel Base . . . \$16 Catalog . . . Free</p>	<p>PARTS</p> <ul style="list-style-type: none"> • EPROMS • ROMS • CONTROLLERS • MEMORY DRAMS • CABLES • KITS • ICS • PAPER • LABELS • RIBBONS • DAISY WHEELS



POLYGON COMPUTERS
1316 Wilshire Blvd., Suite 206
Los Angeles, CA 90017
(213) 483-4406



Calif. res. add 6 1/2% tax
All prices subject
to change/stock avail.


Shipping Charges:
2% or \$3.00 min.
Monitors/Printers
Hardware extra

Explore the Maze of the Dragon's Temple

Dragon's Temple is a fairly simple Simulation of a knight from King Art's Court on a quest through a maze to find treasure and avoid a deadly dragon. At first, I was a little disappointed in the graphics and the speed of the game. The game consists of a maze, with you, the knight, represented as a '-' and the dragon as an 'X'. Also in the maze are the treasures, '*', that you are to gather. As I said, at first, I was disappointed, but when I realized the game sold for \$13.95, I decided it is well worth that price. It is good that someone is still producing challenging programs that the beginning CoCo user can buy at a low cost.

You move through the maze by using a joystick. The maze is only in view while the light is on. Your lantern has little oil in it, so eventually the light will be gone. Once the light goes out, you have to remember the maze the best you can, but you do have help.

You have at your disposal a number of bombs that allow you to blow down a wall, but these bombs are limited and only take down one wall per bomb, so use them sparingly. A few bombs will also be found with the treasures. All this time, the dragon is pursuing you through the maze. You have only a limited time to collect all the treasures. As you collect a treasure, time is added. An analog timer is represented on the left side of the screen. After you gather all the treasures shown, more time is added and new treasures are placed in the maze. The maze does not change as you clear each set of treasures, so when the light goes out, the maze remains the same for each set of treasures.

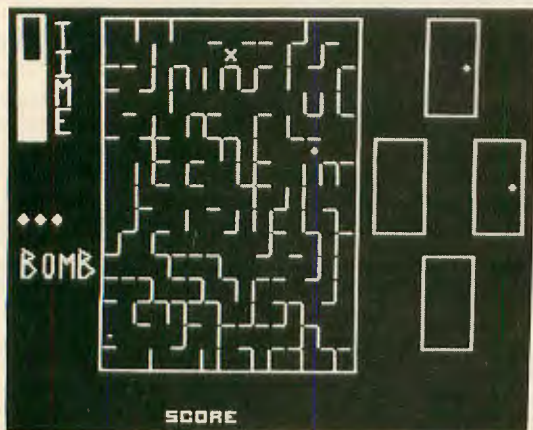

There was one thing about *Dragon's Temple* I was not crazy about. When you are finally eliminated (killed is so final) and you want to start the game again, it takes a couple of minutes to construct the new maze. You do get a different maze when you start a new quest. It's just a short delay, but after you've been playing hot and heavy for awhile, it seems like an eternity.

Overall, I believe *Dragon's Temple* is definitely worth checking out. The game is challenging and can provide hours of entertainment for a small investment. It requires 64K, one joystick and a disk drive.

(Jade, RFD#2, Box 2740, Clinton, ME 04927, disk \$13.95)

— Dale Shell

Lots of Word Processor for the Price With TX

I reviewed the early version of *TX*, without much enthusiasm, in the March 1986 issue of *The RAINBOW*. Well, this latest version is quite a step up from that early one. The general outlines remain the same; *TX* is still written in BASIC and supports a buffer/single file capacity of sixty-six 80-character lines. It still uses the standard 32-by-15 character screen treated as a window over the page. (As one begins, the cursor moves from left to right; however, once the screen corresponds to the right page segment, the cursor appears to stand still and the text moves under it). Calculation, wordwrap, character manipulation and repetition features are similar to those in the earlier version; and again, the documentation is certainly more than adequate.

But there the similarities end. The new *TX* is more smoothly and attractively programmed. Gone, for instance, is the minor irritation of having to retype RUN because of the PCLEAR 1 early in the program. Text entry mode now comes up not only in upper- and lowercase (rather than the previous version's uppercase), but the display is in eye-easing inverse green characters on a black background.

At the bottom of the screen, in normal black-on-green, is a descriptor line that may be saved and loaded with the file, but does not print out. This line serves not only as a single-line notepad, but also as a linking device for chain printing. Thus, *TX*, even though its capacity is but one page, can be used to write and print out a multi-page document by treating each page as a separate file, and chain-printing the files in the desired order via the descriptor line. Possibly a shade awkward, but quite practicable.

TX now permits the insertion of printer codes for change of typeface and underlining, but by line rather than by word. Printer baud rate is easily alterable from within the program without losing text. Another slight inconvenience is that *TX* accepts only files it has created. ASCII files from other word processors may not be loaded into *TX* for editing or printing.

The most striking of the many improvements is the keyboard response speed. I'm no touch-typist, but I have a quite rapid two-to-four-finger technique that left the old *TX* — and just about every other BASIC editor I've tried — in the dust. Not so with the new *TX*. It's fast and accurate (at least as fast and accurate as I am), and comfortable to work with.

Bottom line? The new *TX*, modest though its features are, is a lot of word processor for the money. In spite of its limitations, it handles brief letters and grade school or junior high-level papers easily and smoothly. Moreover, its simple operation makes it a dandy choice for introducing a youngster to the ease and convenience of writing with a computer.

(Kolesar B/S, 7 Ladd Rd., Westfield, PA 16950; 814-367-5384, Disk \$16.95 plus \$2 S/H)

— John Ogasapian

HOT HARDWARE AND SUPER SOFTWARE

UNIVERSAL VIDEO DRIVER IT'S THE BEST!!! Great Price! Only \$29.95

Carefully engineered to work with ALL Color Computer models including the newest COCO II. Enables your COCO to operate with a video monitor instead of a television.

- Works with monochrome monitors!
- Works with color monitors!
- Audio Connection included!
- Easy installation—no soldering!

TANDY 1000 UPGRADES

640K upgrade board with real time clock	\$189.95
Serial Interface Board	49.95
Parallel Interface Board	29.95
Hayes compatible 300/1200 Baud deluxe modem	189.95

MONITORS, PRINTERS, ETC.

Magnavox BM-7622 Amber Screen - high quality, low price \$109.95

Order a quality monitor from us and get a Universal Video Driver for only \$24.95 — Save \$5.00.

Star NX-10 Printer, New model for '86	279.95
Star LV1210, Replaces popular SG-10 model	219.95

GRAFX SCREEN - versatile screen dump software. Print horizontal or vertical, image magnification, positive or negative and more - 5 1/4" disc.

ONLY \$14.95 FREE with your printer order.

SERIAL TO PARALLEL INTERFACE

300 to 9600 baud. Complete with all cables and connectors. **Only \$49.95**

DISC DRIVES

Teac 55B DSDD Drive	\$119.95	Drive one upgrade for new Tandy dual horizontal cabinet ..	119.95
J&M JFD-CP Controller with DOS	129.95	Disc drive cable	24.95
Dual cabinet, power supply holds 2 horizontal 1/2 height drives ..	79.95	Radio Shack DOS Rom 1.1 w/manual	29.95

FOR THE SERIOUS COCO USER

Accounting System - very popular ledger system for small businesses. \$99.95 disk

Order Entry - an excellent companion to the accounting system \$99.95 disk

Easy File - get organized with this user friendly data management system \$59.95 disk

Super Screen - Best screen enhancement program available.
Cassette \$29.95 Disk \$32.95

DISCS • CASSETTES • ROMS • CHIPS

5 1/4" discs, double density, reinforced hub w/sleeve, guaranteed.
\$12.95 for 10 discs in an attractive storage box.

C-10 Cassettes w/labels	10 for \$5.50
Cassette storage box	10 for \$2.00
Basic 1.2 ROM	\$39.95
Extended 1.1 ROM w/Manual	\$49.95

DISC STORAGE CASE - Attractive, heavy duty acrylic case with lock. Holds and protects 50 5 1/4" discs.

SUPER BARGAIN ONLY \$9.95

Purchase this attractive storage case including 10 discs for \$21.95.

64K Memory Expansion Kit.

All parts and complete instructions (for 'E' and 'F' boards and COCO II)
NOW ONLY \$19.95

CHAMPION



64K Disc Only

NEW FOR THE HOLIDAYS

A unique new arcade/adventure game!!! Take on the role of SUPERHERO and become a crusader for all that is right and good! Use your special powers to fight the criminal mastermind, Mr. Bigg and his sinister followers. Combat is hot and heavy and requires fast thinking and a quick joystick. Colorful hi-res graphics and great sound effects.

SHOCK TROOPER

32K required


Other Super Arcade Games:

Tut's Tomb
Time Fighter

Intelligence has intercepted a coded message revealing a plan to conquer Earth. Four of your Shocktroopers must infiltrate the heavily defended underground enemy base and steal all of the secret TRC-5 attack saucer sub-assemblies.

CyberTank

© COPYRIGHT 1985, D. BOCHARDT



Tired of flying wimpy airplanes???

Want to try something macho for a change??

CYBERTANK is a real-time tank simulation that will get your adrenalin flowing!

Your survival depends upon lightning-fast tactical decisions. Penetrate deep into enemy territory with powerful intelligence gathering devices and sophisticated armaments. Cannons, heat seeking missiles, flame throwers, pill boxes, battle tanks... **64K Disk only. \$27.95**

ADVENTURES

The top-selling Mark Data Adventure Series.

Hi-res color graphics! Great story lines!


Calixto Island • Black Sanctum

Sea Search • Shenanigans • Trekboer • Vortex Factor

All adventures require 32K.

COCO UTIL II - NEW VERSION

Transfer Coco disc files to your IBM compatible computer. You may also transfer MS-DOS files to a Color Computer disc. Save hours of retyping. Coco Util has been so popular we decided to make it even more powerful and versatile... extended directories, faster, improved menu selection system and more!



\$39.95

Coco Util users upgrade to the new version for only \$12.95 including shipping and handling.

FREE — Send for our free flier.



Mark Data Products

24001 Alicia Parkway, No. 207, Mission Viejo, CA 92691 • (714) 768-1551

SHIPPING: All orders under \$100 please add \$2 regular, \$5 air. All orders over \$100 please add 3% regular, 8% air. California residents please add 6% sales tax. Orders outside the continental U.S., check

with us for shipping amount; please remit U.S. funds. Software authors—contact us for exciting program marketing details. We accept MasterCard and VISA. Distributed in Canada by Kelly Software.



CINSOFT

THE CENTRAL SOURCE FOR COCO SUPPORT

presents...

Holiday Gift Ideas




Fast Delivery... Friendly Service

New Low Prices...

SEIKOSHA

SP-1000A



REVIEWED IN
OCTOBER 86 RAINBOW

- 100 cps draft
- 20 cps NLQ
- Friction and tractor
- Front panel Controls
- Graphics
- 1.5 K buffer
- 2 yr. Warranty

Parallel printer..... \$209.00
 with Metric Industries
 Model 104 interface..... \$249.00



With pbh-64 interface with 64K BUFFER! **\$299.00**

The Complete **COCO Max II** System
 includes...
 Deluxe Joystick and Y-cable !! \$119.95

COCOMAX II	\$ 79.95
with Y-cable	99.95
with Joystick	99.95

LATEST VERSION FEATURES...

- 14 fonts
 - Shrink, Stretch Rotate
 - Multiple drives
 - Pattern Save
- UPGRADES AVAILABLE
- | | |
|------------------------|-------|
| Disk I to II | 20.00 |
| Tapel I to Disk II | 25.00 |
| Max Edit | 19.95 |
| Picture disks set of 3 | 29.95 |

New! DELUXE JOYSTICK FOR COLOR COMPUTER



- Open gimbal design
- Self-centering or free-floating operation
- Mechanical trim on both axes
- Eight foot cable



DEALER INQUIRES INVITED

\$27.50 each
\$49.95/pair

REVIEWED IN AUGUST 86 RAINBOW

CHOOSE FROM OUR LARGE SELECTION OF COCO PRODUCTS

B5 ... Colorware ... Derringer ... Diecom ... Dynacaic ... Elite ...
 Four Star ... HJL ... J & M ... Mark Data ... Metric Industries ...
 Michtron ... Microcom ... Microworks ... Tom Mix ... PBJ ...
 PXE ... Spectrum Projects ... Speech Systems ... Sugar ...
 TCE ... VIP ... Zebra ... and more!

Yes! We have COCO GRAPHICS DESIGNER!

• Call • Shop by Modem •

513-396-SOFT

513-396-SHOP



• Write •

2235 Losantiville, Cincinnati, OH 45237

SHIPPING will be charged at our ACTUAL COST
Ohio residents add 5.5% Sales Tax COD add 2.00

Inside Information: Comprehensive Survey of Information Industry

Information utilities are companies that sell information, much as the local utility sells natural gas or electricity. Just as there are numerous electric, gas and telephone utilities, there are many information utilities, each providing different kinds of information and different services at varying prices.

Inside Information is an excellent in-depth discussion of these utilities. The intended readership includes professionals and businessmen who frequently need up-to-date or specialized information to pursue their careers. These people will benefit most from reading this book.

This book is written in four parts. The first part provides an introduction to the subject of data communications and describes the necessary hardware and software. It is *not* written around any specific computer, although the author, John Helliwell, considers the IBM PC to be the de facto standard personal computer and the Hayes modem the de facto standard in modems.

The second part (and major portion of the book) describes in detail five types of information utilities: general interest utilities (Dialog and Mead Data Central), bibliographic databases (BRS Information Technologies, SDC/Orbit, Pergamon InfoLine and Wilsonline), news services (Vu/Text, DataTimes, NewsNet, Info Globe and Finsbury Data Services), beginner's utilities (Knowledge Index, Dow Jones News/Retrieval, The Source, CompuServe and Delphi) and specialized databases. Specialized databases include databases for the fields of bioscience and medicine; social sciences, humanities and education; food and agriculture; environment and natural resources; energy; engineering and technology; law and government; trademark and patent; mathematics, chemistry, and physics; and computing and numeric (statistical) databases. He identifies several databases in each category, and compares them to each other in terms of available information, approximate cost and ease of use.

The third portion discusses a related topic — telecommunications (communications between two or more computers, including electronic mail).

The final part of this book is composed of five appendices, which explain "getting the most out of *Crosstalk*" (a communications program written for the IBM PC), "getting the most out of Dialog and Mead Data Central" (two databases described in the book), and the addresses of all the utilities discussed in the first three sections of the book.

I found this book to be well-written and interesting reading. The book is a comprehensive survey of the rapidly growing information industry.

(John Helliwell, New American Library, 1633 Broadway, New York, NY 10019; 212-397-8000 \$14.95 U.S., \$19.95 Can.)

— Jerry Oefelein

Get Rid of the Excess Baggage With *Packer*

Do you want your BASIC programs to hog less memory? Do you want them to run faster than a speeding bullet? Do you want to do all this with almost no effort? Well then, my friends, you need *Packer*.

Packer is a machine language utility that allows you to do all the above and more. You can fix referenced remarks, that is, those nasty programs that have a statement go to a line that is a remark, except you didn't type in those remarks so you get a UL Error. You can delete all those comments to save memory. If you want your programs really tight, you can remove all the extra spaces, colons and LET statements that aren't needed.

Save more memory by removing semicolons that aren't needed in print lists. Get rid of all those unnecessary GOTOs after THENs and ELSEs. If you're really adventurous, you can join lines together in huge, uneditable lines.

Packer allows you to choose any of the options from the menu. Best of all, you can do all of them automatically by selecting item number 7. Believe me, it isn't as complex as it sounds. The program comes with a comprehensive three-page manual that explains everything you need to know. It even includes warnings like making sure you have the program you're about to pack with *Packer* saved somewhere else because you may not be able to edit the packed version.

I have used and unsuccessfully tried to abuse every feature offered by this program. I saved from three to 27 percent of memory usage in BASIC programs I typed in from RAINBOW listings. I couldn't figure out any easy way to see how much faster these programs would run under packed conditions, but I'm sure it increased the speed just because BASIC has less information to interpret.

One major warning: Make sure you have a good copy of your program before executing *Packer*. One BASIC

program I used with *Packer* has some especially tricky graphics statements in the first few lines and, after packing it, the program would not run.

The program reports its movements to either the printer or screen and informs you of the memory saved for each or all the choices you made from the menu. The author never mentioned the program used the default BASIC 600 baud for the printer, so my 1200 baud printer spewed out trash until I set the default to 1200. It would be nice to be able to select the baud rate from the program.

The only other problem I had was that the manual said trailing quotes would be removed from the end of print statements at the end of a line. I couldn't get this to happen, but it certainly is a very minor point.

Speaking of errors, this program even helps you fix your programs by reporting errors such as non-existent lines that are referenced in ON GOTO type statements. If no BASIC program is in memory when you execute *Packer*, it stops execution with an error message and goes back to BASIC so you can load one in. Just type EXEC and *Packer* takes off again.

I was very impressed with this program and its documentation. If you have disks full of BASIC programs and want to pack more on, or you want those programs to run almost as fast as they will on the new CoCo 3, then I would recommend *Packer*.

(Bob van der Poel Software, 17435-57 Avenue, Edmonton, Alberta, Canada T6M 1E1; 403-481-1037, \$14.95 plus \$2 S/H)

— C.L. Pilipauskas

One-Liner Contest Winner . . .

Just enter your name and a color number, one through eight, and watch the magic happen.


The listing:

```
1 D=3: INPUT "NAME, COLOR"; N$, C: Z=L
EN(N$): Y=Z+1: DIM A(Y): A(Y)=127+16
*C: FOR I=1 TO Z: A(I)=ASC(MID$(N$, I,
1)): NEXT I: E=1535: F=E-Z: CLS(C): FOR
X=1 TO 511: E=E-1: F=F-1: FOR I=F TO E:
N=N+1: POKE I, A(N): NEXT N: POKE I-
1, A(Y): D=D+.4: SOUND D, 1: NEXT: PRIN
T@170, N$:; SOUND 1, 50: CLS: RUN
```

Jeff Harper
Karnack, TX

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

PLUG THIS INTO YOUR COCO
Engage mind and Connect the world
(or at least the electrical signals used to control
outside devices and instruments)

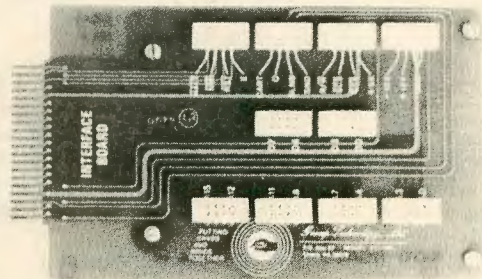

- **Expansion Connector Breadboard**, CC-100 accesses the data, address, and control buses, \$34.95
- **TRS-80 Color Computer Interfacing, With Experiments**, No. 21893, explains and illustrates principles, \$14.95
- **Experiment Component Package**, CC-150, contains the parts needed to do the experiments, \$67.50

Add \$1.50 per item for shipping or **get all three for \$105.00** plus \$3.00 shipping.

Maryland residents add 5% sales tax.
VISA/Master Card accepted. Call 301-298-5716. Free catalog available.

PUTTING
HANDS
AND
MINDS
TOGETHER



Group Technology, Ltd.

6925 Dogwood Road
Baltimore, MD 21207



HI-RES II SCREEN COMMANDER

Are you tired of looking at the 16 line by 32 character display on your CoCo? Do you wish you could see more lines and characters? Then HI-RES II is the answer, it can give you the big screen display you've always wanted. It will display 24 lines of 32, 42, 51, 64 and even 85 true upper and lower case characters per line without any hardware modifications.

HI-RES II is the most powerful screen enhancement package available for the Color Computer, yet it is the least expensive. It is completely compatible and transparent to Basic. Once the program is loaded, everything works the same as before, only you have a much better display to work with. It even allows you to have mixed text and Hi-resolution graphics on the same screen or have separate text and graphics screens. It also has an adjustable automatic key repeat feature and allows you to protect up to 23 lines on the screen. HI-RES II features over 30 special control code functions that allow you to change characters per line, protect display lines, change background color, position cursor, switch normal/reverse video, underline, double size characters, erase line/screen/to end of screen, home cursor, character highlight and much more. It works on all models of the CoCo with 16, 32 or 64K and provides automatic reset control so HI-RES II won't disappear when you press reset.

Only \$24.95 for Tape and \$29.95 for Disk

EDT/ASM 64D

64K DISK EDITOR ASSEMBLER w/DEBUG

EDT/ASM 64D is a Disk based co-resident Text Editor & Assembler. It has a Hi-Resolution 51, 64 or 85 column by 24 line display, so you see your program listings easily. It also supports the PBJ 80 Column Word-Pak cards. The disk also contains a free standing Machine Language Debug Monitor, to help you debug your assembled programs.

The Editor in EDT/ASM 64D is the most powerful, easy to use Text Editor available in any Editor/Assembler package for the Color Computer. It even has automatic line number generation for easy entry of program material. Some of its features include:

- ☞ Local and Global string search and/or replace.
- ☞ Full screen line editing with immediate line update.
- ☞ Easy to use Single keystroke editing commands.
- ☞ Load & Save standard ASCII formatted Tape/Disk files.
- ☞ Move or Copy single & multiple text lines.
- ☞ Create and Edit disk files larger than memory.
- ☞ Hi-Res Text Display 28 to 85 columns by 24 lines.
- ☞ Supports the PBJ 80 Column cards Word-Pak I & II.

The Assembler portion of EDT/ASM 64D is the part that creates the Machine Language program. It processes the source file(s) created or edited by the text editor and creates a LOADM or CLOADM binary file on either Disk or Tape. Using library files you can assemble an unlimited size file, using several different disk drives.

- ☞ Supports conditional IF/THEN/ELSE assembly.
- ☞ Supports Disk Library files (include).
- ☞ Supports standard motorola assembler directives
- ☞ Allows multiple values for FDB & FCB directives.
- ☞ Generates listings to Hi-Res text screen or printer.
- ☞ Assembles directly to disk or tape in LOADM format.
- ☞ Supports up to 9 open disk files during assembly.
- ☞ Allows assembly from editor buffer, Disk or both.
- ☞ Full description text error messages.

DEBUG is a free standing program debugger which provides all the functions supported by most system monitors. Some of them include:

- ☞ Examine and change the contents of memory.
- ☞ Set and display up to 10 breakpoints in memory.
- ☞ Remove single or multiple breakpoints.
- ☞ Display/Change processor register contents.
- ☞ Dump Memory in Hex and ASCII format.
- ☞ Fill Memory range with a specified data pattern.
- ☞ Move a block of memory.
- ☞ Search memory range for data pattern.
- ☞ Disassemble memory into op-code format.

Requires 32K and Disk \$59.00

"The Source"

Now you can easily Disassemble Color Computer machine language programs directly from disk and generate beautiful, Assembler Source Code for a fraction of the cost of other Disassembler/Source generator programs. And, the Source has all the features you looking for in a Disassembler.

- ☞ Automatic Label generation.
- ☞ Allows specifying FCB, FCC and FDB areas.
- ☞ Save, Load and Edit FCB, FCC, and FDB map on Disk.
- ☞ Disassembles programs directly from Disk
- ☞ Output complete Disassembled listing with labels to the Printer, Screen or both.
- ☞ Generates Assembler compatible source files directly to disk.
- ☞ Generated source files are in standard ASCII format.
- ☞ Built in Hex/ASCII dump/display to locate FCB, FCC and FDB areas in a program.
- ☞ Built in Disk Directory and Kill file commands.
- ☞ Menu display with single key commands for smooth, Easy, almost foolproof operation.
- ☞ Written in fast machine language, one of the quickest and easiest to use Disassemblers available.

Requires 32K and Disk \$34.95

TEXTPRO III

"The Advanced Word Processing System"

- ☞ 9 Hi-Resolution Display Formats from 28 to 255 columns by 24 lines.
- ☞ True Upper and Lower Case display format.
- ☞ Three Different Programmable Header lines, re-definable at anytime.
- ☞ Programmable Footer line & Automatic Footnote System.
- ☞ 10 Programmable Tab stops & 7 Tab Function Commands.
- ☞ Automatic Line Justification, Centering, Flush left and Flush right.
- ☞ On screen display of underlining and Double size characters.
- ☞ Change indents, margins, line length, etc. at anytime in a document.
- ☞ Create and Edit files larger than memory, up to the size of a full disk.
- ☞ Easily imbed any number of format and control codes for printers.
- ☞ Automatic Memory sense 16-64K with up to 48K of workspace.
- ☞ Typist Friendly line and Command format entry w/ auto key repeat.
- ☞ Fully supports the use of 80 column hardware cards.

TEXTPRO III is an advanced word processing system designed for speed, flexibility and extensive document processing. It is not like most of the other word processing programs available for the Color Computer. If you are looking for a simple word processor to write letters or other short documents, then most likely you'll be better off with one of the other word processors. But, if you want a powerful word processing program with extensive document formatting features to handle large documents, term papers, manuals, complex formatting problems and letter writing, then TEXTPRO is what your looking for. TEXTPRO works in a totally different way than most word processing programs. It uses simple 2 character abbreviations of words or phrases for commands and formatting information that you imbed directly in your text. There are over 50 different formatting commands you can use without ever leaving the text your working on. There are no time consuming, and often frustrating menu chases, you are in total control at all times. The formatted output can be displayed directly on the screen, showing you exactly what your printed document will look like before a single word is ever printed. This includes margins, headers, footers, page numbers, page breaks, underlining, column formatting and full justification.

Disk \$59.95 Tape \$49.95

To order products by mail, send check or money order for the amount of purchase, plus \$3.00 for shipping & handling to the address below.

To order by VISA, MASTERCARD or C.O.D. call us at the number listed below (Monday thru Saturday, 8am to 5pm PST).

CER-COMP

**5566 Ricochet Avenue
Las Vegas, Nevada 89110**

☎ (702) 452-0632 ☎

DataPack II Plus V4.0

SUPER SMART TERMINAL PROGRAM

With **AUTOPILOT** Executive Command Processor and **AUTO-LOG** Language Processor

X-MODEM DISK FILE TRANSFER SUPPORT

VT-100 & VT-52 TERMINAL EMULATION

- * No lost data when using Hi-Res Display, Even at 1200 Baud.
- * 9 Hi-Res Display formats, 28 to 255 columns by 24 lines.
- * True Upper and Lower Case Displays.
- * 45K Text Buffer when using the Hi-Res Display and Disk.
- * Kill the Hi-Res Display Option for an Extra 6K of buffer space.
- * ASCII & BINARY disk file transfer via XMODEM.
- * Directly record receive data to a disk file while online.
- * VT-100 terminal emulation for VAX, UNIX and other systems.
- * VT-100/52 cursor keys & position, insert/delete, tabs & more.
- * Automatic File Capture.
- * Programmable Word Length, Parity and Stop Bits.
- * Programmable Baud Rates from 300 to 19200 Baud.
- * Complete Full and Half Duplex operation, no garbled data.
- * Send full 128 character set from Keyboard with control codes.
- * Freeze Display & Review Information On line with no data loss.
- * Complete Editor, Insert, Delete, Change or Add to Buffer.
- * Automatic Key Repeat for Buffer Editing.
- * 9 Variable length, Programmable Macro Key buffers can store entire programs. Only limited by the size of available memory.
- * Programmable Control Character Trapping.
- * Programmable Prompt Character or Delay to send next line.
- * Programmable Printer rates from 110 to 9600 Baud.
- * Send Files directly from the Buffer or Disk.
- * Supports True Line Break Transmission.
- * Save and Load Text Buffer and Program Key to Tape or Disk.
- * Disk Commands include: Load, Save, Kill and Directory.
- * Display on Screen or Print the contents of the Buffers.
- * Automatic Memory Sense 16-64K (32K required for Hi-Res).
- * Program and Memory Status Displays.
- * Built in Command Menu (Help) Display.

Auto-Log: is a communications programming language that will enable you to automatically have DP11+ Dial the phone, wait for and respond to a log-on prompt, send commands to a remote system, or even to send an entire program automatically.

AUTOPILOT: is a executive command processor that will automatically process a command file containing a sequence of DP11+ commands including Auto-Log commands.

SUPPORTS: PBJ Word-Pak I, II, R.S. and Double Density 80 Column Cards
Disto Super Controller w/80 column card & parallel printer
PBJ Parallel Printer Card and Dual Serial Port (2SP-Pak)
Radio Shack Modem-Pak & Deluxe RS-232 Pak, even with Disk.

**Not Compatible with JDOS
Requires 32K & Disk
Only \$59.00**

The CBASIC Editor/Compiler V1.1.2

Do you want to write fast efficient machine language programs but you don't want to spend the next few years trying to learn how to write them in Assembly language?
Well with CBASIC, you could be writing them right now!

CBASIC is the only fully integrated Basic Compiler and program editing system available for the Color Computer. It will allow you to take full advantage of all the capabilities available in your color computer without having to spend years trying to learn assembly language programming. CBASIC allows you to create, edit and convert programs from a language you are already familiar with Extended Disk Color Basic, into fast efficient machine language programs easily and quickly. We spent over 2 years writing and refining CBASIC to make it the Best Color Basic compiler available for the Color Computer. We added advanced features like a full blown program editor, Hi-Res text Displays and 80 column hardware support for editing, compiling and even for your compiled programs. Plus we made it exceptionally easy to use, CBASIC is the friendliest and easiest compiler available for the Color Computer.

"The most complete Editor/Compiler I have seen for the CoCo..."
--The RAINBOW, March 1986

CBASIC is for BEGINNER & ADVANCED USERS

CBASIC is a powerful tool for the Beginner as well as the Advanced Basic or Machine Language programmer. You can write programs without having to worry about the Stack, DP Register, memory allocation and so on, because CBASIC will handle it for you automatically. For Advanced users, CBASIC will let you control every aspect of your program, even generating machine code directly in a program easily.

CBASIC adds many features not found in Color Basic, like Interrupt, Reset and On Error handling, and much more.

Commands and Extensive Hardware Support

CBASIC features well over 100 compiled Basic Commands and Functions that fully support Disk Sequential and Direct access files, Tape, Printer and Screen I/O. CBASIC supports ALL the High and Low Resolution Graphics, Sound, Play and String Operations available in Extended Color Basic, including Graphics GET, PUT, PLAY and DRAW, all with 99.9% syntax compatibility. CBASIC also supports the built in Serial I/O port with separate programmable printer & serial I/O baud rates. You can send and receive data with easy to use PRINT, INPUT and INKEY commands.

CBASIC is the only Color Basic Compiler that includes its own Hi-Res 51, 64 or 85 by 24 line display. It also supports the PBJ "Word-Pak" I, II and R.S. versions as well as the Disto and Double Density 80 column displays. All as part of the standard CBASIC package. You can even include them in your compiled programs by using a single CBASIC command.

CBASIC makes full use of the power and flexibility of the 6883 SAM in the Color Computer. It will fully utilize the 96K of address space available in the CoCo during program Creation, Editing and Compilation. There is a single CBASIC command for automatic 64K RAM control, to allow use of the upper 32K of RAM automatically. When used in compiled programs it will automatically switch the ROMs and RAM in and out when needed. Plus there are two other commands to control of the upper 32K of RAM manually in a program.

CBASIC has its own completely integrated Basic Program Editor which allows you to load, edit or create programs for the compiler. It is a full featured editor designed specifically for writing and editing Basic programs, most likely you'll find you want to use it for writing all your Basic programs. It has block move & copy, program renumbering, automatic line numbers, screen editing, printer control and much more.

"The Editor is a very good one and could be the subject for review all by itself."
--The RAINBOW, March 1986

"Comparing ECB's edit mode to CBASIC's text editor is like comparing a World War II jeep to a modern sedan. Both get you to your destination, but what a difference in the ride."
--Hot CoCo, February 1986

The documentation provided with CBASIC is an 8 1/2" x 11 Spiral Bound book which contains approximately 120 pages of real information. We went to great lengths to provide a manual that is not only easy to use and understand, but complete and comprehensive enough for even the most sophisticated user.

"CBASIC's manual is easy to read and written with a minimum of technicalese."
--Hot CoCo February, 1986

The price of CBASIC is \$149.00. It is the most expensive Color Basic Compiler on the market, and well worth the investment. Compare the performance of CBASIC against any Color Basic compiler. Dollar for dollar, CBASIC gives you more than any other compiler available. Requires 64K & Disk, not JDOS compatible.

"The price tag it carries seemed a bit steep for an integer compiler on first glance, but when you add 64k, hi-res drivers, and full-screen editing, CBASIC begins to look more like a bargain."
--Hot CoCo February, 1986

"A Complete Editor/Compiler Well Worth its Price" --RAINBOW March 1986

COMMANDS SUPPORTED

I/O COMMANDS: CLOSE, CLOADM, CSAVEN, DRIVE, DSKIS, DSKOS, FIELD, FILES, GET, INPUT, LINE INPUT, KILL, LSET, LOADM, OPEN, PRINT, PRINT@, PUT, RENAME, RSET, SAVEM, WRITE

CONTROL STATEMENTS: CALL, CHAIN, END, EXEC, FOR, NEXT, STEP, GOTO, GOSUB, RETURN, IF, THEN, ELSE, STOP, END, RUN, ON/GOTO, ON/GOSUB, ON ERROR GOTO, ON NMI GOTO, ON IRO GOTO, ON SWI GOTO, ON FIRO GOTO, ON RESET GOTO, IRO ON, IRO OFF, RAM ON, RAM OFF, RAM64K, IRO, FIRO, NMI, SWI, STACK, RETI

COMPILER DIRECTIVES: BASE, ORG, DIM, HIRE, DPSET, GEN, PCLEAR, TRACE ON, TRACE OFF, MODULE

GRAPHICS/SOUND STATEMENTS: PLAY, SOUND, COLOR, CLS, CIRCLE, DRAW, LINE, PAINT, PCLS, PCOPY, PMODE, PRESET, PSET, RESET, SET, SCREEN, POINT, PPOINT, GET, PUT
NUMERIC FUNCTIONS: ABS, POS, RND, PEEK, DPEEK, TAB, ASC, LEN, INSTR, VAL, ERR, ERL, EOF, SWAP, LOF, LOC, FREE, CVN, VARPTR, JOYSTK, SGN, TIMER, OVEREM, DSEARCH, SWITCH, POS@, INKEY

STRING FUNCTIONS: CHR\$, LEFT\$, RIGHT\$, MID\$, STR\$, TRIM\$, STRINGS\$, MKAN\$, INKEY\$, BUF\$, SWAP\$, SWITCH\$, HEX\$

OTHER/SPECIAL COMMANDS: AUDIO ON/OFF, DATA, DIM, MOTOR ON/OFF, POKE, DPOKE, READ, RESTORE, CBLINK, UNLINK, BRATE, PRATE, MIDS\$, STACK, VERIFY ON/OFF

To order by mail, send check or money order for the amount of the program plus \$3.00 for shipping and handling to the address listed below.

To order by VIAS, MASTERCARD or COD call us at: (702) 452-0632 (Monday thru Saturday, 8am to 5pm PST).

CER-COMP
5566 RICOCHET AVENUE
LAS VEGAS, NV 89110
(702)-452-0632

Assembly Language Programming for the TRS-80 Color Computer

Learning to program in assembly language has never been easy. It takes a lot of concentrated study, time and mistakes (unfortunately). While assembly language is technically termed a low-level language, it provides access to each and every function that a computer is capable of performing. By contrast, a high-level language such as BASIC provides only limited access to a computer's full capabilities.

Those wishing to learn the tricks of assembly language programming now have a new tool available in the form of a book entitled *Assembly Language Programming for the TRS-80 Color Computer*, written by Laurence A. Tepolt. Beginners will find the book very easy to follow, while more advanced programmers will find it to be a valuable reference.

Information and concepts are presented in a logical, easy-to-understand order. For instance, when new technical descriptions or terms are introduced, their first usage is highlighted in boldface text to draw attention. Each new concept is followed by at least one example.

The instruction set of the 6809 processor is discussed in detail. Chapter 5 is a valuable reference guide, as it contains a comprehensive explanation of each instruction, how it operates and how the condition codes are affected. This section could be a valuable stand-alone reference by itself.

The book also describes the operation and use of the *EDTASM+* assembler, text editor and monitor. In fact, all of the examples in the book were written using the *EDTASM+* ROM pack, which is probably the most widely used assembler. In any case, the examples may be readily transferred to practically any other assembler.

Next are the practical applications. Perhaps the most sought-after information for new programmers concerns how to interface their machine language programs with BASIC. Fortunately, the book covers a variety of methods for doing so. Attention is given to methods for passing numeric and string information to and from BASIC, as well as the trusted technique of *USR* calls.

Very good detail is given on the use of ROM routines. Through the use of ROM routines, the assembly language source code may be reduced in size and made more efficient. Practical examples are given for the ROM routines to clear the screen, output a character through the serial port, display text on the screen, get keyboard data, read the joystick values, and do tape and disk I/O. These are subjects that are quite difficult for the student to master on his own, and the book covers them in detail.

Chapters 9 and 10 are devoted to the more advanced topics, such as interrupt processing, the internal control registers and graphics. These topics are very important and are well-covered within the book.

A lot of additional information is provided in the book's appendix — details of the CoCo's cartridge connector, a chart of the 6809E instruction set, ASCII character and control codes, CoCo character and control codes and dedicated CoCo memory addresses. A thorough compilation of this type of data within one publication is very useful, and saves the assembly language programmer a lot of time that might have been spent in searching through several other publications.

While the book presents virtually all the information about CoCo hardware that a programmer needs, there are many more concepts of assembly language programming to be learned. The author himself refers to his book as an introduction to assembly language programming. I call it a *very good* introduction!

(Tepco, 30 Water Street, Portsmouth, RI 02871; 401-683-3019, \$16 plus \$1.50 S/H. Price increases to \$18 January 1, 1987)

— Don Hutchison

TOTHIAN SOFTWARE

COCO TESTEM

Make multiple choice, matching, true/false, completion, short answer tests. Complete randomizing function. Requires printer with underline ability. Works with tape or disk. 32K ECB tape. \$19.95

TEACHER PAK

Both weighted and regular grading, seating charts, alphabetizing, statistical analysis. Works with tape or disk. 16K ECB tape. \$34.95

BOTH COCO TESTEM AND TEACHER PAK - \$47.95

DISKMAN


Backup, reorganize, and alphabetize RS disk directories. Examine & change sectors. Catalog disk files. Printouts. 32K disk. \$21.95

HOMEWARE

Versatile home management package. Use with tape or disk. Five 16K ECB/ML modules on tape:
CALENDAR - Draw calendars. Various formats.
SAVINGS/LOANS - Personal finance calculators.
DIRECTORY - Keep track of phone numbers, addresses, etc. Print address labels.
INVENTORY - For home records, hobbies, etc.
HOME-WRITER - Simple ML word processing.
 Single modules: \$19.95 Whole set: \$49.95

Pa. residents add 6%. Send check or money order - no cash - to:

Tothian Software, Inc.
 Box 663
 Rimersburg, Pa. 16248



.USING THE COCO AS A DEVELOPMENT SYSTEM
 .HIDDEN MODEN
 .MONOCHROME VIDEO DRIVER-WHITE CHARACTERS ON A BLACK SCREEN
 .COMPOSITE VIDEO DRIVER
 .PARALLEL PORTS
 .D/A A/D CONVERTERS
 .ELECTRONIC FLEA-MARKET (PARTS)
 .AND MUCH MORE
 DEAL DIRECT WITH MANUFACTURER
 SEND OR CALL FOR FREE CATALOG OR INFORMATION

RGB VIDEO FOR ANY MODEL COCO \$69.95

.WHITE OR GREEN CHARACTERS ON A BLACK SCREEN-PLUS NORMAL GREEN SCREEN-SWITCH SELECTABLE

.NO SPECIAL SOFTWARE

.HI-RES GRAPHICS

.ADD \$5.00 SHIPPING & HANDLING

INVENTIVE SOLUTIONS
 BOX 286
 STANFORDVILLE, N.Y.
 (914) 528 4404 12506

Mikeydial: Making Mikeyterm Even Better

Here is a very worthwhile addition to *Mikeyterm* that, when used with a Hayes-compatible modem, provides auto-dial and logon capability. When used with an auto-dial modem and *Mikeyterm*, this program eliminates the need for typing in all those telephone numbers and other logon information for your favorite BBSs.

The program, written in BASIC, automatically loads and executes *Mikeyterm* (you will need it on the same disk). Upon running *Mikeydial* you are greeted with a title page followed by a full page of BBS names you added earlier. Pressing ENTER results in a second page of BBS names. You can toggle between these two pages by simply pressing ENTER again. Each BBS name is preceded with a letter, A to V, so that you have the capability of 22 auto-dial/logon possibilities. In addition to the auto-dial directory there is a command mode that allows you to change several modem parameters. The submenu gives choices for speaker on, full duplex, auto-answer off, carrier on, connect alert off and 1200 baud.

Selecting any of the numbers from 1 to 6 toggles to the opposite parameter such as on/off, full/half, 1200/300, etc. After making your selections and/or changes, press CLEAR to return to the directory mode, or the space bar to go directly to the terminal mode. Assuming you want to use the auto-dial feature of the modem, press CLEAR at this time. When you select any of the 22 available BBS names, the program loads a macro, which in turn commands your modem to dial and log on the BBS of your choice. If the "connect alert" feature is turned on and the modem dials a busy number, you can go about your business while the program instructs the modem to keep trying until connection is finally detected. At that time you will hear a continuous warbling tone to alert you to the fact that connection has been established, and the program will wait for you to press any key to go online.

Another nice feature of *Mikeydial* is that it allows you to use a different set of three macros for each different

directory, making up for *Mikeyterm*'s ability to handle only three in total. Macros are used to set up the user numbers, passwords and other logon procedures, and each can be different for all 22 BBSs you have programmed into *Mikeydial*. This is a great convenience, in that you will no longer need your BBS log sheet or scraps of paper with similar information.

In order to program the macros, you can use any word processor capable of reading/writing ASCII files, or you could use the buffer entry mode of *Mikeyterm* itself. Since I already had *Mikeyterm* loaded in the computer, I elected to use the buffer entry mode. It was quite easy to do, as the instructions that come with *Mikeydial* point out. You simply follow a specified sequence of entries, the first being the BBS name followed by the telephone number you want dialed. Then there are three macros that contain other logon information such as your user name and password. The last entry contains the baud rate at which you want to connect to the BBS.

I believe that *Mikeydial* is an excellent program that increases the usefulness and power of *Mikeyterm*. Dave Haber of Foxx Software has done a nice job on this program. Once you couple this program with *Mikeyterm* and a modem, you will have a combination that's hard to beat.

(Spectrum Projects Inc., P.O. Box 264, Howard Beach, NY 11414; 718-835-1344, \$19.95 plus \$3 S/H)

— Jerry Semones

BASIC COMPILER

MLBASIC 1.0 - BASIC COMPILER

Compiled Program Speed (Time in minutes:seconds)

Program	Interpreter	MLBASIC
Eratosthenes Sieve	6:58.7	0:06.3
Matrix Fill, Mult, Sum		
10x10	0:30.9	0:02.5
String Manipulation	6:22.5	2:17.7
Floating Point	0:32.6	0:30.6
Disk I/O (2000 PRINT/INPUTs)	2:21.5	0:27.6

Additional Features not found with RS BASIC

The SUBROUTINE command is used to declare the beginning of a sub-program. The CALL statement is used to call that sub-program, just as GOSUB100 calls a subroutine at line 100. The subprograms contain a list of parameters that are "linked", or referenced, to the variable that is likewise used in the parameter list of the CALL statement. All variables that are not referenced in the parameter list are used as local variables within each subprogram. In other words, variables in the subprogram do not affect the same variables in the calling program. The following is an example using CALL and SUBROUTINE:

```
10 INPUT"ENTER A NUMBER ?":A:PRINT
20 CALL CUBE(A)
30 PRINT"A Cubed=";A:STOP
40 SUBROUTINE CUBE(B)
50 B=B*B
60 RETURN
```

MLBASIC has several commands that offer extended programming capability. These commands are used for double byte PEEKs and POKEs, transferring blocks of memory, executing machine language routines in ROM, and manipulating the hardware registers.

More Reasons to buy MLBASIC Today

Three data types are allowed with MLBASIC. They are 16 bit INTEGER, 40 bit FLOATING POINT (with the same precision as with RS BASIC programs), and CHARACTER.

String manipulation speed is 5 times faster than RS BASIC string handling. A Fully detailed 154 page manual is included that not only explains how to use MLBASIC, but also is an easy to use reference manual for all commands offered with MLBASIC.

(See our other ad in this magazine for more details on the BASIC Compiler, MLBASIC)

Write us for more details on an ENHANCED version of MLBASIC for the COCO 3

WASATCHWARE



7350 Nutree Drive Salt Lake City, UT 84121

One-Liner Contest Winner . . .

This program will display the characters in the RAM/ROM of your Color Computer. It also features a sound output to entertain most anyone within earshot.

The listing:

```
Ø CLS:FORX=1TO65535:A=PEEK(X):PR
INTCHR$(A);:IFA<1THENNEXTELSOU
NDA,1:NEXT
```

David Cross
Bonaire, GA

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

Little Letters Encourages Mastery of Lowercase

Do you know a child who has mastered uppercase letters but is struggling to learn the lowercase alphabet? Bob's Software has the program to help.

This program displays a lowercase letter on the screen and waits until an uppercase letter is pressed. When the correct choice is made, a balloon slowly rises from the bottom to the top of the screen and a new letter is shown. If an incorrect key is selected a buzzer sounds, the appropriate uppercase letter is displayed briefly next to the lowercase letter and another chance is given.

People who have one of the voice packs and who place the translator program on the disk with *Little Letters* will also hear spoken rewards, which enhances the program for the child.

All instructions are included in the program, although if you want to use a voice pack, you need to refer to its instructions and provide your own translator program. Bob's Software distributes *Little Letters* as freeware and encourages distribution of the program. To become a registered owner and receive a catalog of other free programs you are asked to send \$15.

The program works well, the letters are drawn clearly, and it is well suited for children who require a great deal of practice before mastering skills.

(Bob's Software, P.O. Box 391, Cleveland, OH 44107; 216-871-8858 \$15 to become a registered owner)

— Carol Kueppers

One-Liner Contest Winner . . .

Here's one for the Ham! This program computes the lengths of the sides of a two-element Delta Loop antenna as well as the spacing of each element.

The listing:

```
Ø CLS:PRINT" DELTA LOOP ANTENNA
DIMENSIONS":PRINT:INPUT"XMIT FR
EQ. IN MEGAHERTZ";F:D=(1ØØ5/F)/3
:R=(1Ø3Ø/F)/3:SP=(3ØØ/F)*.17:PRI
NT"DIRECTOR=":PRINTD"FT. PER SID
E":PRINT"REFLECTOR=":PRINTR"FT.
PER SIDE":PRINT"APROX. SPACING B
ETWEEN ELEMENTS="SP"FT."
```

Timothy Johnson
Tulia, TX


(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

Battle Hymn: The Battle of Gettysburg

The battle lines are drawn. As Commanding General Lee of the Confederate Army, you are in charge of 39 divisions attempting to turn back the Union Army.

Battle Hymn is a Hi-Res battlefield Simulation for a 64K ECB Color Computer. It comes on either tape or disk with a well-written and informative eight-page instruction booklet. The machine language program is not copy protected, and backup copies for the buyer's own protection are encouraged.

The Simulation is easy to load and execute in the conventional manner. The playing screen is divided into two

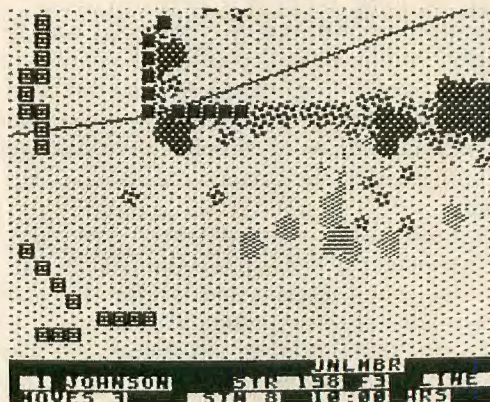

sections. The larger, upper half contains the map-like representation of the battlefield at Gettysburg during the Civil War. The bottom section of the screen contains the commands and status lines. The Union Army's positions are clearly identified by an American flag, while your Confederate positions are identified by an X.

There is also a facing clock that is used to determine which way a unit is facing. This is very important since a unit can only fire in the direction it is facing. The facing is shown at the bottom of the screen as part of the command/status display. To check which way the Union divisions are facing, press U. In addition, the field of fire can be displayed by pressing A for the area affected.

To make the Simulation even more realistic, the author has built in a stamina factor which affects losses under fire. Stamina is affected by fatigue, which in turn is caused by not resting or troops in rout. Some cute sound effects also add another degree of realism.

The graphics in this Simulation are fair. As you might expect, there is little in a map to get excited about, but on the other hand, this Simulation is not a shoot-'em-up arcade game. History buffs and those with military or battlefield interests will love it.

A great deal of strategy has been programmed into *Battle Hymn*. You would be wise to read up on the Civil War before you try it. Personally, I did no better than my forefathers. I, too, met my fate at the hands of General Mead.

(Ark Royal Games, P.O. Box 14806, Jacksonville, FL 32238; 904-786-8603, tape \$29; disk \$31)

David Gerald

It's here!

RAINBOW ON DISK!

ANOTHER GREAT SERVICE FROM THE LITTLE ELVES AT THE END OF THE RAINBOW

Remember the story of the cobbler and the elves, when the little people crept into the old man's shop and did all his chores while he slept? Well, there is a monthly chore we can now eliminate for you — transferring RAINBOW ON TAPE to disk. Now, in addition to RAINBOW ON TAPE, we're offering RAINBOW ON DISK, the perfect companion to RAINBOW magazine for our readers with disk drives. No more typing. No more transfers. We take care of all the work for you.

OS-9 programs

Thanks to the elfin magic going into RAINBOW ON DISK, part of one side of the disk is formatted for the OS-9 operating system. That means that you can now get all the OS-9 programs from the magazine — programs that cannot be put on tape. And, with the introduction of the new CoCo 3, OS-9 programs will become more and more prevalent.

More than two dozen programs

If you're a RAINBOW reader and you have a disk drive, you won't want to go another day without RAINBOW ON DISK. For only \$99, 12 issues of RAINBOW ON DISK will follow the RAINBOW to your door. That's only \$8.25 each disk. To start your subscription, call our toll-free number or use the handy order card between pages 34 and 35. When your copy of the RAINBOW arrives next month, you can start enjoying the programs without any extra effort. The little people at the end of the RAINBOW will already have taken care of all the work.

SUBSCRIBE NOW AND SAVE AN EXTRA \$9!
That's right, you can subscribe to RAINBOW ON DISK between now and January 1, 1987, for only \$90* — \$9 off the regular subscription price of \$99. Order now and receive 12 issues for only \$7.50 each!

* Don't miss out. During this special introductory offer, good until January 1, 1987, subscriptions to RAINBOW ON DISK are only \$90 a year in the United States (regularly \$99). Canadian rate U.S. \$100 (regularly \$115). All other countries U.S. \$145 (regularly \$130). RAINBOW ON DISK single copy rate is \$12 within the U.S.; Canadian rate U.S. \$14; all other countries U.S. \$16. Kentucky residents add 5% sales tax. All subscriptions begin with the current issue unless otherwise specified. Please allow 6 to 8 weeks for first copy. U.S. currency only, please. In order to hold down non-editorial costs, we do not bill.

RAINBOW ON DISK and RAINBOW ON TAPE are not stand-alone products, but are intended as adjuncts and complements to the magazine. Even if you purchase RAINBOW ON DISK or RAINBOW ON TAPE, you will still need the magazine for loading and operating instructions. For information on RAINBOW ON TAPE, see page 160.

To order by phone (credit card orders only), call 800-847-0309, 8 a.m. to 5 p.m. EST. All other inquiries call 502-228-4492.

Hardware Hackers Delight: D & A Research Digital Memory Scope

Have you ever thought the uses for your CoCo were limited? I hope not! D & A Research of Satellite Beach, Fla., has come up with a novel use for your favorite computer that makes it much more valuable if you like hardware experimenting.

This review focuses on the DMS-3B Digital Memory Scope, but we will look at this series of hardware add-ons in a broader sense. Actually, the scope can be purchased as a complete kit for \$169, but the individual boards can be used for many other purposes. The following boards comprise the kit: a J110K CoCo Bus Adaptor, a J105B Buffer Board, two J107B I/O Ports, a J202B A-to-D/D-to-A Board, one probe, one printer cable and a power supply. A 64K CoCo is required, and the review sample had the software on tape.

The J110K CoCo Bus Adaptor is a small circuit board that connects the CoCo to the rest of the D & A Research boards. It really has no stand-alone capabilities other than passing data lines D0-D7 and address lines A0-A7 to peripherals. Address lines A13-A15 are decoded to provide a directional data bus. Out and In signals are provided to the auxiliary bus. Connections to this circuit board are made using edge-type connectors.

The J105B Buffer Board provides bus isolation, better known as buffering, between the J110K and any peripherals. The same signals passed by the bus adaptor are buffered using 74LS245 bi-directional data buffers and a 74LS32. Connections to this board are made using DIP connectors.

The J107B I/O Port is the heart of the expansion interface. With the use of hardware decoding and software, the eight-bit data bus can be addressed as a port with any number between 0 and 255. Each J107B can be used to provide one 8-bit digital input and one 8-bit digital output. The port address is selected using an eight-pole DIP switch on the board. A 5-volt, wall-type DC power supply is necessary for these boards to operate. Connections to the boards are made using DIP headers. Output status is indicated by use of LEDs for each bit.

A keyboard driver is used as an example of a practical application of these three boards.


The J202B A-to-D/D-to-A Board contains a DAC0807 D-to-A converter and a DAC0804 A-to-D converter to further expand the capabilities of this bus. In addition to the 5 volts previously mentioned, +/-9 volts are necessary. These voltages are generated by the use of inexpensive transistor batteries.

The information on the input and output voltage and impedance is sketchy, to say the least, but it appears to be -2.55 to +2.55 volts, corresponding to the digital value read from, or stored to, the port. Four values of sensitivity are hardware selectable. When the sensitivity is increased, the input range is decreased. The sample rate of the A-to-D converter is adjustable from 3 KHz to 10 KHz.

The digital side of the analog input contains an LED display. Asynchronous and synchronous operation is

hardware selectable. Clock frequency and gain are adjustable by means of pots on the board.

If you purchase the entire kit including the two J107Bs, you receive a probe for the A-to-D converter and software that can be used to convert your CoCo to an oscilloscope. It works, too! The software contains a screen dump routine for an Epson MX-70 printer. Therefore, you have the DMS-2B Digital Memory Scope at your disposal. An example of the output is shown below.

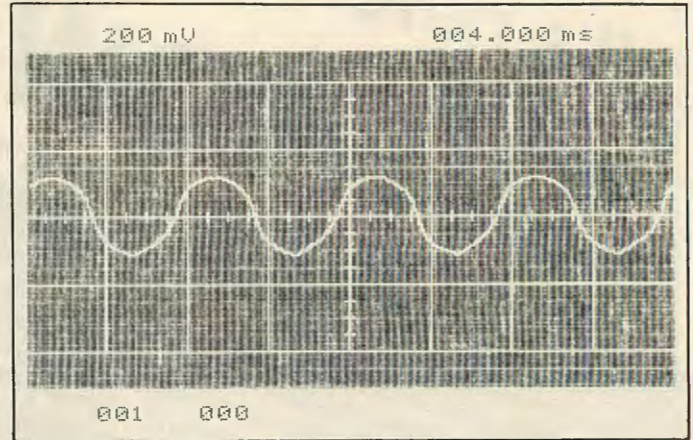

The review package came in an attractive sheet metal enclosure measuring 8 by 6 by 2½ inches. The front panel included power supply switches, a jack for the 5-volt wall supply, the analog input and output jacks and a DB-25 connector labeled Port A. LEDs indicate all power supply voltages. From a hardware standpoint it is impressive.

The manuals are a different story. Adequate instructions are given in general terms. Each board contains an example of a use, such as a BASIC program convertor from a Model I to a CoCo, but specific information is lacking for the operating parameters and board specifications. The manuals assume you have enough background to figure it out from the schematic diagrams.

I would recommend this kit, or any of the individual boards, for only the experienced hardware hacker. At the same time, the assembled package has excellent potential for advanced educational use. The only drawback is the documentation. I think the price is reasonable.


(D & A Research, 400 Wilson Ave., Satellite Beach, FL 32937; 305-777-1728, DMS-3B kit, \$169)

— Dan Downard

Happy Holidays

From your friends at RAINBOW


Holiday Greetings

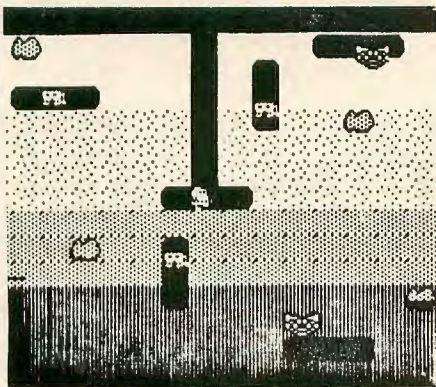

Pumpman

You'll dig this 100% ML arcade game! The Pumpman comes a pump that he fires at aliens Pooky and Dragon as they change forms and chase him around underground 15 different screens. "pause game" feature, bonuses. As fun and challenging as the original arcade game! 32K, one joystick required.

Tape \$21.95 Disk \$24.95



The Andrea CoCo By Art Martin

Another great animated graphics adventure! All you came down to the Yacht Club for was to get a drink and maybe play a little poker. Heck, nobody would ever guess that the closest thing you owned to a real yacht was the one over your fireplace. It was in the bar that you heard rumors of earth-shattering events about to take place. You step out onto the wharf to get a little air when your natural curiosity and sense of adventure start to work...Can you save the world? Superb graphics, save & load feature. 64K, one disk drive required.

Disk \$24.95



Fighter Pilot

An original arcade game! Wave after wave of attacking aircraft attempt to shoot you down as you maneuver your fighter into the wild blue yonder, blasting enemy fighters, bombers, and paratroopers out of the sky. Joystick or keyboard operation. "pause game" feature. Disk version saves high scores. 32K, 100% Machine Language. See February '86 Rainbow for review.

Tape \$21.95 Disk \$24.95



Adventure In Mythology By Scott Cabit

An animated graphics adventure. Battle monsters and discover treasures as you assume the personalities of various heroes in ancient Greek mythology! Your goal is to win the hand of the beautiful Atalanta, the swift-running huntress. But beware of the perils and obstacles that stand in your way as you journey through ancient Greece! Four-voice music and sound effects, automatic speech when using a Tandy SSC speech pak. Load and Save feature, over 250 locations. 64K Machine language.

Tape \$21.95 Disk \$24.95

White Fire Of Eternity



White Fire is a full 64K super animated graphic adventure. In an age of magic and monsters, you are lost in the forbidden woods trying to get out...

Disk \$24.95



Blackjack Dealer Feeler Dealer

These two programs help you develop your Blackjack skill and strategy. In **Blackjack Dealer**, the computer deals the cards and plays the dealer's hand against you. **Feeler Dealer** enables you to test your strategy by playing the desired number of hands using your techniques & tendencies. A great teacher for new Blackjack players and a valuable tool for the veteran player. Both programs included. 32K extended.

Tape \$24.95 Disk \$29.95



MAROONED!

Sitting on the back porch one fine afternoon you see a strange, flashing UFO-type object descend from the clouds & land in the corn field. Being the curious type, you run out to investigate and find a spaceship with its hatch open as you step inside the hatch closes and the ship takes off! Now you must find a way to get back home. A great graphics adventure. 32K & one disk drive required.

Disk or Amdek \$29.95

maxell

3" COMPACT FLOPPY DISKS

Our double-sided, high density 100 TPI disk is the perfect choice for 3" disk drives. Tested and certified error-free. Lifetime warranty.

FOR TABER & AMDEK SYSTEMS
\$49.95 box 10 3.00 s&h per box

Saguaro Software 4137 E. Bermuda, Tucson, AZ 85712
(602) 881-6786

Add \$2.00 for Shipping • C.O.D. Order Add \$3.00
Arizona Residents Add 7% Tax • Dealer Inquiries Invited
Call Or Write For Free Catalog!

Authors - We're Seeking Good Software Now!

phone personal answered between

6:00 — 9:00 pm Mountain time mon tue thur
every 2nd sat. of the month 9am 3pm

*** GERMANY HERE WE COME ***

NEW DEALERSHIP
WATCH FOR DETAILS

The Best Epson Screen Dump

An easy-to-use screen dump utility for Epson, Panasonic, Gemini, and compatible printers. Three sizes of printouts, double-strike option, reverse printing switch, use of double-density, bit-image mode, allows you to view the graphics screen before printing. 16K, supplied on tape. Disk transferable.

Tape \$14.95

CGP-220 Screen Dump

A graphics screen dump utility for the CGP-220 Ink Jet Printer. Features include: Fast machine language, four-color and one-color versions, special CoCo Max version, user-selectable colors, regular or double-size printout. 16K.

Tape \$14.95 Disk \$17.95

Pretty Pictures on the CoCo 3 With CC3 Draw

At last, a package that utilizes the power of the new CoCo 3 has arrived. *CC3 Draw* is a graphics editor designed to operate with the Color Computer 3's enhanced graphics.

This program is a simple editor with several special features. With *CC3 Draw*, you can draw lines, boxes, circles, filled boxes or just set dots. Cursor control is with a joystick. *CC3 Draw* supports a two-button joystick; however, if you only have a single-button joystick, the space bar works as the second joystick button.

To draw with *CC3 Draw*, just set a point on the screen using the joystick's second button or the space bar. Then move to the second point and press the appropriate key for the function. Nothing could be simpler. Sometimes a second press of the space bar or button is required for proper setting of a point. While this is not a major problem, it is somewhat bothersome. I have been assured by the programmers that this is being corrected.

CC3 Draw supports 16 colors on the 320-by-192 Hi-Res screen available for the CoCo 3. All color choices are supported. It is easy to change colors, and *CC3 Draw* allows the user to set up "default" palettes for switching color sets. Complete instructions are included for this. Also included is a discussion of the PALETTE command on the CoCo 3

and how it works. This is handy because the PALETTE command and other associated color-control commands on the Color Computer 3 are somewhat difficult to understand.

CC3 Draw is by no means a replacement for *CoCo Max*. It is a starting point for CoCo 3 software. It does not have fancy icons or close-up editing capabilities. It does offer basic drawing functions for new owners of the CoCo 3. In addition, *CC3 Draw* offers something to the programmer as well.

The program is written entirely in BASIC. Because of this, those who know BASIC will be able to add their own commands and icons. The program is well-commented for these people. Also, several useful routines can be found in the BASIC listing. Among these is a method for saving the Hi-Res screen. This is something the CoCo 3 does not normally allow. If nothing else, *CC3 Draw* gives several examples of how to use the new features of the CoCo 3. However, I believe you'll want to draw a few pictures, too.

CC3 Draw includes five single-spaced pages of documentation covering nearly every aspect of the program. I found this to be helpful.

While I cannot give *CC3 Draw* a super-high rating, it does have some features that make it very worthwhile. I give the program a 75 on a 100-point scale. The documentation, however, gets a score of 90 on the same scale.

(Spectrum Projects, Inc., P.O. Box 264, Howard Beach, FL 11414; 718-835-1344, \$19.95 plus \$3 S/H)

— Cray Augsburg

TCE's 5th Anniversary Catalog is now available!

IF YOU OWN A TANDY COMPUTER THERE'S SOMETHING FOR YOU!

PROGRAMMING TOOLS

DEFT PASCAL WORKBENCH
DEFT EXTRA
DEFT 3D GRAPHICS SAMPLER

WORD PROCESSING

CHILD WRITER
MEMO WRITER
BUSINESS WRITER

DATA MANAGERS

CHILD FILER
LIST MANAGER
BUSINESS MANAGER

SPREADSHEETS

CHILD CALC
SIMPLE CALC
BUSINESS CALC

EARLY LEARNING

ABC's IN COLOR
ALPHA MEMORY
HAPPY COUNT
MIX AND MATCH
MR. BEAR COUNT
MR. BEAR SPELLER
MR. PIGGY
SEE AND SPELL
TEACHING CLOCK

MATH SERIES

BASIC MATH
CRISS CROSS MATH
CRISS CROSS PLUS
FLASH CARD
FRACTIONS
FRACTION DESTROYER
FRIEND OR FOE
MATH BOMBER
MATH REVIEW
MR. BEAR FLASH CARD
MR. BEAR MATH
PLACE VALUES
REDUCING FRACTIONS
RESCUE MATH

LEARNING ACTIVITIES

ALPHA ATTACK
CAPITAL MATCH
HISTORY QUIZ
MATH QUIZ
MEMORY MATCH
QUIZ GAME
UNITED STATES
VOCAB BRUSH-UP

LANGUAGE ARTS

ALPHABETIZE
ANTONYM EXPRESS
ANTONYM MATCH
COMPUTER EASE
CRISS CROSS SPELL
ENGLISH REVIEW
HOMONYMS
NOUNS
NOUNS REVIEW
PLURALS
PRONOUNS
SAVE THE FISH
SPELL BOMBER
SPELLING RULES
SUPER SPELL BOMBER
SYNONYM EXPRESS
SYNONYM MATCH
TORPEDO SCRAMBLE
VERB REVIEW
WEEKLY SCRAMBLER
WEEKLY SPELLER

**100%
SATISFACTION
GUARANTEE**



CALL us at 1-(800)-4TC-4TCE or 1-(301)-963-3848
for a FREE TCE Software catalog and the latest copy of TCE NEWS.

Telewriter-64™

the Color Computer Word Processor

- 3 display formats: 51/64/85 columns × 24 lines
- True lower case characters
- User-friendly full-screen editor
- Right justification
- Easy hyphenation
- Drives any printer
- Embedded format and control codes
- Runs in 16K, 32K, or 64K
- Menu-driven disk and cassette I/O
- No hardware modifications required

THE ORIGINAL

Simply stated, Telewriter is the most powerful word processor you can buy for the TRS-80 Color Computer. The original Telewriter has received rave reviews in every major Color Computer and TRS-80 magazine, as well as enthusiastic praise from thousands of satisfied owners. And rightly so.

The standard Color Computer display of 32 characters by 16 lines without lower case is simply inadequate for serious word processing. The checkerboard letters and tiny lines give you no feel for how your writing looks or reads. Telewriter gives the Color Computer a 51 column by 24 line screen display with *true lower case characters*. So a Telewriter screen looks like a printed page, with a good chunk of text on screen at one time. In fact, more on screen text than you'd get with Apple II, Atari, TI, Vic or TRS-80 Model III.

On top of that, the sophisticated Telewriter full-screen editor is so simple to use, it makes writing fun. With single-letter mnemonic commands, and menu-driven I/O and formatting, Telewriter surpasses all others for user friendliness and pure power.

Telewriter's chain printing feature means that the size of your text is never limited by the amount of memory you have, and Telewriter's advanced cassette handler gives you a powerful word processor without the major additional cost of a disk.

...one of the best programs for the Color Computer I have seen...

— Color Computer News, Jan. 1982

TELEWRITER-64

But now we've added more power to Telewriter. Not just bells and whistles, but major features that give you total control over your writing. We call this new supercharged version Telewriter-64. For two reasons.

64K COMPATIBLE

Telewriter-64 runs fully in any Color Computer — 16K, 32K, or 64K, with or without Extended Basic, with disk or cassette or both. It automatically configures itself to take optimum advantage of all available memory. That means that when you upgrade your memory, the Telewriter-64 text buffer grows accordingly. In a 64K cassette based system, for example, you get about 40K of memory to store text. So you don't need disk or FLEX to put all your 64K to work immediately.

64 COLUMNS (AND 85!)

Besides the original 51 column screen, Telewriter-64 now gives you 2 additional high-density displays: 64 × 24 and 85 × 24!! Both high density modes provide all the standard Telewriter editing capabilities, and you can switch instantly to any of the 3 formats with a single control key command. The 51 × 24 display is clear and crisp on the screen. The two high density modes are more crowded and less easily readable, but they are perfect for showing you the exact layout of your printed page, *all on the screen at one time*. Compare this with cumbersome "windows" that show you only fragments at a time and don't even allow editing.

RIGHT JUSTIFICATION & HYPHENATION

One outstanding advantage of the full-width screen display is that you can now set the screen width to match the width of your printed page, so that "what you see is what you get." This makes exact alignment of columns possible and it makes hyphenation simple.

Since short lines are the reason for the large spaces often found in standard right justified text, and since hyphenation is the most effective way to eliminate short lines, Telewriter-64 can now promise you some of the best looking right justification you can get on the Color Computer.

FEATURES & SPECIFICATIONS:

Printing and formatting: Drives any printer (LPV7/VIII, DMP-100/200, Epson, Okidata, Centronics, NEC, C. Itoh, Smith-Corona, Termet, etc).

Embedded control codes give full dynamic access to intelligent printer features like: underlining, subscript, superscript, variable font and type size, dot-graphics, etc.

Dynamic (embedded) format controls for: top, bottom, and left margins; line length, lines per page, line spacing, new page, change page numbering, conditional new page, enable/disable justification.

Menu-driven control of these parameters, as well as: pause at page bottom, page numbering, baud rate (so you can run your printer at top speed), and Epson font. "Typewriter" feature sends typed lines directly to your printer, and Direct mode sends control codes right from the keyboard. Special Epson driver simplifies use with MX-80.

Supports single and multi-line headers and automatic centering. Print or save all or any section of the text buffer. Chain print any number of files from cassette or disk.

File and I/O Features: ASCII format files — create and edit BASIC, Assembly, Pascal, and C programs, Smart Terminal files (for uploading or downloading), even text files from other word processors. Compatible with spelling checkers (like Spell 'n Fix).

Cassette verify command for sure saves. Cassette auto-retry means you type a load command only once no matter where you are in the tape.

Read in, save, partial save, and append files with disk and/or cassette. For disk: print directory with free space to screen or printer, kill and rename files, set default drive. Easily customized to the number of drives in the system.

Editing features: Fast, full-screen editor with wordwrap, block copy, block move, block delete, line delete, global search and replace (or delete), wild card search, fast auto-repeat cursor, fast scrolling, cursor up, down, right, left, begin line, end line, top of text, bottom of text; page forward, page backward, align text, tabs, choice of buff or green background, complete error protection, line counter, word counter, space left, current file name, default drive in effect, set line length on screen.

Insert or delete text anywhere on the screen without changing "modes." This fast "free-form" editor provides maximum ease of use. Everything you do appears immediately on the screen in front of you. Commands require only a single key or a single key plus CLEAR.

*...truly a state of the art word processor...
outstanding in every respect.*

— The RAINBOW, Jan. 1982

PROFESSIONAL WORD PROCESSING

You can no longer afford to be without the power and efficiency word processing brings to everything you write. The TRS-80 Color Computer is the lowest priced micro with the capability for serious word processing. And only Telewriter-64 fully unleashes that capability.

Telewriter-64 costs \$49.95 on cassette, \$59.95 on disk, and comes complete with over 70 pages of well-written documentation. (The step-by-step tutorial will have your writing with Telewriter-64 in a matter of minutes.)

To order, send check or money order to:

Cognitec
704 Nob Street
Del Mar, CA 92014

Or check your local software store. If you have questions, or would like to order by Visa or Mastercard, call us at (619) 755-1258 (weekdays, 8AM-4PM PST). Dealer inquiries invited. (Add \$2 for shipping. Californians add 6% state tax.)

Available at
Radio Shack stores
via express order
catalogue #90-0253
90-0254

Apple II is a trademark of Apple Computer, Inc.; Atari is a trademark of Atari, Inc.; TRS-80 is a trademark of Tandy Corp; MX-80 is a trademark of Epson America, Inc.



RAINBOW

Give us your best: Join the ranks of these courageous CoCoists in showing the Color Computer world your high score at your favorite micro-diversion. We want to put your best effort on record in THE RAINBOW's "Scoreboard" column. All entries must be received 60 days prior to publication. Entries should be printed — legibly — and must include your full name, address, game title, company name and, of course, your high score. Each individual is limited to three score entries per month. Send your entries to Scoreboard, c/o THE RAINBOW. The "Rainbow Scoreboard" is now a bimonthly feature.

For greater convenience, your high scores may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS.

★ Current Record Holder • Shutout

ADVANCED STAR-TRENCH (THE RAINBOW, 7/86) 3,960 ★Maurice MacGarvey, Dawson Creek, British Columbia	200-3 Martin Parada, Arcadia, CA 143-3 Steven Bullard, Allen, OK 141-0 ★Maurice MacGarvey, Dawson Creek, British Columbia	46,804 Theresa Juetten, Pelkie, MI 43,485 Jon Kirkham, Stratford, CT 38,696 Chuck Lehotsky, North Jackson, OH
2,300 Blain Jamieson, Kingston, Ontario 1,800 Chris Goodman, Baltimore, MD	101-2 Craig Mesler, Walkerville, MI	DRACONIAN (Tom Mix) 780,549 ★Conan Davis, London, Ontario
ALPINE SLOPES (THE RAINBOW, 12/85) 6,851 ★Myriam Ferland, Trois-Rivieres, Quebec	COLOR BLACKJACK (THE RAINBOW, 10/83) \$26,500 ★Francois Provencal, Chateaugay, Quebec	DRAGON FIRE (Radio Shack) 123,120 ★Rupert Young, Sheffield, MA 48,713 Gilles Gagne, Silery, Quebec 33,676 Nathanael Heller, Kenner, LA 30,720 Brian Matherne, Gretna, LA 21,221 Jermaine Jackson, Tallulah, LA 19,986 Owen Edson, Sherman Oaks, CA 18,529 James Nahas, New London, CT 15,260 Ed Emelett, Nanticoke, PA
4,656 Maurice MacGarvey, Dawson Creek, British Columbia 4,254 Todd Wirtz, Midland, MI 4,058 Johnny Garrison, Tuscaloosa, AL 3,970 Steven Bullard, Allen, OK	COLOR CAR (NOVASOFT) 242,767 ★Alan Martin, Cornwall, Ontario 110,454 Scott Enman, Belle-Mead, NJ 107,864 David Entenmann, Monroe, NY	ENCHANTER (Infocom) 400/621 ★Brad Wilson, Lithia Springs, GA 185/186 David Tarleton, Williamsburg, VA 80/115 Scott Bellman, Bettendorf, IA
ANDRONE (Radio Shack) 61,200 ★Maurice MacGarvey, Dawson Creek, British Columbia	CRYSTLE CASTLES (ThunderVision) 820,010 ★J. Yosef Krinsky, Jerusalem, Israel	EVICTOR (THE RAINBOW, 7/86) 9,230 ★Raymond MacGarvey, Dawson Creek, British Columbia
58,200 Scott Bellman, Bettendorf, IA 57,300 Mitch Hart, Seattle, WA 54,300 Daphnie Phillips, Evansville, WI 40,585 Theresa Juetten, Pelkie, MI	DALLAS QUEST (Radio Shack) 87 ★Douglas Bell, Duncan, OK 89 Milan Parekh, Fullerton, CA 89 Andrew Urquhart, Metairie, LA 89 Steve Zemaitis, Howell, MI 90 Roy Grant, Toledo, OH 91 John Semonin, Akron, OH 92 David & Shirley Johnson, Leicester, NC	7,500 Rachael Richards, Blakeslee, PA 4,570 Chris Goodman, Baltimore, MD
ASTRO BLAST (Mark Data) 80,825 ★Craig Schreder, Sarnis, Ontario	DEATH TRAP (Soft Sector) 86,748 ★Douglas Pardon, Brigham City, UT 47,233 Dale Krueger, Maple Ridge, British Columbia	FALCON'S LAIR (THE RAINBOW, 8/85) 30,522 ★Kirby Smith, York, PA 19,554 Talib Khan, Bronx, NY 18,461 Joyce Smith, Butler, PA 17,463 Michael Scott, Johnstown, NY 15,707 Daniel Cecil, Bardstowen, KY
BAG-IT-MAN (Aardvark) 358,000 ★Kevin Krueger, 100 Mile House, British Columbia	DECATHALON (Spectral Associates) 10,304 ★Bernard Florence, Croydon, Australia 9,648 Matthew Sundariand, Christchurch, New Zealand	FIGHTER PILOT (Saguaro Software) 117,000 ★Stephan Arvey, St. Louis, MO 61,500 Steven Arvey, St. Louis, MO
BEAM RIDER (Spectral Associates) 6,004,000 ★James Oakley, Nashville, TN 3,376,080 Lisa Lapointe, La Tuque, Quebec 3,042,470 Evelyn Thompson, Netherland, TX 1,909,630 Paul Bivens, Washington, PA 747,200 Robert Eering, Swift Current, Saskatchewan	9,344 Marco Lecours, Ste-Justine, Quebec	FIRESTORM (THE RAINBOW, 1/86) 3,510 ★Brad Bansner, Wyomissing, PA
BIOSPHERE (Radio Shack) 391 ★Danny Perkins, Clifton Forge, VA	DEMOLITION DERBY (Radio Shack) 110,500 ★Tim Glenn, Havertown, PA 97,700 Brian Ballew, Morganton, NC	FROG-MAN (Computer Island) 8,635 ★Andy Green, Whitehall, PA
BOXING (THE RAINBOW, 8/86) 480 ★Talib Khan, Bronx, NY 395 Blain Jamieson, Kingston, Ontario	DEMON ATTACK (Imagic) 244,110 ★Gregory Day, Holstein, Ontario 125,520 Mike Watson, Northville, NY 81,635 Tim Glenn, Havertown, PA 78,010 Lisa Nebel, Phoenix, AZ 64,195 Jon Ruhnow, Duncannon, TX	GALAGON (Spectral Associates) 73,520 ★Neil Edge, Williston, FL 71,220 Debora Edwards, Wembley, Alberta
BUBBLE WARS (THE RAINBOW, 2/86) 75,100 ★Rachael Richards, Blakeslee, PA 43,150 Shirley Kirk, Elgin, OR 37,957 Odene Kirk, Elgin, OR 30,850 Daniel Cecil, Bardstowen, KY 29,650 Carlton Taylor, Scarborough, Ontario 28,800 Jon Larson, Seligman, AZ	DEMON SEED (MichTron) 15,360 ★Blake Cadmus, Reading, PA	GANTELET (Diecom Products) 787,780 ★Brad Wilson, Lithia Springs, GA 628,020 Mike Dyer, Lompoc, CA 243,810 Jay Graddick, Cocoa, FL 73,460 John Straiton, Merritt Island, FL 72,780 Michael Heitz, Chicago, IL 30,000 Jeff Thompson, Chesterfield, VA
BUSTOUT (Radio Shack) 37,900 ★Gordon Rock, Davenport, IA 21,850 Charles Eglesfield, Sault Ste Marie, Ontario	DESERT PATROL (Arcade Animation) 746,450 ★Rodney Abery, Victoria, Australia	GHANA BWANA (Radio Shack) 693,830 ★Steve Wright, Fredericton, New Brunswick
21,630 Tanya Maestas, Denver, CO 21,236 Mike McCafferty, Idaho Falls, ID 18,403 Chris Zepka, North Adams, MA 1,266 Andy Walker, York, PA	DESERT RIDER (Radio Shack) 68,872 ★Janine Freamon, Citrus Heights, CA 65,215 Skip Freamon, Citrus Heights, CA 62,329 Steve Zemaitis, Howell, MI 51,519 Michael Lizardy, Oregon, OH 50,268 Bernard Florence, Croydon, Australia	510,180 Milan Parekh, Fullerton, CA 459,930 Gene Wells, Silsbee, TX 359,080 Mike Dyer, Lompoc, CA 325,900 Rupert Young, Sheffield, MA
CASTLE (THE RAINBOW, 6/86) 202,659 ★Brendan Powell, La Grande, OR 10,216 Kirby Smith, York, PA 9,941 Maurice MacGarvey, Dawson Creek, British Columbia	DOODLEBUG (Computerware) 2,515,940 ★William Novobilsky, Lanoka Harbor, NJ	GHOST GOBBLER (Spectral Associates) 102,540 ★Greg Erickson, Lowell, MA 80,550 Olga Pichard, Lausanne, Switzerland 76,900 Ghislain Chillis, Trois-Rivieres, Quebec
CATERPILLAR CAVE (T&D Software) 1,170 ★Alex Abraham, Atlanta, GA	1,315,170 Doreen Watt, Sudbury, Ontario 52,430 Craig Schreder, Sarnia, Ontario 18,385 Blake Cadmus, Reading, PA	76,900 Pierre Pichard, Lausanne, Switzerland 72,960 Sylvain Castonguay, Chicoutimi, Quebec 47,200 Mark Herpst, San Diego, CA 37,200 Jason Maxwell, Manchester, TN 14,750 Bobby Brooks, Zephyrhills, PA
CLOWNS & BALLONS (Radio Shack) 62,440 ★Robin Ackerman, Concord, TN 41,280 Blake Cadmus, Reading, PA	DOUBLE BACK (Radio Shack) 2,586,300 ★Eugene Roosa, Stone Ridge, NY 1,618,400 Diane Guernon, Montreal, Quebec 450,600 Michael Brennan, Calgary, Alberta 159,610 Blake Cadmus, Reading, PA 52,840 Joel MacNeil, Needham, MA	GRABBER (Tom Mix) 23,550 ★Rod Krueztfeld, Vanscoy, Saskatchewan
COLOR BASEBALL (Radio Shack) 999-0 ★Erik Munson, Tucson, AZ 866-1 Ghislain Chillis, Trois-Rivieres, Quebec	DOWNLAND (Radio Shack) 89,490 ★Neil Edge, Williston, FL 70,142 Chris Goodman, Baltimore, MD 68,142 Cooper Valentin, Vavenby, British Columbia	GRID FACTOR (T&D Software) 4,550 ★Alex Abraham, Atlanta, GA
814-1 Frank D'Amato, Brooklyn, NY 814-0 ★John Licata, Richton Park, IL 653-0 ★Danny Perkins, Clifton Forge, VA 549-0 ★Skipper Taday, East Lyme, CT	49,500 Danny Perkins, Clifton Forge, VA	

SCOREBOARD POINTERS

In conjunction with THE RAINBOW's Scoreboard, we offer this column of pointers for our game-playing readers' benefit. If you have some interesting hints and tips, we encourage you to share them by sending them to the Scoreboard, c/o THE RAINBOW.

FEEDBACK

Scoreboard:

In response to Dale Lampe's question about *Pyramid* (August 1986), to get out of the maze after you are at the vending machine, you must go north, west and then up.

In the game *Raaka-Tu* I need to know how to get to the goblin and how to kill it.

Avi Finkel
Lewisburg, PA

Scoreboard:

In response to Rodrigo Maldonado's letter (October 1986) about *Pitfall II*, when you get down to the bottom of the caverns, go left as far as possible on land. Wait for the bat to fly over and, after a second, a balloon will appear. Go to the left side of the screen and avoid the bats. When you get to the top, the balloon will pop. Make sure you're over the land part. Go left, jump the scorpion, go up and you'll find the girl. Go down to the second scorpion from the top and then go left. Run and jump off the side, and keep going left to get the ring. The rest is up to you.

I need help in defeating the Wizard's image in *Dungeons of Daggorath*. I've mastered everything but him so far, and he doesn't fall for any tricks. Send help to the "Scoreboard."

Danny Perkins
Clifton Forge, VA

Scoreboard:

In conjunction with Dawn Daniels' letter in the October 1986 "Scoreboard" on how to get the coin in *Raaka-Tu*, using the "wait" command allows you to wait for the guards to pass and then approach the temple and get the coin (without getting killed). Be sure to move away immediately after getting the coin or the guards will return and kill you.

I've been going CoCo crazy trying to kill the image of the Wizard in *Dungeons of*

Daggorath. Any help would be greatly appreciated.

Andy Wolstromer
River Edge, NJ

Editor's Note: Danny and Andy, you both might refer to the letter entitled "Rings are Good for the Image," which appeared in the March 1986 "Scoreboard."

GAME QUEST

Scoreboard:

I am seeking information about a company called Programmer's Guild. They make a game called *Ninja Warrior*, which is shown in the "Scoreboard." I would like to know if anyone has their address or telephone number.

Keith DuBose
Sarasota, FL

Editor's Note: Programmer's Guild is no longer in business, Keith, and we could not find any company that sells their game. We have had numerous requests for this game recently, so if anyone knows of a software company that carries *Ninja Warrior*, please write to the "Scoreboard."

GREEDY CREATURES

Scoreboard:

I have some hints for *Dungeons of Daggorath*. If you have a lot of objects you don't need, drop them. You can then stay in that same cell and no creatures (except the scorpion and the Wizard) may attack you until they are finished collecting the objects. While they are picking them up, you can attack them as much as you want, but watch out for your heart rate.

Michael Wallace
Bronx, NY

A-MAZE-ING RESULTS

Scoreboard:

I have a few tips for *Madness and the Minotaur*. In the room with the strange colored walls, turn the lamp off and then examine everything.

To get the pack rat to give you a treasure, take the sapphire to it.

To find out what you need to get the spell book, when you first start the game go west, west, north and examine the pool. In this room you can also climb the ledge (if you have the rope), or you can get the flute and parchment, go to the room in the maze that plays music, and play the flute. Also in the maze, find the pit that changes location in each game and type LOOK PIT.

To open the crypt which has a passage leading down only, get the Power ring and open the crypt.

John Fulton
Boydton, VA

A LITTLE MARTIAN MUSIC

Scoreboard:

Here are some tips for *Pyramid 2000*. At the entrance to the pyramid, type OPEN PANEL. Be sure you have the lamp, bottle, food and scepter. Be sure to water the plant twice. To get out of the maze, go north, west and then up.

I need directions to the Mummy's Chest. I also need to know if the fallen block can be moved. If so, how?

In *Mars-80*, to get more oxygen go into the ship. To catch the martian, play your harmonica (look in your suit) until he comes in the room. Make sure you have the net. Then type, NET MARTIAN. This will prevent him from moving everything around.

Sherry Moore
Columbus, OH

PLAYING IT SAFE

Scoreboard:

Here are a couple hints for *Paper Route*. Riding your bike in the middle of the street is much safer than the sidewalk; if you miss a few houses in the beginning, don't panic — this makes it easier to get perfect deliveries later.

I need help with *Trekboer*. How can I find the coordinates of the planet Alton, and is this the planet where I will find the Xendos? Also, how can I open the access panel in the environmental control room? Any help would be appreciated.

Michael Heitz
Chicago, IL

IMMUNITY

Scoreboard:

In the second board (Indian Hill) of *Canyon Climber*, if you go up the first ladder and then come back down, the arrows will no longer be able to kill you. This allows you to get points by jumping them without endangering yourself.

I need help with *Pyramid 2000* (What do you do about the mummy?) and *Raaka-Tu* (What do you do after you've gained 25 points?).

Any other help with those games would be appreciated also.

Matt Kurtin
Roanoke, VA

BURIED ALIVE

Scoreboard:

Here are some hints for *War of the Worlds*. Mapping is very useful in Chapter 1, but in chapters 2 and 3 it won't help much. Remember that the priest is only human and everything he says is not always true. When the alien drone tells you Klandor is on the island, he doesn't mean the island near Talma.

I need some help with *The CoCo Zone* (RAINBOW, April 1986). I get the mask and

bottle and get into the casket. Once I am buried, I try to drill a hole, but I get the response, "too dark." When I light the match to drill a hole, a draft of air extinguishes it. I understand that you should be able to see good enough to drill a hole if you have the flashlight, but where do you get it? I've searched all over the entire building. Any help would be greatly appreciated.

Joel DeYoung
Manson, Manitoba

A CATCH-ALL OF CLUES

Scoreboard:

To start, I would like to give some hints on the game *Zork I*. To open the dam, you must go to the maintenance room and get the wrench. After you have the wrench, go to the controls and use it to turn the bolt. Wait awhile before going to the reservoir. You will now have a north direction to follow.

For the game *Enchanter*, try sleeping in the four poster bed and when you get up, examine the bedpost. Also, to get the jewel box open, drop all your items outside the gallery. In the gallery you will find the Ozmo spell. Then, go outside the gallery and make your way to outside the temple. Drop all your inventory, cast the spell on yourself and go inside.

In the game *Hitchhiker's Guide to the Galaxy*, cover the hole in the wagon hold wall with your gown and cover the grating with the towel. I know how to get past the first two objects, but what do you do with the robot panel? Any help would be appreciated.

David Beyer
Melbourne, FL

BRINGING ORDER TO BEDLAM

Scoreboard:

I have solved *Bedlam* several times and

there are two key points. 1) You must get the green key out of the Shock Room by standing in the room before it. 2) Get the hamburger out of the refrigerator, put the blue pill in it and feed it to the dog.

I would like help in solving *Madness and the Minotaur*. I can't seem to get any points at all, or kill monsters. Why?

Maurice MacGarvey
Dawson Creek, British Columbia

HOPING FOR HALL HINTS

Scoreboard:

I need some help, but also have a few tips, in the game *Hall of the King*. I need help in finding the stick and also need to know how to pry open the gate with the funny lettering above it.

Does anyone know how to bend the bar?

The tips I have may be useful to some people. Put the amulet on the hook (the amulet is found in the seats in the theatre), and the gate that is in the room with the two statues and the gem, will open. When you get to the shrine with the bowl and the rod on his head, pull the rod.

While in the room with the statue, box and pole, put the coins in the box. The rest is up to you.

Mark Bourdeaux
Spring Arbor, MI

To respond to other readers' inquiries and requests for assistance, reply to "Scoreboard Pointers," c/o THE RAINBOW, P.O. Box 385, Prospect, KY 40059. We will immediately forward your letter to the original respondent and, just as importantly, we'll share your reply with all "Scoreboard" readers in an upcoming issue.

For greater convenience, "Scoreboard Pointers" and requests for assistance may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS. Be sure to include your complete name and address.

— Debbie Hartley


NEW DISK DRIVES

STARTING AT

\$ 89.⁹⁵

**WITH CASE &
POWER SUPPLY**


\$129.95

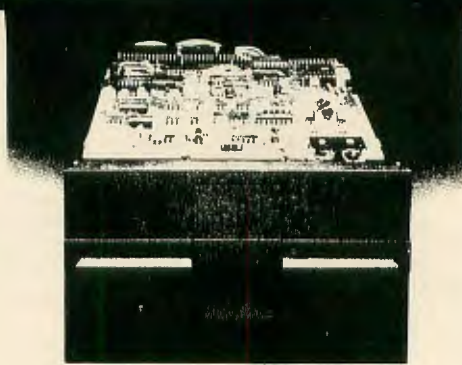

TANDON MPI TEAC

Speed 6 ms tk to tk and up
Capacity 250k unformatted
Tracks 40
Warranty **now 1 YEAR**

New Low Price!



40 Tks 6Ms
Double Sided
Double Density

40 or 80 Tracks

1/2 Hght. Teac/Panasonic



We carry only the finest quality disk drives • no seconds • no surplus

SATISFACTION GUARANTEED!!

ALL DRIVES FULLY TESTED & WARRANTED

- Complete Disk Drive with Power Supply & Case Teac \$129.95
- Two Drives in Dual Case & Power Supply Teac ~~\$279.95~~ **CALL**
- 1/2 ht double sided double density Disk Drives (Panasonic/Teac) **\$119.95**
- 1/2 ht double sided double density Disk Drive with ps & case, ~~\$199.95~~ **CALL**



How to use your new drive system on audio cassette

Single ps & case \$44.95 Dual 1/2 ht ps & case \$54.95 Dual ps & case ... **Call**

Color Computer Controller (J&M)

\$129.95

DRIVE 0 FOR RADIO SHACK COLOR COMPUTER

TANDON, MPI OR TEAC DRIVE (SINGLE SIDED 40 TRACKS SPEED 5 MS TRK TO TRK & UP)

POWER SUPPLY and CASE, TWO DRIVE CABLE WITH ALL GOLD CONNECTORS

J&M CONTROLLER, MANUAL and DOCUMENTATION ~~\$249.95~~ **\$ SALE!**

BUY THE BEST
FOR LESS!
CALL!

DRIVE 0 FOR RADIO SHACK COLOR COMPUTER

PANASONIC 1/2 HEIGHT DOUBLE SIDED DOUBLE DENSITY DRIVE 500K unformatted

POWER SUPPLY and CASE, 2 DRIVE CABLE WITH ALL GOLD CONNECTORS

J&M CONTROLLER, MANUAL and DOCUMENTATION ~~\$279.95~~ **Super!! SALE!**

TAKE ADDED SAVINGS ON TWO DRIVE SYSTEMS

DISKETTES with free library case **\$17.95**

Unadvertised Specials **\$Call**

Drives cleaned, aligned & tested **\$29.95**



10 Diskettes
GD CONTROL DATA

TECHNICAL STAFF ON DUTY, PLEASE CALL FOR ASSISTANCE.



**CALL US TODAY!!
ORDER TOLL FREE**

**617-278-6555
1-800-635-0300**

* DEALER INQUIRIES INVITED.
617-278-6555





TRUE DATA PRODUCTS

**9 SOUTH MAIN ST
UXBRIDGE, MASS. 01569**

617-278-6555

HOURS MON-SAT 9-6 (EST)


We welcome

- Visa /Master Charge  
- Checks (allow 2 weeks for clearing)
- C.O.D. Add \$2.00

New Hard Drives

----- COMPLETE SYSTEM ----- JUST PLUG IN -----

**Call For
BEST PRICE**

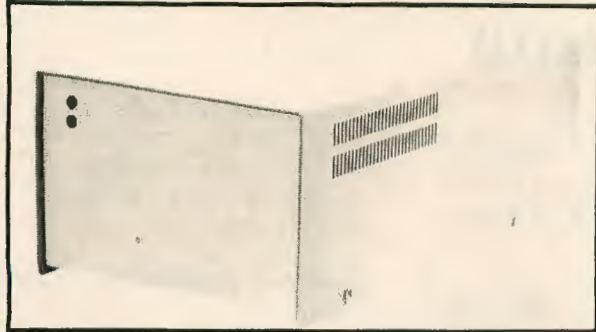

Warranty - One Full Year

5 to 20 Megabyte, ready to run on the TRS
80 Model I/III/IV/4P, color computer,

64K UPGRADES \$19.95

VIDEO DRIVER

ENABLES YOUR COCO TO OPERATE WITH A
VIDEO MONITOR INSTEAD OF A TELEVISION!


\$24.95

Panasonic 1091 Printer 239.95

1091 Printer & SP3 & Screen Dump **299.95**

stair PRINTERS

PRINTER CABLES AND
INTERFACES AVAILABLE
Call for current pricing

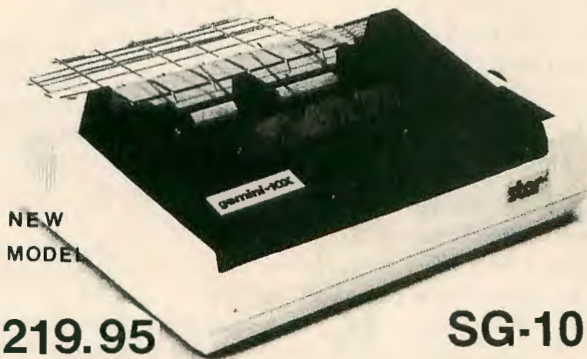

NEW
MODEL

\$219.95

SG-10

IBM XT

COMPATIBLE



call for low price

SCREEN DUMP PROGRAM


The best screen dump program for the Epson & Gemini
printers ever!! Have the option of standard images
reverse w/regular or double sized pictures **\$19.95**

SP-3 INTERFACE for Color Computer

- 300-19,200 BAUD rates
- External to printer — No AC Plugs
- Built in modem/printer switch—no need for
Y-cables or plugging/unplugging cables

Only:

\$54.95

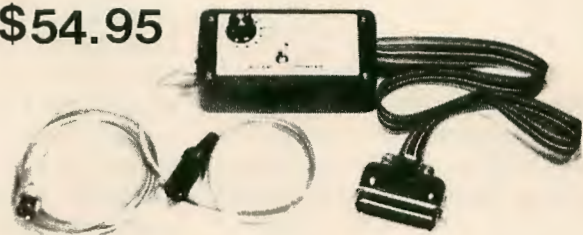

COMPLETE SYSTEM

~~299~~⁹⁵

NEW
LOW
PRICE

now
with
screen
dump

Nothing more to buy!

Dealer inquiries invited



TRUE DATA PRODUCTS

9 SOUTH MAIN ST.
UXBRIDGE, MASS. 01569



**CALL US TODAY!!
ORDER TOLL FREE**

**617-278-6555
1-800-635-0300**

The Disappearing PCOPY Dilemma

By Richard E. Esposito
Rainbow Contributing Editor
with Richard W. Libra

R Whenever I PCOPY 1 to 5, I get a syntax error and everything gets erased from memory. Is this a bug in one of my ROMs?

Ernest Feo
Miramar, FL

R To PCOPY higher than 4, Ernest, you must PCLEAR memory first. When you power up your Extended BASIC CoCo, BASIC reserves 6K bytes of screen memory starting at Address 1536 and continuing in 1,536-byte increments to 7679. Space above this area is used for your programs. Therefore, if you PCOPY into this area without clearing additional screen memory, you will get syntax errors and lose your program.


Bar Code for the CoCo

R Does someone make a device like a light pen that can read data from a magazine to the CoCo 2?

John Leach
New York, NY

R What you are interested in, John, is a text scanner. There was a firm marketing a device that claimed to read typewritten documents with a high degree of accuracy. Introduced at \$1,000 plus, it consisted of a frame that held an 8½-by-11-inch page and a trolley used to manually scan one line at a time. The product apparently has not been too successful, since I've seen it reduced to under \$200. There have been attempts to put machine readable

Richard Esposito is a project engineer for TRW's Government Systems Group. He holds bachelor's, master's and doctorate degrees from Polytechnic Institute of Brooklyn. He has been writing about microcomputers since 1980.

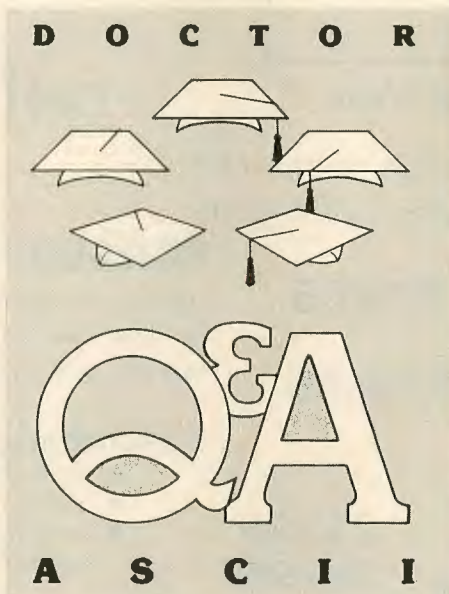

text in magazines, and RAINBOW's sister publication, PCM, has been printing portable computer software in bar code since April 1984.

RAINBOW once bound a phonograph recording of a CoCo tape into an anniversary issue. The most encouraging technology at the moment is the Cauzin SoftStrip, which its proponents claim can tolerate the variation inherent in mass producing a magazine.

80-Column Display

R In the August 1986 issue, Marty Goodman recommended Word-Pak RS and the Disto Super Controller for those who desired an 80-column display. When I asked Howard Medical Computers about Word-Pak RS, they told me it only worked with OS-9; the Disto Controller is advertised to work with BASIC only if I rewrite some commands. Since I am not a programmer, can you give me programming hints on getting it to work with my software

before I lay out \$220 on a Disto Controller?

Guenter Glebinski
Union, NJ

R If you are looking for an 80-column display to work with your existing Color Computer software, Guenter, you are in for a big disappointment. Most standard CoCo software either uses high resolution graphics or the 32-by-16 text screen. FLEX and OS-9 software is usually written using these operating systems' standard display drivers, which can be patched to utilize a hardware 80-column display such as the ones sold by Disto or Howard Medical. PBJ, the manufacturer of Word-Pak, sold FLEX and BASIC drivers for earlier versions (Word-Pak I and II) of their Word-Pak RS. Cer-Comp and Elite Software market Word-Pak versions of their software. The 80-column display for the CoCo that has the most potential for non-OS-9 support is the one that comes standard on the new CoCo 3.

Buffer Printing


R I use my MC-10 to access bulletin boards using Tandy's Micro Compact communications program and a modem. It is my understanding that the June 1984 issue of HOT CoCo had an article explaining how one could print the buffer contents.

Frank McCain
Pearland, TX

R The review by John S. Cullings on Page 109 of that HOT CoCo issue included a BASIC program Compact Patch, which patches the Micro Compact communications program to allow you to return to BASIC without destroying the text buffer. It also includes a BASIC program Scan and Print,

which allows you to print the text buffer from BASIC. Back issues and reprints of articles from *HOT CoCo* are available from CW Communications/Peterborough, Inc., 80 Pine Street, Peterborough, NH 03458, (603)924-9471.

Merging With Pokes

 What pokes do I use to merge two programs using Extended Color BASIC?


B. Cohn
West Stockbridge, MA

R_x The following technique can be used to merge any number of BASIC programs as long as you do not exceed your CoCo's memory limit and the programs were saved in normal (non-ASCII) format:

- 1) Type PRINT HEX\$(PEEK(25)*256+PEEK(26)) and record the value.
- 2) CLOAD the first program.
- 3) Type PRINT HEX\$(PEEK(27)*256+PEEK(28)-2) and again record the value.
- 4) Poke the values from Step 3 into addresses 25 and 26. (e.g., POKE25, \$H53; POKE26, &H41)
- 5) CLOAD the next program and renumber if necessary to avoid line number conflicts.
- 6) Poke the values from Step 1 into addresses 25 and 26.

Note: You can repeat steps 2 through 6 to merge additional programs as long as you have sufficient memory. This technique also works with disk systems for programs that are not saved in ASCII.

Pondering an Upgrade


 I have a 16K ECB CoCo, cassette, a DWP-210 printer and Color Script. I bought this setup a while ago and now since everything is much improved, should I upgrade or buy a new system? I am interested in using my computer for word processing, book-keeping and telecommunications.

Rosemarie Hoyt
Sharon, VT

R_x The lowest cost upgrade that will significantly enhance the capability of your CoCo would be to increase its memory to 64K RAM. With the RAM upgrade, the addition of one, or preferably two, double-sided disk drives would open the door to more professionally written home/office software. If your needs require an 80-column display and memory beyond 64K, then I would advise getting a new CoCo 3

instead of adding memory to your current machine. In any case, the drives will work even if you move up to a 3 later.


Program Interference

 Is it possible that one program can interfere with another? I have a program, Gopher, and it works fine unless I try to run it with Diskmenu, at which time I get an illegal function call.

Robert LeBlanc
Boucouteche, New Brunswick

R_x The *Diskmenu* program performs a PCLEAR 1 in Line 30. This eliminates most of the graphics memory that *Gopher* may require. Try removing this statement from Line 30 and see if that helps.

EDTASM Assembly


 I recently purchased Tandy's Disk EDTASM assembler. My question is how can I get the assembler source listings from RAINBOW ON TAPE to disk for processing with my assembler?

W. Tudor Morris
Middletown, OH

R_x Assembler source listings are not included on RAINBOW ON TAPE. However, the program that follows will accomplish the task in other cases. It allows you to transfer ASCII files to disk and to number them if necessary for the EDTASM editor.

```
10 DIM L$(80): L=0
20 INPUT "TAPE FILENAME"; FT$
30 INPUT "DISK FILENAME"; FD$
40 OPEN "I", #1, FT$: OPEN "O", #1, FD$
50 INPUT "DOES FILE HAVE LINE NUMBERS?"; Q$
60 L=L+10: I$=STR$(L): LINE INPUT #1, L$
70 IF LEFT$(Q$, 1) = "Y" THEN PRINT #1; L$ ELSE PRINT #1, RIGHT$(I$, LEN(I$)-1); " "; L$
80 IF EOF(-1) = 0 THEN 60
90 CLOSE #1: CLOSE #1
100 REM END OF EDTASM TRANSFER
```

A Hard Disk Bargain


 Is it possible to hook a hard disk to the CoCo at a reasonable price?

Jeff Miller
Midland, VA

R_x Since Tandy is currently marketing a hard disk controller, Catalog No. 26-3145 (\$129.95), look for advertisers in RAINBOW to offer low-cost packages consisting of a drive, case,

cable and power supply to support this "standard" controller.


Epson Dump

 Where can I find a good, low-cost screen dump for my Epson RX-80 printer?

Russell Bolick
Middleburg Heights, OH

R_x *Versadump*, in *HOT CoCo* March 1985, is a screen dump generator that will build a machine language screen dump routine for your printer as well as many others. It was also part of the Instant CoCo tape for that month.

MicroMeltdown Problems

 I am having difficulty entering the machine language portion of MicroMeltdown, RAINBOW, April 1983. I tried to write a poke routine. The first two lines which follow resulted in an ?LS Error.

```
10 FOR X=&H0 TO &H0134: READ A$: POKE X, VAL("&H"+A$): NEXT X
20 DATA 6D, BC, 31, 26, 1B, 6C, BC, 2C, BE, 01, 6B, AF, BC, 27
```

When I tried to assemble it, I got 193 errors. Is the program chock full of errors?

Teddy Kanamori
Pasadena, CA

R_x You're on the right track, but you are poking into BASIC's reserved area of memory and consequently blowing it away. The confusion arises from the "ORG 0000," which EDTASM interprets as Address \$600 not \$0000 as one might expect. The following loop will poke the proper code into memory in locations that will not interfere with BASIC, using data statements like the ones you are currently using. After saving the machine language version of this routine, be sure to subtract \$600 from the offset value calculation mentioned in the article.

```
10 FOR X=&H600 TO &H94A: READ A$: POKE X, VAL("&H"+A$): NEXT X
```


When entering this code into EDTASM+, omit the Hex numbers in columns two and three. For example, the line:

```
0003 0000 6D8C31 START TST <TOGGLE, PCR NOT 0
```

should be entered as:

```
0003 START TST <TOGGLE, PCR NOT 0
```


Colorful Text

 I would like to know if there is a poke that changes the border of the screen to a different color. Also, can the text be changed to a different color?

Karl Beyer
Marengo, IL

R_X See Tony DiStefano's "Turn of the Screw," RAINBOW, October 1986, Page 162, for the border color. Text can be displayed red on yellow or yellow on red using the command SCREEN1,0. This change is nullified by BASIC when your program terminates. This nullification can be aborted by poking various values into Address 359 decimal. Some cassette machines work with 16 and some disk machines with zero.


OS-9 System Disk Add-On

 Can BASIC09 be put on the OS-9 system disk? I am new to OS-9 and would like to learn much more about this operating system.

Tim Hill
Woodstock, Ontario

R_X Boot up with a backed-up copy of your system disk and use the DEL command to eliminate routines that you will not likely use with BASIC09. Then simply use the COPY command to put BASIC09 in the /d0/CMDS directory. Dale Puckett's books on OS-9 and BASIC09 are just the ticket for a new OS-9 aficionado.

Disk Fix


 I have a tape-to-disk program that allows me to use most, but not all, of my old tape programs with my new disk system. As a novice, how can I fix the routines that do not run or execute with my disk?

Carl Rexrode
Las Vegas, NV

R_X As far as BASIC programs are concerned, look for embedded machine language routines in the code. Disk BASIC puts your programs 2,048 bytes higher in memory and in many cases, it's just a matter of identifying addresses in the embedded routines and incrementing them by 2,048. Machine language programs are another story. If they have an auto-loader, it must be disabled first. Assuming no auto-loader, either address dependencies or pokes that affect the disk drive hardware can be the culprit. If the problem is only address-dependent, a program, TAPEFIX, was published in my column in 80 Micro, June 1986. It disables

Disk BASIC after loading an ML program into high memory, and then moves it down to its normal address space before executing it. If TAPEFIX fails and the vendor of the software has no upgrade policy, your only alternative would be to disassemble the code and fix it the hard way.


Nondestructive Putting

 How can I put an object on the screen without destroying the portion underneath it?

Rox Lores
Ponce, PR

R_X Use GET to retrieve the portion of the screen where you will PUT an image and put it to a non-displayed page of screen memory for safekeeping. Later, when you want to remove your object, you can get the original background and put it back.


Mileage With a Light Pen

 Can I use a light pen to aid in estimating mileage from a road map?

Virhe Lowe
Mio, MI

R_X A light pen is essentially a photocell that detects the absence or presence of light. It can give the illusion of writing on a CRT because the software driver quickly blinks each pixel on the screen so the computer can detect the switching on or off of the pixel to which the light pen is pointed. If the map is displayed on a CRT and the appropriate hardware and software is available, it is technically feasible.

Crack Proof?

 For months now I have been using what I thought was a fail-safe protection called K-Lock. Just recently, a friend of mine found a way to search through the directory, find the password, match it, and pass through K-Lock right to the directory by changing Line 380 to:


```
380 DATA 166,128,177,18,134,  
38,80,129
```

Can this program be made unbreakable?

Ryan Haldeman
Dallas Center, IA

R_X There is no software protection scheme that cannot be broken. Some are more difficult than others, but it's a constant cat and mouse game. It appears that this time, the cat got the mouse.


The CoCo Print Shop

 I have seen a program for other computers called Print Shop. Is there anything like it for the CoCo?

Steven Day
Dayton, OH

R_X The closest CoCo equivalent I have seen is CoCo Max II.


Atari Games for CoCo

 Is there any way to run Atari 2600 video games on the CoCo?

Bobby King
McCrary, AR

R_X It would be difficult to get the Atari code running on the CoCo, Bobby. First of all, you would need to disassemble the ROMs and convert the 6502 code to 6809 code. Then you would need to rewrite the portions of the code that are hardware dependent. Yes, it's possible, but with Atari game consoles selling for \$30 and less, it's not worth the effort.


Bank Switching

 I have a 64K CoCo and I would like to have a program that allows me to use two 32K banks of memory. Where can I find one?

Mike Johnson
Jacksonville, FL

R_X An ML program that allows you to bank switch from BASIC was included in the article "The 80K Color Computer," HOT CoCo, June 1985.


A Transfer Vehicle

 Having just traded to a Tandy 1000, how can I transfer my RAINBOW ON TAPE programs to my Tandy 1000?

Warren Dugger Jr.
Orange, TX

R_X You can transfer RS-232 to RS-232. This is done by saving all of the BASIC programs on the CoCo in ASCII form, then loading them into the upload buffer of a smart terminal program such as Cer-Comp's Datapack II. With a similar program such as Crosstalk on the 1000, you can then save the programs to an MS-DOS disk. The alternative is to save the programs in ASCII to a CoCo disk and then use a program such as Mark Data Product's CoCo Util II to make the transfer. Keep in mind, however, most programs will require heavy editing before they will run on the Tandy 1000 and some may not run at all.


Edit to Squeeze in a Little More

 Sometimes when typing in a program from RAINBOW, I find a program line is too long, e.g., the program Oh! Canada, September 1985, Page 124, had such a line.

Florence Campeau
Coteau Landing, Quebec

R_x Sometimes, Florence, you can squeeze in a few extra characters using the editor even after you have reached the end of the line.


Old-time Games

 Several years ago, before computers became so popular, there were two programs for the TRS-80 Model I known as Santa Paravia and Fiumaccio. These were later released by Instant Software, but I've never seen them for the CoCo.

Madison Farrell
Walterboro, SC

R_x Before the beginning of the video-game craze, Madison, game programs were mostly in the public domain and were written by programmers for mini-computers and mainframes for fun with no profit motive. Two books by David H. Ahl, *101 Basic Computer Games* and *More Basic Computer Games*, contain a collection of the best of these. Many of these games were customized for the TRS-80 Model I and subsequently showed up in Instant Software.

Fill in the Blank


 I would like to have the computer display lines with blank fields and then have the user fill them in. Can you offer some hints as to how this might be done?

Keith March
Continental, OH

R_x The cursor position in the CoCo is stored in addresses 136 and 137 decimal. The normal text screen memory is in the range 1024 to 1535, the first 32 bytes corresponding to the first row; the next 32 bytes, the second row; etc. You can put your fixed text on the screen using PRINT@ statements and then position the cursor for inputs by poking the addresses 136 and 137. For example, to position the cursor to the center of the second row and prompt for input to the variable X, the BASIC code would be:

```
100 POKE136,4:POKE137,48
110 INPUT X
```


Drivers Needed

 Are there any graphics printer drivers marketed for non-Tandy printers which run under OS-9?

Paul French
Burlington, IA

R_x I do not know of any commercial packages, but one could easily be written using C or BASIC09.


Upgrade for MC-10 Not Practical

 How far can I go with my 20K MC-10 in making it more like my dad's CoCo? I would like 64K, extended BASIC and assembly language capability.

Nicholas Petroff
N. Vancouver, British Columbia

R_x It is technically possible to expand the MC-10 to 64K. You could write an assembler in BASIC for it. Pete Stark, in his book *Kilobaud Classroom*, includes one for the 6800 that is very similar to the MC-10's 6803. The CoCo and the MC-10 both use the same tape ML format so a 6803 assembler could run on the CoCo and create ML tapes for the MC-10. However, with 64K CoCos as cheap as they are now, it makes no economic sense to expand the hardware of your MC-10. Even upgrading a CoCo 1 or 2 is questionable in light of the price of the new CoCo 3.


Rainbow's the Answer

 Where can I find in-depth information on upgrading my CoCo, particularly printers, DOSs and disk drives?

Howard Knickerbocker
Olalla, WA

R_x The most popular printers for CoCo owners are the Star Gemini series. If you buy drives, don't get the obsolete single-sided ones. Get double-sided drives. The ones made by TEAC have a good reputation for reliability. If you plan to use CoCo commercial software, get Radio Shack Disk Color BASIC 1.0 or 1.1 in ROM for disk controller, which supports single as well as double-density operation. You can get ADOS, BDOS, JDOS or some other ROM DOS, but use one of these as an alternate when you are writing your own code. For specific information on a particular product, check the reviews in RAINBOW. Since 1984, the July issues of the RAINBOW have included a comprehensive index of the previous year, which includes a reviews index.


Cross Assembling

 Does anyone market a 6809-68008 cross-assembler? I am interested in moving CoCo source code to CIR-PAK Ltd.'s 68008 board for the CoCo.

Dennis Kakoske
Winnipeg, Manitoba

R_x Contact Frank Hogg Laboratory. They market a 6502-6809 translator and may be planning one for the 68008.


64K Runs 16K Programs

 Will a 64K CoCo run programs designed for a 16K machine?

Michael Albert
Long Beach, NY

R_x A similarly configured CoCo with larger memory will run the programs of one with less memory unless there is a difference in the ROMs, and the program uses undocumented ROM calls. Incompatibilities do arise with disk versus non-disk CoCos primarily due to the use of the memory in the range \$600 to \$DFF, which is reserved for use by Disk BASIC.

The IRS Is Watching

 Can the CoCo be used to prepare federal tax returns and will the IRS accept computer-generated forms from a DMP-130 printer?

David Sharp Jr.
Dover, PA

R_x There have been income tax preparation programs published in CoCo magazines and included in tape loaders such as *Chromasette*. None of those I have seen generated the tax forms, but they supplied the information. I do, however, know that the IRS does accept computer-generated forms. I suggest that you contact your local branch of the IRS or a tax attorney for regulations governing computer generated forms.

For a quicker response, your questions may also be posted in the Forum section of RAINBOW's CoCo SIG on Delphi. In Forum, type ADD and address your questions to the username DOCTOR-ASCII. You may also send questions to DOCTORASCII via Delphi Mail

*No more wasted electricity
with this clever project*

LED Power Indicator

By Logan Ward

As everyone knows, one of the problems with owning disk drives for the CoCo is that you can't tell if power is being supplied to the unit.

I am just as guilty as the next person. I will finish using *CoCo Max* or some other software, turn off my trusty CoCo and leave. Hours later I'll come back to my computer room, turn on my CoCo and reach around the back of the drives, only to find out that I failed to turn them off the last time. I do not know about other CoCo users, but electricity is costly these days and I feel the need to save all I can. Plus, I do not like power supplied to any of my units when they are not in use.

Enter the bi-color, power-on indicator. This modification allows you to use a tri-color LED in place of the existing red LED. Under normal conditions, with the power on, the LED will glow red or green, depending on what color you choose. During disk I/O, the LED will glow the opposite color, letting you know the drive is being accessed. After I/O is complete, the LED will return to its original color.

Logan Ward lives in Memphis, Tenn., and is studying electronics technology and computer engineering at the State Technical Institute. He is head technician and service manager at The Computer Center, and his hobbies include custom programming and creating pictures on CoCo Max.

One of the big advantages to this modification is that no holes need to be drilled in the drive face plate. Another plus is that the basic components can be bought at your local Radio Shack.


The first order of business is building the circuit (see Figure 1). The modification uses a 7404 Inverter and a tri-color LED (we will only use two colors). The inverter requires +5 volts to operate. This can be done a couple of ways. One is to tap 5 volts from the power connector on back of the drive to the chip mounted on perf board and stuck with double-stick tape to the drive or drive case.

The second method is piggybacking the chip to an existing chip on the drive motherboard with Pin 14 to 5 volts and Pin 7 to ground. Spread out the other legs so they do not touch the chip on the drive circuit board. Use a meter to find these voltages. Run two wires from pins 1 and 2 of the 7404 to the existing LED on your drive.

Take the tri-color LED and solder a long lead to the wire going to Pin 1 for a green power-on light and a red access light. To have a red power-on light and green access light, reverse LED pin connections. Next, remove the red LED from the face plate. How you do this is up to you. There are many different drives and many ways of removing the LED. Take it out as you see fit.

After removal of the LED, disconnect it from the leads attached to it. Take the positive lead and put a piece of electrical tape across the exposed

Figure 1: CoCo Disk Drive Power-on Indicator

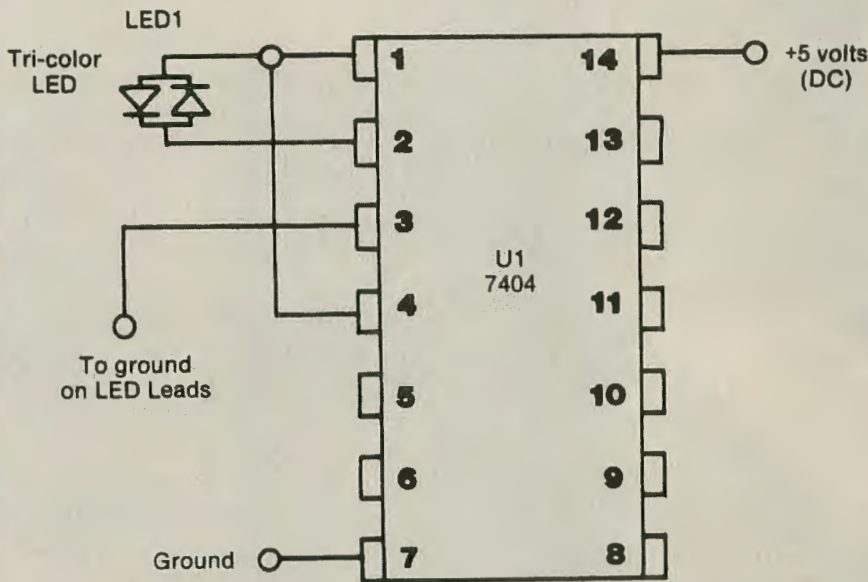

- Parts List
 LED1 — Tri-color LED (RS # 276-035)
 U1 — 7404 inverter (RS # 276-1802)
 IO — PERF Board (RS # 276-024)

part of the wire. You will no longer need this. Now attach the ground lead wire from the old LED and solder it to Pin 3 of the 7404. When this is complete, solder a small wire from Pin 4 to Pin 1 of the 7404 inverter. Finally, remount your tri-color LED in the holder your original red LED was in. That's all there is to it. Some drives have the LED soldered into the circuit board. This project will work for those drives, but it will take a little extra work.


I have tried this modification on full-height TEAC, TEC, Shugart, Tandon, MPI and Texas Peripheral disk drives. It worked on all of them, with success in all cases.

The basic modification can be done for under \$3 and in one evening. So get to work and enjoy. This modification has truly helped me and I know it will help you. If you have any questions, feel free to call me at the Computer Center (901-685-0009) from 9 a.m. to 5 p.m. CST.

I would like to thank Jesse Dunn, of the Memphis Color Computer Users Group for this idea, and my best friend, Ken Hunt, for a helpful suggestion. Happy computing!

"XPNDR2 and SuperGuide - an Ideal Expansion Card Set"

— RAINBOW 2/86
 HARDWARE REVIEW

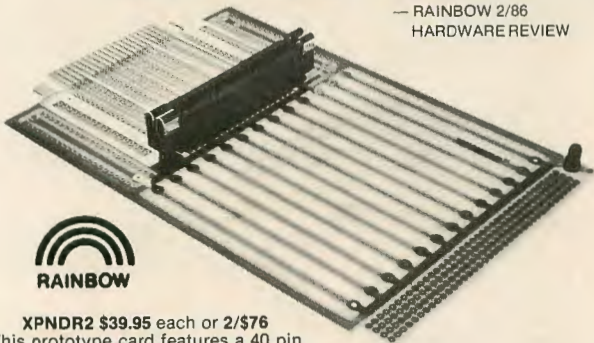

XPNDR2 \$39.95 each or 2/\$76

This prototype card features a 40 pin connector for projects requiring an on-line disk system or ROM paks. The CoCo signals are brought out to wire-wrap pins. Special gold plated spring clips provide reliable and noise-free disk operation plus solid support for vertical mounting of the controller. The entire 4.3x7 inch card is drilled for ICs. Assembled, tested and ready to run.

XPNDR1 \$19.95 each or 2/\$36

A rugged 4.3x6.2 inch bare breadboard that brings the CoCo signals out to labeled pads. Both XPNDR cards are double-sided glass/epoxy, have gold plated edge connectors, thru-hole plating and are designed with heavy power and ground buses. They're drilled for standard 0.3 and 0.6 inch wide dual in-line wirewrap sockets; with a 0.1 inch grid on the outboard end for connectors.

SuperGuide \$3.95 each

Here is a unique plastic insert that aligns and supports printed circuit cards in the CoCo cartridge port. Don't forget to ORDER ONE FOR YOUR XPNDR CARDS.

Included with each XPNDR card are 8 pages of APPLICATION NOTES to help you learn about chips and how to connect them to your CoCo.



To order or for technical information call:

(206) 782-6809

weekdays 8 a.m. to noon

We pay shipping on prepaid orders. For immediate shipment send check, money order or the number and expiration date of your VISA or MASTERCARD to:

ROBOTIC MICROSYSTEMS



BOX 30807 SEATTLE, WA 98103

SPECTROGRAM

MAGAZINE FOR COLOR COMPUTER USERS.

Spectrogram Magazine provides useful and interesting support material with a wide range of programs and articles by some of the best writers and programmers available.

*TELEGRAM by Bobby Ballard: A monthly column concerning the Color Computer and its use in telecommunications.

*DOWNTIME by Rush Caley: Little-known facts, new and different ideas, opinions, and an occasional criticism or two.

*BASIC HELP by Bill Bernico: Answers to your questions concerning the Color Computer and the BASIC language.

*PASCAL PROGRAMMING by Delmar Searis: An in-depth study of Pascal and how to use it effectively.

Assembly, C, OS-9, REM statements as data storage, floating point math, and graphics animation are covered with an emphasis on understanding. Utilities, games, business and home management programs are a steady diet, and all the programs in Spectrogram are available on tape or disk. Spectrogram Magazine could become the most informative addition to your Color Computer system!

PLEASE SEND ME 12 ISSUES OF SPECTROGRAM MAGAZINE FOR \$18 (40% off the cover price).

Name: _____

Address: _____

City: _____

State: _____ Zip: _____

() Check enclosed () Visa () MasterCard

Card # _____ Exp. Date: _____

Mail to: SPECTROGRAM MAGAZINE
 P. O. Box 138 (815)968-9600
 Rockford, IL 61105

Foreign subscriptions: \$26 Canada, all others \$34
 Groups: \$15 with 5 or more subscriptions



The Best Money Can Buy . . . HDS Floppy Drive Controller Board



Features:

- Gold Plated Edge Cards
- Dual Selectable ROM Sockets
- Compatible with COCO I & II
- 120 Day Warranty
- Double and Single Density

Reduce your I/O errors with the Hard Drive Specialist Floppy Drive Controller for the Color Computer. Gold edge card connectors, advanced design, and the absence of potentiometers make it the best available. Our newest version controller allows the use of either (two 24 pin ROMs), or (one 24 pin and one 28 pin ROM). Using this board with the standard Radio Shack ROM gives you 100% compatibility with all Radio Shack software.

Completed and Tested Board

with Radio Shack ROM \$99.
(Includes Case, and DOS Instructions)

Completed and Tested Board without ROM . . . \$79.
(Includes Case)

Bare Board with Instruction manual \$30.

Parts Kit For Bare Board without ROM \$30.

Radio Shack ROM (current version) \$20.

Radio Shack ROM 1.0 \$40.

DOUBLE SIDED!

Drive 0 Complete	\$199.
Drive 1 Complete	\$129.
Drive 0 & 1 Dual Drive	\$319.

HARD DRIVE SPECIALIST

Ordering Information:

Use our WATS line to place your order via Visa, MasterCard, or Wire Transfer. Or mail your payment directly to us. Any non-certified funds will be held until proper clearance is made. COD orders are accepted as well as purchase orders from government agencies. Most items are shipped off the shelf with the exception of hard drive products that are custom built. UPS ground is our standard means of shipping unless otherwise specified. Shipping costs are available upon request.

1-713-480-6000
Order Line 1-800-231-6671
16208 Hickory Knoll
Houston, Texas 77059



Creating Designer Arcade Games

By Fred B. Scerbo
Rainbow Contributing Editor

Editor's Note: If you have an idea for the "Wishing Well," submit it to Fred c/o THE RAINBOW. Remember, keep your ideas specific, and don't forget that this is BASIC. All programs resulting from your wishes are for your use, but remain the property of the author.

The pages of THE RAINBOW have often served as the testing ground for graphics, subroutines, and full-blown games I have worked on during the last few years. Some of the earliest offerings were short 4K programs such as *Zelda's Bat Bottle* or *Alpine Aliens*.

One of the most popular games I have listed was in 1982: *Snail Invaders*. "Snail" was the nickname of one of my students who served as the inspiration for that game written entirely in BASIC. Since a BASIC *Invader* game could not

match the speed of its machine language relatives, making the targets slow-moving snails more than justified the lack of speed. (In July of 1983, *Snail's* sequel, *Snail's Revenge* was also listed for RAINBOW readers. It even made the "Scoreboard," as readers submitted their high scores.)

Snail Invaders served as the later inspiration for a more refined version I released called *Creatavader*. The routines were slightly faster and a menu of assorted targets was added to allow the user to blast something that really bugged him, whether it be cats or those little "have a nice day" smiley faces. While it still could not match the speed of a machine language game, it was an interesting variation on the theme, and those who purchased copies told me they enjoyed it.

The Wish

Since then, some of you have written asking how to obtain copies of some of those out-of-print IMB games including *Creatavader* and *Snail Invaders*. While *Snail Invaders* could be obtained by ordering back issues of the magazine or RAINBOW ON TAPE, *Creatavader* has been totally unavailable, until now.

As my 1986 Happy Holidays gift to

all my readers, now you can enjoy a vastly improved *Creatavader* (Version 2.0), which is not only a shorter listing than the original *Snail* (by about 1,700 bytes), but a much more efficient program as far as programming techniques are concerned.

Cleaning House

When I decided to rewrite *Creatavader*, the first step was to dump the old title card with the IMB logo. Using *CoCo Titlemaker* from several issues ago, I created a much more attractive title card which matches most of my recent programs.

However, as I started to analyze the listing, which was now over four years old, I was a little embarrassed to see how sloppy the structure of the program was. Quite honestly, I must have been GOSUB crazy, since I had weaved such a tangled web of subroutines it was a nightmare to unravel. In fact, I couldn't help but be reminded of comic Pee Wee Herman's line about trying to unravel a sweater ". . . that someone keeps knitting and knitting and knitting and knitting . . .!" I had knit some sweater with this listing!

The next change I made, after I found my place, was to rewrite the graphic

Fred Scerbo is a special needs instructor for the North Adams Public Schools in North Adams, Massachusetts. He holds a master's in education and has published some of the first software available for the Color Computer through his software firm, Illustrated Memory Banks.

scoring display, which was quite crude in the original version. *Snail* had been written without using string arrays, so this time I incorporated a more efficient subroutine that also cut down on the number of GOSUBS. Subroutines are slower than straight programming since the CPU (Central Processing Unit) of your CoCo must set up a flag and pointer whenever a subroutine is called. By reducing the number of GOSUBS, the program would execute in much less time. Next, I went to the section of the program that would draw the boxes containing our graphics targets. Both *Snail* and *Creatavader* listed every location and IF-THEN statement as a separate set of lines. This constituted 48 separate lines for the 24 graphics targets.

These lines were cut down to about four lines by inserting variables and using a set of nested FOR-NEXT loops. The end result would be that the program's speed increased dramatically by this one change.

The original versions of *Snail* and *Creatavader* also used a set of complicated IF-THEN statements at the end of the program to set up the explosion locations correctly if a target was hit. A short math formula using the INT function allowed me to eliminate this entire subroutine at the end of the program. An added side bonus also now allowed me to award different values of points based on the location of the target's height.

Add to this the rewrite of the scoring mechanism and the reduction in GOSUBS, and *Creatavader* (Version 2.0) runs more than twice as fast as its original version. Naturally, I could not help but add a few other refinements. I made the difficulty level a little tougher to compensate for the speed increase.

For example, sometimes a target will reappear after it has been blasted. Also, the phantom ship that takes shots at you is now much quicker and appears more often. The scoring mechanism will handle up to a 15-digit score, so forget trying to turn it over. You can't.

A major change that helped speed up the game was my change from PMODE3 to PMODE1. The resolution between these two modes is not as dramatic as the difference between PMODE4 and PMODE1, for example. Since in PMODE1 only half as much graphics memory is used as in PMODE3, we also get a dramatic speed increase in BASIC.

Another interesting change I added


was the use of the PCOPY command. Since PMODE1 uses only graphics pages 1 and 2, we do most of our animation on pages 3 and 4 and PCOPY them to 1 and 2. This eliminates the annoying ripple effect when the targets move across the screen. Now they march to the right in unison, rather than one at a time.

More Speed

If you want to get the maximum speed out of this program, add an extra line with the speed-up poke in Line 0:

```
0 POKE65495,0
```

Do this only when you have run the program without the poke and saved it.

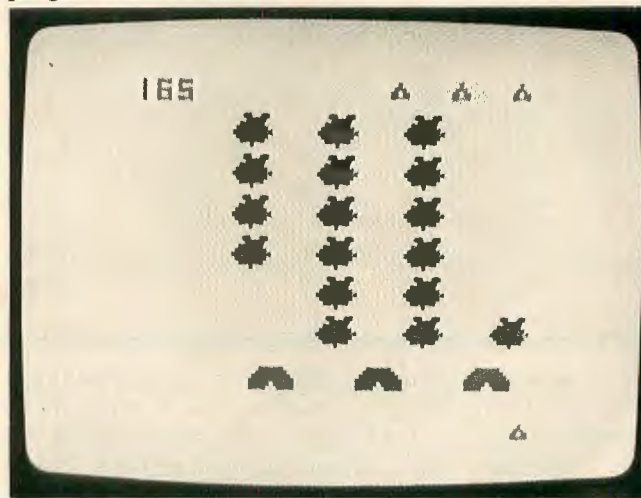

Some CoCos will not accept this poke with the disk drive plugged in, so be careful to save the program first, or POKE65494,0 before attempting a save. This makes the program really zip along.

On running the game, you see the new title card. Pressing any key gives you the menu of choices. The targets you may choose are communist flags (years before *Rambo*), television sets (get even with junk programming), whales (if you don't want to save them), killer tomatoes, nuclear bombs (nuke the nukes), smiley faces (don't have a nice day), cats and Creatavader mode.

As you can see, there is something for everyone. After you select the target, the screen will clear and your game starts. You must use the right joystick and firebutton. Play the game just as you would any other invader-style game with these variations:

1) The targets do not shoot back, but a phantom ship will appear and take shots at you.

2) You cannot shoot and move at the same time.

3) Even if you blast all the targets to the right, you must clear all the targets before the last one on the left reaches the center. To have allowed it to go all the way to the right would require changes that would slow down the program too much.

4) Sometimes you may shoot through your shield without destroying them. Other times you cannot.

5) Once you clear the screen, the phantom ship may still shoot at you for awhile. Hide behind your shields!

When all your men are destroyed, you may restart the game by pressing the ENTER key. The program determines a blast when the point on the screen

where your shot is going is tested for background color. Sometimes, you may just graze a target which has some background color in it. In this case, the target will not explode.

Creatavader Mode

You may make your own "designer" targets by selecting the Creatavader mode. You may use either a green or white background when you select this mode.

After selecting the background color, you will see a small box that will hold your design. Use the arrow keys to move a dot around the screen to draw a target. At the bottom of the screen are four circles with available colors. Press numbers 1 through 4 according to their order to create a dot. Be sure to select other than the background color before you start drawing. Use the background color to erase any mistakes.

When you are finished drawing, press @ to start playing with your new target. If you use too much background color in your drawing, you may not hit your targets.

You may not save your creations, unfortunately. If you really must save your own creations, renumber the program using RENUM and kill one of my targets and create your own using DRAW and PAINT in the same lines.

Conclusion

I hope you enjoy this holiday gift. You should be able to pick up some programming ideas just from keying it

RAINBOW Info

How To Read Rainbow

Please note that all the BASIC program listings in THE RAINBOW are formatted for a 32-character screen — so they show up just as they do on your CoCo screen. One easy way to check on the accuracy of your typing is to compare what character "goes under" what. If the characters match — and your line endings come out the same — you have a pretty good way of knowing that your typing is accurate.

We also have "key boxes" to show you the *minimum* system a program needs. But, do read the text before you start typing.

Finally, the little cassette symbol on the table of contents and at the beginning of articles indicates that the program is available through our RAINBOW ON TAPE service. An order form for this service is on the insert card bound in the magazine.


What's A CoCo?

CoCo is an affectionate name that was first given to the Tandy Color Computer by its many fans, users and owners.

However, when we use the term CoCo, we refer to both the Tandy Color Computer and the TDP System-100 Computer. It is easier than using both of the "given" names throughout THE RAINBOW.

In most cases, when a specific computer is mentioned, the application is for that specific computer. However, since the TDP System-100 and Tandy Color are, for all purposes, the same computer in a different case, these terms are almost always interchangeable.

The Rainbow Check Plus



The small box accompanying a program listing in THE RAINBOW is a "check sum" system, which is designed to help you type in programs accurately.

Rainbow Check PLUS counts the number and values of characters you type in. You can then compare the number you get to those printed in THE RAINBOW. On longer programs, some benchmark lines are given. When you reach the end of one of those lines with your typing, simply check to see if the numbers match.

To use *Rainbow Check PLUS*, type in the program and *CSAVE* it for later use, then type in the command *RUN* and press *ENTER*. Once the program has run, type *NEW* and press *ENTER* to remove it from the area where the program you're typing in will go.

Now, while keying in a listing from THE RAINBOW, whenever you press the down-arrow key, your CoCo gives the check sum based on the length and content of the program in memory. This is to check against the numbers printed in THE RAINBOW. If your number is different, check the listing carefully to be sure you typed in the correct BASIC program code. For more details on this helpful utility, refer to H. Allen Curtis' article on Page 21 of the February 1984 RAINBOW.

Since *Rainbow Check PLUS* counts spaces and punctuation, be sure to type in the listing exactly the way it's given in the magazine.

```
10 CLS:X=256*PEEK(35)+178
20 CLEAR 25,X-1
30 X=256*PEEK(35)+178
40 FOR Z=X TO X+77
50 READ Y:W=W+Y:PRINT Z,Y;W
60 POKE Z,Y:NEXT
70 IF W=7985 THEN B0 ELSE PRINT
  "DATA ERROR":STOP
80 EXEC X:END
90 DATA 182, 1, 106, 167, 140, 60, 134
100 DATA 126, 183, 1, 106, 190, 1, 107
110 DATA 175, 140, 50, 48, 140, 4, 191
120 DATA 1, 107, 57, 129, 10, 38, 38
130 DATA 52, 22, 79, 158, 25, 230, 129
140 DATA 39, 12, 171, 128, 171, 128
150 DATA 230, 132, 38, 250, 48, 1, 32
160 DATA 240, 183, 2, 222, 48, 140, 14
170 DATA 159, 166, 166, 132, 28, 254
180 DATA 189, 173, 198, 53, 22, 126, 0
190 DATA 0, 135, 255, 134, 40, 55
200 DATA 51, 52, 41, 0
```

Using Machine Language

Machine language programs are one of the features of THE RAINBOW. There are a number of ways to "get" these programs into memory so you can operate them.

The easiest way is by using an editor/assembler, a program you can purchase from a number of sources.

An editor/assembler allows you to enter mnemonics into the CoCo and then have the editor/assembler assemble them into specific instructions that are understood by the 6809 chip, which controls your computer.

When using an editor/assembler, all you have to do, essentially, is copy the relevant instructions from THE RAINBOW's listing into CoCo.

Another method of getting an assembly language listing into CoCo is called "hand assembly." As the name implies, you do the assembly by hand. This can *sometimes* cause problems when you have to set up an *ORIGIN* statement or an *EQUATE*. In short, you have to know something about assembly to hand-assemble some programs.

Use the following program if you wish to hand-assemble machine language listings:

```
10 CLEAR200,&H3F00:I=&H3FB0
20 PRINT "ADDRESS:";HEX$(I);
30 INPUT "BYTE:";B$
40 POKE I,VAL("&H"+B$)
50 I=I+1:GOTO 20
```

This program assumes you have a 16K CoCo. If you have 32K, change the &H3F00 in Line 10 to &H7F00 and change the value of I to &H7FB0.

The Rainbow Seal



The Rainbow Certification Seal is our way of helping you, the consumer. The purpose of the Seal is to certify to you that any product that carries the Seal has been physically seen by us, that it does, indeed, exist and that we have a sample copy here at THE RAINBOW.

Manufacturers of products — hardware, software and firmware — are encouraged by us to submit their products to THE RAINBOW for certification. We ascertain that their products are, in actuality, what they purport to be and, upon such determination, award a Seal.

The Seal, however, is not a "guarantee of satisfaction." The certification process is different from the review process. You are encouraged to read our reviews to determine whether the product is right for your needs.

There is absolutely no relationship between advertising in THE RAINBOW and the certification process. Certification is open and available to any product pertaining to CoCo. A Seal will be awarded to *any* commercial product, regardless of whether the firm advertises or not.

We will appreciate knowing of instances of violation of Seal use.

1655
26252
377
4636
66174
82205
100113
END32

The listing: CRTVADER

```

1 *****
2 * CREATAVADER VERSION 2.0 *
3 * BY FRED B. SCERBO *
4 * 60 HARDING AVE *
5 * NORTH ADAMS, MA. 01247 *
6 * COPYRIGHT (C) 1986 *
7 *****
8 CLEAR400:PLAY"V31P255"
9 CLS0:PRINTSTRING$(32,220);
10 FORI=1TO224:READA:PRINTCHR$(A
+128);:NEXT
11 DATA110,109,101,108,109,101,1
08,104,110,108,106,108,110,104,7


```

```

8,76,74,42,32,,37,37,44,45,37,45
,34,46,44,37,44,45
12 DATA106,,101,,101,101,,96,106
,,106,,106,,74,80,74,42,32,,37,3
7,32,37,37,32,42,42,32,37,,37
13 DATA106,,101,,101,101,,96,106
,,106,,106,,74,80,74,42,32,,37,3
7,32,37,37,32,42,42,32,37,,37
14 DATA106,,101,108,110,101,108,
96,110,108,106,,106,,78,76,74,45
,32,32,46,37,44,45,37,32,42,46,4
0,37,44,46
15 DATA106,,101,,106,101,96,96,1
06,,106,,106,,74,80,74,37,34,33,
42,37,32,37,37,32,42,42,32,37,,4
2
16 DATA106,97,101,,106,101,,96,1
06,,106,,106,,74,80,74,32,43,39,
32,37,32,37,37,33,42,42,32,37,,4
2
17 DATA108,108,100,,108,100,108,
104,104,,104,,104,96,72,80,72,80
,36,40,32,36,32,36,36,44,32,44,4
4,36,,44
18 PRINTSTRING$(32,220);
19 PRINT@326," BY FRED B. SCERBO
";:PRINT@358," VERSION 2.0
";:PRINT@390," COPYRIGHT (C)
1986 ";
20 IFINKEY$=""THEN20
21 CLS0:SR=3:R=5:Z=110:R$=CHR$(1
28)
22 PMODEL,1:PCLS:SCREEN0,0:Q$="C
1BRNU4RU4RD4RU4RD4RU4RNL4D2NL4D2
L6C3"
23 DIMT(24),N$(9),A(15):FORI=0TO
9:READN$(I):NEXT
24 DATA BR2U4R3D4NL3,BR4NU4BR,BR
2U2R3U2NL3BD4NL3,BR2R3U2NL2U2NL3
BD4,BR2BU2NU2R3U2D4,BR2R3U2L3U2R
3BD4,BR2U4NR3D2R3D2NL3,BR2BU3UR3
D4,BR2U4R3D2NL3D2NL3,BR2BU2NR3U2
R3D4
25 QQ$="L25502B01C"
26 GB$="ULUL2UR7DL2DLD":CLS0:PRI
NT@38,"communist"+R$+"flags";:PR
INT@102,"television"+R$+"sets";:
PRINT@166,"whales";:PRINT@230,"k
iller"+R$+"tomatoes";:PRINT@294,
"nuclear"+R$+"bombs";:PRINT@358,
"smiley"+R$+"faces";
27 PRINT@422,"cats"+R$+"cats"+R$
+"cats";:PRINT@486,"creatavader"
+R$+"mode";
28 FORI=1TO8:POKE1058+LW,48+I:LW

```

BUILD THIS COCO POWERED ROBOT



- BATTERY POWERED
- SONIC RANGING
- SPEECH PROCESSED
- PROGRAMMABLE
- SELF CONTAINED

SEND \$ 69.50 FOR

**BUILD PLANS LAYOUTS SCHEMATICS
PROGRAM AND DRAWINGS**

USE THIS HARDWARE TO BUILD ROBOTS OR
ANY OTHER AUTOMATED PROCESS WITH COCO

MODEL 100 PARALLEL PORT	\$ 53.85
MODEL 200 BUSS DRIVER	\$ 83.75
MODEL 300 STEPPER AMP.	\$ 65.75
MODEL 400 MOTHER BOARD	\$ 54.75
MODEL 500 DC MOTOR AMP.	\$ 43.70
MODEL 600 A TO D CONVERTER	\$ 38.50

SEND FOR OUR FREE 7 PAGE BROCHURE.
ELECTRONIC MOTION CONTROL
PO BOX 17271 ARPT STATION
CLEARWATER FLORIDA 33520
COD CALL 813-8968295

ORDERS ADD \$3.00 S+H FLA. RES. ADD 5% SALES TAX


```


=LW+64:NEXTI
29 TR$=INKEY$:IFTR$>"8"THEN29
30 IFTR$<"1"THEN29
31 CLS:TR=VAL(TR$):ON TR GOTO32
,34,35,37,38,39,40,42
32 LINE(26,28)-(48,42),PSET,BF
33 DRAW"S4BM30,41C2E3RF2R4E2NF4E
2U2H4L4BD4BRNE2NG2NF4":AC=1:SR=3
:R=1:GOTO65
34 COLOR7,6:LINE(26,28)-(48,42),
PSET,BF:LINE(30,31)-(41,39),PRES
ET,BF:COLOR8,5:LINE(44,31)-(46,3
4),PSET,BF:SR=3:R=5:GOTO65
35 DRAW"S6BM36,39C3L5H2U5HU2RNF3
RF2E2R2D2G3LD2R2REURERER6F2DGL3G
2R4NL11DL15"
36 PAINT(40,36),3,3:DRAW"S6BM36,
39C5BL4BU4NU5UC3R":PSET(40,36,8)
:AC=1:R=1:GOTO65
37 COLOR4,5:CIRCLE(38,36),11,,.7
:PAINT(40,36),4,4:DRAW"S4BM40,32
C2L2NH3R5E3LG2L4H2":SR=3:R=5:AC=
0:GOTO65
38 COLOR3,5:DRAW"S4BM40,42C3L7H2
NR17H2E4R13F4G4L6BM40,42BL7BH4BL
2C2NH3NG3L2NU2ND2":PAINT(40,38),
3,3:CIRCLE(40,34),6,4,.7:R=1:AC=
1:GOTO65
39 COLOR2,5:CIRCLE(38,36),11,,.9
:PAINT(38,36),2,2:DRAW"S4BM38,40
C7L2NH3R5NE3":FORI=0TO1:PSET(41,
34-I,3):PSET(36,34-I,3):NEXT:PSE
T(29,36,3):AC=1:R=1:GOTO65
40 DRAW"S4BM38,41C2BL7U2EU2H3U5R
12DL11D4E2R7F4U2EUF3RE3DFGL3DFR2
GL5H2D3FR2D2BL4H2U5G2L2H2D2FR2D4
":PAINT(38,34),2,2:PAINT(44,34),
2,2:PSET(44,34,3)
41 AC=1:R=1:GOTO65
42 GR=1:PRINT@104,"select"+R$+"c
olor"+R$+"mode";:PRINT@169,"whit
e"+R$+"screen"+R$+R$+"1";:PRINT@
233,"green"+R$+"screen"+R$+R$+"2
";:PMODE3,1:PCLS
43 XI$=INKEY$:IFXI$="1"THEN44ELS
EIFXI$="2"THEN45ELSE43
44 R=5:SCREEN1,1:AC=0:GOTO46
45 R=1:SCREEN1,0:AC=1
46 LINE(23,27)-(49,43),PSET,B:FO
RI=50TO240STEP60:PC=PC+1:CIRCLE(
I,120),10,PC:PAINT(I,115),PC,PC:
CIRCLE(I,120),11,4:NEXT
47 FP=34:SP=36:C=2
48 PSET(FP,SP,C)
49 XI$=INKEY$:IFXI$="1"THEN51ELS
EIFXI$="2"THEN52ELSEIFXI$="3"THE
N53ELSEIFXI$="4"THEN54ELSEIFXI$=
"^"THEN55ELSEIFXI$=CHR$(10)THEN5
6ELSEIFXI$=CHR$(8)THEN57ELSEIFXI

```

```

$=CHR$(9)THEN58ELSEIFXI$="@"THEN
59
50 GOTO49
51 C=1:GOTO48
52 C=2:GOTO48
53 C=3:GOTO48
54 C=4:GOTO48
55 SP=SP-1:GOTO48
56 SP=SP+1:GOTO48
57 FP=FP-1:GOTO48
58 FP=FP+1:GOTO48
59 LINE(23,27)-(49,43),PRESET,B:
CLS:SCREEN0,0:Z=30:GOTO65
60 GOTO60
61 IFAC=0THENSREEN1,0ELSESCREEN
1,1
62 RETURN
63 IFAC=0THENSREEN1,1ELSESCREEN
1,0
64 RETURN
65 DIMS(10)
66 GET(20,28)-(48,42),S,G
67 FORI=1TO90:PSET(RND(43),RND(1
9),RND(5)):NEXT
68 DIME(21):GET(0,0)-(43,19),E,G
69 GG$="BR2U2R2U2R2U2RD2R2D2R2D
L9"
70 DRAW"S4BM14,192C3"+GG$

```



MicroWorld
MicroWorld II

230 Moorestown Rd. Wind Gap, PA 18091
(215) 759-7662

LOW PRICES, (SHIPPING INCLUDED)
ON 100% TANDY EQUIPMENT

Tandy 1000	\$575
w/2-disk, 256k	\$799
Tandy 1000EX	\$585
Tandy 1000SX	\$875

DMP-105	\$120
DMP-130	\$225
DMP-430	\$535

CoCo II	\$120
CoCo 3	\$175
Drive 0	\$185
Multipack	\$75

15% OFF ALL OTHER TANDY HARDWARE !!
20% OFF ALL OTHER TANDY SOFTWARE !!

Prices & availability
subject to change

```

71 PAINT(19,190),3,3
72 DIMF(9):GET(0,185)-(41,192),F
,G:GOTO75
73 MS$=STR$(M1):MK=LEN(MS$)-1:MS
$=RIGHT$(MS$,MK):FORID=1TO MK:A(
ID)=VAL(MID$(MS$,ID,1)):NEXTID
74 DRAW"S8BM13,20"+Q$:FORSW=1TOI
D-1:DRAWN$(A(SW))+Q$:NEXTSW:RETU
RN
75 PCLS
76 CLS0:SCREEN0,0
77 GOSUB73
78 KL=4:K=0:GOSUB98
79 FORI=0TO176STEP48:FORY=28TO12
8STEP20:PUT(I,Y)-(I+28,Y+14),S,P
SET:NEXTY:NEXTI
80 FORI=4TO184STEP60:BI$=STR$(I+
20):DRAW"S8BM"+BI$+",165;C8U2E3R
6F3D2L4H2G2L4":PAINT(I+24,163),8
,8:NEXTI:GOSUB63
81 FORI=1TOSR:DRAW"S4BM"+STR$(12
6+(34*I))+",18;C3"+GG$:NEXTI
82 FORI=0TO80STEP3:PCOPY1TO3:PCO
PY2TO4:PMODE1,3:FORD=0TO144STEP4
8:IC=I+D
83 FORF=36TO136STEP20:IFPPOINT(1
0+IC,F)=R THEN84ELSEPUT(0+IC,F-8
)-(28+IC,F+6),S,PSET
84 NEXTF
85 NEXTD:PCOPY3TO1:PCOPY4TO2:PMO
DE1,1:GOSUB105:GOSUB87:NEXTI
86 GOTO75
87 IFPPOINT(Z+19,190)=R THEN111
88 XC=0:FORB=1TO26:IFC=1THENGOSU
B99
89 IFW=1THENGOSUB101
90 NEXTB:IFW=1THENRETURN
91 POKE339,255:W=JOYSTK(0):IFPEE
K(339)=254THEN101ELSEIFW<10THENG
OSUB94ELSEIFW>56THENGOSUB96
92 RETURN
93 PCLS:GOTO82
94 Z=Z-16:IFZ<=8THENZ=8
95 GOSUB98:RETURN
96 Z=Z+16:IFZ=>216THENZ=216

```

```

97 GOSUB98:RETURN
98 PUT(Z-2,185)-(39+Z,192),F,PSE
T:RETURN
99 FF=INT(K/20):KR=FF*20+4:PUT(Z
-4,186-KR)-(Z+39,170-KR),E,PSET:
LINE(Z-8,190-KR)-(Z+42,170-KR),P
RESET,BF:GOSUB61:PLAY"O5L255BO3C
":GOSUB63:W=0:C=0:PSET(Z+19,183-
K,R):K=26:KL=0:M1=M1+(5*FF)
100 GOSUB73:RETURN
101 W=1:PSET(Z+19,183-K,R):K=K+2
0:IFPPOINT(Z+19,183-K)=R THENC=0
:GOTO102:ELSE C=1
102 PSET(Z+19,183-K,3):IFK=>156T
HEN104
103 GOTO92
104 PSET(Z+19,183-K,R):W=0:K=26:
KR=0:GOTO92
105 GOSUB87:IFSB=1THEN108
106 XB=RND(4):IFXB=4THEN107ELSER
ETURN
107 SB=1:SC=RND(180)+35:RETURN
108 IFPPOINT(SC,160)=R THENBL=19
2ELSEBL=165
109 SB=0:DRAW"S4BM"+STR$(SC)+",1
48C2"+GB$:PLAYQQ$:LINE(SC,146)-(
SC,BL),PSET:PUT(SC-11,BL-18)-(SC
+11,BL),E,PSET:LINE(SC-11,BL-18)
-(SC+11,BL),PRESET,BF:GOSUB63:LI
NE(SC,146)-(SC,BL),PRESET
110 DRAW"BM"+STR$(SC)+",148C1"+G
B$:RETURN
111 FORDS=1TO4:PUT(Z+8,184)-(Z+3
0,192),E,PSET:LINE(Z+8,184)-(Z+3
0,192),PRESET,BF:NEXTDS
112 SR=SR-1
113 GOSUB61:COLOR3,1:DRAW"S4BM"+
STR$(126+(34*(1+SR)))+",18C1"+GG
$+"U2R13":SOUND1,4:GOSUB98:GOSUB
63:IFSR=0THEN114ELSE88
114 GOSUB63:FORI=200TO200STEP-20:
SOUND1,1:NEXT
115 IFINKEY$<>CHR$(13)THEN115ELS
ERUN
116 SR=3:M1=0:Z=4:SR=3:GOTO75

```

CoCo Repairs

• • • \$25 Plus Parts • • •

HARDWARE MODIFICATIONS


Front Panel Controls
Monitor Drivers
UPS Memory Backup

Memory Upgrades
Keyboard Upgrades
ROM Upgrades

AND MANY MORE!

Special Requirements? Just let us know.

Rowe Electronics Co., Inc.
5137 Goldman Dr. • Birmingham, Al 35210
(205) 956-4943

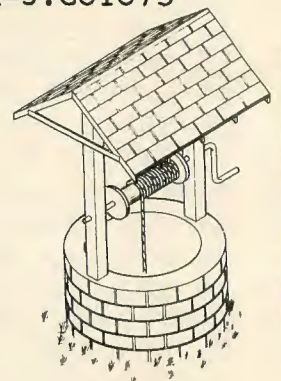

A Follow-up on SIG Mail

By Cray Augsburg
Rainbow's CoCo SIGop

Welcome to the Delphi Bureau. If you read this column last month, you know we covered some of the basic commands used in the Mail system on Delphi. This month we'll show you several commands that give total control of your Mail files.

Mail Commands

The following list describes several useful Mail commands.

BACK — This moves you back to the message prior to the one you have just read. If you just read message four, **BACK** allows you to read message three.

COPY — This command copies a message from one folder to another. Unlike the **FILE** command (discussed last month), it does not delete the message from the original folder. To use, just enter **COPY foldername**.

EXTRACT — puts the message in a file you choose in your Workspace, as opposed to adding it to a folder. This command is very handy for saving a

copy of a message in Workspace if you want to download it later. The **EXTRACT** command has several options:

Extract/Append filename — adds the message to the end of an existing file in Workspace.

Extract/Noheader filename — saves the message, which can be an ASCII or binary program file, to the indicated filename in Workspace after deleting the Mail header from the file. If the file is a program, it may then be downloaded and immediately run.

EXTRACT can also be used in conjunction with other commands, such as **SELECT**, to work on all messages in a selected group. For this, you would use the **Extract/All** option.

NEXT — This command skips over the current message and starts sending the next message to your terminal. Just enter it at any "Press **ENTER** for more" prompt when reading a long message.

SEARCH — If you want to find a given string in your current folder of messages, use **SEARCH text string**. This will search every message in the folder for the occurrence of the named string. The string may appear in the "To:" and "Subject:" fields as well. When it encounters the string, the message will be displayed. To continue using the same

string to find other occurrences, just enter the **SEARCH** command again without retyping the search string.

SELECT — This is one of the more powerful commands in Mail. It establishes a folder of messages that future commands can affect as a group. You can use the **COPY**, **SEARCH** and **EXTRACT** commands to manipulate these messages.

SET — Use this command to alter the characteristics of your Mail setup on Delphi. Following are commonly used command structures. For more commands and examples, type **HELP SET** at the **MAIL>** prompt.

SET COPY_SELF — This establishes the default for whether the **SEND** or **REPLY** commands return a copy of the message being sent to the user sending the message. Options with this command are **Nosend** and **Noreply**.

SET FILE — establishes or opens another file as your current mail file. The default file will be **MAIL.MAI**. If you use the **COPY**, **FILE** or **MOVE** commands to close other mail files, you can then use **SET FILE** to open those files.

SET FOLDER — This enables you to change folders within a given mail file. **SHOW FOLDER** can be used to display the currently set folder.

Cray Augsburg is RAINBOW's technical assistant and has an associate's degree in electrical engineering. He and his wife, Ruth Ann, have two children and live in Louisville, Kentucky. His username on Delphi is RAINBOWMAG.

SET FORWARD — establishes a "forwarding address" for your mail messages. The "address," or username, you specify will receive all messages addressed to you.

SET PERSONAL_NAME — allows you to add to the From: field of any mail messages you send. A good item to fill this with is your real name, so that users receiving your mail will know who you are.

As you can see, the SET command is very powerful and useful. Use the HELP SET command to find out more about SET.

Last month, we discussed the READ command. This month, I have a few more comments to make about READ.

Sometimes your message counter in Mail will indicate you have no more messages, but there really might be some new messages. This could occur if you are reading your mail while "gagged." You can check to find out by typing READ/NEW. If there are any new messages, you will then begin reading them.

READ/BEFORE and READ/AFTER are beautiful commands. They allow you to read messages before or after a specified date. As an example, to read all messages before September 24, 1986, enter READ/BEFORE 24-SEP-1986.

Distribution Lists

By using Mail commands and Workspace commands you can create what

are known as distribution lists. A distribution list is a list of usernames to which you may choose to send a copy of a letter. It is useful if you commonly send mail to the same group of people. First, go into Workspace and create a file containing all the usernames to which you want to send mail. Each username must be on a separate line. Also, the filename must end with the extension .DIS. To send a message to a distribution list, just enter @filename at the "To:" prompt of the send command. For example, to send mail to the list FRIENDS.DIS, enter @FRIENDS without the extension at the "To:" prompt.

We thank Delphi for this information, which was derived from The Del-

DATABASE REPORT

Although the CoCo 3 has not yet become available to most CoCo owners, we already have files in our CoCo 3 News database with preliminary specifications on the GIME chip and a tutorial on the workings of the CoCo 3's memory manager, kindly uploaded by **Kevin Darling** (KDARLING). **Jerome Kalkhof** (GRUMCLUB) uploaded his own impressions of it (he seems to prefer Commodore machines). **Larry Wimble** (formerly THEASSEMBLER, and now LARRYWIMBLE) has already uploaded a responding essay to that one. I uploaded three files concerning the machine, including some critiques of aspects of it and some inside information on how to order from National Parts the needed PAL fix for the multipack and the 512K memory upgrade board. One of these files is an essay that compares the CoCo 3 to the Atari 520 ST.

Dale Lear (DALELEAR) has been busy organizing and enabling files in the OS-9 database. **Jonathan Guthrie** (SCIGUY) (one of our more vocal forum members) has sent us a *Sieve of Eratosthenes Benchmark* program in C, **Milt Webb** (MILTWEBB) has given us a *Sort* program in C, and Dale Lear has provided some patches and fixes for his OS-9 text editor programs *TSEdit* and *TSWORD* (these are available at your local Radio Shack store). **Denny Skala** (DENNYSKALA) uploaded a powerful OS-9 based disassembler. **Don Hutchison** (DONHUTCHISON) has provided a text file to answer questions about how to download using OS-9. He also has

provided some patches for *CCDISK* that allow customizing the step rate and motor on delay for much faster disk access. **Ronald Cole** (RONALDCOLE) has provided software and hardware instructions on how to use a remote terminal to talk to OS-9. **Rick Adams** (RICKADAMS) has provided source code for a utility to change the color of the cursor under OS-9 Version 2.0. **Dan Angelich** (BOWSIN) uploaded a valuable conversion program that converts files from Disk Extended BASIC to OS-9 format. He has also given us a story of his first experiences with the OS-9 operating system. Much of the material uploaded either includes or is in the form of source code in assembly or C, and can constitute a tutorial for folks wanting to learn programming under OS-9. Some of the material was commented for use as a tutorial.

In the Source Code for 6809 database **Edward Coen** (EDCOEN) has sent us source code for an elaborate CoCo Disk Extended BASIC disk editor program. In the Product Reviews database, I have posted a preliminary review of an outstanding new CoCo OS-9 product, *Robot Odyssey*.

Our Utilities database has seen over a dozen new files added this last month. **Stanley Townsend** (ST) has provided a program to strip the carriage returns from *Telewriter 64* files, for later transfer to *VIP Writer* and MS-DOS-based word processors. **Jerome Kalkhof** has given us a complementary utility that adds line feeds to CoCo files and prepares them for subsequent conversion to an MS-DOS-

based system. **Dan Downard** (DAN-DOWNARD) of "Downloads" fame has provided yet another utility of this sort. Dan has also given us a tracer utility called *Newtrace*. **Jim Martin** (JIMM) has given us a math quiz, and **Don Hutchison** has sent us a handy amortization utility. **Tom Bedwell** (REBECCA) has given us an elaborate *Lotus 1-2-3*-like spreadsheet program. **Loren J. Howell** (XENOS) has uploaded a CGP-200 graphics dump program. Other programs have been contributed to the Utilities database by **Mark Camp** (MARKCAMP), **Rex Cowan** (DOC10), **Dave Macleod** (SCORPION2), **Steven Schnautz** (WOODSMITH), **Excer R. Zayas** (NY-PHOTO) and Dale Lear.

In our Hardware Hacking database, **Kevin Darling** has posted an article about Color Computer hard drive systems. It tells what you need to know to make your own CoCo hard drive system, assuming you have general computer hardware experience. Both the Tandy and third-party hard drive hookups are discussed. I've posted a note about the current generation of one-megabit EPROMs, and **Paul Kenneth Ward** (PKW) has shared his experience in setting the speed on full-height MPI drives.

In the Graphics database **Ira Goldwyn** (IRAG), who recently became a published *RAINBOW* author, has again sent several dozen enhanced digitized images of popular TV actors and cartoon characters. I've posted the October "CoCo Gallery" in the Graphics database, and **Art Flexser** (ARTFLEXSER) has provided us with a revised version of the *MAXCMP* picture compressor, which now provides for color flip of the files it creates. **Marc Leavy** (MARCWA3AJR) has contributed a patch for **Erik Gavril-**

phi Handbook as well as from experience in Mail.

Taking the Lead

In early October, the CoCo SIG took the lead as far as Forum messages are concerned. The CoCo SIG has more Forum messages posted than any other SIG on Delphi. Thanks to CoCo SIG Manager **Jim Reed** (JIMREED) for this observation which coincides with the SIG's first birthday! The SIG began operation on Oct. 12, 1985. While this does not necessarily mean we are the most active SIG on Delphi, it would appear we are the most talkative.

Size of the Database

Marty Goodman (MARTYGOODMAN) has provided us with another

tidbit of information regarding our SIG. After using a special command in the databases, Marty has announced that we have some 2,500 files in our database totaling more than 12 megabytes of disk space. Let's double this by taking advantage of the Free Upload Time Offer, which Jim has posted in the Questions & Feedback section.

Thanks to Forum "Helpers"

We extend a special thank you to all members of the SIG who seem more than willing to help out in answering Forum messages. While the names are too numerous to mention, those people know who they are. It is people like this who make the CoCo Community what it is. □

uk's (ERIKGAV) *Macintosh Picture Converter* program. **Richard Trasborg** (TRAS) has sent us several images of lovely ladies. **Greg Geary** (GJG) has given us a DMP driver for *MACPIX*. Don Hutchison has provided more of his wry humor with his "Burger King" cartoon.

In the Music database we have some big news. **Stephen Scherock** (SFSCHEROCK) has uploaded a utility that allows one to play Orchestra-90 type music files on a CoCo that does not have an Orchestra-90 hardware card in the system. Although, of course, compromises are made in getting the CoCo's hardware to generate the music, this will allow CoCo music lovers with other music hardware to sample the music. Stephen has also uploaded some music files. **Ray Wright** (RAYWRI) has been busy sending us 10 new *Musica 2* compositions. Other material has been uploaded to the Music database by **George McCashin** (GMCC), **Mike Carey** (MIKECAREY), **Don Kline** (DON13), **Paul Seng** (PAULSENG), Tom Bedwell and **Tim Collier** (TIMEXTWIN).

In the Data Communications database we have just put a patch for *Mikeyterm* 3.0, written by Mike Ward, that allows it to run on the CoCo 3. The Delphi CoCo SIG and *RAINBOW* magazine managed to test Mike's code (Mike did not have a CoCo 3 at the time he wrote and sent us the patch), confirm it worked and get back to him all within 24 hours. **Cray Augsburg** (RAINBOWMAG) rushed to check that patch on *RAINBOW*'s in-house CoCo 3. This patch will not allow operation in the CoCo 3 80-column mode. That may be available at a later date.

Two new utilities for *Mikeyterm* have been provided. Stephen Scherock has given us a revised version of *MTSTART*,

allowing auto-dialing and setup configuration for several different communication situations. **Mark Gallagher** (GALLAGHER) has given us *MT*, a combination of *MTWPRS* and *MTHAYES* that at once patches, loads and starts *Mikeyterm* 3.0, and sets it up for use with both the Hayes Smartmodem command set and with the *WordPak RS*.

Art Flexser has uploaded some "bug fixes" for *Colorcom/E* Version 3.0 or 3.01.

Don Hutchison has been very active on our service, doing well over half of the work of enabling and fixing files in the database here. I want to thank him for his untiring efforts. If you submit a file, it is very likely it will be Don who examines it.

Over the next month I expect to upload back issues of the "CoCo Gallery" to the Graphics database. I also hope to upload graphics images of the original documentation for the *WEFAX* program published in the February 1985 issue of *RAINBOW*, along with a complete set of current versions of the *WEFAX* program, in variants for a number of printers and for a send/receive version. Now that the CoCo 3 is finally becoming available to the public, I expect our CoCo 3 News section to become more active. Expect to see the first public domain programs for it there, new technical information about it, and descriptions of any problems found in this brand new machine.

See you all on the Delphi *RAINBOW* CoCo SIG!

— Marty Goodman
(MARTYGOODMAN)

Delphi CoCo SIG Database Manager

And even then you couldn't access as many CoCo goodies as you get in Public Domain Software Copying Company's special pre-selected package deals. Check it out:

1 TOOLS—4 disks, 62 files. Includes: Basic 64, BSearch, DiskTest, DOS64, DSBBoot, Print-Dir, Recover, Romback, Romfix, Scrn51, Backup, Unlock, MultiBack, Spell & Fix Free Ware, Manual, Dict, Build, List, Append, Addword, Teleterm, MTerm, Kermit, Superforth. **\$25**
16K Forth, Editor.
32K Forth, Manual

2 GAMES—4 disks, 59 files. GAMES IN BASIC include: Gunner, Life, Poker, Bio rhythm, Hangman, Go, Fractal, World 3D, Lovetrek, Nude, Sizz, Reverse, Scramble, Pizza, FAST MACHINE LANGUAGE, Pong, Squash, Blockade, Germ, Grid, 3D Tictac, Zerog, SIMULATIONS & ADVENTURE Cave, Wargame, NORAD, arcoyle, KingTUT, Civilwar, Icewar. **\$25**

3 MUSICA MANUAL & UTILITIES—4 disks, 80 files. Includes: Adplay, Boogie, Circus, Clowns, Hyden, JBGood, Sonata3, Straw, #3 Foggy, Funeral, Hardday, Joplin, Peanuts, Rock, Stranger, Camelot, Diamond, Fantasy11, Greengras, Star Wars, Superman, RootBeer, Ghos-Bust, Mash, 201, Stelmo, Balstar, Messiah, Raiders, Watermus, Toc-cata, Fuge, etc. **\$25**

4 GRAPHICON PICTURES—these pictures demonstrate the ability of the Color Computer to produce exciting art. Graphicon need ed. Modifiable. 4 disks. **\$25**

5 PICTURE DISKS—2 disks, 35 files. Turn your CoCo into a Mac includes: New version of McPaint and Pictures. **\$15**

6 FOR THE OS9 OPERATING SYSTEM—2 disks, 20+ files. Includes programs from BASIC09, ASM and C, Finance, Clk, MathDemo.c, Bounce.c, rafDemo.c, Primes.c, WC.c. Six text adventures for OS9 operating system. **\$15**

7 5 New Disks, assorted. **\$20**
SPECIAL

8 ALL THE ABOVE—\$130 value **\$80**

ORDERS: Include full name, complete address, phone with area code (important!!) Specify for CoCo. Include \$3 P/H per order. Phone credit cards only. Overseas add 80¢ per disk U.S. postage. N.Y. include 8.25% tax, prepaid only. Canada: postal money orders, U.S. \$ only. We also have PD Software for Ms.Dos, CP/M Catalogs: \$4. We sell 2 Drive Ms.Dos portable \$12k. \$895. We are a copying service providing programs from Users Groups; corrections solicited. Please include \$2.40 handling with any returned (postal mangled etc.) disk. Content not warranted.

The Public Domain Software Copying Company
(est. 1983)

33 Gold Street, New York City 10038
212/732-2565

SHACK UP WITH A LIBRARIAN

Computer Island Educational Software

PROGRAM TITLE	GRADES	MEMORY	PRICE	PROGRAM TITLE	GRADES	MEMORY	PRICE
PRESCHOOL				MATH			
Preschool I - counting	Pre-K	16K-Ext.	11.95	Opening a Bank Account	4-7	32K-disk	24.95
Preschool II - adding	Pre-K	16K-Ext.	11.95	Dollars & Sense	2-4	16K-Ext.	14.95
Preschool III - alphabet	Pre-K	16K-Ext.	11.95	McCoco's Menu	3-5	16K-Ext.	14.95
Music Marvel-play songs	Pre-K, 1	16K-Ext.	11.95	Moneypak	2-5	32K-Ext.	24.95
Arrow Games-6 games	Pre-K, 1	32K-Ext.	21.95	Graph Tutor	3-7	32K-Ext.	19.95
First Games-6 games	Pre-K, 1	32K-Ext.	24.95	Graph-It	7-up	16K-Ext.	14.95
Mr. Cocohead-facemaker	K-3	16K-Ext.	16.95	Math Invaders	1-8	16K-Ext.	17.95
LANGUAGE ARTS				Mathquiz-4 operations	2-5	32K-Ext.	19.95
Beyond Words 1-3 parts	3-5	32K-Ext.	19.95	Addition & Subtraction	2-3	16K	11.95
Beyond Words 2-3 parts	6-8	32K-Ext.	19.95	Skill Tutor Series			
Beyond Words 3-3 parts	9-12	32K-Ext.	19.95	Division Tutor	3-7	16K-Ext.	14.95
Vocabulary 1-1000 words	3-5	32K-Ext.	19.95	Multiplication Tutor	3-7	16K-Ext.	14.95
Vocabulary 2-1000 words	6-8	32K-Ext.	19.95	Factors Tutor	5-8	16K-Ext.	19.95
Vocabulary 3-1000 words	9-12	32K-Ext.	19.95	Fractions Tutors (3 programs)			
Context Clues	4,5,6 or 7	16K-Ext.	17.95	addition, subtraction or multiplication	4-8	16K-Ext.	19.95 ea.
Reading Aids - 4 parts	2-4	16K-Ext.	19.95	Trigonometry	8-10	32K-Ext.	24.95
King Arthur-writing tool	2-6	16/32 Ext.	29.95	Equations Linear	7-9	32K-Ext.	19.95
Cocowheel of Fortune	4-up	32K-Ext.	19.95	Equations Quadratic	8-11	32K-Ext.	19.95
Context Clues	2-3	32K-Ext.	19.95	Arith. Diagnostic Disk	3-8	32K-disk	49.95
CLOZE Stories	3,4,5,6 or 7	32K-Ext.	19.95	Fraction Diagnostic Disk	4-9	32K-disk	49.95
Locating Story Details	2-3 or 4-5	32K-disk	24.95	Verbal Problems Series			
Drawing Conclusions	3-4 or 5-6	32K-Ext.	19.95	Distance Problems	5-8	32K-Ext.	19.95
Punctuation Practice	3-7	32K-Ext.	19.95	Area & Perimeter	5-8	32K-Ext.	19.95
FOREIGN LANGUAGES				Pizza Game	3-5	32K-Ext.	19.95
French Baseball-200 wds.	4-up	16K-Ext.	11.95	Sales & Bargains	6-8	32K-Ext.	19.95
French Baseball-500 wds.	4-up	32K-Ext.	19.95	Comparison Shopping	4-7	32K-Ext.	19.95
Spanish Baseball-200 wds.	4-up	16K-Ext.	11.95	Binary Dice Game	4-up	32K-Ext.	19.95
Spanish Baseball-500 wds.	4-up	32K-Ext.	19.95	SOCIAL STUDIES			
Hebrew Alphabet	beginners	16K-Ext.	11.95	Know Your States	5-up	32K-Ext.	19.95
Hebrew Utility	drawing utility	16K-Ext.	15.95	History Game	5-up	32K-Ext.	14.95
CRITICAL THINKING PROBLEMS				States & Capitals	5-up	32K-Ext.	19.95
Find The Math Sequence	4-up	32K-Ext.	19.95	Explorers & Settlers	4-up	32K-Ext.	19.95
Stranded-graphic advert.	4-up	32K-disk	24.95	Famous American Women	6-up	32K-Ext.	19.95
TEACHER/STUDENT AIDS				Street Map Game	3-5	32K-Ext.	19.95
Colorgrade-gradebook	Adult	32K-disk	29.95	MISCELLANEOUS			
Quizmaker-write quizzes	5-up	32K-Ext.	24.95	Name That Song 1,2 or 3	2-up	16K-Ext.	11.95
ETT typing tutor (CocoWarehouse)	4-up	16K-Ext.	21.95	Music Drill	3-up	16K-Ext.	19.95
DISK INDICATES AVAILABLE ON DISK ONLY.				Science Game	8-up	32K-disk	29.95
TAPE PRICES GIVEN.				Computer Literacy	6-up	32K-Ext.	19.95
ADD \$5.00 FOR ANY PROGRAM ON DISK.				5 Educational Programs	1-2 or		
				with Lightpen	3-6	32K-disk	44.95
				Chemistry Tutor	10-up	32K-disk	29.95



(718) 948-2748



Dept. R 227 Hampton Green, Staten Island, N.Y. 10312

Send for catalog with complete descriptions.

Please add \$1.00 per order for postage. N.Y. residents, please add proper tax. FREE set of BINARY DICE, including full directions, with orders of 2 or more items.

Dealer Inquiries Invited.

TRS-80 Color Computer

All Payments in U.S. Funds.

Computers and Our English Vocabulary

By Michael Plog, Ph.D.
Rainbow Contributing Editor

The English language is one of the most (possibly the single most) flexible languages in the world. English contains a great number of words with specific definitions. About 450,000 words are now in general use in English. A lot of our words are adapted from other languages, such as French (when William the Conqueror invaded England, he made French the language of the ruling class), Latin, German and old Celtic languages (through earlier invasions of England). It is my understanding that English vocabulary is twice the size of other, related languages, such as French, Italian, Spanish and German.

When we want to express ourselves, we have far greater opportunities than people speaking other languages. At the opposite end of the spectrum from English is Taki, a language spoken in parts of French Guinea that has only 340 words. Our large vocabulary allows us to convey our thoughts to others with a richness of meaning and a minimum of confusion.

Of the 450,000 words now in general use in English, Shakespeare would have understood only about 250,000. Of all

Michael Plog received his doctorate degree from the University of Illinois. He has taught social studies in high school, worked in the central office of a school district and is currently employed at the Illinois State Board of Education.

those words added since Shakespeare's time, about half have come into use during the past 50 years. The language is growing even today.

The dictionary in our house has a few pages at the beginning entitled "New Words." These are words which are new to the English language ("ninja" and "kung fu" are examples); new uses of previously existing words ("jet lag"); or words once primarily used only by specialists but are now in general use ("clone"). It is fascinating to read some of these words, and to realize that NOW accounts at banks come from the term "Negotiable Order of Withdrawal."

As you might expect, many of these new words come from the computer and electronic fields. One example is the term "micro," which has always meant "very small" since ancient Greek times. Some of our new English words include microwave oven, microprobe, microdot, microfiche microcircuit and microcomputer.

The new computer words in the English language come in different forms. Some new English words have a background in computer science, or have been made possible by computers, but still relate only to technical concepts. As an example, we have all heard of the CAT scan in the field of medicine. The term comes from "Computerized Axial Tomography." The CAT scan equipment (and, thus, word) would be impossible without computers. This is not a computer term, but a medical term

whose existence relies on computer technology.

Other new words apply only to areas of computer science, but are used and understood by the general population. If you talk about artificial language or artificial intelligence, almost everyone will know it has something to do with computers. Most people know the term "BASIC" as a computer language, even if they do not know how to program in BASIC, or even use computers. Also, most people, including those who never use computers, will have some idea of the use of terms like binary, chip, core, cursor, daisy wheel and floppy disk.

Because of the wide interest in computers in the United States today, the specialized vocabulary has been absorbed by our culture quickly. With the effect of computer education in schools, we can expect the next generation of Americans to have these terms as a natural part of their speech, and perhaps a better understanding of the definitions than many of us today have.

My favorite new English words derived from computer jargon, however, are those words that have adopted new meanings. These are words that began in the computer field, but have since taken on wider uses. Some words have been around for a long time, but have had meanings changed or expanded because of their use in the computer field.

Consider the old, faithful word "program." This word started as a noun

outside the computer area. We used to speak of a program as a plan to be followed, or the total of the individual components of a plan. Then, the word entered the area of computers and became a set of instructions for the machine to follow. It was still a noun (we wrote the program), but soon took on verb meanings also (we programmed the machine). People who have never seen a computer, never even been inside a Radio Shack computer store, know the definition of the term and know that computers are programmed by humans.

But in the past few years, the word has adopted a wider meaning. We now speak of programming humans, with both a positive and negative aspect. We can be programmed to wear seat belts, control our anger, or any number of things we used to do differently. People who have undergone intense mental conditioning are now considered programmed. Specialists deprogram youngsters from religious cults and reprogram them to live in more conventional society. The term "deprogramming" is listed in the dictionary as the process of eliminating a set of thinking caused by intensive indoctrination.

Now that is a great promotion for a word that started as "plan."

Other words from the field of computer science have been accepted into our language, then altered to assume a wider definition. The term "debug" came from computer science, referring to corrections in a computer program. (See this column in the October 1986 RAINBOW.) We now speak of debugging relationships with other people, or of working the bugs out of any new activity. "Feedback" is another example of an electronic term that has come to have broader meanings. Speakers get feedback from audiences; teachers get feedback from students. A "glitch" no longer just means a malfunction of a machine due to a surge of power, but now can refer to any problem from a relatively small source.

Have you ever heard an employer say he wanted someone "online" as quickly as possible, so the new person could "interface" with people necessary to complete the task before the whole "program" got "zapped?"

Some people believe that our language controls our thoughts. The way we think is determined by the vocabu-

lary we have with which to express our thoughts. I do not know whether that is true or not. But, a large vocabulary allows us to express ourselves with greater precision and have greater control over how we share our thoughts with other people. In essence, communication is limited by vocabulary. We are fortunate that our language is less limiting than other languages — we can communicate our thoughts with fewer limitations. We should also recognize the debt we owe to the field of computer science for giving us a richer vocabulary for our communications.

Education is learning: knowing the thoughts of others and sharing our thoughts with other people. Before we can express a thought, or learn from the expressions of others, we need to have a language capable of accommodating that thought. Because our language is still growing, our thoughts can continue to grow. If we ever get caught in an "endless loop," our thoughts will stop growing, and education will stop.

If you want to share your thoughts, please write me at 829 Evergreen, Chatham, Illinois 62629. Until next time, happy words!

Products listed in the Holiday Shopping Guide are available from the following companies:

B5 Software
1024 Bainbridge Place
Columbus, OH 43228
(614) 276-2752

Cinsoft
2235 Losantiville Avenue
Cincinnati, OH 45237
(513) 396-SOFT

Computerware
P.O. Box 668
Encinitas, CA 92024
(619) 436-3512

Diecom Products
6715 Fifth Line
Milton, Ontario
Canada L9T 2X8
(416) 878-8358

Diversions, Inc.
505 W. Olive Avenue #520
Sunnyvale, CA 94087
(408) 245-7575

Federal Hill Software
8134 Scotts Level Road
Baltimore, MD 21208
(800) 628-2828

Foto-Wear, Inc.
62 Herbert Drive
East Brunswick, NJ 08816
(201) 257-6549

H&H Enterprises
P.O. Box 2672
Corona, CA 91718
(714) 737-1376

HJL Products
P.O. Box 24954
Rochester, NY 14624
(800) 828-6968

Howard Medical Computers
1690 N. Elston
Chicago, IL 60622
(800) 443-1444

J&R Electronics
P.O. Box 2572
Columbia, MD 21045
(301) 987-9067

Lomiq, Inc.
c.p. 105, succursale A
Jonquiere, Quebec
Canada G7X 7V8
(418) 542-6425

The Lyter Side
511 Cottonwood
Canon City, CO 81212
(303) 275-1640

Ohm Electronics
P.O. Box 368
Palatine, IL 60067
(800) 323-2727

Spectrum Projects, Inc.
P.O. Box 264
Howard Beach, NY 11414
(718) 835-1344

Speech Systems
38W255 Deerpath Road
Batavia, IL 60510
(312) 879-6880

Tepco
30 Water Street
Portsmouth, RI 02871
(401) 683-3019

Thinking Software, Inc.
46-16 65 Place
Woodside, NY 11377
(718) 429-4922

Tothian Software, Inc.
Box 663
Rimersburg, PA 16248
(814) 473-3887

Weber and Sons, Inc.
P.O. Box 104
Adelphia, NJ 07710
(800) 225-0044

York 10
9525 Vassar Avenue #R1
Chatsworth, CA 91311
(818) 700-0330

Zebra Systems, Inc.
78-06 Jamaica Avenue
Woodhaven, NY 11421
(718) 296-2385

Best Wishes for a Happy, Healthy Holiday Season from Sugar Software

We make all of our holiday greeting cards with

The CoCo Calligrapher
and so can you!

The CoCo Calligrapher works on these printers:

Epson: MX80, FX80, 100 (8 1/2 x 11 size only), and all models with graphtrax
Gemini: 10, 10X, 15, 15X (8 1/2 x 11 size only)
Radio Shack: LP7, LP8, DMP100, 110, 120, 200, 420, 510, 2100
Okidata: 92A - unless it is version 4. The ROM has a bug and the dealer should replace it for you.
Banana: Behaves like a Radio Shack
Prowriter: 8510

These type styles come on the CoCo Calligrapher program tape or disk:

Old English
Gay Nineties
Cartoon

Tape - \$24.95
Disk - \$29.95
Both require 32K ECB

These additional type styles are also available —
\$19.95 each, or \$49.95 for all on tape or disk.

Tape 1

Old English-reduced	Cartoon-reduced	Gay Nineties-reduced
Old English-reverse	Cartoon-reverse	Gay Nineties-reverse
Old English-reverse/reduced	Cartoon-reverse/reduced	Gay Nineties-reverse/reduced

Old English Cartoon Gay Nineties

Tape 2

Broadway
Broadway

Broadway
Broadway-reduced
Broadway-reverse
Broadway-reverse/reduced

Tape 3

Business
Business

Business
Business-reduced
Business-reverse
Business-reverse/reduced

Old Style
Old Style

Old Style
Old Style-reduced
Old Style-reverse
Old Style-reverse/reduced

BonTique
BonTique

Antique
Antique-reduced
Antique-reverse
Antique-reverse/reduced

Simplify all of your Holiday Mailing

with
TIMSMAIL



\$19.95 - Tape
32K ECB
Disk
Compatible

- User friendly
- Detailed tutorial & guide
- No blank line!
- Send formatted file to tape, disk, or printer
- Upper and lower case
- Up to 230 characters per record

Address all your holiday greeting cards in minutes! Update your list in seconds!

- Designed for 80 column printers
- Continuous feed or single sheet labels
- 1, 2 or 3 labels wide
- 2.5, 2.75, 3, 3.5 and 4 inch labels
- Sort by zip code
- Sort by name
- Select records to print
- About 200 records will fit in 32K

Spend some quality time with your family and play


Bible
Stories
Adventure

Tape -
16K ECB - \$19.95
Disk -
32K ECB - \$24.95

A very simple graphics adventure game for young children and their families.

All of these stories are included:

- Adam and Eve
- Noah's Ark
- Abraham and Isaac
- The Exodus
- David and Goliath



Intriguing sound effects. Exciting high-res graphics and animation. The one adventure game that's fun to play over and over again!

Disk software compatible with Radio Shack DOS only.
A complete catalog of other sweet Sugar Software products is available.

SUGAR SOFTWARE
P.O. Box 7446
Hollywood, Florida 33081
(305) 981-1241

No refunds or exchanges.



Add \$1.50 per program for postage and handling. Florida residents add 5% sales tax. COD orders are welcome. CIS orders EMAIL to 70405.1374. Dealer inquiries invited.

Dealer and author inquiries are always welcome. Canadian dealers should contact Kelly Software Distributors, Ltd., P.O. Box 11932, Edmonton, Alberta T5J-3L1 (403) 421-8003.

Gold Star Performance

Editor:

I have received such outstanding service from one of your advertisers that I would like to call it to the attention of you and your readers.

I own a CoCo 2 and one disk drive. I decided to purchase a second drive from the Computer Center, Inc., in Memphis, Tenn. About six months after I purchased this drive, it developed a problem. I returned it to the Computer Center with a note. It was returned 10 days later with a note saying that the drive worked and the only charge was for shipping and handling. I thought that was fine, since the drive worked perfectly when I connected it.

About two weeks later, the drive developed the same problem. I sent it back to the Computer Center again. This time it was returned within eight days and it had been repaired free of charge, and they didn't even charge postage and handling. It is so hard to get prompt, courteous service these days. The drive has been working fine ever since.

Howard D. Clark
El Paso, TX

A Veteran Beginner

Editor:

I'm writing to tell you about Paul Bangert of Bangert Software Systems. After ordering the *Super Programming Aid*, I had a question concerning it. In less than a week I had my answer from Mr. Bangert.

If anyone in CoColand needs a decent programming aid, the *Bangert Super Programming Aid* [reviewed in the July 1986 RAINBOW, Page 158] is the item to get.

I was really glad to read that you will always have things in RAINBOW for beginners. I've had my CoCo for a few years, but I'll never be a super programmer. I just make small, inefficient programs that keep me occupied.

Philip Beltz
Uhrichsville, OH

Label Legacy



Editor:

I have been lucky to have had my letter printed in your magazine and have gotten some very nice CoCo pen pals. I met one man who became very close to me and we wrote to each other every week for over a year. He was really great with the CoCo and had made an address label with a dog on it and the word 'love' under it for me because of a stamp I try to use all the time. Then he had a heart attack. His family wrote me about it. I am trying to find someone who could write a program to make this label for me. I will gladly pay for it. Can anyone help me? I have a 64K CoCo, tape and a DMP-105 printer. You have a great magazine and

I wouldn't miss it for anything. Thanks for helping me meet some very nice people.

Sandra Steed
115 2nd Drive SE
New Philadelphia, OH 44663

KUDOS

Editor:

I just wanted to pay you a compliment on the wonderful opportunity you've given me, as well as many others, in providing us with such a treasure as RAINBOW. It is definitely a gift to all CoCo users!

I am a data processing major, with an associate's degree, working as a computer operator, on my way to becoming a programmer. I enjoy the programs RAINBOW provides, as well as all the ads for equipment and software to expand my system and help me program better and more efficiently. Thank you for that gift.

Bonnie Kitts
Williamsburg, VA

Please Don't Forget Us

Editor:

I ask you not to forget that it is the novice or beginner who makes your magazine grow, so consider the minimum equipment required to compute and address these people. I learned more from *Don't String Me Along* [October 1986, Page 100] than I have from any article in some time. Go get 'em Ellen and George Aftamonow!

I would like for someone to gather all errors ever gotten in BASIC and/or OS-9, with an explanation, reason, how to overcome, what caused the error and what they mean. Large order I know.

Harold E. Crunk
Maplewood, MO

My Favorite Record

Editor:

Why not have a Rainbow One- and Two-Liner book and tape to complement your Simulations and Adventure series? I'd buy one. Also, why not put the CoCo Gallery on tape? Even more than either of these, I'd like to see the Simulations, Adventures, One- and Two-Liners, and CoCo Gallery all on disk. This would be of great value to me.

Kerry B. Rogers, USN
FPO New York, NY

Doesn't Like OS-9

Editor:

Just when I had concluded that you and your magazine were hurting yourselves, patting yourselves on the back, you finally did something I consider worthwhile. *Writer-Zap* [September 1986, Page 116] is the program I have been looking for. I run my printer at 2400 baud and had to change that parameter manually each time. No more, thanks to you and special thanks to Ian Millard for making it available to the members of CoCo Community who use and like *VIP Writer*.

I have OS-9 Version 01:01:00 and I consider it to be a total waste of money. I have not been able to find anything useful to do with it, nor do I find I can learn what to do

with it from Dale Puckett. I have the *Rainbow Guide to OS-9* but it assumes you know all about it and leaps in at full speed. I certainly am not going to spend \$25 to upgrade to Version 2 of OS-9 until or unless I can find a use for it.

I am running a CoCo 2, a J&M controller and a double-sided, 40-track disk drive. I use a DMP-105. I would like to see some entry-level tutorials on OS-9 so I can figure out what to do with it and how to do it.

Keep Bill Barden going; he is the most lucid writer I have found on computers.

Sam P. Carroll
Olympia, WA

PMODE is Red, PMODE is Blue

I'm an honest person and I'd like to say, I had the urge to get a computer one day, Went to Radio Shack, walked in with ease, The salesman said, "May I help you please?"

I said, "I'm looking for a computer," he asked, "What kind?" I replied, "I'm not sure, let's see your line." We looked at all the computers in the store, My knowledge of computers, unknown, not anymore.

He asked, "See anything to suit you?" I said, "I really like that Color Computer 2." He picked up the computer and handed it to me, He rang it up and the total came to \$279.33.

I was so excited, I had a computer now, But how to use it, I didn't know how. I called Radio Shack that very day, The salesman explained in full, right away.

After experimenting for about four weeks, I had learned a lot about pokes and peeks, I bought software that worked my way, But I had one problem, only 16K.

I searched and found an upgrade for 69 bucks, It was from Spectrum Projects, was I in luck. My order was filled and filled very fast, I had my upgrade I wanted, 64K at last.

The magazine I had was called RAINBOW, Got it from a friend, where he got it I don't know.

RAINBOW was filled with articles to read, My friend told me, "That RAINBOW is a need.

I've been reading RAINBOW ever since then, Of all computer magazines, RAINBOW always wins.

With Lonnie Falk as its editor, I don't think RAINBOW could be better.

I supported my CoCo 2 all the way, Until I heard about the new CoCo 3 one day. With its exciting new features, I was amazed, Its brilliance and colors flared with a blaze.

I haven't had a chance to try one out, From what I've read, it's the best without a doubt.

My local Radio Shack hasn't received them yet, When they do, I'll get one, you can bet!

RAINBOW is, and will always be for me, I know it'll get better, thanks to CoCo 3. RAINBOW magazine will always be the best, But I think it's time to put my pen to rest.

*Andrew Urquhart
Metairie, LA*

PEN PALS

● I'm looking for a CoCo pen pal. I'm 14 years old and have a 64K CoCo 2 BASIC Version 1.1 with disk and a cassette recorder.

*Jon Larson
P.O. Box 237
Seligman, AZ 86337*

● I read the letter in the July 1986 RAINBOW [Page 10] about all the different countries THE RAINBOW is sent to. I already have pen pals in Australia, Canada, Argentina and Brazil, but would like pen pals in other countries. I would also like to hear from anyone who is interested in war and weapons, law or politics.

*Tim Vogel
2425 Greendale Road
Wilmington, DE 19810*

● I have a 64K ECB system with a cassette recorder and am in search of a pen pal. I am 16 years old.

*Brannon Baxley
P.O. Box 355
Live Oak, FL 32060*

● Anyone who wants to be a pen pal and has a cassette player please write me. I will answer all letters. You can help me keep my expenses down by sending an SASE.

*Dane Kramer
802 N. DeQuincy
Indianapolis, IN 46201*

● I'm searching for pen pals who are interested in heavy metal, Adventure games and computer graphics. I have a 64K CoCo, disk drive, DMP-110 printer and the fantastic CoCo Max. All ages are welcome to write.

*Erik Ames
406 East 12th Street
LaPorte, IN 46350*

● I'm 15 years old and would like a pen pal. I have a 64K computer, double disk drive, cassette recorder, modem and a DMP-130 printer.

*Yvonne Hinkle
RR 1, Box 358
Washington, IN 47501*

● I'm 16 years old and have a 64K ECB CoCo 2, two double-sided disk drives, DMP-105 printer, 300/1200 Baud modem and would like to have some pen pals.

*Michael Adams
31740 Courtney Cr.
Walker, LA 70785*

● I would like to have a pen pal who owns a CoCo 1 or 2. I'm 16 years old and own a CoCo with dual-disk drive, cassette recorder and a Spirit-80 printer that thinks it is an Epson.

*Kelly Stone
P.O. Box 225
Rose City, MI 48654*

● I would like to hear from other CoCo owners who are involved in law enforcement, particularly those who have written job-related programs. Also, I would like to hear from law enforcement people from other countries.

*J.E. Borger
Box 52
South Dennis, NJ 08245*

● If you enjoy throwing out your 16K Color Computer, trashing your DMP-105 printer or putting an ax in your color TV — do not write to me. If you love your CoCo, please write to me.

*Michael Albert
661 Neptune Boulevard
Long Beach, NY 11561*

● I am 13 years old and want pen pals who are having trouble with programs, games or anything else. Must have a cassette recorder and disk drive.

*Eurik Perez
358 Wadsworth Avenue
Apt. 43
New York, NY 10040*

● I am looking for a pen pal who enjoys Adventures. I am 10 years old and have a TRS-80 Color Computer with disk drive, printer and modem.

*Brad Bergstresser
26027 Redwood Drive
Olmsted Falls, OH 44138*

● I would like to have pen pals who have a CoCo 2 with at least 32K. I have many tapes but I don't have a disk drive.

*Joel High
2155 Jarvis Road
Lancaster, PA 17601*

● Anyone who wants a pen pal in the USA please send an SASE or 25 cents. I will try to answer all letters. This offer stands for people in foreign countries also.

*Blake Cadmus
1106 Whitfield Boulevard
Reading, PA 19609*

● I am interested in getting a CoCo pen pal. I am 14 years old and have a 64K CoCo 2 and tapes.

*Jason Maxwell
867 Rye Street
Manchester, TN 37355*

● I am willing to correspond with CoCo users anywhere in the world who have a similar or compatible CoCo configuration to mine (tape, ECB, modem and printer). I hope to have a disk drive soon.

*Bill Kroulek
13809 Lillard Road
Soddy, TN 37379*

● If there are any CoCo users who want to write to me, I'd be very pleased. I am 14 years old and own a TRS-80 64K computer.

*Ben Stimmel
P.O. Box 44
Burlington, TX 76519*

● I'm looking for a girl pen pal. I have a 64K CoCo with printer and cassette.

*Pierre-Etienne Michel
808 du Chateau
St-Hilaire, Quebec
Canada J3H 1N4*

● I am looking for a pen pal. I have a 16K CoCo 1.

*Steven Freriks
P.O. Box 116
Englefeld, Saskatchewan
Canada S0K 1N0*

● I would like to have a pen pal. For more information write me.

*Shane Pasiechnyk
Box 344
Marysville, British Columbia
Canada V0B 1Z0*

● I want to correspond with CoCo users who have MIDI systems using Yamaha DX and RX synthesizers and any of the following: Colorchestra, Syntrex by Intercomp, CoCo MIDI by Speech Systems and Musica MIDI by Speech Systems.

*Ross Whitney
201-21 Pioneer Drive
Kitchener, Ontario
Canada N2P 1H1*

● I am in search of a CoCo pen pal living in Germany or the USSR. I am 12 years old and have a 64K CoCo 2 and cassette recorder.

*Mathieu Chouinard
616 Rue Hudon C.P. 500
LaPocatiere, Quebec
Canada 60R 1Z0*

● I would like to write to anyone sharing my interest in Adventures. So far I have either solved or helped in finding the solutions to most of the Mark Data programs and Dallas Quest. At the moment I am having some difficulty with The Vortex Factor, Major Istar and To Preserve Quantic. I am 10 years old.

*Scott Chase
3 Thomas Street
Baxter, Victoria 3911
Australia*

THE RAINBOW welcomes letters to the editors. Mail should be addressed to: Letters to Rainbow, The Falsoft Building, P.O. Box 385, Prospect, KY 40059. Letters should include the writer's full name and address. Letters may be edited for purposes of clarity or space.

Letters to the editors may also be sent to us through the MAIL section of our Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS. Be sure to include your complete name and address.

DOWNLOADS

Now's the Time to Get Online

By Dan Downard
Rainbow Technical Editor

• *Having just purchased a Modem I, I dug through back issues only to find zilch. Can you explain how to use my modem?*

Mervyn Swaine
Hantsport, Nova Scotia

So you want to join the ranks of telecommuters, Mervyn. Really all you need is the modem, a cable to connect it to the computer, a cable to connect it to your telephone, some terminal software, and the telephone number of your local Uninet pad in order to get on Delphi. (See the ad in this issue for more details.)

A few terminal programs have appeared in the RAINBOW. If you have a CoCo 3, a terminal program appeared in last month's issue. All that the terminal, or communications, program does is allow you to send and receive data over the telephone lines. The more elaborate programs have buffers — methods of storing text received or to be sent. Also, they have different protocols for reliable transmission of data. I recommend *Mikeyterm*. It is available on Delphi for the cost of your connect time.

The cables you need can be found at your local Radio Shack store. Your Modem I just converts the data to tones for transmission purposes. More elaborate modems are also available. They automatically dial and answer your telephone, and are capable of faster baud rates than your Modem I.

When you finally get connected to Delphi, send a message to DANDOWNARD or RAINBOWMAG on the CoCo Forum. We are always glad to hear from you.

• *A strange thing happens when I type EXEC without a machine language program in memory. The drive starts running, looking for a file on the disk in Drive 0 (if one is in the drive).*

What is the file the drive is looking for? Is it looking for a machine language file, BASIC file, ASCII file or OS-9 file? Does it load and automatically execute the file?

Willie Wong
San Francisco, CA

Willie, you are doing something wrong. When the command EXEC is found in a program, the microprocessor program counter (the address counter) jumps to the address pointed to by \$009D. If there is nothing stored at this address, you're in never-never land. The disk drive is not looking for a file, but just running without any purpose. This is dangerous from a software standpoint since you may jump to a place in Disk BASIC that may re-format a disk, etc. I suppose that is why we have write-protect tabs. At the same time it will do no physical damage to the computer, and pushing reset will re-initialize the system.

• *Do you have to get an RGB monitor to use the 80-character screen and the Hi-Res graphics, or can that be done on a normal TV? I was also wondering about the option for adding more memory. Does more memory mean more string space, and does it give more room before OM Errors?*

Could you recommend a good word processing and small-business accounting program for the CoCo 3? I do not have a CoCo 3 yet.

Do you recommend getting OS-9 Level II for the CoCo 3? I have never used the OS-9 system, and I do not know whether that would be a good investment for a 14-year-old, self-taught programmer on a limited budget.

David West
Leesburg, FL

I see you are looking forward to the CoCo 3 with the rest of us, David. I wouldn't recommend using a TV with the CoCo 3 for Hi-Res graphics. The RF circuits are no different than in the present CoCos. It is impossible to send the necessary video information over a standard RF carrier. At the same time, a monochrome monitor works fine for 80-column word processing. Graphics are better on an RGB monitor, but a color monitor will suffice.

To take advantage of the added memory in the CoCo 3, at present you will have to use OS-9 Level II. There hasn't been time to develop software for RS-DOS, even though it's possible. You will still be able to write longer programs with the same amount of memory due to the fact that graphics screens are now stored in different memory banks, and do not interfere with program memory.

Because the CoCo 3 is so new we will have to see what kind of business software develops. Existing software will run, but most is formatted for a 32-column screen. It should not be too difficult to convert the screen formats. As far as OS-9 goes, there are several excellent word processors and accounting programs already available. Try contacting some of the established vendors such as Computerware and Frank Hogg Labs.

Dan Downard is an electrical engineer and has been involved in electronics for 27 years through Ham radio (K4KWT). His interest in computers began about eight years ago and he has built several 68XX systems.




Recommended Reading for Your CoCo from . . .



The Rainbow Bookshelf

New!

New!



The Complete Rainbow Guide to OS-9

The book that demystifies the state-of-the-art operating system for the Tandy Color Computer. Authors Dale L. Puckett and Peter Dibble show you how to take advantage of OS-9's multitasking and multi-user features, and the capability of redirecting input and output commands at will. An easy-to-read, step-by-step guide packed with hints and tips, tutorials and free software in the form of program listings.

Book \$19.95
Disk Package \$31 (2 disks, book not included)

The Second Rainbow Book of Adventures

This sequel features 24 of the most challenging Adventure games ever compiled. Meet the Beatles and battle the Blue Meanies, find a hidden fortune, or win the heart of a beautiful and mysterious princess. Experience the thrills and chills of the most rugged Adventurer without ever leaving your seat. *Ring Quest, Secret Agent Man, Dark Castle, Curse of Karos, Island* and more!

Book \$13.95, Tape \$13.95

The Second Rainbow Book of Simulations

The 16 winning programs from our second Simulation contest. Fly through the dense African jungle as a bush pilot, bull your way down Wall Street, lead the Rainbow City bomb squad, or try your hand at Olympic events. Test your skills and talents.

Book \$9.95, Tape \$9.95, Disk \$10.95

First

The Rainbow Book of Adventures

A collector's item containing 14 winning programs from THE RAINBOW's very first Adventure contest. Includes such favorites as *Sir Randolf of the Moors, Search for the Ruby Chalice, Deed of the York, Horror House, One Room, The Door* and *Dr. Avaloe*. Plus, hints and tips on solving Adventures.

Book \$7.95, Tape \$7.95

The Rainbow Book of Simulations

Features 20 award-winning entries from THE RAINBOW's first Simulation programming competition. You are the Commander-in-Chief of the Confederate Army during the Civil War, an air traffic controller at one of the nation's busiest airports, the owner of your own software business, a civil defense coordinator in charge of saving Rainbow City from a raging flood, a scientist conducting experiments on Mars . . . Your wits are on the line.

Book \$9.95, Tape \$9.95

Coming Soon

The Rainbow Guide to Introductory Statistics

I want to start my own Rainbow Bookshelf!

Please send me:

- The Rainbow Book of Simulations \$ 9.95 _____
- Rainbow Simulations Tape \$ 9.95 _____
- The Second Rainbow Book of Simulations \$ 9.95 _____
- Second Rainbow Simulations Tape \$ 9.95 _____
- Second Rainbow Simulations Disk \$10.95 _____
- The Complete Rainbow Guide to OS-9 (book only) \$19.95 _____
- Rainbow Guide to OS-9 Disk Package (2 disks) \$31.00 _____
- The Rainbow Book of Adventures (first) \$ 7.95 _____
- Rainbow Adventures Tape (first) \$ 7.95 _____
- The Second Rainbow Book of Adventures \$13.95 _____
- Second Rainbow Adventures Tape \$13.95 _____

Add \$1.50 per book Shipping and Handling in U.S.

Outside U.S., add \$4.00 per book

Kentucky residents add 5% sales tax

(Allow 6 to 8 weeks for delivery)

Total _____

Name _____

Address _____

City _____

State _____ ZIP _____

Payment Enclosed, or Charge to:

VISA MasterCard American Express



Account Number _____


Card Expiration Date _____

Signature _____

Mail to: Rainbow Bookshelf, The Falsoft Building, P.O. Box 385, Prospect, KY 40059.

Please note: The tapes and disks offered by The Rainbow Bookshelf are not stand-alone products. That is, they are intended to be an adjunct and complement to the books. Even if you buy the tape or disk, you will still need the appropriate book. OS-9® is a registered trademark of the Microware Systems Corporation.


TOM MIX'S MINI-CATALOG

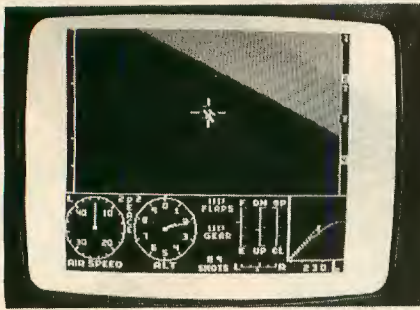

P-51 Mustang Attack/Flight Simulation

The ultimate video experience! Link two CoCo's together by cable or modem, and compete against your opponent across the table OR across the country! (Both computers require a copy of this program). The P-51 flight simulator lets you fly this WWII attack fighter in actual combat situations—against another player OR against the computer.


32K Machine Language
Flight Manual Included
Tape \$29.95 Disk \$34.95

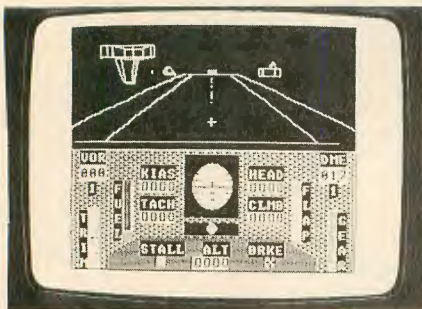

Worlds of Flight Small Plane Simulation

Real-time simulation generates panoramic 3-D views of ground features as you fly your sophisticated plane in any of nine different "worlds." Program models over 35 different aircraft/flight parameters. Realistic sound effects too! Manual included helps you through a typical short flight.

32K Machine Language
Flight Manual Included
Joysticks Required
Tape \$29.95 Disk \$34.95

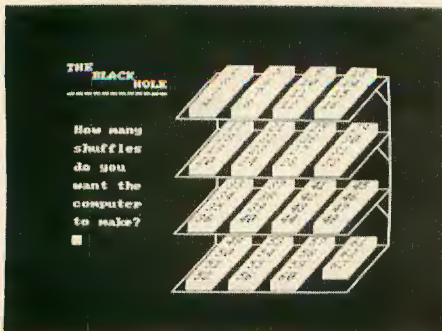

Educational Best-Sellers!

Teachers Database II—Allows teachers to keep computerized files of students. Recently updated with many new features!

- Up to 100 students, 24 items per student
- Many easy-to-follow menus
- Records can be changed, deleted, combined
- Statistical analysis of scores
- Grades can be weighed, averaged, percentaged
- Individual progress reports
- Student seating charts
- Test result graphs/grade distribution charts

64K TDBII \$59.95 Disk Only
32K TDBI \$42.95 Tape \$39.95

NOW AVAILABLE FOR IBM PC & COMPATIBLES—Holds information on up to 250 students with as many as 60 individual items of data for each. Contains the features listed above PLUS.

Requires 128K - \$89.95

Factpack—Three programs for home or school use provide drill and practice with basic "-/+/-/×" Grades 1-6.


32K Ext. Basic
Tape \$24.95 Disk \$29.95

Vocabulary Management System—Helps children learn and practice using vocabulary and spelling words. Eleven programs including three printer segments for tests, puzzles, worksheets and five games; many features make this a popular seller!

Requires 16K Ext. Basic/
32K for Printer Output
Tape \$39.95 Disk \$42.95

Fractions—A Three-Program Package. 1/Mixed & Improper 2/Equivalence 3/Lowest Terms. Practice, review and definitions make learning easy.

32K Ext. Basic
Tape \$30.95 Disk \$35.95

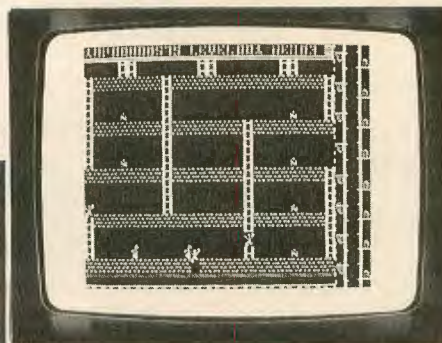

NEW RELEASE GOLD FINDER

Here's the quality you have come to expect from TOM MIX. Another outstanding color computer game. This one ranks right up there with "Donkey Kong". Listen to this: 69 levels for one or two players PLUS you can create your own levels (up to 306 on a disk). Endless possibilities await you in this exciting new creation. Move over Goldrunner and Loderunner, here comes GOLD FINDER. . .

32K & Joysticks Required
Disk \$27.95

**We Have More Software
Available Than Listed Here.
Please Write for a Free Catalog!**

NEW RELEASE THE BLACK HOLE

For anyone who enjoys solving a challenging logical puzzle, here is a 3-dimensional puzzle composed of 63 numbered cubes in a 4 by 4 by 4 array that leaves one BLACK HOLE. You tell the computer to sort the cubes and the computer tells you to put them in numerical order. A real brain bender. Outstanding color and action. Years of entertainment. . .

For IBM PC & Compatibles
\$24.95

More Tandy-IBM/PC software available.

Unique Utilities!

New! Use the tools we've used to create "Donkey King," "Sailor Man" and others!

- Full use of 64K RAM
- 100% Machine Language
- No ROM Calls
- Selectable Drive
- Support 1-4 drives
- Menu Selected functions
- "Cold Start" exit to Basic
- Parameters easily changeable in basic loader

MAS Assembler—the finest ever!
(Includes EDT)

Disk \$74.95

EDT—Effortless full screen editing w/2-way cursor. Text files to 48K+. Copy, save, move, delete, print blocks, much more!

Disk \$39.95

Deputy Inspector—Alphabetize, resort and backup directory; fast 3-swap backups, copy files or programs, auto-reallocate granules during backup for faster loading, more!

Disk \$21.95

Sector Inspector—Alphabetize, backup and print directory; repair crashes, LLIST basic programs, read in and edit 23+ grans, much more!

Disk \$29.95



TOM MIX SOFTWARE

P.O. Box 201
Ada, Michigan 49301
616/957-0444


Ordering Information

- Call us at 616/957-0444 for Charge Card orders
- Add \$3.00 postage and handling
- MI residents add 4% sales tax
- Authors—We pay top royalties!



Look What's New at NOVASOFT!

Top-quality software at affordable prices, written by well-known authors in 6809 Machine Language

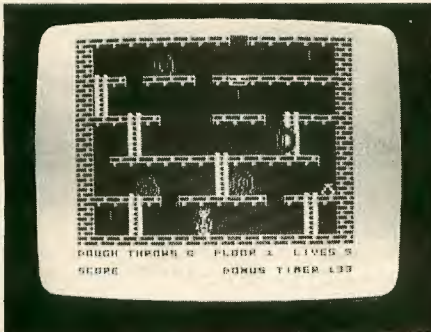

NEW RELEASE DONUT DILEMMA

Angry Angelo has raided Antonio's Donut Factory sending the entire complex amuck! Donuts have come alive and all the machines are out of control. You must reach floor 10, past the Fat Spurters, Cream Blasters and Berserk Bucket to name a few, and deactivate the power generator to restore law and order. But hurry! Time is running out!

Requires 32K

Tape \$21.95 Disk \$24.95



Maui Vice

Step into the shoes of Crockett & Tubbs, and gather evidence, photographs and witnesses to convict your suspects! With "windows" to select your options, hi-res graphics, and a new story generated each time you play. This is state-of-the-art that guarantees excitement and newness every time you play.

64K Ext. Basic & Joystick Required
Disk \$21.95

Other Best Sellers


The Misadventures of Eddie—Eddie is roaming through time creating havoc and you must bring him home! Over 140 locations, 50+ commands, hi-res graphic adventure. 64K Disk \$21.95

Brewmaster—Move along the end of the bars, serving beer to your thirsty customers. Fast-paced action. 32K & Joystick.

Tape \$14.95 Disk \$17.95

Martian Crypt—Life once existed on Mars! Find the hidden Martian crypt. Animated hi-res graphic adventure with sound effects.

32K Tape \$18.95 Disk \$21.95

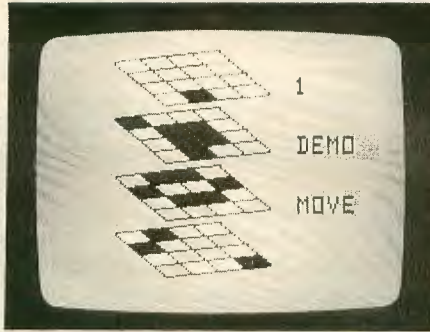


NEW RELEASE FOURCUBE

Now you can play TIC-TAC-TOE in 3D. The board consists of a 4x4x4 grid of cells. Pit your wits against the computer with six levels of difficulty or against your favorite opponent. Sound easy? Try it and you'll agree with us when we say its a "real challenge".

Requires 32K 1 or 2 Players

Tape \$15.95 Disk \$18.95

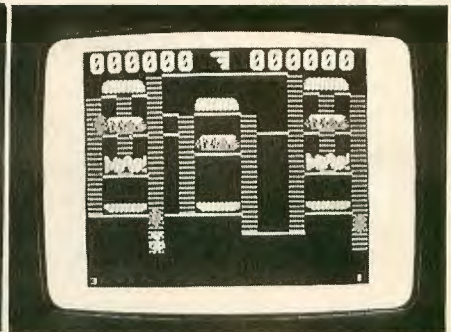

NEW RELEASE LUNCHTIME

Your chef, Peter Pepper, is surrounded! Dodge pickles, hot dogs, and eggs while building hamburgers. This high res game features 7 difficult levels of wild entertainment. Fast paced action for either one or two players. Have a Burger Time. . .

Requires 32K & Joysticks

Tape \$18.95 Disk \$21.95

Tom Mix Products at New Reduced Prices!

Sailor Man—Defeat the bigfatbadguy and win Elsie's heart. Super graphics.

64K Tape \$24.95 Disk \$27.95

Dragon Slayer—Defeat the dragon by finding your way through a mountain maze. Gather treasure but avoid the deadly traps! 160 exciting screens.

32K & Joystick or Keyboard
Disk \$24.95

The King—

32K Tape \$24.95 Disk \$27.95

Draconian—

32K Tape \$19.95 Disk \$22.95

Ms. Maze—

32K Tape \$19.95 Disk \$22.95

Kater Pillar II—


16K Tape \$19.95 Disk \$22.95

Warehouse Mutants—

16K Tape \$18.95 Disk \$21.95

Buzzard Bait—

32K Tape \$19.95 Disk \$22.95

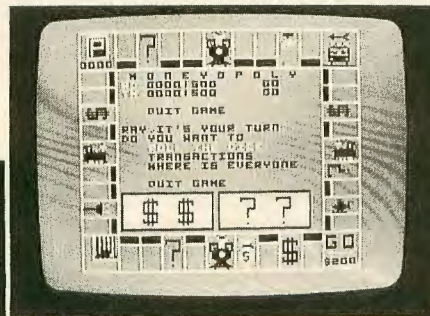

Moneyopoly

Play the popular board game on one of the most realistic computer game simulations ever! Contains all the features of the original. Buy, sell, rent, wheel & deal your way to fortune.

32K Joystick Required

Tape \$19.95 Disk \$22.95



Vegas Game Pak

Six games in all! Blackjack, Keno, Video Poker & 3 slot machine lookalikes. Super graphics!

16K Ext. Basic Required
Tape \$24.95 Disk \$27.95

NOVASOFT

A Tom Mix Company

P.O. Box 201
Ada, Michigan 49301
616/957-0444

Ordering Information

- Add \$3 shipping/handling
- MI residents add 4% sales tax
- Dealers welcome
- Many more titles—write for free catalog!

Credit Card Orders

Call 616/957-0444



● *Whenever I press the reset button on my CoCo 2, garbage appears on the screen and the computer crashes. Also, the click normally heard when reset is pressed is absent. What's wrong?*

Jeff Walker
Hudson, NC

The reset button is a hardware connection to the reset line of several devices inside your CoCo, the most important being the 6809E microprocessor. It sounds as if you are having trouble with this circuit. The type of switch you need depends on the version of CoCo 2 you have, Jeff. It is called S2 and the part number can be identified if you have a service manual for the version in question. There were several versions of the CoCo 2 produced.

You should hear two simultaneous clicks when the reset button is pressed. One is the switch and the other is the cassette relay. This is due to the fact that you are actually re-initializing the system.

● *About Melvin Halpern's letter concerning his Gemini 10 buffer [October 1986, Page 195], I experienced the same problem with my Gemini 10. I tried three commercial interfaces, all with the same results. I'm not sure what causes the problem. The computer updates the printer very slowly. It appears to be a problem in handshaking, or something in that area.*

However, the solution to the problem is on Page 202 of the November 1983 issue of RAINBOW. After building this interface, my Gemini 10 prints a file almost four times as fast as it did when using the commercial interfaces.

Jim Fodor
Warner Robins, GA

Thanks for the info, Jim. As the Gemini 10 is a very popular printer, I think several readers will benefit from your advice.

● *I'm having an unusual problem with my 'D' revision 64K Extended CoCo 2. It's lying to me! Somehow it has developed its own unique set of rules for mathematics. Within these rules it's very consistent in its answers to mathematical questions, except that these answers are as apt to be wrong as they are to be right. It makes no difference whether the calculation is in a program or entered directly, or if accessories are attached. Here is a simple example: PRINT 22.95-22.00 and the answer it gives is .950003.*

The problem becomes serious when a

relational test between two variables is made, and then the program branches, based on whether A<>. Example, the trial balance within a bookkeeping program. The books may balance perfectly, but CoCo says they don't!

Radio Shack says they can't find anything wrong. Do you, or any of your readers, know what could be causing the problem?

Ron Stanwood
Langley, British Columbia

Ron, it's been awhile since I have been in school, but I think you need to normalize your numbers. One of the shortcomings of not having integer math in BASIC is the fact that all numbers have to be normalized. By the way, my CoCo gives the same answer. One plus one is no longer two in the computer world.

It's not a problem, though. Try the following:

```
10 A=22.95-22.00
20 B=(INT(A*100+.5))/100
30 PRINT B
```

Line 20 is called normalizing and is required in all programs using integer math. There is really nothing wrong inside your computer other than the fact that math is done with algorithms that are correct to only so many decimal places.

● *I am learning machine language and I am now getting into graphics. I have had no trouble making simple routines like point-plotters or screen copiers, but I am having trouble with routines requiring complicated math like line and circle makers. Could you please tell me where the Extended Color BASIC line routine is, or at least how it is done? I really need help.*

I would also like to know if it is possible to switch only certain parts of ROM to RAM in a 64K machine. I can go to the all-RAM mode, but then I am unable to use the hardware addresses in \$FF00 to \$FFFF. How does one perform an interrupt request?

John-Paul Williams
Montclair, CA

Let's take the topics one at a time, John-Paul. First, we'll look at the Extended BASIC line routine. Drawing a line or a circle is a lot more complicated than it sounds because different graphics modes require different coordinates. I suggest *Extended BASIC Unraveled* by Spectral Associates. This commented disassembly of BASIC explains all of the steps necessary to make ROM calls for machine language programs. If you want to disassemble BASIC yourself, the line routine is at \$93BB. Keep in mind that it first checks to see if it's a LINE INPUT command.

You can still use the hardware addresses from \$FF00 to \$FFFF in the 64K mode.

This will also be the case for the CoCo 3, even though you will be able to switch in banks of memory in 8K increments. Keep in mind that this bank switching is only implemented using OS-9 Level II, or for graphics screens.

Interrupts will be a hot topic with the advent of the CoCo 3, and will be used extensively. An interrupt is an external signal to the microprocessor that stops the normal execution of a program, does something else for awhile, and then resumes normal program execution. There are several types of interrupts, both hardware and software, and they tend to speed execution of software because software polling is no longer necessary to find out what kind of external events are happening.

A good example is the software overhead required to see if a key is depressed. If this is set up as an interrupt type of event, no software is necessary until the key is depressed, generating a hardware signal to the microprocessor. Earlier CoCos did not have the hardware necessary to implement all types of interrupts. The GIME chip inside the CoCo 3 uses interrupts extensively. We'll keep you up to date as more information develops.

● *I have a 64K CoCo 2 and I seem to have a problem when I type in a program of some length. When I list the program it will list as if all the lines are there, but when I run the program I get a UL Error. When I try to list that line, the computer gives just the line number like it was never typed. The rest of the program is gone when I list it line by line, but when listing the whole program it seems to be there.*


Can you help me or tell me what is wrong?

Edgar Barr
Goldendale, WA

Edgar, it sounds as if you have an incorrect function call in your program that is overwriting some of your memory. Check all of the functions such as POKE, EXEC, etc., to see if the proper arguments are included, and whether they are correct.

Your technical questions are welcomed. Please address them to: Downloads, THE RAINBOW, P.O. Box 385, Prospect, KY 40059. We reserve the right to publish only questions of general interest and to edit for space and clarity. Due to the large volume of mail we receive, we are unable to answer letters individually.

Your technical questions may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick DELPHI MAIL, then type SEND and address TO: DANDOWNARD. Be sure to include your complete name and address.



PRINTER UTILITY

OS-9 Spooler: Print a File as a Background Task

By Stephen B. Goldberg

One of the first things I tried when I fired up OS-9 on my CoCo was printing a file as a background task (`list file >/p &`). What a disappointment that was! Each time a line was read from the disk and every time data was sent to the printer through the standard CoCo serial port, the computer hung up.

However, there is a printer utility, similar to one I saw described in a UNIX text, that permits background printing with just a bit of slowing of any other work. The program `lpr`, is not for use with a hardware serial port such as Tandy's or PBJ's but for the "plain vanilla" Color Computer RS-232.

The program consists of a buffer to hold text (cutting down on disk accesses) and its own routine to send characters directly to the printer, one at a time, without using the OS-9 printer device driver which hogs computer time.

The baud rate is automatically set by reading it from the device descriptor, `p`. The constants in the listing work for my computer and printer, and I imagine

that they should be OK for you, also. If your printer produces nonsense, juggle the values a bit. The slower baud rates are fairly tolerant, but at higher speeds, a change of one or two can make a big difference.

Don't be disturbed by the warnings you receive when you assemble `lpr`. The program directly addresses RAM locations, which OS-9 doesn't like. The program is not reentrant for the same reason (even though it says it is).

To use this program, type `lpr` followed by the name(s) or pathlist(s) of the file(s) you want printed, followed by an ampersand (&), which makes `lpr` run as a background task and returns the use of the computer to you while your file(s) print. For example:

```
lpr fileone filetwo & ENTER.
```

The default buffer size is about 4K. To reduce disk access to a minimum, make the text buffer as large as possible by using the `#` command line modifier. If you can, make it large enough to hold the entire file. Be sure to leave enough memory free to run whatever other program you want to use while your file(s) are being printed. For example:

```
lpr bigfile #20K & ENTER.
```

If you don't enter a filename after `lpr`

on the command line, the input is via the standard input path and data can be accepted from another program through a pipeline. For example, you can print the output of a text formatter:

```
form <texfile ! lpr & ENTER.
```

If you forget to use the ampersand, your computer will proceed with printing your file(s) but you will not be able to use it for any other programs. In this case, press CLEAR-C and the printing process will move to the background and control of the machine will be returned to you.

The only way you can terminate a background process is with the `kill` command. When you execute `lpr` using the ampersand on the command line, you will see the process ID number displayed on the screen after pressing ENTER. If you want to stop the program before it has finished printing, enter `kill` followed by the process ID number. If you have forgotten the process ID number, you can always find it by using the `procs` command.

That's about it. It makes life with CoCo OS-9 a bit more pleasant.

(You may direct questions about this program to Mr. Goldberg at 695 Plainview Road, Bethpage, NY 11714, 516-681-7209. Please enclose an SASE when writing.)

Steve Goldberg is a dentist and lives in Bethpage, N.Y. He was taught programming by his son Joe, a high school senior.

The listing: spooler

```
*****
*
* LPR - COPYRIGHT (c) 1985 by S. B. GOLDBERG
*
* PRINT SPOOLER FOR STANDARD COCO SERIAL PORT
*
* Use: lpr [filename] [...] &
*
* <program> ! lpr &
*
* lpr <filename &
*
* Use '#' modifier to enlarge buffer.
*
        ifpl
        use /d0/defs/os9defs
        endc
*
        mod len,name,prgrm+objct,reent+1,entry,dsiz
*
path      rmb      1      file path number
startbuf  rmb      2      starting address of buffer
endbuf    rmb      2      end address of text
bufsiz    rmb      2      size of buffer
pointer   rmb      2      filename pointer
count     rmb      2      delay constant
buffer    rmb      4000    buffer
           rmb      200    stack
           rmb      200    parameters
dsiz      equ      .
*
*
name      fcs      /lpr/
           fcc      /(c) 1985 S.B.GOLDBERG/
descript  fcc      /p /
*****
*
* BAUD RATE DELAY CONSTANTS
*
table     fdb      $0168    300 baud
           fdb      $00af    600 baud
           fdb      $0056    1200 baud
           fdb      $0029    2400 baud
           fdb      $0012    4800 baud
           fdb      $0007    9600 baud
*****
*
* DATA INITIALIZATION AND
* BUFFER SIZE CALCULATION
*
entry     clr      path      set to standard input path
           leay    buffer,u   starting address of buffer
           sty     startbuf   save it
           tfr     x,d      data area top
           subd   startbuf   subtract start of buffer
           subd   #200      subtract stack bytes
           std    bufsiz    save size of buffer
```

WE'VE OUTDONE OURSELVES!

DS-69A DIGISECTOR™ THE VIDEO DIGITIZER NOBODY CAN BEAT!

NEW

The DS-69A is the best video digitizer available for your COCO at any price. This new, turbocharged version of our original DS-69 Digisector allows your 64K COCO to see clearly into the world of any television picture.

- SPEED!** The fastest — 8 images per second!
- PRECISION!** The highest — 64 levels of true grey scale!
- RESOLUTION!** The finest — 256 × 256 picture elements!
- Compatibility** Use with a black and white or color camera, a VCR or tuner.
- Compactness** Self contained in a plug in Rompack.
- Convenience** Use with a Y-cable, Multi-Pak, PBJ Bus or plug directly into the cartridge slot.
- Ease of Use** Software on disk will get you up and running fast!

POWERFUL C-SEE™ SOFTWARE

C-SEE is the menu driven software package included with your DS-69A. Available on disk or cassette, it provides lightning fast 5 level digitizing to the screen, high precision 16 level digitizing for superb hard copy printout and simple keyboard or joystick control of brightness and contrast. Or call our driver routines from your own Basic program for easy 64 level random access digitizing. Pictures taken by the DS-69A may be saved on disk or cassette by C-SEE and then edited with COCO MAX, MAGIGRAPH or GRAPHICOM for special effects. Any of the popular printers may be used to obtain printouts of images digitized by the DS-69A.

ONE YEAR WARRANTY

- | | |
|--|----------|
| DS-69A Digisector & C-SEE III Software | \$149.95 |
| OR your DS-69 & | \$ 59.95 |
| MAGIGRAPH Graphics Editor on disk | \$ 39.95 |

*Coming Soon
for
CoCo 3*

DS-69 DIGISECTOR™ THERE'S ONLY ONE BETTER VIDEO DIGITIZER...

And that's the DS-69A. The DS-69 is The Micro Works' original video digitizer, tried and true since 1984. It provides almost all the features of the DS-69A and is now available at a new low price. The DS-69 features;

- SLUGGISHNESS** 2 images per second. Quick enough to freeze all but the fastest moving pictures.
- INCOMPATIBILITY** Brightly colored scenes may be striped when using a color camera.
- INCONVENIENCE** Will not work with a Y cable.

Otherwise, it's a DS-69A. Precision, resolution, compactness, ease of use, software and warranty. Except one last thing.

- | | |
|---------------------------------------|----------|
| DS-69 Digisector & C-SEE III Software | \$ 99.95 |
|---------------------------------------|----------|

Superb image quality produced by both Digisectors.



Printout



Screen



Screen

NO RISK GUARANTEE

If you are not completely satisfied with the performance of your new DS-69A or DS-69 you may return it, undamaged, within ten days for a full refund of the purchase price. We'll even pay the return shipping. If you can get any of our competitors to give you the same guarantee, buy both and return the one you don't like. We know which one you'll keep.

Prices Change
Every Day.
Please Call
1-800-343-8841
For Lower Prices

DEALER
INQUIRIES
INVITED

PRICE

Announcing MEGADISK PLUS +

Complete Systems! for the TRS 80 Model I/III/IV/4P, **COLOR COMPUTER**, IBM-PC & AT, Max/80
Software Drivers: LDOS, NEWDOS/80, DOSPLUS, TRSDOS 6.x, CP/M



Drive a 5 to 40 Megabyte Hard Bargain Starting at \$399.95
REMOVEABLE CARTRIDGE Systems Now Available!!!

MEGAPLEX your Megadisk — 2 to 10 Port Systems
Prices Start at a LOW \$199.95
Models III/ IV 4P

Call Toll Free Ordering 1-800-343-8841



\$279.95
Disk Drive Upgrade Kit for Model III/IV easy to install system—no soldering. Complete with controller, towers, power supply, 1 Half High Disk Drive, cables, and easy to follow instructions. Second Drive \$99.95

Now Dual Sided Drives



COLOR COMPUTER
Drive 0 & 1 dual sided drive with our special driver (one dual sided drive) RSDOS or J&M \$219.95.

CANADIAN CUSTOMERS PLEASE CALL 514-383-5293

Micro Smart Inc.

**300 Homer Avenue
Ashland, MA 01721
1-617-872-9090**

Hours: Mon.-Fri. 10 am to 5:30 pm (est) Sat 4:00 pm

Toll Free Ordering 1-800-343-8841
Dealer Inquiries Invited

TERMS and CONDITIONS:

All prices are cash discounted. However, we do accept MC, VISA, AMEX & DISCOVER credit cards. C.O.D.'s are accepted—No deposit required. Purchase Orders—Corporate, Government & School P.O.'s are accepted. Please call for details. Shipping Costs are calculated per order. Please call for total. Shipments of all in-stock products are made within 24 hours. Same day service is available upon request — no added cost. Not responsible for typographical errors. Terms and Specifications may change without notice.

Service & Returns: It is our policy to repair all service returns within 24-48 hours. Normally same day turn-around is accomplished. It is necessary to have a (R)eturn (M)aterial (A)uthorization to insure speedy service. IBM, TAVA, COLUMBIA, 5151, COMPAQ, EAGLE, TRS/80, HEATH/ZENITH are registered trademarks of IBM Corp., Tava Corp., Columbia Computer Corp., Key Tronics Corp., Compaq Corp., Eagle Computer, Tandy Corp., Zenith Corp., respectively.

1986 MicroSmart, Inc. All rights reserved.

BREAKTHROUGH

**DEALER
INQUIRIES
INVITED**

Prices Change
Every Day.
Please Call
1-800-343-8841
For Lower Prices

MEGADISK™ HARD DISK DRIVE SYSTEMS

TOLL FREE ORDERING 1-800-343-8841

For the **IBM/PC, Tandy 1000, TRS/80 Models I/III/IV/4P, Compaq, Tava, PC Workalikes, Color Computers, Heath/Zenith, Max/80**
Complete with Hardware, Cables, Software and Quikfit Installation

5-15 Megabytes Removable Internal Mount IBM/Tandy 1000	Starting at \$399.95
11 Megabytes Internal Mount IBM/Tandy 1000	starting at 349.95
24-33 Megabytes Internal Mount IBM/Tandy 1000	starting at 449.95
5-15 Megabytes Removable External System IBM/Tandy 1000	starting at 524.95
10 Megabytes External System	starting at 549.95
20 Megabytes External System	starting at 699.95

**WOW! NEW LOW PRICES
IMMEDIATE DELIVERY***

DOS Drivers: IBM/Heath — DOS, 1.0, 2.0, 2.1, 3.0, 3.1 or later
TRS/80-LDOS, TRSDOS 6.x, Newdos/80, Dosplus, CP/M, COCO DOS, Max/80 LDOS, OS9

FULLY WARRANTED — PARTS AND LABOR — CALL TOLL FREE - 1-800-343-8841

FLOPPY DISK DRIVES, POWER SUPPLIES AND CABINETS

Our Disk Drives are UL approved — Our Floppy Drive Cabinets and Power Supplies are Underwriters Laboratory Listed and have passed the required Federal Communications Part 15 Section B-EMI/RFI tests.

Warranty on all disk drives is one full year parts and labor. Warranty on floppy disk drive power supplies is five (5) years. In warranty or out of warranty service is 24 hour turn-a-round on all disk drives and power supplies.

Specially Priced Dual Sided Drives

Dual Sided 40 tk Bare	109.95
In Case with Power Supply	149.95
Dual Drives in One Cabinet	259.95

Apple/Franklin Disk Drives	
35/40 Track in Case with Cable and Software	129.95

TURBO-M™ PC

**CALL
TOLL FREE ORDERING
1-800-343-8841**

Trademark of Micro Smart, Inc.

**40 Track Dual Head with Case, Power Supply, Cable Controller,
Instruction Booklet, Special Software** 219.95
Above with Dual Drives in One Cabinet 319.95

CALL FOR MODEM SPECIALS
Modem Special 300/1200..... \$149.95

*ALL IN-STOCK ITEMS SHIPPED WITHIN 24 HOURS. SAME DAY SHIPPING
PROVIDED BY REQUEST WITHOUT ANY EXTRA HANDLING CHARGES.

PRINTERS

Dot Matrix	\$ Call
Citizen	
Star Micronics—N.X. Series	starting at \$299.95
Daisy Wheel	
Silver Reed 440 80 Column 12 CPX	315.95
550 132 Column 19 CPS	439.95
770 132 Column 36 CPS	895.00
Olympia 132 Column 14 CPS WITH Form and Tractor Feed	399.95
Printer Cables	starting at 9.95
Printer Paper — Microperf Edge 1000 Sheets	16.95

ELECTRICAL

Surge protectors-Line Filter-6 Outlets with Switch	\$29.95
Uninterruptable Power Supplies	399.95

MISCELLANEOUS

Diskettes in 10 Pack	from \$7.95
Two print switches	from 49.95
Disk Drive Cables	from 16.00
Maintenance Cleaning Kits	12.00
Parallel Printer Buffers 8K	149.95
Floppy Disk Drive Cables	
1 Drive	16.00
2 Drives	18.95
Heath/Zenith 2 Drive Cables — Shielded	24.95

Micro Smart Inc.

**200 Homer Avenue
Ashland, MA 01721
1-617-872-9090**

Hours: Mon-Fri, 10 am to 5:30 pm (est) Sat 4:00 pm
Toll Free Ordering 1-800-343-8841
Dealer Inquiries Invited

TERMS and CONDITIONS:

All prices are cash discounted. However, we do accept MC, VISA, AMEX & DISCOVER credit cards. C.O.D.'s are accepted-No deposit required. Purchase Orders-Corporate, Government & School P.O.'s are accepted. Please call for details.

*Shipping Costs are calculated per order. Please call for total.

Shipments of all in-stock products are made within 24 hours. Same day service is available upon request — no added cost. Not responsible for typographical errors. Terms and Specifications may change without notice.

Service & Returns: It is our policy to repair all service returns within 24-48 hours. Normally same day turn-a-round is accomplished. It is necessary to have a (R)eturn (M)aterial (A)uthorization to insure speedy service.
IBM, TAVA, COLUMBIA, 5151, COMPAQ, EAGLE, TRS/80, HEATH/ZENITH are registered trademarks of IBM Corp., Tava Corp., Columbia Computer Corp. Key Tronics Corp., Compaq Corp., Eagle Computer, Tandy Corp., Zenith Corp., respectively.

1986 MicroSmart, Inc. All rights reserved
TURBO M™ of MicroSmart Inc.

```

*****
*
* FIND BAUD RATE AND SET DELAY
*
      pshs  x   save parameter pointer
      leax  descri,pcr  device descriptor name
      clra  any type or language
      os9   f$link  link to descriptor
      bcs   out    exit with error
      ldb   39,u   get baud rate
      decb  adjust value
      aslb  for table offset
      leax  table,pcr  constant table address
      ldd   b,x   get delay constant
      std   count  save it
      puls  x   retrieve parameter pointer
*****
*
* CHECK FOR PARAMETER
*
      lda   ,x   parameter character
      cmpa  #$0d  parameter present?
      beq   read  no, read from standard input path
*****
*
* OPEN FILE FOR PRINTING
*
open   lda   #read.  read mode
      os9   i$open  open file
      bcs   out    exit with error
      sta   path    save file path number
      stx   pointer  save pointer to next filename
*****
*
* READ FILE INTO BUFFER
*
read   ldy   bufsiz  size of buffer
      lda   path    input path number
      ldx   startbuf  start address of buffer
      os9   i$read  read block into buffer
      bcs   error   branch on error
      tfr   y,d    length of block in buffer
      addd  startbuf  add starting address
      std   endbuf  save end address
      tfr   x,y    start of buffer to 'Y' register
*****
*
* OUTPUT CHARACTERS TO PRINTER
*
write  lda   $ff22  get printer status
      asra  printer busy?
      bcs   write  yes, check again
      pshs  cc    no, save condition codes
      orcc  %#01010000  mask interrupts
      clr   $ff20  start bit to printer
      bsr   wait  delay
      ldb   #8    bit counter

```

```

outchar lsr ,y get data bit
rola put in correct
rola position for output
sta $ff20 send out bit
bsr wait delay
dec b last bit?
bne outchar no, send next one
lda #2 stop bit
sta $ff20 out to printer
bsr wait delay for two
bsr wait stop bits
puls cc retrieve condition codes
leay l,y address of next character
cmpy endbuf last character?
beq read yes, get next block
bra write no, send next character to printer

```

*

* ERROR CHECK

*

```

error cmpb #e$eof end of file?
bne out no, exit with error
tst path standard input path?
beq noerr yes, exit program
lda path no, get input path number
os9 i$close close input file
ldx pointer get parameter pointer
lda ,x get next parameter character
cmpa #s$d another parameter present?
bne open yes, open next file
noerr clrb no, clear error flag
out os9 f$exit quit LPR

```

*

* BAUD RATE TIMING LOOP

*


```

wait ldx count delay count
waitl leax -1,x done?
bne waitl no, count some more
rts yes, go back
emod
len equ *
end

```

CANYON COUNTY DEVICES

P.O. BOX C
SAUGUS, CA. 91350



Precision™

Mfg. by Xidex/Dysan
High Quality at low
cost DSDD 5 1/4" Disks
10 per box. \$9.90/bx
3-9 10 up
\$9.20 \$8.40

Generic DSDD 5 1/4" Disks. \$56. per box
63¢ each 30 for \$18. of 100.

Voice Line
(818)904-1398

Data 300 Baud
(805)253-0221

Add \$1.50 on orders
less than \$20.00.
Add \$1.50 for CODs.
Calif. Sales Add
6.5% Tax.

DEALER INQUIRIES
INVITED

PRINTER RIBBONS

Catalog#	Description	1 - 5	6 - 11	12 up
101-1505	C. Itoh Prowriter I&II (Nylon)	\$ 5.05	\$ 4.65	\$ 4.35
101-2240	Epson LX80 (Nylon)	\$ 5.95	\$ 5.45	\$ 5.15
101-2250	Epson MX/FX/RX 70/80 (Nylon)	\$ 4.95	\$ 4.55	\$ 4.30
101-4505	Gemini 10/10X/15/15X (Nylon)	\$ 2.20	\$ 2.00	\$ 1.99
101-4970	Gorella Banana (Nylon)	\$ 6.60	\$ 6.15	\$ 5.95
101-4320	NEC Spinwriter 5500/7700(Nylon)	\$ 5.50	\$ 5.05	\$ 4.75
101-4505	Okidata(Microline) 80/82/83/92/93(Ny)	\$ 2.20	\$ 2.00	\$ 1.90
101-4515	Okidata(Microline) ML84 (Nylon)	\$ 5.15	\$ 4.70	\$ 4.45
101-4700	Panasonic KX-P1090/91/92 (Nylon)	\$11.15	\$10.45	\$10.10
101-4950	Radio Shack LP VI/VIII(Nylon)	\$ 5.80	\$ 5.30	\$ 5.00
101-4970	Radio Shack LP VII (Nylon)	\$ 6.60	\$ 6.15	\$ 5.95
101-4615	Silver Reed EXP 400/500/550/770(Ny)	\$ 5.85	\$ 5.20	\$ 5.05

101-1505 C. Itoh Prowriter I&II/Apple Imagewriter
Box of 5 colors (Red,Green,Yellow,Blue,Brown) \$25.75/bx
101-4505 Okidata 80/82/83/92/93 Box of 5 Colors
Gemini 10/10X/15/15X (Red,Green,Yel,Blue,Brown) \$12.50/bx

Ribbons for most printers are available. Write for catalog or call on the Data Line. Quantity discounts available in larger quantities. OK to mix ribbons for quantity prices (Minimum 6 per Type). ALL GUARANTEED

BARDEN'S BUFFER

The BASIC PSET and Graphics Display Speeds

By William Barden, Jr.
Rainbow Contributing Editor

At one of the computer shows I attended recently, I saw a graphics display by Evans and Sutherland. It showed, in real time, a Harrier Jump Jet landing on a battle zone highway, taking off, and then overflying the area. The image was terrific — almost the same resolution you'd get from extended play low resolution mode on a VCR. Scenery, buildings and other features were continually updated and displayed on the screen, creating a scenario that made Sublogic's *Flight Simulator* look very crude. Let me hasten to add that I'm a big fan of *Flight Simulator* — I've flown between the World Trade Centers many times and put a number of dents in the Sears Tower with the Cessna 182. But the two displays are worlds apart. What's the answer? Why can't we get graphics like the Evans and Sutherland display on systems such as the CoCo?

There are several reasons. Although the CoCo 3 is a fast system, its graphics will not be fast enough. What is fast enough? As you might guess, there is no upper limit to the rate at which we'd like to update the screen. In this column we'll take a look at how fast graphics are, why they aren't faster, and what we can do about speeding them up. We'll provide a little assembly language subroutine that's 2½ times as fast as the one in BASIC, which might help you plot as well as the Borgias. We'll also show you how we developed the subroutine. Unfortunately, we'll also tell you what went wrong with the design so that the program is not a good one to call from BASIC.

Bill Barden has written 27 books and over 100 magazine articles on various computer topics. His 20 years experience in the industry covers a wide background: programming, systems analyzing and managing projects ranging from mainframes to microcomputers.

An Inefficient Screen

It's unfair to compare an Evans and Sutherland graphics system to a small computer's graphics capability. Evans and Sutherland builds its system around dedicated hardware — graphics functions such as drawing lines and figures are done with the help of high-speed electronics at nanosecond (billionths of seconds) rather than microsecond (millionths of seconds) response times.

The CoCo and other systems, the IBM PC, the Tandy MS-DOS machines, and other small computers, use "raster-scanned" graphics. The video display is updated like a television set's display by sweeping the light beam across the face to draw 525 horizontal lines. There are other types of displays that draw "vectors" on the screen as required — an oscilloscope is a simple form of this type of screen display. However, we're stuck with the raster scan display — actually an excellent choice, as the costs of the system can be kept low with this type of screen display.

The raster can update the screen with a complete frame 30 times a second. This is enough of a continuous update to provide a flicker-free picture. Ideally, then, we're shooting for updating graphics on the screen 30 times a second. However, even lower update rates, a few times per second as in the *Flight Simulator*, can provide a good simulation of movement.

The raster scan is updated from a graphics memory buffer, called graphics or text "pages." The current graphics or text page is an area of memory set aside that the graphics electronics in the computer continually read to update the display. Depending upon the graphics/text mode, several different types of mapping are used. In CoCo graphics displays, the two most common types of maps are one-bit and two-bit mapping, shown in Figure 1.

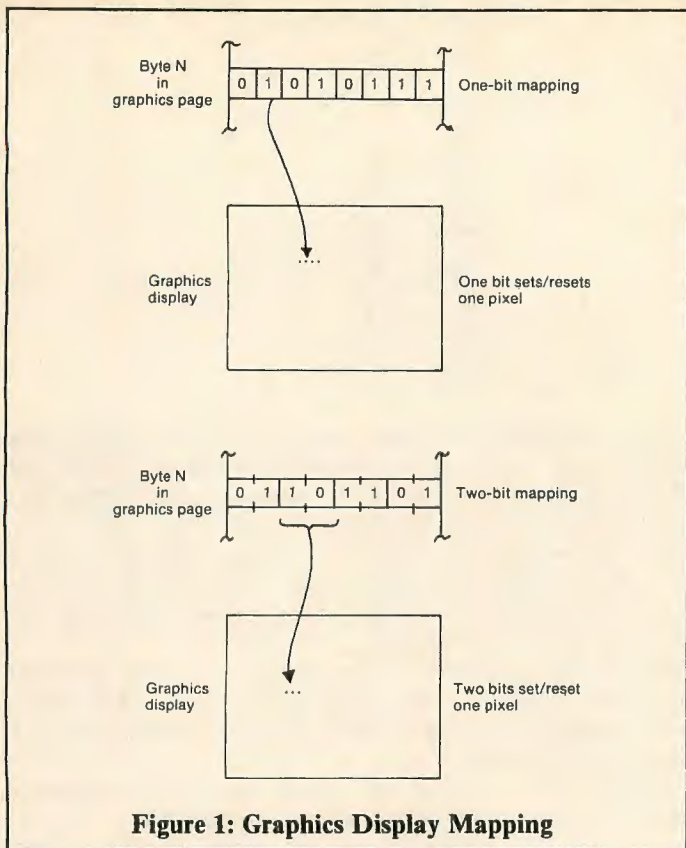


Figure 1: Graphics Display Mapping

In one-bit mapping, each bit in the graphics memory corresponds to one pixel, or picture element, on the screen. If PMODE 4 is being used, the resolution of the picture on the screen is 256 horizontal elements by 192 vertical elements, each element having a corresponding bit in memory. Now 256 by 192 is 49,152 pixels or 49,152 bits. Since there are eight bits per byte, a 256-by-192, single-color mode takes 49,152/8 bytes, or 6,144 bytes in the graphics memory area. Each bit is either a 0 or 1, standing for one of two colors.

In two-bit mapping, every two bits represent one pixel on the screen. The possible permutations of two bits are 00, 01, 10 and 11. These four codes represent four different colors. Although the CoCo 2 *could* have a four-color, 256-by-192 mode, it does not. The maximum resolution four-color mode is PMODE 3, 128 by 192 pixels. Since 128 by 192 is 24,576 pixels, and because each pixel takes up two bits in memory, the number of bits is again 49,152 and the number of graphics memory bytes is 6,144.

The CoCo 3, of course, has a much greater resolution — 640 by 192 in four colors — requiring 640 * 192 * 2 = 245,760 bits or 30,720 bytes! More on the CoCo 3 when they become commonplace.

Bit Tweaking

All graphics display speeds boil down to one thing: how fast bits can be set and reset in the video memory (graphics page). As you know, 6809 instructions are oriented towards bytes and doublebytes (words). Data can be moved around from 6809 registers to memory and back again in chunks of one or two bytes (memory transfers are one byte at a time, but may occur twice for 16-bit operands). However, it's not as easy to manipulate bits. There is one "bit" instruction, appropriately called BIT, but all it does is test whether a bit in a memory byte is a 0 or 1. It would be nice to be able to set or reset a bit in a memory byte with one instruction. This is not to be, at least with the current version of the 6809. About the best we can do is:

```
LDA  VIDMEM  5
ORA  #80     2
STA  VIDMEM  5
```

These three instructions load Register A with a byte from video memory, set one bit (the most significant bit), and store the changed byte back again. In two-color, 256-by-192 mode, this would set one pixel on the screen.

How long do these instructions take? To find out, look in Appendix II of *TRS-80 Color Computer Assembly Language Programming*. The execution speeds of each instruction are given in cycle times. A cycle time is just a fixed clock pulse width (in the CoCo 2 it's 1.12 microseconds). The total cycles required in the three instructions are 12 cycles, or 13.4 microseconds. Of course, the previous code is not the whole story. We need more generic instructions to allow any byte in video memory to be accessed, and any bit within the byte to be set. Here's a more realistic code segment:

```
PSET  LDX    BYTE    6
      LDA    ,X      4
      ORA   MASK    5
      STA   ,X      4
      RTS                               5
BYTE  RMB    2
MASK  RMB    1
```

This code makes up a complete subroutine. To set a pixel on the screen (in 256-by-192 mode), locations BYTE and BYTE+1 are loaded with the address of the screen byte to be accessed and Location MASK is loaded with the "mask" of the bit to be set — \$80, \$40, \$20, \$10, \$08, \$04, \$02 or

BASIC COMPILER

WASATCHWARE believes that users of the Color Computer deserve the right to use all 64k of RAM that is available in the computer, and have fast machine language programs that use the full potential of the 6809 microprocessor. That is why the BASIC compiler, called **MLBASIC** was developed. Here are some of the reasons that make this compiler one of the best bargains in this magazine:

- Use all 64k of RAM for program storage and/or variables
- Full Floating Point arithmetic expressions with functions
- Full sequential and direct access disk files allowed
- BASIC source and M.L. output I/O to disk, tape or memory
- Many new commands that expand your programming capability

Commands Supported

1. I/O -Commands
CLOSE CLOADM CSAVEM DIR DRIVE DSKIS DSKOS FIELD FILES
GET INPUT KILL LSET OPEN PRINT PUT RSET USING
2. Program Control Commands
CALL END EXEC FOR STEP NEXT GOSUB GOTO IF
THEN ELSE ERROR ON..GO RETURN STOP SUBROUTINE
3. Math Functions
ABS ASC ATN COS CVN EOF EXP FIX INSTR
INT LEN LOG LOC LOP PEEK POINT PPOINT RND
SGN SIN SQR TAN TIMER VAL
4. String Functions
CHRS INKEYS LEFTS MIDS MNMS RIGHTS STRS STRINGS
5. Graphic/Sound Commands
COLOR CLS CIRCLE DRAW LINE PAINT PCLEAR PCLS PLAY
PMODE PRESET PSET RESET SCREEN SET SOUND
6. Other/Special Commands
DATA DIM LLIST MOTOR PEEK READ REM RESTORE RUN
TAB VERIFY DLD DST IBEHFT LREG PCOPY PMODE PTY
REAL SREG SWP VECTD VECTI

64 K REQUIRED

MLBASIC Disk - \$59.95
MLBASIC Tape - \$59.95
MLBASIC Disk & Tape - \$64.95

SALE

Sale prices end December 31, 1986

Include \$4.00 Shipping and Handling
Utah residents add 5.75 % tax
Check or Money Orders Only (No C.O.D.)



WasatchWare 7350 Nutree Drive
Salt Lake City, UT
CALL (801) 943-6263 84121

(See our other ad in this magazine for more details on the BASIC Compiler, MLBASIC)

Write us for more details on an ENHANCED version of MLBASIC for the COCO 3

\$01. There are 24 cycles here (26.9 microseconds). With this code it's possible to update an entire 256-by-192, two-color screen in $49,152 * 26.9$ microseconds, or about 1.3 seconds.

Of course, there are some variables. If we want to clear a horizontal line, we can just store a \$00 or a \$FF in a single byte to handle eight pixels at one time, thereby increasing the speed by a factor of eight. Also, we may not want to update all of the pixels on the screen — perhaps only one quarter of the screen is being changed between frames — this increases the screen update rate by a factor of four. In general, though, setting any point will probably take no less than 26.9 microseconds. This means that we're stuck with an update rate of about .76 full screens, 1.5 half-filled screens, or three quarter-filled screens per second in real time, nothing approaching the Evans and Sutherland graphics.

About the only way to speed up the graphics is to sequentially display previously generated graphics data. You could, for example, load in 6,144-byte images from disk at a rate of 5 per second (the data transfer rate from disk is about 31,000 bytes per second and the screen can be updated at this rate with block moves). However, this would not be real time and you couldn't easily make the program interactive. (You could have sets of images on a hard disk, I suppose, but even a 10-megabyte hard disk could only hold 1,627 frames worth of 6,144-byte data — about seven minutes at 4 frames per second.)

How Microsoft Does It

With these discouraging limitations behind us, let's see how fast the BASIC PSET is. Here's some BASIC code to measure it:

```

100 SCREEN 1,0
110 PMODE 4,1
120 PCLS
130 TIME1 = TIMER
140 FOR X=0 TO 255
150 FOR Y=0 TO 191
160 PSET (X,Y)
170 NEXT Y
180 NEXT X
190 TIME1 = TIMER - TIME1
200 IF TIME1 < 0 THEN TIME1 = 65536 + TIME1
210 PRINT "TIME="; TIME1/60

```

The time required to clear the screen by vertical columns is 248 seconds. Obviously, though, some of this time is spent in the "overhead" of the BASIC loop. How much? Substituting this statement deletes the call to PSET with an approximately equivalent statement:

```
160 X=X
```

The time now required is 150 seconds. Subtracting the two results gives about 98 seconds for the time of the PSET action itself, for 49,152 points, or about 2,000 microseconds (2 milliseconds = 2/1000th second) per point! Other tests bear this figure out.

The question now must be: Why does the BASIC PSET take 2,000 microseconds per point when the assembly language example we gave takes only 26.9 microseconds per point?

The answer lies in the Microsoft code for PSET:

```

$92A6 PSHS    U,B
      LDB    BYTESR
      LDA    YCOORD
      MUL
      ADDD   PAGEST
      TFR    D,X
      LDB    XCOORD
      LSRB
      LSRB
      LSRB
      ABX
      LDA    XCOORD
      ANDA   #7

```

```

LDU    #MSKTAB
LDA    A,U
PULS   PC,U,B
.
.
.
$9377 LDB    ,X
      PSHS  B
      TFR  A,B
      COMA
      ANDA ,X
      ANDB COLOR
      PSHS  B
      ORA  ,S+
      STA  ,X
      SUBA ,S+
      ORA  FLAG
      STA  FLAG
      RTS

```

The two parts of the code appear at locations \$92A6 and \$9377 in my ROM. It was disassembled by Z-BUG in *ED TASM+* and modified slightly to include symbolic references to variables. Other ROM versions should have this code at about the same locations. It is not the complete PSET code, but performs the basic operation of computing the byte location of the pixel, finding the pixel mask, and setting the pixel. Here's how it works:

The first portion of the code computes the address of the byte containing the pixel and leaves this address in Register X. Also computed is the bit mask to use within the byte, which is stored in Register A.

The second portion of the code actually accesses the byte and uses the bit mask to set or reset the proper bit.

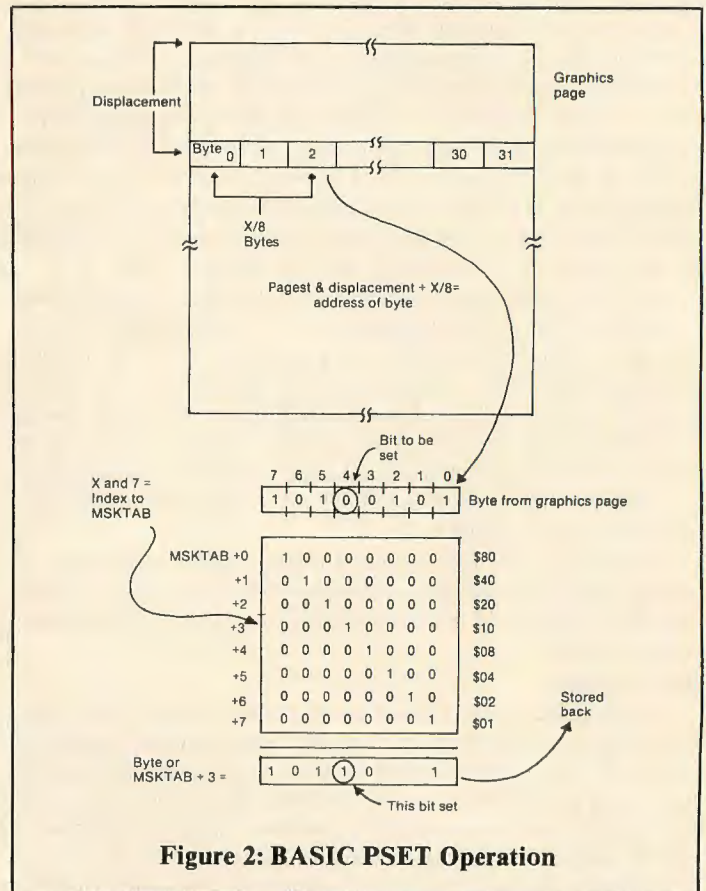


Figure 2: BASIC PSET Operation

In the first portion, the U and B registers are first saved in the S Stack. This is standard for any registers that will be used in a subroutine. The registers are restored at the end of the subroutine.

Register B is then loaded with BYTESR, a variable representing the number of bytes per screen row. This varies

with the PMODE. For the 256-by-192 case it's 32 bytes — eight bits per byte for 32 bytes gives a complete row of 256 bits.

The Y coordinate YCOORD is now loaded into Register A and the number of bytes per row is multiplied by the value of the Y coordinate. The result is the displacement of the row in bytes from the start of the graphics page, as shown in Figure 2. Adding the beginning address of the current graphics page (PAGEST) now points to the 32-byte row containing the pixel, as shown in the figure. This address is transferred to Register X.

The X coordinate XCOORD is now loaded into Register B. Three LSRBs divide this value by eight to find the byte displacement from the start of the row 0 - 31. This value is added to X by an ABX. X now points to the byte containing the pixel as shown in Figure 2. The X coordinate is now loaded into A and ANDed with 7. The result is 0 to 7, and defines the bit in the byte that is to be set or reset. The bit mask value is loaded from the mask table (MSKTAB) by using the contents of A as an index value (LDA A,U). The bit mask table has entries of \$80, \$40, \$20, \$10, \$08, \$04, \$02 and \$01, reflecting the proper bit to be set or reset within the byte. A PULS PC,U,B now restores the U and B registers and returns from the subroutine.

The second part of the code uses the address in X and the bit mask in A to obtain the byte, AND out the proper bit(s), OR in the new color for a set or reset, and set a change flag if the graphic byte is unchanged. The crux of the operation is the OR, overly complicated here because more than one PMODE is handled by the routine.

There's no question that this code is neat, good code. However, because the PSET must handle different PMODEs and colors, the code is much longer than necessary for a special 256-by-192 case. Most importantly, the code in the complete PSET (not shown) has a great deal of overhead for syntax checking and argument evaluation as well. A figure of 2,000 microseconds per point is about 300 instructions for each PSET, but it's easy to see where this time is spent! Unfortunately, I didn't consider all of the aspects of this syntax checking and argument evaluation when I first looked at the problem, but more about that soon.

Rolling Your Own PSET

Considering the time that PSET takes in BASIC, it certainly seems that we should be able to implement our own assembly language subroutine to duplicate the action of PSET or PRESET at a much faster rate. We are not burdened by the overhead functions of syntax checking and would not have to spend time in finding the arguments either (at least that was my original theory and it's partially true).

What would be the absolute fastest code to set a point on a 256-by-192 element screen? One way that came to mind was to use a table of 49,152 addresses, each address corresponding to the screen location of the byte containing the pixel involved (see Figure 3). As each address would have to be two bytes, the table would be 98,304 bytes long. In addition to the address table, we'd have a mask table of 49,152 entries, each entry a single byte in length, and corresponding to the proper bit mask for a given X, Y. However, the size of the tables exceeds the addressing range of the 6809! Even with an extended addressing range, the displacement from the table start would exceed the maximum 16-bit value — a Y,X of \$A080 representing Y,X = 160, 128, for example, would require a displacement address of \$14100 (remember, there

are two bytes per entry). This is a pity, as it would make for a fast PSET, something like:

```

PSET      LDD      YX      get Y,X values
          ADD      YX      x 2, but possible overflow!
          TFR      X        save in X - may be too large
          CLRA     zero A
          LDB      X        X now in D
          TFR      D,Y      save in Y
          LDA      [ADDTAB,X] get byte
          ORA      [MSKTAB,Y] set bit
          STA      [ADDTAB,X] restore
          RTS
          return
  
```

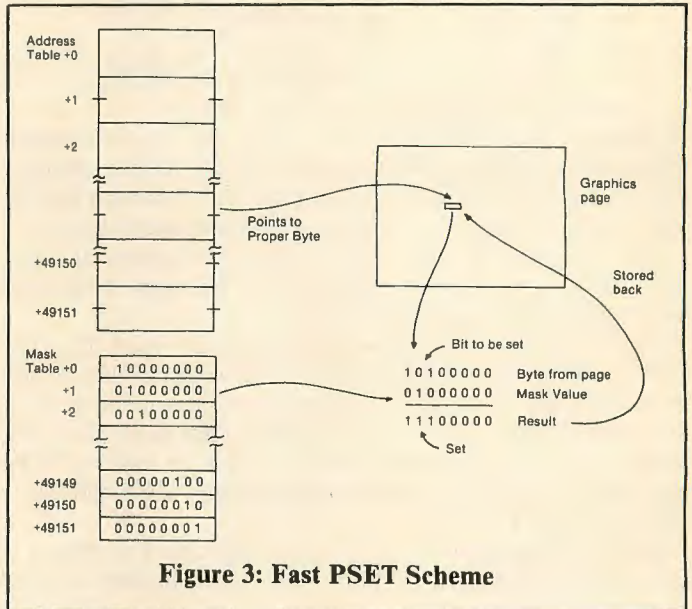


Figure 3: Fast PSET Scheme

Outside of taking a horrendous amount of memory, and the fact that it doesn't work, it's a good idea for systems like the CoCo 3 with 512K bytes of cheap memory. Maybe a modification of splitting the address table into two parts would work.

What about a modification with a more manageable table?

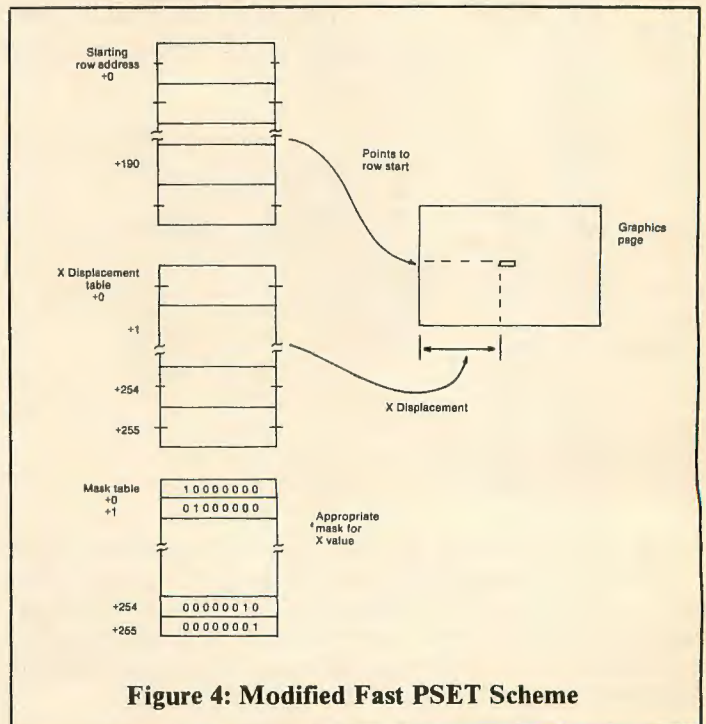


Figure 4: Modified Fast PSET Scheme

If we had a table containing the addresses of all of the starting rows, a second table for the displacements for an X within

the row, and a third table for the mask for every X, we could use this code to do the PSET:

```

PSET  LDD  XLOC      get X location
      ADDD XLOC      times 2
      TFR  D,X       now in X
      LDD  YLOC      get Y location
      ADDD YLOC      times 2
      TFR  D,Y       now in Y
      LDD  YTAB,Y    get starting row address
      ADDD XTAB,Y    add in X displacement
      TFR  D,Y       now in Y
      LDA  ,Y        get byte
      ORA  MSKTAB,X  set bit
      STA  ,Y        restore byte
      RTS                    return
XLOC  RMB  2        two bytes - X in second
YLOC  RMB  2        two bytes - Y in second

```

The table arrangement is shown in Figure 4.

However, this code uses a lot of double-length operand instructions — lots of LDDs and ADDDs. The total number of cycles here is about 85, making the subroutine about 96 microseconds long. Is there a more efficient subroutine?

The final version of the PSET subroutine follows. It is not unlike the core Microsoft subroutine, although developed before I reviewed the BASIC code.

The Y and X coordinates are stored in Location YX. The LDD picks up YX into D. The three sets of shifts then divide by 8. The result in D is the displacement from the start of the graphics page. The start of Graphics Page 0, \$E00, is then added to this displacement address to give an address value that points to the byte containing the pixel. This address is then stored in Y.

Next, X is loaded with the X value and the lower three bits are masked through to B. Register X is then loaded with the address of the mask table.

The byte containing the pixel is loaded into A by the LDA, Y. The proper bit is set by doing an ORA B,X, which adds the value of 0 to 7 in B with the address of MSKTAB to get an effective address pointing to the mask value. The mask value is then ORed to set the bit. The result in A is then stored back to the byte and an RTS is done to return.

```

PSET  ORG  $3F00
      LDD  YX        get Y to A, X to B
      LSRA                    divide by 8 to get row displacement
      RORB
      LSRA
      RORB
      LSRA
      RORB
      ADDD #$E00     point to actual byte
      TFR  D,Y       save in Y
      LDB  YX+1     X value to B
      ANDB #7       get 0 - 7 value for bit position
      LDX  #MSKTAB  address of mask table
      LDA  ,Y       get byte
      ORA  B,X      set bit
      STA  ,Y       restore byte
      RTS                    return
MSKTAB FCB  $80
      FCB  $40
      FCB  $20
      FCB  $10
      FCB  $08
      FCB  $04
      FCB  $02
      FCB  $01
YX      RMB  2        Y, X in reverse order
      END

```

This subroutine takes 56 cycles and is therefore about 34 percent faster than the previous version without having the additional memory requirement of 1,152 bytes worth of tables. The subroutine is not relocatable in this version. It is shown in Listing 1 incorporated in a BASIC program to clear the screen.

```

100 ' BENCHMARK FOR PSET SUBROUT
101 INE
110 CLEAR 100, &H3EFF
120 DEFUSR0=&H3F00
130 DATA &HFC, &H3F, &H25, &H44, &H5

```

```

6, &H44, &H56, &H44
140 DATA &H56, &HC3, &H0E, &H00, &H1
F, &H02, &HF6, &H3F, &H26
150 DATA &HC4, &H07, &H8E, &H3F, &H1
D, &HA6, &HA4, &HAA
160 DATA &H85, &HA7, &HA4, &H39, &H8
0, &H40, &H20, &H10
170 DATA &H08, &H04, &H02, &H01
180 FOR I=&H3F00 TO &H3F24
190 READ A: POKE I,A
200 NEXT I
210 SCREEN 1,0
220 PMODE 4,1
230 PCLS
240 TIME1=TIMER
250 FOR X=0 TO 255
260 FOR Y=0 TO 191
270 POKE &H3F25,Y: POKE &H3F26,X
280 A=USR0(0)
290 NEXT Y
300 NEXT X
310 TIME1=TIMER - TIME1
320 IF TIME1<0 THEN TIME1 = 6553
6+TIME1
330 PRINT "TIME-"; TIME1/60

```

And therein lies the second part of this story. Although the assembly PSET is indeed 2½ times as fast as the "core" assembly language code in Microsoft BASIC, it is only that fast when not called from BASIC. When I ran the program in Listing 1, I was horrified to discover that the program took about 574 seconds, 326 seconds longer than the plain vanilla PSET version. Why? The extra time was created by the two pokes to set up the X and Y parameters and by the USR call itself. BASIC overhead for evaluating arguments adds considerable time to the execution of the code. The upshot of this is that the assembly language code can be used stand-alone with other assembly language code, but when called from BASIC will take 2.3 times longer than PSET. It taught me that innocuous BASIC statements can take a great deal of time compared to assembly language subroutines that are a lot more efficient. Score one for Microsoft.

The PRESET version to clear points is a separate subroutine and is shown in the code below. The only differences between the two subroutines is that the mask table in PRESET is a 0 for the bit to be reset and that the mask value is ANDed with the contents of the byte.

Both versions work for 256-by-192 mode (PMODE 4) for Graphics Screen 1 on a disk system.

```

PSET  LDD  YX        get Y to A, X to B
      LSRA                    divide by 8 to get row displacement
      RORB
      LSRA
      RORB
      LSRA
      RORB
      ADDD #$E00     point to actual byte
      TFR  D,Y       save in Y
      LDB  YX+1     X value to B
      ANDB #7       get 0 - 7 value for bit position
      LDX  #MSKTAB  address of mask table
      LDA  ,Y       get byte
      AND  B,X      reset bit
      STA  ,Y       restore byte
      RTS                    return
MSKTAB FCB  $7F
      FCB  $BF
      FCB  $DF
      FCB  $EF
      FCB  $F7
      FCB  $FB
      FCB  $FD
      FCB  $FE
XY      RMB  2        Y, X in reverse order

```

What good is an assembly language PSET subroutine that is actually slower than BASIC's PSET? When this code is used by itself, it is fast and can therefore be used to construct your own line and graphics shape subroutines. More about those in the next column.

So until you write that 10-microsecond PSET, keep on assembling!

BITS AND BYTES OF BASIC

Dealing With Variables In BASIC09

By Richard A. White
Rainbow Contributing Editor

All programs deal with data in some way and there must be ways to store, retrieve and use this data. Conventional BASICs have variable tables in which the variable's name is associated with values if the data is numbers or, if the data is a string, the table keeps the location of the string and its length. When a string variable is changed, BASIC writes the string to a free area of string space and changes the string variable table to reflect the new location and length. The old string is forgotten and its space is unused. Periodically, BASIC runs out of string space and program execution stops while the forgotten strings are found and active strings are moved into their space, freeing a memory block for new storage.

This can be pretty handy for a programmer; he doesn't need to worry about string length, provided it does not exceed about 250 bytes. Further, BASIC uses only what it needs of string space, so memory is conserved. Nearly all other languages require that the pro-

grammer declare the variable type and, if it is a string, its maximum length. Storage space is then assigned to each variable and is unchangeable once program execution starts. BASIC09 works this way.

There are a number of advantages to doing things this way. The programmer may use the simple data types to build complex data structures. These complex structures can then be used in definition of an array that uses a very large block of memory. Instead of saving each member of the array or each individual variable comprising the data structure individually to a disk file, the memory block can be written directly to disk. BASIC09 does not care what is stored in the block. All it does is grab bytes and shove them to the disk as fast as it can, which is pretty fast. It's just as fast loading in, too. Since each byte has its own place in the memory block, BASIC09 finds the right value for each variable it looks for individually. To make this possible, the programmer has to understand data types and how to build with them.

There are five basic or "atomic" data types in BASIC09, which are also found in many other languages. Byte, integer and real data types deal with numbers. A string type holds a string of characters. Boolean is a one-byte variable that can only be either true or false.

BASIC09 allocates variable storage space in memory based either on dimension statements, which declare the variable name, type and (in the case of string) the length, or by a default when the variable is first used in the program. Following are some typical variable declarations:

```
0000 DIM count1,count2:INTEGER
000B DIM buff:STRING[2000]
0017 DIM line:STRING[100]
```

Note that more than one variable may be dimensioned in a line as long as the variable names are separated by commas. Some more complex examples follow. The number in the square brackets after STRING is the string length. The square brackets must be used and are generated by pressing the CLEAR key and the left or right parenthesis keys.

```
0090 DIM smwords,mdwords,lg
words,bgwords:INTEGER
00A3 DIM smstwords,mdstwords,
lgstwords,bgstwords:
INTEGER
00B7 DIM length,count,value,
patho,pathi:INTEGER
00CE DIM char:STRING[1]
00DB DIM filein,fileout:STRING
[16]
```

Richard White lives in Fairfield, Ohio, has a long background with microcomputers and specializes in BASIC programming. With Don Dollberg, he is the coauthor of the TIMS database management program.

Obviously, a byte-type variable is one *byte in size*. It can store positive whole numbers in the range of zero to 255. Its primary value is memory economy. There is no computation advantage, since byte variables are always converted to integer or real values for computation.

Integer variables use two bytes of memory. The number stored may be positive or negative and be in the range of -32,768 to 32,767. Integer variables should be real workhorses in your programs. Though restricted to whole numbers, integer math is fast. It's the natural language of your 6809 micro-processor. Integers make great counters in FOR-TO-NEXT and other looping structures available in BASIC09.

It is important to keep in mind their limits when using byte and integer variables. First, it is possible to assign a number stored in an integer variable to a byte variable. Provided the number is positive and less than 256, all will be well since the least significant eight bits of the integer are stored. The most significant eight bits, those that help define a number greater than 255 or a negative number, go into the bit bucket and disappear for all time. No error results.

Arithmetic operations can cause values outside the integer range. This causes a "wrap around." For example, $32,767 + 1 = -32,768$. Although these results are predictable, they are confusing, so it is best to avoid trouble in the first place. When there is a chance the limits of integer math will be exceeded, use real variables.

Division of one integer by another yields an integer result with any remainder discarded.

Any undeclared numeric variables default to real type. A variable can also be declared real at the outset, which is the best practice from a program clarity viewpoint. Real variables use five bytes of storage. They include the range from $2.938735877 * 10^{-39}$ to $1.0701411835 * 10^{38}$. Operations that exceed the range will cause either an overflow or underflow error.

Real number or floating-point decimal calculations in a computer are never exact. There are certain to be errors in the 10th digit, and the ninth digit is suspect in some operations. This can mean that a number computed one way can look identical to a number computed another way, while a comparison made by the computer will say they are different. This is because the

numbers were rounded differently in the different operations. Programmers need to be cautious about making strict comparisons (i.e., = or <>) between real numbers.

A string is a variable length sequence of characters. The string can have zero length, in which case it is empty and is sometimes called a null, or nil, string. Strings can be dimensioned from one character in length up to memory limits. The string length assigned in the dimension statement only assigns memory space for that string. The actual length of the string itself may vary from zero up to the space assigned. This raises some significant memory conservation questions.

Say you write a simple note-taking program and allow a separate string variable for each of twenty 80-character lines. You have just committed 1,600 bytes of memory and have yet to enter a character. If you null each string and individually write them to a disk file as variable length ASCII strings, the file will be very short. Use the program to enter some notes and save the file, and it will be the length of text stored plus an ASCII null character (\$00) between each string. If, on the other hand, you put the file to disk under a single array name, a full 1,600 bytes (mostly garbage) will be in the disk file.

A possible way around this is to define a very long string and treat it as a buffer, storing shorter strings in sequence somewhat like conventional BASICs do. Of course you need to work out how to manage the buffer and its data yourself. This is demonstrated by Listing 1.

The string `buff` is dimensioned 2000 characters long. The first three FOR-TO-NEXT loops simply load letters and numbers (in character format) into the string `buff`, more than half filling it. The fourth FOR-TO-NEXT simply gets 100-byte sections of the string `buff` and sends them to the screen to demonstrate that long strings actually work. Using `ADDRname` you have the program find the start of the string in memory and peek and poke at it. Of course, these types of activities are not for the novice programmer.

Note that the two strings, `buff` and `line`, were initialized at the beginning of the program. In the case of `buff`, it was essential to start with an empty string; a dimensioned-only string is sure to contain garbage. Because we always make an assignment to `line`, it could have been uninitialized. Neither of the

Listing 1:

```

PROCEDURE longstring
0000 DIM count1,count2:INTEGER
000B DIM buff:STRING[2000]
0017 DIM line:STRING[100]
0023
0024 buff:=""
002B line:=""
0032
0033 FOR count1=1 TO 100
0043 buff:=buff+"a"+STR$(count1)
0054 NEXT count1
005F
0060 FOR count1=1 TO 100
0070 buff:=buff+"b"+STR$(count1)
00B1 NEXT count1
00BC
00BD FOR count1=1 TO 200
009D buff:=buff+"c"+STR$(count1)
00AE NEXT count1
00B9
00BA FOR count1=0 TO 10
00CA line=MID$(buff,count1*100,100)
00DB PRINT line
00E0 FOR count2=1 TO 2000
00F1 NEXT count2
00FC NEXT count1
0107
010B END

```

count variables were initialized since FOR-TO-NEXT handles that chore.

Finally, there is the Boolean type, which is essentially a true or false flag that BASIC09 understands. When Boolean values are printed, they appear as true and false.

Occasionally, it is necessary to mix numeric variables of different types in a calculation. In this case, values are automatically converted to the largest type needed to retain accuracy. But type conversion takes time, so keeping to a single type in an expression has merit.

Arrays of variables are data structures in which a number of items of data are stored under a single variable name. Here are some examples:

```

DIM words(100):STRING[16]
DIM each_sale(200):REAL
DIM bowling_scores(3):IN
TEGER

```

These statements make room for a 100-word list, 200 sales and three bowling scores. The individual member of an array is accessed by the array name and the number of the member. The member number may be assigned to a variable; perhaps in a loop that is printing the array, the member number could be the loop counter.

```
FOR count1=1 to 20
PRINT student_name(count1)
NEXT count1
```

The preceding arrays have one dimension. Two- and three-dimension arrays are also possible under BASIC09. If you think of a single-dimensioned array as a numbered list, then two- or three-dimensioned arrays can be thought of as added columns or lists to the right.

```
DIM sales(100,100,100):REAL
```

In this example, the first dimension could be the sale, the second the sales tax and the third the total.

The TYPE statement is used to define a list of variables to be associated together. For example, let's consider writing a program to store phone numbers. Three pieces of information are needed at minimum. These are first name, last name and phone number. The list might be sorted by last name, which is why first and last names are stored separately. We want these three pieces of data stored together as a record. They can be set up as a complex data type.

```
TYPE phone_rec = first,last:
STRING[16]; phone:STRING[12]
```

This says that the variable phone_rec is a complex type made of two 16-character strings named first and last and the 12-character string named phone. This only established the type for data structure and has not dimensioned it. The next step is to dimension an array to hold the records.

```
DIM phone_list(100):phone_rec
```

Since first and last each have space for 16 characters and phone allocates 12 more, each member of the array phone_list() will need 44 bytes, and the whole array will use 4,400 bytes.

Here is a somewhat more complex example. I wrote a program to store advancement and badge awards for a local scout troop. A major reason for doing this in BASIC09 was that it afforded me a way to print customized reports for each scout showing only those advancements and awards actually earned and the dates of the awards. The record for each boy must keep track

of 10 ranks, 12 skill awards and 118 merit badges, along with the name of the boy, the date joined and his patrol. This is not something to do in a spreadsheet, and none of my file manager programs would handle the specialized reports. This is where the TYPE statement really shines.

```
TYPE rec = last,first,patrol,
STRING[12];
joined,rdate(10),sdate(12)
,mbdate(120):STRING[8]
DIM scout:rec
```

All the eight-character strings are intended to store a date in the form of YY/MM/DD. Note also how easily arrays are included. The rdate() array is for rank, sdate() is for skill awards and mbdate() is for merit badges. Only a single variable, scout, is dimensioned. It's big — over 1,000 bytes. So I store the records on disk and only work with one or two at a time.

To show how individual fields in the record are accessed, here is the code to select and print merit badges and the dates they were awarded.

```
FOR count1=1 TO 118
IF scout.mbdate(count1)>" THEN
PRINT #pr USING "X12,S30<,SB
<","mb(count1),
scout.mbdate(count1)
count3:=count3+1
ENDIF
NEXT count1
```

Since there are 118 merit badges, the scout's merit badge date field for each badge must be checked. This field is described to BASIC09 by the variable name, scout, a period and the array name, mbdate(count1). In most instances the mbdate member is null. When there is a date in the field, the name of the merit badge is printed from the separate mb() array followed by the date from the scout.mbdate() array. The variable count3 keeps track of the number of lines printed for pagination purposes.

Note how neatly the IF-THEN-ENDIF lays out. There is really no limit on how much code can go after THEN or ELSE. In conventional BASIC all the code associated with IF-THEN-ELSE must be on one numbered line. BASIC09's control structures provide a rich set of tools to do top down programming. We'll take up this topic when we return to BASIC09 after a tour of the new commands in CoCo 3 BASIC. ☺

A Christmas gift?

Choose from the following **COMPUTER FRIENDS** winners. **SPECIAL CHRISTMAS OFFER.** Buy one item and get 15% discount on any other item or supply accessory.

MAC INKER™, Automatic Ribbon Re-inker. Re-ink any fabric or spool fabric ribbon for **less than 5 cents.** Over 70,000 in the field and



we support **ALL** printers. Universal Cartridge or Universal Spool **MAC INKER**

\$68.50. Dedicated Imagerwriter or Epson \$42.00. We have cartridges re-inkable in 10 colors. Ask for your printer type or for complete listing. Bottle ink \$3.00/each. Shipping \$3.00.

PROTEUS™, the 'Siamese' Buffer.

It is a **Data Switch** with buffer on both ports. Switch manually or via software. Saves time, space and money. Or ask about our **MAC MASTER** line of Universal Buffers and Printer Controllers (serial or parallel up to 1 MEG).



PROTEUS 64 K-199.00

256 K-299.00 Shipping \$4.00.

Of course we have **Data Switches**, serial/parallel, 2 way, 4 way, crossed etc., at most competitive prices (all lines switched).

MERCURY MODEM. Really 100% Hayes* Compatible. 300/1200 baud, speaker, full status light display and 2 years warranty. Includes

QUICK LINK, easiest and most reliable Comms Software (available for IBM PC or Macintosh). **\$205.00** Shipping \$4.00.



*Hayes is a trademark of Hayes Microproducts.

MAC THE RIPPER. Our newest, original and welcome printer companion. Pulls off paper perforations and tears the sheets apart. Takes little space and will pay for itself almost immediately in saved time and tedium. Ask for brochure. Introductory Price **\$299.00.** Shipping \$10.00.

Order Toll Free.

Call or write for free brochure.

1-800-547-3303

In Oregon 503-626-2291 (24 hour line)

Computer Friends®

14250 N.W. Science Park Drive
Portland, Oregon 97229 Telex 4949559
Dealer inquiries welcome.



KISSable OS-9

A Bundle of Holiday Goodies

By Dale L. Puckett
Rainbow Contributing Editor

Early this year Stephen Goldberg of 695 Plainview Road, Bethpage, NY 11714, started distributing *Utilipak* — a very handy package containing nearly two dozen OS-9 utilities. Later in the year he updated the package to make everything compatible with OS-9 Level I, Version 2.00.00. Now, just in time for Christmas, he's offering *Utilipak Too*.

Utilipak Too features a number of programs that were supposed to be included in *Utilipak*. Unfortunately, according to Goldberg, there wasn't enough room on the contents page. The price for *Utilipak Too* is right, just \$12, and you can still buy the original *Utilipak* for \$25. And, Goldberg says the Pack, Unpack and Crypt utilities now work much faster.

The utilities include Bootfix, Cls, Copy, D, Deiniz, Del, List, Page, Rep, Update and Unload. Bootfix will be especially handy for Disk BASIC 1.0 users who own single-sided disk drives. It combines the Disk BASIC boot program with a system disk and lets you boot OS-9 from Disk BASIC with a single disk.

While Cls merely clears the screen, it is much faster than typing `display c.`

Dale L. Puckett, who is author of The Official BASIC09 Tour Guide and co-author, with Peter Dibble, of The Official Rainbow Guide to OS-9, is a free-lance writer and programmer. He serves as director-at-large of the OS-9 Users Group and is a member of the Computer Press Association. Dale works as a U.S. Coast Guard chief warrant officer and lives on Governors Island in New York Harbor.

Copy uses the same syntax as the original Tandy copy command, however it lets you overwrite an existing file if you desire. It also reduces the number of exchanges required for disk-to-disk copies on single-drive systems and gives better error management.

D is the unformatted directory utility from the original *Utilipak*. It is included in this package so you can use it with Del and Rep. Deiniz, Rep and Unload have all been published in this column during the past year. However, the versions that come on the *Utilipak Too* disk have improved error handling.

Del directly replaces both the original Tandy `del` command and the *DL* utilities, saving you some disk space. This Del duplicates the syntax of both of these, and also features improved error handling.

Update is a simple one-step replacement for the Tandy `verify` utility. With Update you don't have to remember to request the 'U' option on your command line. The *Utilipak Too* List utility optionally prints line numbers if you request them on your command line. Also, this list will not fill your screen with garbage if you try to list a file containing an OS-9 module. Along the same lines, Page gives you a paginating filter utility program that prints optional page numbers and headers. It also lets you set the page length and pause at the end of each page if you desire.

You can hear sleigh bells in many places this time of year. And if you install this patch from Goldberg, you will hear bells more often while running OS-9.

Change the byte at Offset \$639 Hex

in the module IOMan to a 7. After you do this, every time OS-9 reports an error you will hear a beep. If you change the byte at \$617 Hex in ASM to a 7, that program will also sound off.

After you make these changes with debug you can make them permanent by saving the modified modules. If you do this, don't forget to verify them with the U option or run the new Update utility from *Utilipak Too*.

Another Request for Config Help

Nick Molfese of South Holland, Ill., sent me a question about the new `config` utility that comes with OS-9 Level I, Version 2.00.00. Since a lot of people are still having problems running `config`, we thought it would be good to take another look at it here.

Just about everyone having trouble getting `config` to run properly receives a #216 (File Not Found) Error. Here's the reason. When you insert the `config` disk to run it, you must change both the current data directory and current execution directory. If you have a single-disk system, remove the OS-9 system disk and insert a working copy of the `config` disk. Then type the following OS-9 command lines to run `config`:

```
OS9: chx /d0/cmds      ENTER
OS9: chd /d0           ENTER
OS9: Config            ENTER
```

I think you'll really enjoy this handy utility. If you buy BASIC09 sometime in the near future, here's another quick tip. You must go through the same procedure to run BASIC09 with a single-drive system. First, take out the OS-9 system

disk. Then, insert the BASIC09 disk in the drive. With BASIC09, you must type the following OS-9 command lines:

```
OS9: chx /d0          ENTER
OS9: chd /d0          ENTER
OS9: basic09          ENTER
```

Notice that in this sequence you did not set the current execution directory to /d0/CMDS. That's very unusual. But you must do it because Tandy has stored BASIC09 in the root directory of the distribution disk. This means if you insert a working backup of that disk in drive /d0, BASIC09 is stored in the root directory — or /d0.

More Version 2.00.00 Tips

Howard Luckey of Park Forest, Ill., wasn't so lucky when he tried to run some of the procedure files listed in the *Complete Rainbow Guide to OS-9*. Unfortunately, I was unable to duplicate his problem with the tee command. He received a #215 (Bad Pathname) Error when he ran the sample command line:

```
OS9: list /d0/startup ! tee /p
     /d1/test_directory/scratch
```

I suspect that Howard misspelled the name of the test directory when he created it or that he did not have a device named /p or /d1 installed when he ran the sample. Misspelling the name of a device would also cause a #215 Error.

Many of you may have run up against the other problem Howard noticed. When he used the procedures on pages 145 to 150 of our book using Version 2.00.00 of OS-9, everything worked fine. Unfortunately, however, when he tried to boot his new disk he ran into a major problem — it wouldn't work.

Howard was on the right track and checked the CRC of the modules in his new OS-9 boot file. He found two that were bad. What happened?

During one of the steps in the procedure files, you save, into a special directory, the modules in memory that you want in the new boot file. Later, you use OS9Gen to place them in a new file named OS9Boot.

Unfortunately with Version 2.00.00, the code in the modules CCIO and CO32 or CO80 are modified as soon as you start your system. If you save them from memory, you will have saved a module with a bad CRC.

The solution is to use the copy of CCIO and CO32 or CO80 that come in

the MODULES directory on your config disk. They haven't been modified and will work fine. Another example later in the same chapter shows how to use other files with OS9Gen to create a new OS9Boot.

"Some say it is confusing to have a floppy be d0 and a hard disk be d0. I say it is less confusing than having the root device be either h0 or d0 depending on how I booted."

Having a Ball!

Last month we recommended you download the Ball Demo from Steve Bjork in the OS-9 section of the Color Computer SIG database on Delphi. A few days ago we received a note from Fred Sawtelle with a neat trick you can do with that demo.

"Ball has two documented options, -s and -f, but it also has a -u option," Sawtelle said. "Try that one! And put an ampersand (&) on the end of your command line.

"After you start the demo, type display 0f0005 and press ENTER. By using this line and display e you can toggle the graphics mode," he said. "Hold down the BREAK key and watch what happens. To freeze the screen, type kill 3, or whatever Ball's procedure number is on your CoCo."

Once Sawtelle had stopped the demo, he was able to send the image to his printer. His son wanted to show it to his geography teacher. Thanks for the tip, Fred.

Free OS-9 Details

We have mentioned that there was a bonanza of information available in the files in your OS9DEFS directory. Several people have asked us how they can get to that information. Probably the most effective way is to assemble them using the OS-9 assembler, ASM. First, build a short file named asmdefs.

```
OS9: build asmdefs          ENTER
     ? opt 1                  ENTER
     ? use /d0/defs/os9defs  ENTER
     ? use /d0/defs/scfdefs  ENTER
     ? use /d0/defs/rbfdefs  ENTER
     ? use /d0/defs/systype  ENTER
     ?                          ENTER
```

After you have typed this file, assemble it with this command line:

```
OS9: asm asmdefs l #20K >/p
```

Note that the l is a lowercase 'L', not a numeral one. This command line prints a formatted listing that shows the names of all the internal variables in OS-9. Enjoy!

One-Liner Contest Winner . . .

Resist calculates the equivalent resistance of any number of parallel resistors.

The listing:

```
l0 C=0:INPUT"HOW MANY RESISTORS"
;A:IFA<1THEN10ELSEFORX=1 TO A:PR
INT"RESISTOR#"X"(OHMS)";:INPUT R
(X):IFR(X)<=0THENPRINT"RT=0 OHMS
":GOTO10ELSEC=C+1/R(X):NEXTX:PRI
NT"RT="1/C"OHMS":GOTO10
```

Joseph Ferullo
Revere, MA

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

A Quick Correction

In the September column a typo slipped into one line of the BASIC09 Procedure Printer listing. Here is the correction.

```
Bad line:  run gfx("gcolr",x
            ,y-pin,color)
Correct line: run gfx("gcolr",x
                    ,y, pin,color)
```

Another Nifty Trick From Greg Law

Would you rather test a procedure file while you're typing? Try this:

```
059: ex shell t -p >>new
      procedurefile          ENTER
```

This command line creates a shell that echoes your command lines and does not print any prompts. Since you have redirected the standard error output path to a file, you will wind up with a file that will run as a procedure file. If each command line you typed ran perfectly when you typed it live, it will run properly from the script, `new procedurefile`. If, however, you ran into an error with your typing, you will need to edit `newprocedurefile`. Since you actually ran the code you typed, you'll know which typos need to be fixed. Nifty!

More On Standards

Cornelius Seon sent us a note recently about a technique he thinks should become a standard. He pointed to the Computerware/Tandy program *OS-9 Profile* and endorsed programmer Brian Lantz's technique.

"*Profile* uses the OS-9 `makdir` utility to make a data directory in the current data directory for each database you create. The filename you give to *Profile* becomes the name of a new directory," Seon said. "The files in this directory are data files, the names of which are

symbols that describe what each file contains. Each directory also contains the screens, indexes, reports and format files needed by *OS-9 Profile*."

Another nice note came our way from Carl Kreider this month. Kreider is the chairman of the OS-9 Users Group Software Committee and, among other things, a real programming genius. If you scan the programs in the Users Group's library you will find he is the author of many of them.

"I have never had to use `h0` as the name for my hard disk," Kreider writes. "My system normally boots on its hard disk as `d0`, but I had to boot from a floppy until I cut a PROM with the boot code for my new 31-megabyte drive. Here's the procedure.

"In your modules directory, rename your floppy descriptors with a suffix of `.f`. Copy `d0.f` to `d1.h` and patch its name to be `d1`. Repeat for other necessary floppy descriptors.

"Then, copy `h0` to `d0.h` and patch its name to be `d0`. Build a new boot file using the new descriptors. I like to keep a vertical list of modules in files named `hardmods` and `floppymods`. They can be used with `cat` and `install` or as input to `059Gen` to build a new boot file."

Kreider reports that using the new boot file brings the system up on the hard disk with the hard disk as `d0`. After you do this, your software will have no problem finding `/d0/defs`, or other files hard coded in programs that assume they are stored on Drive `/d0`.

"I feel rather strongly that the root device should be named `d0` just to avoid the problems you discussed in your column," Kreider said. "Some say it is confusing to have a floppy be `d0` and a hard disk be `d0`. I say it is less confusing than having the root device be either `h0` or `d0` depending on how I booted.

"After all, is not the `.../defs` hack just an attempt to find the root device?"

Kreider asked. "Let's make it easy and always call it `d0`. I have practiced what I preach since my first hard disk four years ago, even on a CoCo. This technique is so simple that I would be foolish to claim originality, but I am surprised that it has not been mentioned in the press."

Thanks for the tip Carl. I think a lot of CoCo OS-9 hackers are going to have fun experimenting.

This Month's Listings

Fred Sawtelle sent us a real holiday present this month. We are printing four interesting utilities written in OS-9 assembly language. We've saved two more for the New Year.

This month you can study and try `del`, `dname`, `exit` and `time`. The `del` is an improved delete utility. It expects a space between filenames and interprets a carriage return as the end of the file list. This means that a list of filenames, one to a line, won't work. But, you can flush a directory by piping the output of `dir` to Sawtelle's `del`. When you do, don't be surprised when you see:

```
DEL: can't find directory
DEL: can't find of
DEL: can't find .
DEL: can't find 06:08:59
```

After these messages it will go ahead and delete the files in your directory.

The `dname` gives you a way to change the name of the volume stored on a disk. `exit` lets you return to Radio Shack Disk BASIC smoothly. And finally, `time` gives you a way to print the time without the date.

Happy Holidays

I hope this column has given you a few ideas or answered a few questions. I hope also that your holiday season will be the best ever. Until next year, keep on hacking. □

Listing 1: del

```
*-----*
*          DEL          *
* an Improved Delete Utility *
*-----*
*   (C) Copyright 1986   *
*   by Fred Sawtelle    *
*   3103 Montgomery Road *
*   Huntsville, TX 77340 *
*   June 16, 1986       *
*-----*

nam DEL
ttl an Improved Delete Utility

ifpl
```

```
use /d0/defs/os9defs
endc

* CONDITION: use /d0/defs/os9defs

SKIP2 equ $8c

*---- MODULE SPECS ----

TYP set prgrm+objct
REV set reent+1
mod ZZ,MN,TYP,REV,GO,EDAT
MN fcs "del"
fcb 1 :version

*---- DATA SPECS ----

FLAG rmb 1
```

```

LASTNAME rmb 2
BUFFER rmb 400
EDAT equ .

*---- STRINGS, ETC. ----

SNTXMSG fcc "USE: DEL [-x] pathname [...]"
fcb $0a
fcc " or get pathnames from standard input."
fcb $0a
fcc " -x option = use execution directory."
fcb $0d
SEND equ *

FINDMSG fcb 7
fcc "DEL: Can't find "
FEND equ *

*---- EXECUTABLE CODE ----

GO clr ,u :=stdin
lda ,x
cmpa #$0d
beq STDINPUT
cmpa #'?
beq SYNTAX
inc ,u :=path in param area
cmpa #'-
bne DELETE
ldd ,x++
andb #$df
cmpb #'X
beq XDELETE

SYNTAX leax SNTXMSG,pcr
ldy #SEND-SNTXMSG
lda #1
bsr WRITE
bra OUT

*---- STANDARD INPUT ----

STDINPUT leax BUFFER,u
clra
ldy #200
os9 i$readln
bcs ERROR
lda ,x
cmpa #$0d
beq OUT
fcb SKIP2

```

```

XDELETE com ,u

DELETE lda ,u
bmi EXDIR
os9 i$delete
DEL1 bcs DELERR
DEL2 lda ,x
cmpa #$0d
bne DELETE
lda ,u
beq STDINPUT
bra OUT

EXDIR os9 i$deletx
bra DEL1

ERROR cmpb #e$eof
bne EROUT
OUT clrb
EROUT os9 f$exit

WRITERR lda #2
WRITE os9 i$writln
bcs EROUT
rts

DELERR stx LASTNAME,u
leax FINDMSG,pcr
ldy #FEND-FINDMSG
bsr WRITERR
ldx LASTNAME,u
clrb

D1 incb
lda ,x+
cmpa #$20
beq D2
cmpa #$0d
bne D1
leax -1,x
pshs x
clra
tfr d,y
ldx LASTNAME,u
bsr WRITERR
puls x
bra DEL2

D2 lda -1,x
pshs a,x
lda #$0d

```

OS-9™ SOFTWARE/HARDWARE

SDISK—Standard disk driver module allows the full use of 35, 40 or 80 track double sided disk drives with COCO OS-9 plus you can read/write/format the OS-9 formats used by other OS-9 systems. (Note: you can read 35 or 40 track disks on an 80 track drive). Now updated for OS-9 ver. 02.00.00 **\$29.95**

SDISK + BOOTFIX—As above plus boot directly from a double sided diskette **\$35.95**

L1 UTILITY PAK—Contains all programs from Filter Kits Nos. 1 & 2 plus Hacker's Kit #, plus several additional programs, Over 35 utilities including "wild card" file cmds, MacGen command language, disassembler, disk sector edit and others. Very useful, many of these you will find yourself using every time you run your system. These sold separately for over \$85. **\$49.95**

SKIO—Hi res screen driver for 24 x 51 display; does key click, boldface, italics; supports upgraded keyboards and mouse. With graphics screen dump and other useful programs. **Now UPDATED FOR OS-9 Ver 2.0 \$29.95**

PC-XFER UTILITIES—Utilities to read/write and format ss MS-DOSTM diskettes on CoCo under OS-9. **\$45.00 (requires SDISK)**

CCRD 512K Byte RAM DISK CARTRIDGE—Requires RS Multipak interface, two units may be used together for 1MB RAM disk. OS-9 driver and test software included. **\$199.00**

All disk prices are for CoCo OS-9 format; for other formats, specify and add \$2.00 each. Order prepaid or COD, VISA/MC accepted, add \$1.50 S&H for software, \$5.00 for CCRD; actual charges added for COD.

**D.P. Johnson, 7655 S.W. Cedarcrest St.
Portland, OR 97223 (503) 244-8152**

(For best service call between 9-11 AM Pacific Time)

OS-9 is a trademark of Microware and Motorola Inc.
MS-DOS is a trademark of Microsoft, Inc.

RAINBOW ON TAPE

Those Great RAINBOW Programs Without All The Fuss! Subscribe to RAINBOW ON TAPE!

Every month, RAINBOW ON TAPE brings as many as two dozen ready-to-run programs right to you. Using the current issue of THE RAINBOW as documentation, all you have to do is load and run them. Just a one-year subscription gives you more than 230 new programs! The typing time saved is time that can be spent with the CoCo. (RAINBOW ON TAPE does not include OS-9 programs or those less than 20 lines.)

**Need a back issue of RAINBOW ON TAPE?
Issues available beginning with April 1982**

Subscribe to RAINBOW ON TAPE Today! LOOK FOR OUR ORDER CARD BETWEEN PAGES 34 AND 35

The cost for a single copy of RAINBOW ON TAPE is \$10 within the United States; U.S. \$12 in all other countries. The annual subscription rate for RAINBOW ON TAPE is \$80 within the U.S.; U.S. \$90 in Canada; and U.S. \$105 for all other countries. **U.S. currency only, please.** In order to hold down non-editorial costs, we do not bill.

DISK USERS: RAINBOW ON DISK IS NOW AVAILABLE!

All the programs from THE RAINBOW — including OS-9 — are now available on disk. For more information, see page 145 of this issue.


NOW AVAILABLE ON DELPHI!

For your convenience, RAINBOW ON TAPE can also be ordered via the Delphi Information Network, in our Shopping Service area of THE RAINBOW's Color Computer SIG (Special Interest Group).

The individual programs from our past December issues are also available for immediate download in the RAINBOW ON TAPE Database area in THE RAINBOW's Color Computer SIG on Delphi. There is a \$3.50 per program surcharge.

RAINBOW ON TAPE is not a stand-alone product, but is intended as an adjunct and complement to the magazine. Even if you purchase RAINBOW ON TAPE, you will still need the magazine for loading and operating instructions.

To order by phone, (credit card orders only) call 800-847-0309, 8 a.m. - 5 p.m. EST. All other inquiries call 502-228-4492.

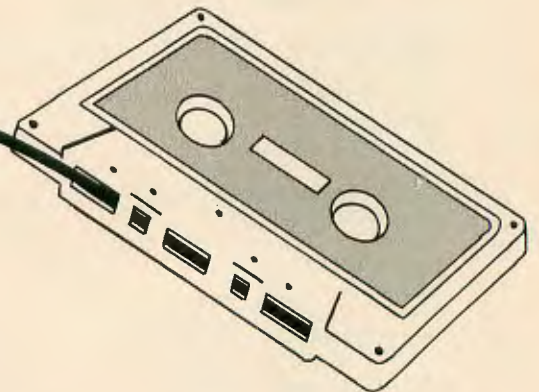

Programs from Our Past Holiday Issues:

December 1985 — *Rudolph*, a graphics and music storytelling program; *Christmas Songs*, computerized chimes that ring out seasonal tunes; *Remote Burglar Alarm, Part I*, a computerized alarm system for the home; *Trivia Tic-Tac-Toe*, a multiple-choice game where a correct answer gives an 'X' or 'O'; *Puzzle*, an educational word search puzzle game; *CoBBS*, part two of a complete bulletin board system; *Awards*, a Ham utility that keeps track of various awards for Ham radio operators; *Brain Games*, five programs combined to challenge your insight and memory; *Menorah*, a graphics program that illustrates and gives a short history lesson on the lighting of the menorah candles; *Alpine Slopes*, an action game that shows the techniques of programming with 4K; and *Christmas Show*, a graphics program that displays various holiday scenes accompanied with seasonal tunes.

December 1984 — *Holly Jolly Holidays*, a program that consists of a series of holiday scenes each followed by an appropriate holiday song; *Handler*, the second of three parts on diskette file organization; *Christmas Card File and Labeler*, an aid in preparing holiday greetings; *Season's Greetings*, a graphics program that displays an animated, holiday greeting; *Rescue on Alpha II*, the graphics winner from The Second RAINBOW Adventure Contest; *The Head of the Beast*, the 16K winner from The Second RAINBOW Adventure Contest; *Season's Greeting Cards*, a program to create computerized multicolor greeting cards; *128K The Easy Way*, a tutorial on expanding CoCo's memory; *Encyclopedia*, a program to help students seek information from the CoCo; *Football Fever, Part II*, a graphics program to create AFC helmet pictures; and *Personable Pascal*, a program to manage a Christmas gift list.

```

sta -1,x
ldx LASTNAME,u
clra
tfr d,y
bsr WRITERR
puls a,x

```

```

sta -1,x
bra DEL2

emod
ZZ equ *
end

```

Listing 2: dname

```

*-----*
*          DNAME          *
*-----*
* Change Diskette Volume Name *
*-----*
*      (C) Copyright 1986      *
*      by Fred Sawtelle        *
*      3103 Montgomery Road    *
*      Huntsville, TX 77340    *
*      February 7, 1986        *
*-----*

```

```

nam Dname
ttl Change Diskette Volume Name

```

```

ifpl
use /d0/defs/defsfile
endc

```

```
* CONDITION: use /d0/defs/defsfile
```

```
*----- MODULE DEFINITION -----
```

```

TYP set prgrm+objct
REV set reent+1
mod ZZ,MN,TYP,REV,GO,EDAT
MN fcs "Dname"
EDITION fcb 4
fcc "(C)1986FredSawtelle"

```

```
*----- DATA MEMORY AREA -----
```

```

rmb dd.opt :input buffer
PATH rmb 1 :pathname
RENAMFLG rmb 1 :rename or not?
NEWNAME rmb 2 :new name address
BUFFADR rmb 2 :free string area
STRINGS rmb 200 :device name$
EDAT equ .

```

```
*----- EXECUTABLE CODE -----
```

```

OPEN leax STRINGS,u :index device
OPl lda #updat. :get access mode
os9 i$open :open device
bcs EROUT
sta PATH :save path number
rts

```

```

FORMAT leax FMMSG,pcr
ldy #FMEND-FMMSG
bsr OUTPUT
EXIT clrb :insure no error code
EROUT os9 f$exit

```

```

OUTPUT lda #1 :standard output
os9 i$writln :send message
bcs EROUT
rts

```

```
*----- INITIAL ENTRY HERE -----
```

```

GO clr RENAMFLG :for no rename
leay STRINGS,u
G1 lda ,x :examine parameters
cmpa #$20 :space?
bne G2
leax 1,x
bra G1

```

```

G2 cmpa #$0d :no dev specified?
beq COPY2
cmpa #'/' :is it a device?
bne FORMAT :if not, show format
os9 f$prsnam :is it ok?
bcs FORMAT :show proper format
leay STRINGS,u :Y-index buffer
leax -1,x :back up to "/"
COPY1 lda ,x+ :transfer devname
sta ,y+
decb
bpl COPY1
COPY2 ldd #$4020 :tell OS9 entire
std ,y++ : device is a file
sty BUFFADR

```

```
*----- CHECK FOR RENAME -----
```

```

lda ,x+ :Xreg = end of devname
cmpa #$0d :if cgrtn, then no
beq READIN : rename wanted.
cmpa #$20 :space?
bne FORMAT :only cgrtn, sp ok
SKIPSPCE lda ,x+ :check next chr
cmpa #$0d :is it cgrtn?
beq READIN :if so, no rename
cmpa #$20 :another space?
beq SKIPSPCE :if yes, loop back
GOTNEW1 leax -1,x :found a name
stx NEWNAME :so save pointer
com RENAMFLG :flag a rename

```

```
*----- OPEN FOR READ -----
```

```

READIN bsr OPEN
ldy #dd.opt :# bytes to read
leax ,u :index buffer
os9 i$read
bcs EROUT
os9 i$close

```

```
*----- DISPLAY OLD NAME -----
```

```

lda RENAMFLG
bne MAKENEW
leax dd.nam,u :point at old name
ldy BUFFADR
NEXTONE lda ,x+
bmi LASTONE :if bit 7 set
sta ,y+
bra NEXTONE
LASTONE anda #$7f :switch off bit 7
sta ,y+ :normal for write
lda #$0d
sta ,y
ldx BUFFADR
ldy #33

```

```

lbrs OUTPUT
*----- TEST FOR RENAME -----
lda RENAMFLG :do we rename?
lbeq EXIT :if not, out.

MAKENEW leay dd.nam,u :index old name
ldx NEWNAME :index new name
ldb #1f :max count less 1
MOVENAME lda ,x+
  cmpa #0d
  beq SETBIT :if string end
  sta ,y+
  decb
  bpl MOVENAME :if not past max
SETBIT lda -1,y :get last chr
  ora #80 :set bit 7
  sta -1,y :replace it

CLRBYTES decb :past max yet?
  bmi REWRITE :if yes

```

```

clr ,y+ :if not, clear it
bra CLRBYTES

REWRITE lbrs OPEN
  leax ,u :index buffer
  ldy #dd.opt :get count
  lda PATH
  os9 i$write :output new data
  lbrs EROUT
  os9 i$close
  lbrs EROUT
  lbra EXIT

*----- MESSAGES, DATA -----

FMMSG fcc "USE: DNAME [/device [new name]]"
  fcb 0d
FMEND equ *

  emod
  ZZ equ *
  end

```

Listing 3: exit

```

*-----*
*          EXIT          *
*-----*
*   (C) Copyright 1986   *
*   by Fred Sawtelle     *
*   3103 Montgomery Road *
*   Huntsville, TX 77340 *
*   February 8, 1986     *
*-----*

nam Exit
ttl from OS-9 to Disk BASIC

* NOTE: Clearly, this is not a
*   time-sharer's utility.

ifpl
use /d0/defs/os9defs
endc
* CONDITION

* use /d0/defs/os9defs

*----- MODULE SPECS -----

TYP set prgrm+objct
REV set reent+objct
mod ZZ,MN,TYP,REV,GO,EDAT
MN fcs "Exit"
  fcb 2 (edition)
  fcc "(C)1986FredSawtelle"

*----- DATA SPECS -----

  rmb 200
EDAT equ .

*----- MODULE EXECUTION -----

```

```

GO lda ,x
  anda #df
  cmpa #'Y
  beq YES
  leax SURE,pcr
  lda #1
  os9 i$writln
  bcs OUT

  ldy #1
  clra
  leax ,u
  os9 i$read
  bcs OUT
  clrb
  lda ,x
  anda #df
  cmpa #'Y
  bne OUT

YES leax D0,pcr
  bsr TRACK0
  leax D1,pcr
  bsr TRACK0
  leax D2,pcr
  bsr TRACK0
  leax D3,pcr
  bsr TRACK0

OVERRIDE orcc #50
  leau EXIT,pcr
  cmpu #8000-(X1-EXIT)
  blo EXIT
  ldx #1000
  ldb #X1-EXIT
TFR lda ,u+
  sta ,x+
  decb
  bne TFR

```

```

jmp $1000
OUT os9 f$exit

TRACK0 lda #1
os9 i$open
bcs OVERRIDE
ldb #SS.Reset
os9 i$setstt
bcs OVERRIDE
ldx #5
os9 f$sleep
bcs OUT
rts

```

*----- STRINGS, ETC. -----

```

D0 fcc "/D0@"
D1 fcc "/D1@"
D2 fcc "/D2@"
D3 fcc "/D3@"

```

```

SURE fdb $0707
fcc "EXIT OS9 (y,n)?"
fcb $0d

```

*----- THE OS9 TRASHER -----

```

* NOTE: this may not work with
* the CoCo Deluxe. It depends
* on what's been done to Disk
* Extended BASIC.

```

```

EXIT ldx #$71
sta $ffde
clr ,x
jmp [$fffe]
X1 equ *

```

```

emod
ZZ equ *
end

```

Listing 4: time

```

*-----*
*          TIME          *
*-----*
* Display time without date *
* By Fred Sawtelle       *
*-----*

```

```

nam Time
ifpl
use /d0/defs/os9defs
endc

```

* CONDITION: use /d0/defs/os9defs

*----- MODULE SPECS -----

```

TYP set prgrm+objct
REV set reent+1
mod ZZ,MN,TYP,REV,GO,EDAT
MN fcs "Time"

```

*----- DATA SPECS -----

```

rmb 200
EDAT equ .

```

*----- EXECUTABLE CODE -----

```

GO tfr u,x
os9 f$time
bcs EROUT
leax 3,x
leau 3,x
ldb ,x+
bsr PROCESS
lda #':

```

```

sta ,u+
ldb ,x+
bsr process
lda #':
sta ,u+
ldb ,x+
bsr process
lda #$0d
sta ,u

```

```

lda #1
ldy #9
os9 i$writln
bcs EROUT
clrb
EROUT os9 f$exit

```

```

PROCESS lda #$2f
inca
P1 subb #$64
bcc P1
sta ,u+
cmpa #$30
bne P2
leau -1,u
P2 lda #$3a
P3 deca
addb #$0a
bcc P3
sta ,u+
addb #$30
stb ,u+
rts

```

```

emod
ZZ equ *
end

```

THESE FINE STORES CARRY THE RAINBOW

The retail stores listed below carry THE RAINBOW on a regular basis and may have other products of interest to Tandy Color Computer users. We suggest you patronize those in your area.

ALABAMA

Birmingham Jefferson News Co.
Brewton McDowell Electronics
Florence Anderson News Co.
Greenville M & B Electronics
Madison Madison Books
Montgomery Trade 'N' Books

ALASKA

Fairbanks Electronic World

ARIZONA

Phoenix TRI-TEK Computers
Sierra Vista Livingston's Books
Tempe Books Etc.
Tucson Computer Library
Anderson News Co.

ARKANSAS

Fayetteville Vaughn Electronics/Radio Shack
Little Rock Anderson News Co.

CALIFORNIA

Citrus Heights Software Plus
Grass Valley Advance Radio, Inc.
Half Moon Bay Strawflower Electronics
Hollywood Levity Distributors
World Book & News Co.
Lompoc L&H Electronics Emporium
Los Angeles E.D.C. Industries
Polygon Co.
Sacramento Tower Magazine
Santa Rosa Sawyer's News, Inc.
Sunnyvale Computer Literacy

COLORADO

Westminster Software City

DELAWARE

Middletown Delmar Co.
Milford Milford News Stand
Wilmington Normar, Inc.—The Smoke Shop

FLORIDA

Boca Raton Software, Software, Inc.
Cocoa The Open Door
Davie Software Plus More
Ft. Lauderdale Electronics Engineers
Mike's Electronics Distributor
Jacksonville The Book Nook
Book Town
Deano's TV
Melbourne City Newsstand
The Little Store
North Miami Aimar Bookstore
Beach Book Mania
Orlando Boyd-Ebert Corp.
Panama City Anderson News Co.
Pensacola Wolf's Newsstand
Pinellas Park Family Computers
Sarasota Record Junction, Inc.
Starke Radio Shack Dealer
Sunnyside Sunny's at Sunset, Inc.
Tallahassee Anderson News Co.
Tampa Fine Print Bookstore
Titusville Sound Trader & Computer Center
Computrac

GEORGIA

Bremen Bremen Electronics/Radio Shack
Cummings Kent Radio Shack
Jesup Radio Shack
Marietta Act One Video
Toccoa Martin Music Radio Shack

IDAHO

Moscow Johnson News Agency

ILLINOIS

Aurora Kroch's & Brentano's
Belleville Software or Systems
Book Market
Chicago B. Dalton Booksellers
N. Wabash St.
West Jackson St.
Bob's in Newtown

Bob's News Emporium
Bob's Rogers Park
Book Market
East Cedar
North Cicero
West Diversy
E.B. Garcia & Associates
Kroch's & Brentano's
South Wabash
West Jackson
516 N. Michigan
835 N. Michigan
Parkway Drugs
Parkwest Books
Sandmeyer's Bookstore
Univ. of Chicago Bookstore
Univ. of Illinois Bookstore
Videomat, Inc.
Book Emporium
Book Market
Book Emporium
K-Mart Plaza
Northgate Mall

Chillicothe
Danville
Decatur

East Moline
Evanston
Geneseo
Kewanee
Lisle
Newton
Oak Brook
Oak Park
Paris
Peoria

Schaumburg
Skokie
Springfield

Sunnyland
West Frankfort
Wheeling

INDIANA

Angola D & D Electronics
Radio Shack
Berne White Cottage Electronics
Columbus Micro Computer Systems, Inc.
Columbus Finn News Agency, Inc.
Greenwood The Computer Experience
Indianapolis Bookland, Inc.
Delmar News
Indiana News
Ellettsville Ellettsville
Marion Arco Office Supplies
Marionville Radio Shack
Wabash Mitting's Electronics

Jasper
Madison
Marionville
Wabash

IOWA

Davenport Interstate Book Store

KANSAS

Topeka Palmer News, Inc.
Town Crier of Topeka, Inc.
Wichita Amateur Radio Equipment Co.
Lloyd's Radio

KENTUCKY

Georgetown Goodwin Electronics
Hazard Daniel Boone Gulf Mart
Hazard Hobby Shop
Hopkinsville The Computer Store
Louisville Radio Shack
Paducah R-Kaf Electronics
Paintsville Gus-Stan Enterprises
Pikeville Miller Electronics
Princeton

LOUISIANA

Crowley Acadiana Newsstand
Monroe The Book Rack

MAINE

Brockton Voyager Bookstore
Caribou Radio Shack
Waterboro Radio Shack

MARYLAND

Silver Spring Layhill Newsstand

MASSACHUSETTS

Brockton Voyager Bookstore
Cambridge Out Of Town News
Fitchburg Corners Book Shop
Ipswich Ipswich News
Littleton Computer Plus
Lynn North Shore News Co.

MICHIGAN

Allen Park Book Nook, Inc.
Dearborn DSL Computer Products
Durand Robbins Electronics
Harrison Harrison Radio Shack
Lawell Curt's Sound & Home Arcade Center
Mt. Clemens Key Book Shop
Michigan Radio
Muskegon The Eight Bit Corner
Owosso C/C Computer Systems
Perry Perry Computers
Roseville New Horizons
Royal Oak Software City
St. Johns Clinton Electronics
Sterling Sterling Book Center
Trenton Trenton Book Store
Wyoming Gerry's Book Co.

MINNESOTA

Minneapolis Read-More News
Willmar The Photo Shop

MISSOURI

Farmington Ray's TV & Radio Shack
Jefferson City Cowley Distributing
Kirksville T&R Electronics
Moberly Audio Hut
St. Louis Book Emporium
Computer Xchange
Final Edition
University City

MONTANA

Whitefish Consumer Electronics of Whitefish

NEBRASKA

Lincoln Hobby Town

NEVADA

Las Vegas Hurley Electronics

NEW HAMPSHIRE

West Lebanon Verham News Corp.

NEW JERSEY

Cedar Knolls Village Computer & Software
Clinton Micro World II
Lawrenceville Micro Con Software Center
Linwood Software City
Mamora Outpost Radio Shack
Montvale Software City
Pennsville Dave's Elect. Radio Shack
River Edge Software City
Rockaway Software Station

NEW MEXICO

Alamogordo New Horizons Computer Systems
Albuquerque Desert Moon Distributors
Page One Newsstand

NEW YORK

Brockport Lift Bridge Book Shop, Inc.
Elmira Heights Southern Tier News Co., Inc.
Fredonia On Line: Computer Access Center
Hudson Falls G.A. West & Co.
Johnson City Unicorn Electronics
New York Barnes & Noble—Sales Annex
Coliseum Books
Eastern Newsstand
Grand Central Station, Track 37
200 Park Ave., (Pan Am #1)
55 Water Street
World Trade Center #2


	First Stop News Idle Hours Bookstore International Smoke Shop Jonil Smoke Penn Book Software City State News Usercom Systems, Inc. Walden Books World Wide Media Services Software City Universal Computer Service Village Green World Wide News Spectrum Projects			
N. White Plains Pawling Rochester Woodhaven				
NORTH CAROLINA				
Aberdeen	King Electronics Radio Shack News Center in Cary Village Newsstand Int'l Papers & Paperback Computer Plus C ² Books & Comics Boomers Rhythm Center			
Cary Charlotte				
Havlock Hickory Marion				
NORTH DAKOTA				
Fargo	Computer Associates			
OHIO				
Blanchester Canton Chardon Cincinnati Columbiana Coshocton Dayton	JR Computer Control Little Professor Book Center Thrasher Radio & TV Cinsoft Fidelity Sound & Electronics Utopia Software Huber Heights Book & Card Wilke News News-Readers Girard Book & News The News Shop T.W. Hogan & Associates Lakewood International News Brunner News Agency Edu-Caterers Wilke News Mount Orab Radio Shack Programs Unlimited Leo's Book & Wine Shop Fine Print Books			
Fairborn Girard Kent Kenton Lakewood Lima				
Miamisburg Mount Orab Rocky River Toledo Xenia				
OKLAHOMA				
Oklahoma City Tulsa	Merit Micro Software Steve's Book Store			
OREGON				
Portland	Fifth Ave. News			
PENNSYLVANIA				
Allison Park Alltoona Brookville Malvern Philadelphia	Software City Newborn Enterprises Lary's Stereo Shop Personal Software City Software Center Newsy Stevens Radio Shack All-Pro Souveniers Pitt Computer & Software Software Corner Micro World The Computer Center of York			
Phoenixville Pittsburgh Pleasant Hills Temple Wind Gap York				
RHODE ISLAND				
Warwick	Software Connection			
SOUTH CAROLINA				
Charleston Hts. Gaffney Greenville Spartanburg Union	Software Haus, Inc. Gaffney Book Store Palmetto News Co. Software City Fleming's Electronics			
TENNESSEE				
Chattanooga	Anderson News Co. Guild Books & Periodicals Highland Electronics Anderson News Co. First Byte Computer Co. Computer Center Software, Inc. Mosko's Book Store Delker Electronics Cox Electronics Radio Shack			
Dickson Knoxville				
Memphis				
Nashville Smyrna Union City				
TEXAS				
Elgin Orange San Antonio	The Homing Pigeon Northway Books & News CoCo Nuts			
UTAH				
Murray	Deseret Book			
VIRGINIA				
Gaffton Norfolk Richmond	Electronics Marketing I-O Computers Software City			
WASHINGTON				
Seattle Tacoma	Adams News Co., Inc. B & I Magazines & Books Nybbles 'N Bytes			
WEST VIRGINIA				
Huntington Logan Madison Parkersburg	Nick's News Stan's Electronics & Radio Shack Communications, LTD Valley News Service			
WISCONSIN				
Appleton Cudahy Ladysmith Milwaukee	Badger Periodicals Cudahy News & Hobby Electronics, Etc. Book Tree Booked Solid Booked Solid II Harvey Schwartz Bookshop Univ. of Wisconsin Bookshop			
WYOMING				
Casper	The Computer Store			
ARGENTINA				
Cordoba	Informatica Y Telecomunicaciones			
AUSTRALIA:				
Kingsford	Paris Radio Electronics			
CANADA:				
ALBERTA				
Banff Blairmore Bonnyville Brooks Calgary Claresholm Drayton Valley Edmonton	Banff Radio Shack L & K Sports & Music Paul Tercler Double "D" A.S.C. Radio Shack Billy's News Radio Shack Associated Stores Langard Electronics CMD Micro Kelly Software Distributors Radio Shack D.N.R. Furniture & TV Fox City Color & Sound A.S.C. Radio Shack			
Edson Fairview Fox Creek				
Ft. Saskatchewan Grande Cache Grande Centre	Ft. Mall Radio Shack, ASC The Stereo Hut			
Hinton Innisfail Leduc Lethbridge Lloydminster Okotoks Peace River	The Book Nook Jim Cooper L & S Stereo Radio Shack Associated Stores Datatron Lloyd Radio Shack Okotoks Radio Shack Radio Shack Associated Stores Tavener Software Walter's Electronics			
St. Paul				
Stettler Strathmore Taber Westlock Wetaskwin	Stettler Radio Shack Wheatland Electronics Pynewood Sight & Sound Westlock Stereo Radio Shack			
BRITISH COLUMBIA				
Burnaby Burns Lake Campbell River Chilliwack Coertenay Dawson Creek Golden Langley N. Vancouver Nelson Parksville Penficton	Compulfit VT. Video Works TRS Electronics Charles Parker Rick's Music & Stereo Bell Radio & TV Taks Home Furnishings Langley Radio Shack Microwest Distributors Oliver's Books Parksville TV D.J.'s Four Corner Grocery Matrix Computing Sidney Electronics Wall's Home Furniture			
Salmon Arm Sidney Smithers 100 Mile House				
MANITOBA				
Altona Lundar Morden The Pas Selkirk Virden Winnipeg	LA. Wiebr Ltd. Goranson Elec. Central Sound Jodi's Sight & Sound G.L. Enns Elec. Archer Enterprises J & J Electronics Ltd.			
NEW BRUNSWICK				
Moncton Sussex	Jeffries Enterprises Dewitt Elec.			
NEWFOUNDLAND				
Botwood Carbonear	Seaport Elec. Stade Realities			
NOVA SCOTIA				
Halifax	Atlantic News			
ONTARIO				
Aurora Concord Exceter Hamilton Hanover Huntsville Kenora Kingston Listowel South River	Compu Vision Ingram Software J. Maclean & Sons Dataman Modern Appliance Centre Huntsville Elec. Donny "B" T.M. Computers Modern Appliance Centre Max TV Dennis TV			
QUEBEC				
LaSalle Pont. Rouge	Messageries de Presse Benjamin Enr. Bouffique Bruno Laroche			
SASKATCHEWAN				
Assiniboia Estevan Moose Jaw Nipawan Regina	Telstar News Katyk Electronics D&S Computer Place Cornerstone Sound Regina CoCo Club Software Supermarket Everybody's Software Library Gec. Laberge Radio Shack Paul's Service Grant's House of Sound			
Saskatoon Shellbrooke Tisdale Unity				
YUKON				
Whitehorse	H & O Holdings			
JAPAN				
Tokyo	America Ado, Inc.			
PUERTO RICO				
San Juan	Software City			

Also available at all B. Dalton Booksellers, and selected Coles Bookstores, Waldenbooks, Pickwick Books, Encore Books, Barnes & Noble, Little Professors, Tower Book & Records, Kroch's & Brentano's, and Community Newscenters.

ADVERTISER INDEX

We encourage you to patronize our advertisers — all of whom support the Tandy Color Computer. We will appreciate your mentioning **THE RAINBOW** when you contact these firms.

Ark Royal Games	87	Hard Drive Specialists	162	Rainbow Adventure Book II	121
Bangert.....	31	Hawkes Research Services	84	Rainbow Binder	65
Canyon County Devices	189	HJL div. of Touchstone		Rainbow Bookshelf.....	179
Cer-Comp.....	140, 141	Technology, Inc.....	99	Rainbow Gift Subscription	33
Challenger.....	55	Howard Medical	34, 210	Rainbow On Disk.....	145
Cinsoft	138	Inventive Solutions	142	Rainbow On Tape	202
CMOS Conversions	63	J & M Systems.....	BC	Robotic Microsystems	161
CNR Engineering.....	103	J & R Electronics	132	Rowe Electronic Co., Inc.	168
Cognitec	149	Kelly Software Distributors.....	95	Saguaro Software	147
Colorware.....	21, 22, 23	Lucus Industries 2000	96	Selected Software	69
Computer Center	35	Mark Data Products	137	Software House, The	84
Computer Friends	197	Metric Industries	13	Spectrogram	161
Computer Island	172	Micro Works, The	185	Spectrosystems	94
Computer Plus	3	Microcom Software.....	9, 11	Spectrum Projects Inc.	
Computerware	41	MicroSmart, Inc.....	186, 187105, 106, 107, 109, 110, 111	
Computize, Inc.....	127, 209	Microtech Consultants Inc.....	92	Speech Systems	
CoCo Cat/Anti-drug ad	52	MicroWorld	16756, 57, 58, 59, 60, 61	
Crockett Software	63	Moreton Bay	97	Sugar Software	175
Custom Computer Products	82	Novasoft.....	181	Sunrise Software	79
D.P. Johnson	201	Other Guys Software, The.....	113	T & D Software	38
Dayton Associates of		Owl-Services.....	73	TCE.....	148
W. R. Hall, Inc.	128	Owl-Ware	74, 75	Tepco	14
Delphi	122, 123	PCM	130	Thinking Software, Inc.	24
Derringer Software.....	90, 91	Perry Computers	16	Tom Mix Software	180
Diecom.....	IFC	Polygon	135	Tothian Software Inc.....	142
Disto.....	17, 53	Preble's Programs, Dr.....	100	True Data Products	154, 155
Dorsett.....	IBC	Prickly-Pear Software	15	Wasatchware	143, 191
Duck Productions	89	Public Domain	171	Woodstown Electronics	79
Electronic Motion Control	166	Puce	81	York 10.....	118
Federal Hill Software	55	PXE Computing	7	Zebra Systems	46
Group Technology	139	Radio Shack	49, 51		

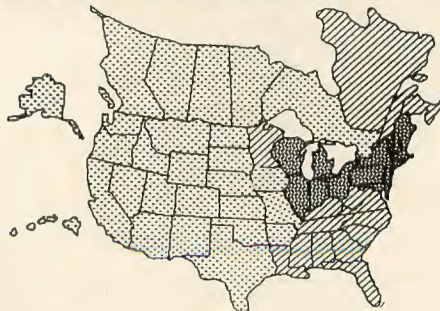

Call:
Shackleford, Nolan, Davis, Gregg and Associates
Cindy Shackleford, president
Shirley Duranseau
Advertising Representative
12110 Meridian South, Suite 5
P.O. Box 73-578
Puyallup, WA 98373-0578
(206) 848-7766

Call:
Kim Vincent
Advertising Representative
The Falsoft Building
9509 U.S. Highway 42
P.O. Box 385
Prospect, KY 40059
(502) 228-4492

Call:
Jack Garland
Garland Associates, Inc.
10 Industrial Park Road
Hingham, MA 02043
(617) 749-5852

**ALL SOFTWARE
COMPATIBLE WITH
COCO I, COCO II
& COCO III
COMPUTERS**

Computeize INC

(215) 946-7260 P.O. BOX 207 • LANGHORNE, PA 19047

Check or M.O. • Add \$3.00 shipping • PA residents add 6% sales tax

***** THE LATEST IN COCO NEWS!!! *****

**OUR
GRAPHICOM
DIGITIZER
JUST GOT BETTER
SEE PAGE 127**

**SUPER BACK-UP
UTILITY ©**

... WITH S.B.U. FROM COMPUTIZE — YOU'LL NEVER NEED ANOTHER BACK-UP UTILITY FOR YOUR COCO!!! SUPER BACK-UP UTILITY WILL PERFORM ALL OF THE FOLLOWING FUNCTIONS:

1. TAPE TO TAPE (Regardless of most protection schemes)
2. TAPE TO DISK (Move Cassette programs to Disk)
3. AUTO RELOCATE (For those Cassette programs that conflict with Disk operating systems.)
4. DISK TO TAPE (Place Disk programs onto Cassette)
5. DISK TO DISK (Our powerful Split-N-Image Program. Copies regardless of most protection schemes)
 - MENU DRIVEN
 - REQUIRES 32K EXTENDED COCO
 - REQUIRES 1 OR 2 DRIVES
 - ALL MACHINE LANGUAGE!!!

COMPARE WITH OTHER INDIVIDUAL PROGRAMS COSTING IN EXCESS OF \$100.00
DISK \$49.95 Cat. No. 107CD


SPIT-N-IMAGE ©
M/L Disk Back-Up Utility

There is no need to suffer the heartbreak of crashed disks any longer. Spit-N-Image will create a mirror image of your valuable disk programs which do not respond to normal back-up functions. Will also initialize and back-up in one pass. Data processing experts always insist on having a back-up — it's good practice.
REQUIRES 32K CC
DISK \$34.95 Cat. No. 101CD

**TRIPLE TRANSFER
UTILITY ©**

Transfer contents of disk to tape • Transfer contents of tape to disk • Automatically relocates cassette programs that conflict with the disk operating system • Displays machine language program addresses • Copies ASCII, Basic, & Machine Language Programs • All contained in 1 menu driven program!
REQUIRES 32K CC EXT.
Disk \$24.95 Cat. No. 105CD

"Y BOX"



If you have ever owned a "Y" Cable you know how easy it is to "bump" or dislodge the cable from the computer. With the positive mechanical connection of the "Y Box" chances are greatly reduced of the "Y" coming dislodged.

One of the most common causes of a shorted data bus in the CoCo is a misaligned or loose "Y" Cable. Don't let your computer be the next victim of a "Y" Cable. Order the "Y Box" from COMPUTIZE.

- NOISE FREE "GOLD CONTACT" TO YOUR COMPUTER
- POSITIVE MECHANICAL AND ELECTRICAL CONNECTION
- Catalog No. 162CH Only \$29.95

MASTER KEY II

New Improved Version! A hardware product that takes control of any program regardless of protection. Now use with RS Multi-pak, "Y" cable or optional extender cable. Captures register contents as they were when Master Key II was engaged. Complete disassembler, memory save, and much more. Requires some familiarity with Assembly Language.

ROM PAK Cat. No. 160HR \$ 99.95
Cat. No. 161HR With Ext. Cable \$109.95

**QUICK BACKUP
UTILITY \$19.95**

Catalog No. 185CD
Deluxe backup utility for the Radio Shack Color Computer.
• Backup a disk in as few as 32 seconds (in three passes)
• Format and backup a full disk in one minute
• Full error correcting features (retry, skip, infinite retry)
Displays the current track that is being processed, works with all ROM versions. Supports 1 or 2 disk drive. A great disk production tool.

GRAPHICOM \$24.95

Catalog No. 111GD
Simply stated - One of the finest graphic programs written for the Color Computer!
FEATURES:
• S-U-P-E-R U-S-E-R F-R-I-E-N-D-L-Y !

- Supports 4 Hi-Res display modes
 - 4 page animation mode
 - Color Palette with over 15 color patterns for use with Hi-Res artifact
 - Send/Receive pictures over modem
 - Supplied utility allows capturing Hi-Res screens from most COCO arcade games
 - Multiple Hi-Res character fonts (user re-definable)
 - Supplied utility for transferring Graphicom screens to Basic or other M/L programs.
 - Supplied utility for loading screens from Basic or other sources
 - Built in Hi-Res SCREEN PRINT (compatible with EPSON, C-I/OH, GEMINI-10, OKI, plus Radio Shack's LP-VII, LP-VIII, DMP-100, DMP-200, and GCP-115 printers) from 110 to 9600 baud
 - SEND/RECEIVE slow-scan television
 - Many additional features, operating hints, hardware mod's and suggestions, etc.
- REQUIRES 64K COCO, 1 DISK DRIVE, AND 2 ANALOG JOYSTICKS

Season's Greetings

Announcing COLORSCAN, new software for the CGP-220. This program is a must for anyone who owns a Radio Shack Ink Jet Printer, and enjoys creating graphics with Graphicom, Graphicom Part II, CoCo MAX, or any program that produces a standard 6K binary picture files.

This program contains some of the popular features found in "HARDCOPY" such as 1x1, 2x2 and posters; but color scan produce full color printouts of your favorite 6K graphics files. You can also create colorful banners up to 27" in length, or dump a disk's entire graphic contents to paper.

Colorscan will print program listings in blazing color, make remarks in red, line numbers green, search for strings and print in blue, etc. All these features and more.

Colorscan catalog number 184WD \$29.95

**GRAPHICOM PART II
Catalog No. 132WD . \$24.95**

**GRAPHICOM PART II DOES NOT
REQUIRE GRAPHICOM TO RUN!**



Graphicom Part II is a video processing package that provides many functions that are missing in Graphicom. Here are just a few of the features provided by Graphicom Part II:

ENLARGE/REDUCE/ROTATE
Enlarge or reduce any portion of a graphic screen, just like a photographic enlarger! Rotate by any degree or fraction of a degree around any point on the screen.

PAINT
Paint or "fill-in" any irregular area on the screen! More than 50 different colored patterns available. Additional paint patterns may be user-defined.

PAN & ZOOM
"Zoom in" x2, x4, or x8 on any portion of the screen to do fine pixel work. Allows editing of Graphicom character sets with ease!


TYPESETTER & FONT EDITOR
Add text in 16 different sizes, also supports user definable foreground & background colors. Design & Edit characters for use in the typesetter.

PIXEL BLASTER
Allows the user to easily substitute or remove colors. Widen lines, swap BLUE & RED without effecting BLACK & WHITE, etc.

Graphicom Part II requires a 64K extended disk basic system, and supports 1 to 4 disk drives, keyboard or joystick (analog or switch type) input. It will load and save both Standard BIN files and Graphicom screens. All functions support color or Hi-Res operation, as well as the 4 screen display modes.

**ARE YOU LOOKING
FOR A HI-RES GRAPHIC
SCREEN PRINT
PROGRAM?**

HARDCOPY

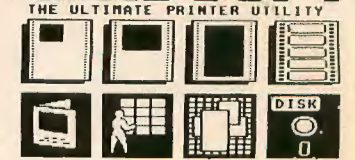

©1984 WHITESMITH V:1.0 ALL RIGHTS RESERVED

HARDCOPY - Hardcopy is more than just a screen print utility, compare these features with any other graphic dump program on the market:

- Full GRAPHICOM/GRAPHICOM PART II compatibility! Loads STANDARD 6K images, GRAPHICOM pictures, and COCO MAX pictures too!
- BLACK & WHITE or GREY SCALE printing. In GREY SCALE printing, colors are printed as user definable patterns. Supports hi-res in all 4 GRAPHICOM display modes!
- 1x, 2x, 3x PRINTOUTS - Three menu options are reserved for the most frequently used printout sizes; 1x (quarter page), 2x (half page), and 3x (full page).
- GRAPHIC LABELS - The label printing option allows the user to create custom mailing or disk labels with professional looking results.
- GREETING CARDS - The greeting card option allows the user to custom design greeting cards using both text and graphics.
- GIANT POSTERS - The poster option provides the user with a means of reproducing a hi-res graphic to a multi-sheet poster.
- SPECIAL EFFECTS - The special effects option allows the user to directly control the printing directives; ROTATION, X/Y SIZE, X/Y FLIP, X/Y GRID, X/Y FILL, TAB, WINDOW, POS/NEG IMAGE, and more!
- USER CALL - Have an application that HARDCOPY doesn't quite match? HARDCOPY routines can be added to EXTENDED BASIC through the USR command!

HARDCOPY* requires a 64K Color Computer or Color Computer II, and at least one disk drive. It supports 1 to 4 disk drives, keyboard or joystick input. Please specify printer and cat. number when ordering.

* Due to hardware differences, some features may function differently on certain printers.

IDS 480/560-G	Cat. No. 170WD
Oki 82A (OkiGraph)	Cat. No. 179WD
Okidata 92	Cat. No. 171WD
Gemini 10X	Cat. No. 174WD
Gemini SG-10/15	Cat. No. 178WD
DMP-105	Cat. No. 183WD
Epson LX-80	Cat. No. 173WD
Epson MX-80	Cat. No. 172WD
Epson RX-80	Cat. No. 173WD
Epson FX-80	Cat. No. 173WD
Riemann PLUS	Cat. No. 177WD
DMP-110	Cat. No. 180WD
DMP-120	Cat. No. 176WD
DMP-130	Cat. No. 182WD
DMP-200	Cat. No. 175WD
GCP-220	Cat. No. 181WD

**HARDCOPY PRINT
UTILITY \$29.95**

Most Howard Medical products are COCO 3 compatible, some require special patches. Please inquire when you order.



(800) 443-1444 ORDERS

(312) 278-1440 INQUIRIES AND ORDER STATUS

PRINTERS



**NEW
Dual Mode
EPSON LX-80**

The LX-80 offers draft or near letter quality plus a 1K input buffer for much faster graphics printing speed. LX-P package includes the LX-80, a Botek serial to parallel converter, and a Howard Printer Tutorial.

\$317 (\$7 shipping)
Add \$29.50 for tractor ET-1



**STAR
NX-10**

The NX-10 is the latest generation of printers and offers built-in back tractor feed giving forward and backward movement of paper plus exceptional graphics printing capabilities. NX-P package includes the NX-10, a Botek serial to parallel converter and the Howard Printer Tutorial.

\$307 (\$7 shipping)

MONITORS

ZENITH

123A 12"



This 12" green screen high resolution monitor offers 80 column capability, Zenith quality and a 30 day warranty valid at any of Zenith's 1200 locations.

Retail \$149 **\$67⁵⁰** **REPACK**
Our price (\$7 shipping)

122A Zenith 12" Amber Screen offers the same 640 dots x 200 dots resolution at 15MHz as the 123A and a 90 day warranty valid at our 1200 locations.

\$88
(\$7 shipping)

Closeout Specials — only 14 in stock. We have a limited number of lesser known color monitors that have been discontinued but are brand new in their original boxes.

\$139
(\$14 shipping)

141 Roland 13" Color Monitor with speaker, 270 dots x 200 dots resolution, 4 MHz band width.

\$217
(\$14 shipping)

131 Zenith 13" Color Monitor has medium resolution with speaker and RGB jack.

\$168
(\$14 shipping)

All monitors require an amplifier circuit to drive the monitor and are mounted inside the color computer. They attach with spring connectors, with two wires extending out of the computer, one for audio and one for video.




VA-1 for monochrome monitors only, fits all color computers

\$24⁴⁵
(\$2 shpg)

VC-4 for monochrome or color, fits all color computers

\$39⁴⁵
(\$2 shpg)

DISK CONTROLLERS



DISKO

Includes controller and C-DOS ROM chip.

DC-3

\$98 (\$2 shipping)

ADD-ON BOARDS

DC-3B includes 80 column capability, parallel printer, real time clock, and all software **\$138**

DC-256 256K RAM Board includes software to access all RAM **\$125**

DC-3P Mini EPROM Programmer includes all software to program 2764 or 27128 **\$55**

DC512 512K RAM Board **\$165**

DC-3C Clock Calendar and parallel printer port **\$40**

DD-2 Double sided 360K disk drive with 1/2 height case and power supply **\$188**

CA-1 Cable to connect controller to one drive **\$2450**

CA-2 Two drive cable **\$2950**

MEMORY

64-E1 for E Boards with complete instructions. Remove old chips and replace with preassembled package—no soldering or trace cuts. (\$2 shpg) **\$28.45**

64-F1 for F Boards. No soldering needed. Capacitor leads must be cut **\$2445**
(\$2 shipping)

64-2 for COCO 2. Kit requires one solder point, no trace cuts. (\$2 shipping) **\$2445**

64-22 Two chip set for 26-3134A and B, 26-3136A and B. Koren Color Computers require 1 solder point **\$2845**
(\$2 shipping)

SOFTWARE SPECIALS

PAYROL/BAS™

Written in nonprotected basic for the color computer. This easy-to-use package of programs will simplify and decrease the time spent doing payroll. *Rainbow* May 1986 review says, "Elegant and professional." State and federal tables are already included. Send for FREE 11 page reports guide.

\$79⁹⁵

VIP LIBRARY

Softlaw's integrated package includes VIP writer terminal, data base, call and disk zap which can fix a diskette that is giving I/O errors

\$125

SAP-II

Stock analysis program organizes your portfolio and gives specific sell and stop-loss points.

\$19⁹⁵

BPA-1

Chart your blood pressure from daily readings taken in the comfort of your home.

\$19⁹⁵

GUARANTEE

Howard Medical's 30-day guarantee is meant to eliminate the uncertainty of dealing with a company through the mail. Once you receive our hardware, try it out; test it for compatibility. If you're not happy with it for any reason, return it in 30 days and we'll give you your money back (less shipping).

Howard Medical Computers 1690 N. Elston Chicago, IL 60622



ORDERS

(800) 443-1444

INQUIRIES AND ORDER STATUS

(312) 278-1440

Showroom Hours:
8:00-4:00 Mon-Fri.
10:00-3:00 Sat.

WE ACCEPT: VISA • MASTERCARD • AMERICAN EXPRESS
C.O.D. OR CHECKS • SCHOOL P.O.'S

COMPUTER AIDED INSTRUCTION

Educational Programs for Students Grade K-12 and Adult Self Studies

NEW PROGRAMS FOR YOUR TANDY 1000 AND TRS-80 COLOR COMPUTER

Compatible with Apple - Atari - Commodore - TRS 80 I, III, 4 - IBM PC Jr.

16 New Programs now available in Basic Spanish

NEW! VIDEO CASSETTES FOR VHS!

InnerActive™ Video Tutorials
Complete with audio narration

4 cassettes with 8 programs in each of the following subject areas:

- Basic Spanish Grammar
- Basic Algebra
- Reading by Phonics
- Basic Fractions

2 programs per tape. Running time: 45 minutes per tape.

\$19⁹⁵ per/tape

16 Programs on 8 VHS Tapes \$159⁰⁰

CALL TOLL FREE FOR MORE INFORMATION



One-syllable adjectives that end in **y** usually just add **ly**



Which has one syllable?



You may be able to reduce your taxes by

- Income averaging
- Income splitting
- Tax shelter

Which?

1 sister

2 smaller

One-syllable adjectives that end in **y** usually just add **ly**

Which has one syllable?

1 icy

2 sly

Interactive Tutorial Programs for Home or Classroom Use

Over 1000 programs for your selection with 32 now available on disk for the Color Computer and 500 now available for the Tandy 1000.

"We're Your Educational Software Source"

Subject	No. of Programs
Reading Development	256 (4 on disk)
Reading Comprehension	48 (4 on disk)
Mathematics	128
Algebra	16 (16 on disk)
History	32 (4 on disk)
Spelling	16
Government	16
Physics	16 (4 on disk)

16 Programs in each of the following:

Children's Tales - Carpentry - Electronics
Health Services - Office Skills - Statistics
First Aid/Safety - Economics - Business
Accounting - Psychology - MUCH MORE!

Apple II, TRS 80 I, III, & 4, and Commodore 64 computers require respective conversion kits (plug-in board and stereo cassette player), \$99.00. Atari 400/600/800/1200 computers require the Atari cassette recorder and the Dorsett 4001 Educational Master Cartridge, \$9.95. For the IBM PC Jr. a cassette adapter cable and a good cassette recorder are required. The Tandy 1000 requires the Dorsett M1001 speaker/PC board kit, \$69.00, and a standard cassette recorder. A Radio Shack CCR-81 or CCR-82 is recommended.

CASSETTES: \$59.90 for an album containing a 16-program course (8 cassettes with 2 programs each); \$8.80 for a 2-program cassette.

DISKS: \$14.95 for a one-program disk; \$28.95 for two disks; \$48.95 for four disks. All disks come in a vinyl album.

Dorsett Educational Software features:

- Interactive Learning
- User Friendly
- Multiple Choice and Typed
- Program Advance with Correct Response
- Full-time audio narration (Cassette Programs Only)
- Self-Paced Study
- High Resolution Graphics
- Easy-Reading Text

For more information, or to order call:

TOLL FREE 1-800-654-3871
IN OKLAHOMA CALL (405) 288-2301



DORSETT
Educational Systems, Inc.
Box 1226, Norman, OK 73070

Send for our free educational programs for Commodore, Tandy, etc. educa- PC Jr.

Dealer Inquiries Welcome

LOWEST CONTROLLER PRICE EVER!

The New JFD-EC, Only \$75

JFD-EC DISK CONTROLLER

The JFD-EConomical controller combines the best features of the original JFD-COCO with the two switchable ROM sockets, fully buffered data lines, and Memory Minder in ROM. The JFD-EC replaces the JFD-COCO in our product line at an even lower price. The controller includes JDOS, Memory Minder in ROM, and the JDOS manual.

JFD-EC Disk Controller with JDOS

\$75

JFD-CP DISK CONTROLLER

Our new JFD-CP, compatible with both the original COCO and the COCO 2, features a parallel port to support a Centronics compatible printer or our hard drive, and an external ROM switch, which allows you to select JDOS or an optional RS DOS-type ROM. It comes in a case and includes JDOS 1.2 and manual. JDOS implements all RS DOS commands, plus many more, including auto line numbering, error trapping, baud rate selection, OS/9* boot from floppy or hard drive, and Memory Minder**, our disk drive analysis program (Precision Alignment Disk not included).

JFD-CP Disk Controller with JDOS

\$139

NEW TERMS

One-year warranty on parts & labor; 30-day money back guarantee (except shipping) if not totally satisfied. Items must be returned in like new condition.

Free shipping via UPS in continental United States for payment by VISA, MasterCard, or cashiers check. COD requires 10% prepayment by bank card plus 3% shipping. Blue Label and foreign shipping extra.

DRIVE SYSTEMS

Upgrade your Color Computer by adding our new JFD-CP disk controller, supercharged with JDOS 1.2 operating system, and a top quality drive with case and power supply. Comes complete with cable and JDOS manual.



Drive 0 System with one **double side drive** \$299
 Drive 0, 1 System with two **double side drives** \$449

MEMORY MINDER**



Memory Minder is a disk drive test program now included in JDOS. Used with a Precision Alignment Disk, Memory Minder allows you to check

your drives for speed, alignment, sensitivity, hysteresis, and more! You can actually align or adjust the drives while viewing the graphics on the screen. No special equipment needed!

PRECISION ALIGNMENT DISKS (From Dysan)
 PAD-40X1: Tests single side disk drives \$26
 PAD-40X2: Tests double/single disk drives \$33

Memory Minder is available on diskette for those who don't own a JFD-CP or JFD-EC Controller with JDOS. Includes Precision Alignment disk.

Memory Minder: single side package \$59
 Memory Minder: single/double side package \$75

*OS/9 is a registered trademark of Microware, Inc.

**Memory Minder is a registered trademark of J&M Systems, Ltd.



J & M SYSTEMS, LTD.

15100-A CENTRAL SE
 ALBUQUERQUE, NEW MEXICO 87123
 505/292-4182