

# COMPUTE!

\$2.50  
July  
1982  
Issue 26  
Vol. 4, No. 7  
63379 £1.85 in UK

## The Journal For Progressive Computing™



**Gold Rush**  
Action Game For  
Atari And VIC

**Atari Video  
Graphics: An  
In-depth Tutorial**

**An Apple DOS  
Changer:  
Protect Your Disks  
From Accidental  
Erasure**

**Super QuadraPET**  
Independently  
Partitioning  
PET/CBM Memory


**Whither VIC:  
An Overview  
Of The  
VIC-20 Computer**

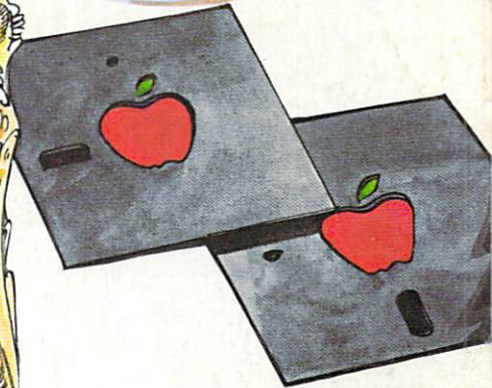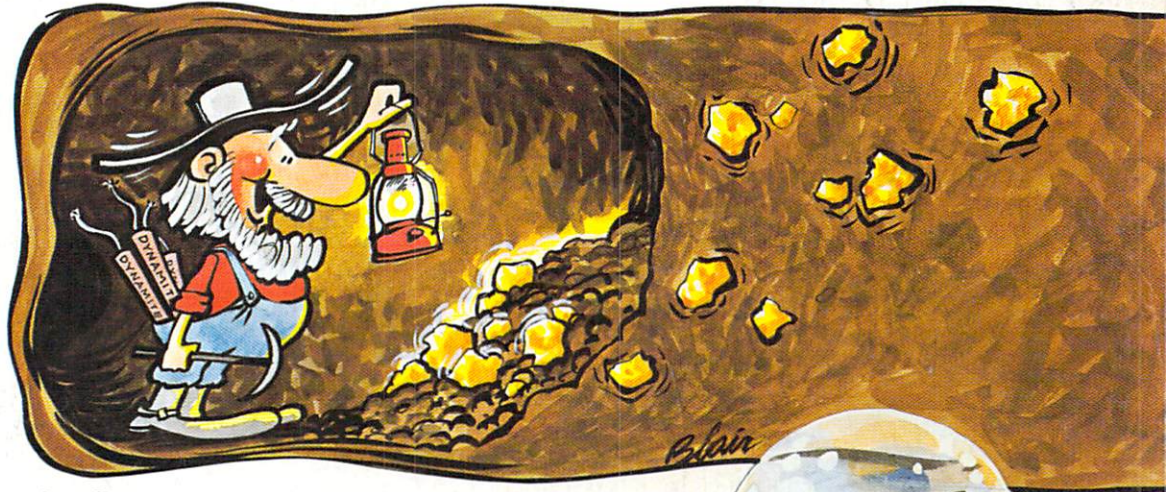

**Reviews: Caverns of Mars  
for Atari, Two VIC-20 Games,  
Softbox-CP/M for  
PET/CBM, and more**





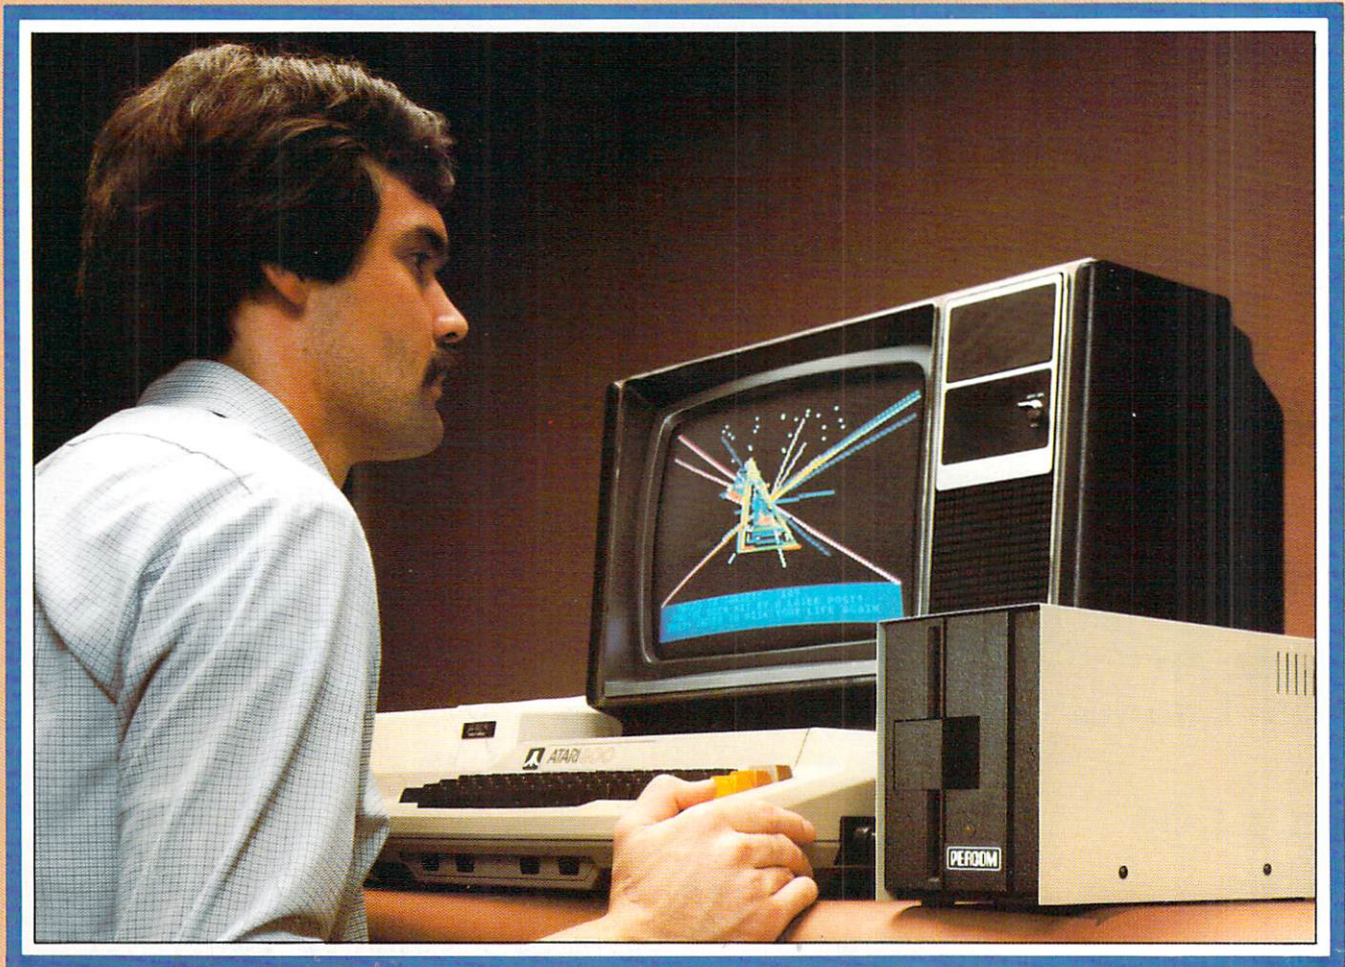

# Introducing the **PERCOM** Alternative to ATARI Disk Storage

Your Atari 800 is the finest home computer on the market. Now you can own a floppy disk system that measures up — an RFD mini-disk storage system from Percom.

At Percom we've been making disk storage systems since 1977.

Our designs are proven, our quality is well known. And we back our dealers with service know-how. Expect more from Percom. You won't be disappointed.

- Operate in either single- or double-density storage mode using Atari DOS 2.0S. In double-density you can store almost 184 Kbytes (formatted) on one side of a 40-track diskette.

For the best thing next to your computer, see your Atari dealer about a Percom RFD floppy disk storage system. For the name of your nearest dealer, call Percom toll-free 1-800-527-1222.

**PERCOM**

PERCOM DATA COMPANY, INC.

11220 PAGEMILL RD. • DALLAS, TX 75243 • (214) 340-7081

ATARI 800 & ATARI 810 are trademarks of the Atari Corporation. PERCOM is a trademark of Percom Data Company, Inc.

- Connect your Percom RFD first-drive system directly to your computer or connect into your system through your Atari 810 Disk Drive.
- Add an RFD first-drive system with its versatile four-drive controller, then connect as many as three more low-cost RFD add-on drives.
- Write application programs that can query and set up your system to operate a different type drive at each cable position — that can even change configuration as the program executes.

- Get quality and state-of-the-art capability at competitive prices. Percom first-drive RFD systems are priced from only \$799, add-on drives from only \$399.

**Watch for announcement of a new, powerful, easy-to-use disk-operating system for your Percom-equipped Atari 800 computer.**

Minimum system requirements — are an Atari 800 computer with 24-Kbytes of RAM and compatible video display system; Atari's disk-operating system (ver 2.0S) and owner's manual; and, for add-on drives (if used) an optional disk drives interconnecting cable available from Percom.

Yes... I'd like to know more about Percom RFD disk drives for my Atari 800 Computer. Rush me free literature.

Send to: **PERCOM DATA COMPANY, Inc.**, Dept. 18-C01  
11220 Pagemill Road, Dallas, Texas 75243

name \_\_\_\_\_

street \_\_\_\_\_

city \_\_\_\_\_

state \_\_\_\_\_

zip \_\_\_\_\_

phone number \_\_\_\_\_

I plan to add a hard disk system to my Atari:  yes  no.

**MAIL TODAY!**


PRICES AND SPECIFICATIONS  
SUBJECT TO CHANGE  
WITHOUT NOTICE.



# IF YOU'RE WAITING FOR THE PRICE OF WORD PROCESSORS TO FALL WITHIN REASON,



## IT JUST DID.

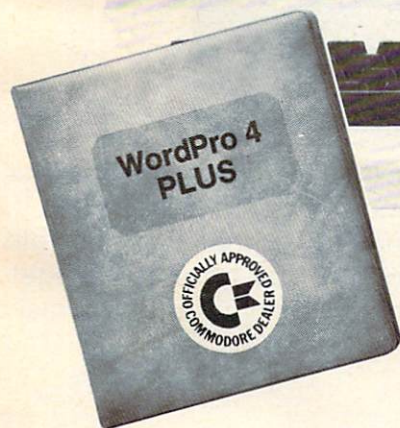

Everyone expected it would happen sooner or later... with **WordPro PLUS™** it already has! Now all the marvelous benefits of expensive and advanced word processing systems are available on Commodore computers, America's largest selling computer line. WordPro PLUS, when combined with the new 80 column CBM 8032, creates a word processing system comparable to virtually any other top quality word processor available—but at savings of thousands of dollars!

TM WordPro is a Registered Trademark of Professional Software, Inc. WordPro was written by Steve Punter. All specifications subject to change without notice.

New, low cost computer technology is now available at a fraction of what you would expect to pay. This technology allowed Commodore to introduce the new and revolutionary CBM 8032 Computer.

WordPro PLUS turns this new CBM 8032 Computer into a sophisticated, time saving word processing tool. With WordPro PLUS, documents are displayed on the computer's screen. Editing and last minute revisions are simple and easy. No more lengthy re-typing sessions. Letters and documents are easily re-called from memory storage for editing or printing with final drafts printed perfectly at over five hundred words per minute!

Our nationwide team of professional dealers will show you how your office will benefit by using WordPro PLUS. At a price far less than you realize.

**Invest in your office's future...  
Invest in WordPro PLUS...  
Call us today for the name of the  
WordPro PLUS dealer nearest you.**

**Professional Software Inc.**  
51 Fremont Street  
Needham, MA 02194  
(617) 444-5224  
TELEX: 95 1579



# CMS Software General Accounting

## For the Commodore 8000



Now there is an interactive General Accounting System designed especially for the first time user. The user is led through each function by highlighted prompts explain-


ing the required input at each point. And all input requests are prompted with complete verification. Plus, a step-by-step instruction manual guides the user through the

program. The user prompts and the detailed manual make it virtually impossible for the first time user to get lost or to accidentally crash.

### General Ledger

Cash Disbursements and Cash Receipts Journal as well as a General Journal. Maintains account balances for Present Month, Quarter to Date and Year to Date. Accepts postings from


Accounts Receivable, Accounts Payable, Payroll and other programs. Also provides user customized financial statements. Up to 1000 accounts and up to 99 departments.

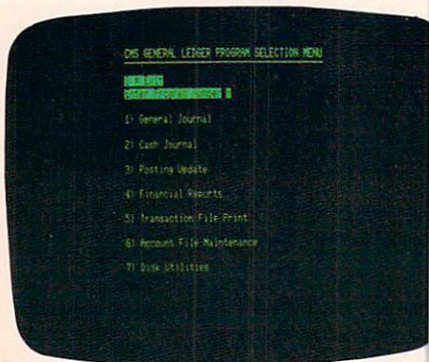



# re Systems nting System II


## Series Computer System

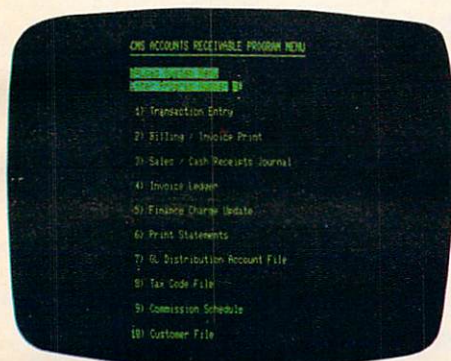

### Accounts Receivable

Invoices and Monthly Statements as well as Credit and Debit Memos. Accommodates full or partial payments. User sets finance charge rate and period. User also sets invoice aging reports and aging breaks. Invoices may be distributed among nine different General Ledger accounts with


automatic updating to the General Ledger. During invoice data entry the invoice is displayed on the screen and typed exactly as if in a typewriter. File capacity allows 1800 customers and invoices. Five hundred customers allows room for 1300 invoices.

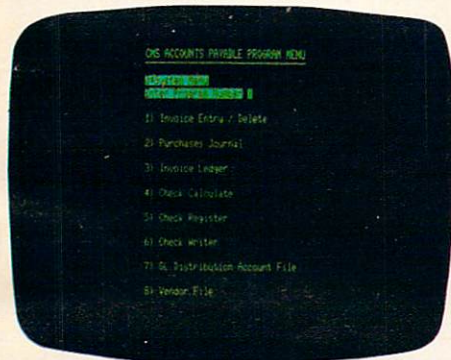

### Accounts Payable

Accounts Payable checks with full voucher detail. Detailed check register. Automatic application of Credit Memos. User sets invoice aging reports and aging breaks. Invoices may be dis-

tributed among nine different General Ledger accounts with automatic updating to the General Ledger. File capacity allows 2500 vendors and invoices.

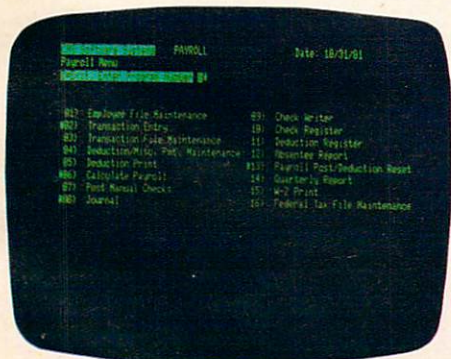

### Payroll

Payroll checks with full deductions and pay detail. Pays regular, overtime, holiday and piece work hours. Accommodates Weekly, Bi-Weekly, Semi-Monthly and Monthly employees. Up to eight miscellaneous deductions or payments per

employee. Prints Payroll Journal, Payroll Check Register and an Absentee Report as well as 941 information and W2 forms. Maintains Monthly, Quarterly and Yearly totals for up to 350 employees. Automatic General Ledger updating.

See your nearest  
Commodore dealer for  
a demonstration.

## CMS Software Systems

2204 Camp David Mesquite, TX. 75149 214 285-3581



# WHY THE MICROSOFT RAMCARD™ MAKES OUR SOFTCARD™ AN EVEN BETTER IDEA.

Memory — you never seem to have quite enough of it.

But if you're one of the thousands of Apple owners using the SoftCard, there's an economical new way to expand your memory dramatically.

## 16K ON A PLUG-IN CARD.

Microsoft's new RAMCard simply plugs into your Apple II®, and adds 16k bytes of dependable, buffered read/write storage.

Together with the SoftCard, the RAMCard gives you a 56k CP/M® system that's big enough to take on all kinds of chores that would never fit before (until now, the only way to get this much memory was to have an Apple Language Card installed).

## GREAT SOFTWARE: YOURS, OURS, OR THEIRS.

With the RAMCard and SoftCard, you can tackle large-scale business and scientific computing with our COBOL and FORTRAN languages. Or greatly increase the capability of CP/M

applications like the Peachtree Software accounting systems. VisiCalc™ and other Apple software packages can take advantage of RAMCard too.

And RAMCard gives you the extra capacity to develop advanced programs of your own, using the SoftCard and CP/M. *Even with the RAMCard in place, you can still access your ROM BASIC and monitor routines.*


## JOIN THE SOFTCARD FAMILY.

The RAMCard is just the latest addition to the SoftCard family — a comprehensive system of hardware and software that can make your Apple more versatile and powerful than you ever imagined.

Your Microsoft dealer has all the exciting details. Visit him soon, and discover a great idea that keeps getting better.

Microsoft Consumer Products, 400 108th Ave. N.E., Suite 200, Bellevue, WA 98004. (206) 454-1315.

# 16 k

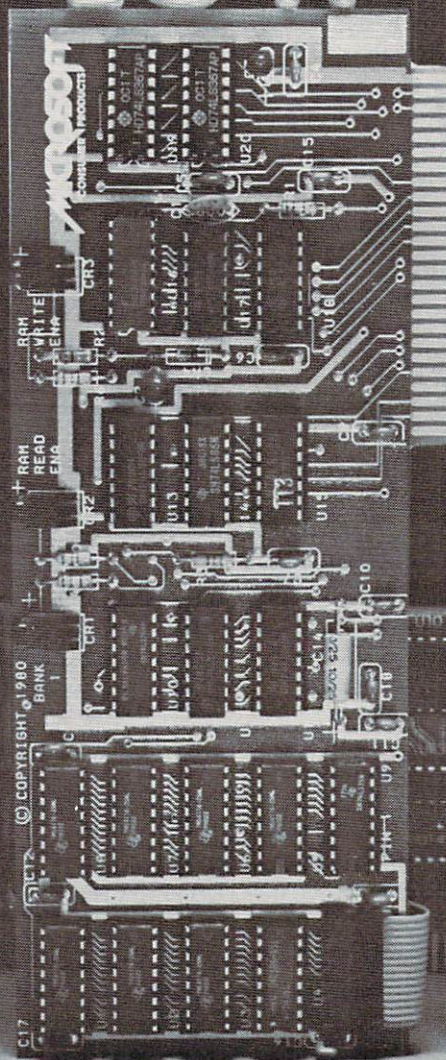

SoftCard and RAMCard are trademarks of Microsoft. Apple II is a registered trademark of Apple Computer, Inc. Z-80 is a registered trademark of Zilog, Inc. CP/M is a registered trademark of Digital Research Corp. VisiCalc is a trademark of Personal Software, Inc.

# MICROSOFT



Table of Contents

July, 1982 Vol. 4, No. 7

Guide To Articles And Programs

Computer Specific Multiple Computers

Features

Gold Rush! ..... Joseph Weber, 27  
 IRA Planner ..... Richard and Betty Givan, 34  
 Maze Race ..... Mike Peterson, 40  
 Test RAM For Bad Bits, Nondestructively ..... Leo J. Scanlon, 46

Education And Recreation

Recursive BASIC Subroutines ..... Earl Wuchter, 58  
 Screen Graphics ..... Ian Paull, 68  
 Answer Selection With Joysticks ..... Stephen Levy, 84  
 Apple Game Paddles ..... John K. Elberfeld, 92  
 Computing Techniques For The Handicapped ..... George Leotti, 94  
 Multidigit Addition ..... Zoltan Szepesi, 96

Reviews

Caverns Of Mars ..... Charles Brannon, 183  
 Two Programs From The VIC Six Pack ..... Harvey Herman, 184  
 SoftBox: CP/M For PET/CBM ..... Richard Mansfield, 185  
 SYSRES For PET/CBM ..... Charles Brannon, 186  
 Fun With Microcomputers And BASIC ..... Fred D'Ignazio, 187

Columns And Departments

The Editor's Notes ..... Robert Lock, 6  
 Ask The Readers ..... Robert Lock, Richard Mansfield, and Readers, 12  
 Computers And Society ..... David Thornburg, 18  
 The Beginner's Page: Making Files Work ..... Richard Mansfield, 22  
 Friends Of The Turtle ..... David Thornburg, 64  
 The World Inside The Computer ..... Fred D'Ignazio, 76  
 Learning With Computers ..... Glenn Kleiman, 88  
 Telecommunications: Choosing A Modem ..... Michael Day, 122  
 Machine Language: First Steps ..... Jim Butterfield, 150  
 Insight: Atari ..... Bill Wilkinson, 165

The Journal

A Direct Access File Editor ..... Charles Brannon, 97  
 MicroDOS ..... Dennis Keathley, 106  
 Whither VIC ..... Jim Butterfield, 112  
 Super QuadraPET ..... David Sale, 116  
 Apple DOS Changer ..... Robert Swirsky, 121  
 Atari Video Graphics And The New GTIA ..... Craig Chamberlain, 124  
 All About PET/CBM Character Sets ..... Louis F. Sander, 130  
 Language Lab ..... Steve Steinberg, 142  
 VIC Super Expander Memory Map ..... Chuan Chee, 144  
 Atari Variable Table Refresh And Program Backup ..... Jon Harding, 151  
 How To Use The 6560 Video Interface Chip ..... Dale Gilbert, 154  
 Machine Language Compactor ..... David L. Evans, 159  
 The FORTH Page: Headless Metacompilation ..... Richard Mansfield, 174  
 Resource Part 1: Mapping Machine Language Code ..... T. R. Berger, 175

COMPUTE!'s Listing Conventions ..... 188

New Products ..... 191

CAPUTE! Modifications Or Corrections To Previous Articles ..... 190

Advertisers Index ..... 208

AP = Apple, AT = Atari, P = PET/CBM, V = VIC-20, O = OSI, C = Radio Shack Color Computer, \* = All or several of the above.

COMPUTE! The Journal for Progressive Computing (USPS: 537250) is published 12 times each year by Small System Services, Inc., P.O. Box 5406, Greensboro, NC 27403 USA. Phone: (919)275-9809. Editorial Offices are located at 625 Fulton Street, Greensboro, NC 27403. Domestic Subscriptions: 12 issues, \$20.00 Send subscription orders or change of address (P.O. form 3579) to Circulation Dept., COMPUTE! Magazine, 515 Abbott Drive, Broomall, PA 19008. Second class postage paid at Greensboro, NC 27403 and additional mailing offices. Entire contents copyright © 1982 by Small System Services, Inc. All Rights reserved. ISSN 0194-357X.

TOLL FREE  
 Subscription  
 Order Line  
 800-345-8112  
 In PA 800-662-2444





# The Editor's notes...

## A Brief Overview Of The Chicago Consumer Electronics Show And National Computer Conference In Houston

Robert Lock, Publisher/Editor and Tom Halfhill, Features Editor

I don't know why they ended up holding these two significant shows on overlapping days, but it made for some extremely hectic traveling. Tom Halfhill, our new Features Editor, will describe the shows and new products in much more detail next issue (both shows are still in progress), but we thought you'd enjoy a tantalizing preview.

### Commodore's Third Generation

In this partial list of features you'll be able to discern the impact of the Commodore introductions. Tom will fill in the blanks next month:

	BX256	B128	"P" Series	64	MAX
Integral Monitor	80X25 Green Phosphor	80X25	40X25 External color (not included)	40X25 optional	40X25
Dual Disks optional cassette	yes	yes	optional	optional	
Standard RAM	256K	128K	128K	64K	unknown
Colors	N/A	N/A	16	16	unknown
Graphics Resolution	N/A	N/A	320X200	320X200	unknown
CP/M Compatible	yes	optional	optional	optional	N/A
Interfaces: IEEE-488	yes	yes	yes	accepts VIC peripherals CBM peripherals optional	N/A
RS-232	Yes	Yes	Yes	unknown	N/A
Standard Language	BASIC 4.0	BASIC 4.0	BASIC 4.0	A BASIC Version Described As Compatible In Most Ways With 4.0	BASIC Cartridge Available
Planned Retail:	\$2995	\$1695	\$995	\$595	\$179.95
Scheduled Release:	fall	fall	fall	July/August	





# MORE THAN EVER, ATARI HOME COMPUTERS ARE SPEAKING YOUR LANGUAGE.

With more program languages than ever to choose from, you now have more opportunities than ever to utilize the amazing capabilities of the ATARI 800™ Home Computer.

Whether you're a beginning programmer, or at the forefront of the art, you'll find an ATARI program language that can make your task quicker and simpler than ever before. Just look at what ATARI has to offer:

**ATARI Microsoft BASIC**—Now we offer the industry standard, most powerful Microsoft BASIC yet. With simple commands, it allows you to take advantage of unique ATARI hardware features such as our well-known player/missile graphics. For ease of programming, it includes n-dimensional arrays for numerics and string handling. And importantly, conversion procedures are simple.

**ATARI Macro Assembler™**—Faster and more powerful than any ATARI language before, the ATARI Macro Assembler also allows you to access more memory space. And it's excellent for I/O interface and manipulation of such features as: player/missile graphics, sound registers and peripherals. In addition, the macro processor and "include" file library features speed-up program development considerably.

**Fig-FORTH\***—For specialized programming needs, such as educational or game applications ATARI Fig-FORTH is uniquely effective. Fig-FORTH combines power and simplicity in an efficient 10K size, with

characteristics of an interpreter and the speed of machine language code.

**ATARI BASIC**—An affordable and easy to use BASIC that uses only 8K of memory. It allows you to take advantage of the spectacular ATARI graphics and sound capabilities. And its immediate mode error messages greatly simplify debugging.

**ATARI Assembler Editor**—An excellent tool to assist the assembler-programmer in creating, editing and debugging assembly programs.

**PILOT**—PILOT is an exceptional learning language, with built-in "turtle" graphics to let you create spectacular designs and pictures with very short programs. Simple one or two-letter commands can allow you to create a dialogue with the computer. And a single "match" command can perform complex text evaluation and pattern-matching instantly.

ATARI is constantly developing new ways to help you get more out of your ATARI 800 Home Computer. So watch for more innovative and exciting program languages from ATARI in the future.

In addition to bringing the computer age home, ATARI is committed to answering the needs of computer professionals.


© 1982 ATARI, Inc.  
All Rights Reserved  
\*Available from the ATARI Program Exchange



## ATARI HOME COMPUTERS

We've Brought The Computer Age Home.™



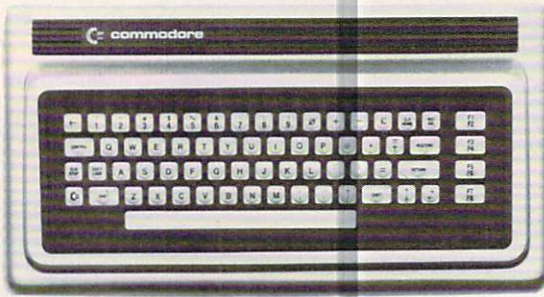


Commodore "MAX" Machine

### Third Generation Commodore "B" Series Microcomputer



### Third Generation Commodore P128 Series Microcomputer

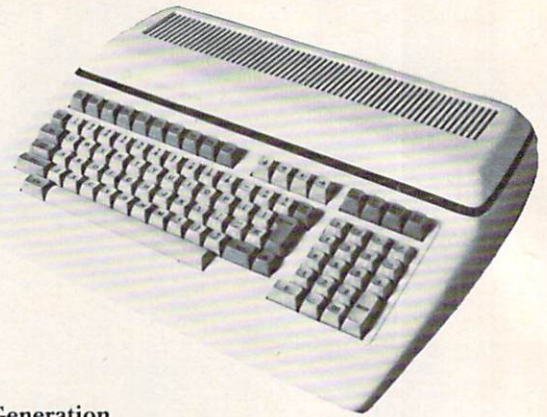

### Commodore 64



## Other New Computers: Sinclair Introduces A Color Computer

The Sinclair Spectrum was introduced in the US at the CES. It's roughly the same size as the ZX-81, but includes a partial stroke keyboard rather than the familiar membrane keyboard. The unit features extended Sinclair BASIC, 16 colors, 16K RAM standard, and a suggested retail in the \$200 price range. More next issue.

Epson, the well-known printer manufacturer, introduced a 16K portable computer with a suggested retail of \$795. The computer is truly portable, deriving power from four NiCad batteries. Built-in (standard) features include a LCD (Liquid Crystal Display) screen with 20 character by four line display, and a 24 column dot matrix printer. The entire unit measures roughly 11 inches by 8.5 inches by 2 inches, and weighs 3 pounds, 13 ounces. The unit also features a built-in RS-232C communications port with full/half duplex selection and 110 to 4800 baud rate. A standard microcassette unit is optional.

## Other Random Bits In The "More Later" Category...

Atari, Apple and Commodore were showing off new software. Atari announced a price reduction on the 400's suggested list to \$349.95. Microsoft reports increased and substantial support for MS-DOS. TIMEX was actively promoting the \$99.00 TIMEX/Sinclair computer.



Epson HX-20





**POWER**

Professional Software Introduces

**POWER**

by Brad Templeton

## ADD **POWER**™ TO YOUR COMMODORE COMPUTER

**\$89.95**

POWER produces a dramatic improvement in the ease of editing BASIC on Commodore's computers. POWER is a programmer's utility package (in a 4K ROM) that contains a series of new commands and utilities which are added to the Screen Editor and the BASIC Interpreter. Designed for the CBM BASIC user, POWER contains special editing, programming, and software debugging tools not found in any other microcomputer BASIC. POWER is easy to use and is sold complete with a full operator's manual written by Jim Butterfield.

POWER's special keyboard 'instant action' features and additional commands make up for, and go beyond the limitations of CBM BASIC. The added features include auto line numbering, tracing, single stepping through programs, line renumbering, and definition of keys as BASIC keywords. POWER even includes

new "stick-on" keycap labels. The cursor movement keys are enhanced by the addition of auto-repeat and text searching functions are added to help ease program modification. Cursor UP and cursor DOWN produce **previous** and next lines of source code. COMPLETE BASIC program listings in memory can be displayed on the screen and scrolled in either direction. POWER is a must for every serious CBM user.

Call us today, for the name of the Professional Software dealer nearest you.

### **Professional Software Inc.**

51 Fremont Street  
Needham, MA 02194

Tel: (617) 444-5224 Telex #951579



**Staff of COMPUTE!**

Robert C. Lock, Publisher/Editor  
 Kathleen Martinek, Managing Editor  
 Richard Mansfield, Assistant Editor  
 Tom R. Halfhill, Features Editor  
 Alice S. Wolfe, Publisher's Assistant  
 Georgia Papadopoulos, Art Director/  
 Production Manager  
 Harry Blair, Advertising Sales Manager  
 Terry Cash, Typesetting/Production Assistant  
 De Potter, Production Assistant  
 Dai Rees, Production Assistant  
 Kate Taylor, Production Assistant  
 Charles Brannon, Editorial Assistant  
 Vicki Jennings, Administrative Assistant  
 Sonja Whitesell, Dealer Coordinator  
 Bonnie Valentino, Accounting Coordinator  
 Fran Lyons, Circulation Coordinator  
 Christine Gordon, Customer Service

**Associate Editors**

Jim Butterfield, Toronto, Canada  
 Harvey Herman, Greensboro, NC  
 Fred D'Ignazio, c/o COMPUTE!  
 P.O. Box 5406, Greensboro, NC 27403  
 David Thornburg, P.O. Box 1317  
 Los Altos, CA 94022

**Contributing Editors**

Marvin DeJong, Dept. of Mathematics-Physics  
 The School of the Ozarks  
 Pt. Lookout, MO 65726  
 Bill Wilkinson, Optimized Systems Software  
 10379-C Lansdale, Ave.  
 Cupertino, CA 95014  
 Gene Zumchak, 1700 Niagara St.  
 Buffalo, NY 14207

**Subscription Information**

**COMPUTE! Circulation Dept.**  
**515 Abbott Drive**  
**Broomall, PA 19008 USA**

**TOLL FREE**  
**Subscription**  
**Order Line**  
**800-345-8112**  
 In PA 800-662-2444

**COMPUTE! Subscription Rates**

**(12 Issue Year):**

US	(one yr.) \$20
	(two yrs.) \$36
	(three yrs.) \$54
Canada and Foreign Surface Mail	\$25
Air	
Europe, US Possessions	\$38
Middle East, Central America and North Africa	\$48
South America, South Africa, Far East and Australia	\$88

Small System Services, Inc. publishes:

**COMPUTE!**  
 The Journal For Progressive Computing

**COMPUTE! Books**

**Corporate office:**  
 625 Fulton Street,  
 Greensboro, NC 27403 USA


**Mailing address: COMPUTE!**  
 Post Office Box 5406  
 Greensboro, NC 27403 USA

**Telephone: 919-275-9809**

Robert C. Lock, President  
 W. Jerry Day, Vice-President,  
 Comptroller  
 Kathleen Martinek, Assistant To The President  
 Ellen Day, Accounting Manager  
 Carol Holmquist Lock, Research Assistant

Authors of manuscripts warrant that all materials submitted to COMPUTE! are original materials with full ownership rights resident in said authors. By submitting articles to COMPUTE!, authors acknowledge that such materials, upon acceptance for publication, become the exclusive property of Small System Services, Inc. No portion of this magazine may be reproduced in any form without written permission from the publisher. Entire contents copyright © 1982, Small System Services, Inc. Rights to programs developed and submitted by authors are explained in our author contract. Unsolicited materials not accepted for publication in COMPUTE! will be returned if author provides a self-addressed, stamped envelope. Program listings should be provided in printed form (new ribbon) as well as machine readable form. Articles should be furnished as typed copy (upper and lower case, please) with double spacing. Each page of your article should bear the title of the article, date and name of the author. COMPUTE! assumes no liability for errors in articles or advertisements. Opinions expressed by authors are not necessarily those of COMPUTE!  
 PET is a trademark of Commodore Business Machines, Inc.  
 Apple is a trademark of Apple Computer Company.  
 ATARI is a trademark of Atari, Inc.

**Advertising Sales**

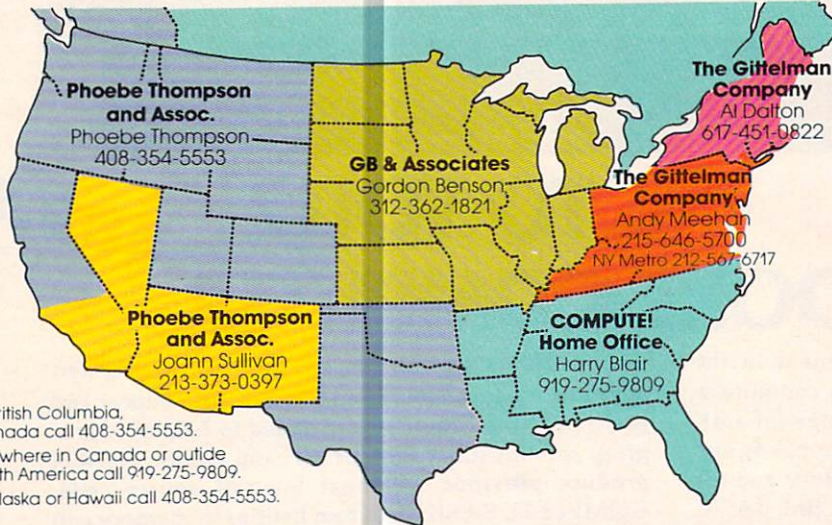

In British Columbia, Canada call 408-354-5553.  
 Elsewhere in Canada or outside North America call 919-275-9809.  
 In Alaska or Hawaii call 408-354-5553.

**Phoebe Thompson and Associates**  
 101 Church Street, Suite 13  
 Los Gatos, CA 95030  
 PHOEBE THOMPSON

**Phoebe Thompson and Associates**  
 P.O. Box 7000-462  
 Redondo Beach, CA 90277  
 JOANN SULLIVAN

**GB & Associates**  
 P.O. Box 335  
 Libertyville, IL 60048  
 GORDON BENSON

**COMPUTE! Home Office**  
 625 Fulton Street  
 Greensboro, NC 27403  
 HARRY BLAIR

**The Gittelman Company**  
 Statler Office Building  
 Suite 518  
 20 Providence Street  
 Boston, MA 02116  
 AL DALTON

**The Gittelman Company**  
 Summit Office Center  
 7266 Summit Avenue  
 Fort Washington, PA 19034  
 ANDY MEEHAN

**Address all advertising materials to:**  
 Alice S. Wolfe  
 Advertising Production Coordinator  
**COMPUTE! Magazine**  
 625 Fulton Street  
 Greensboro, NC 27403 USA

**Coming In The August Issue Of COMPUTE!**

**Keyprint Compendium: PET/CBM**

**A Color Computer Energy Monitor**

**Electric Eraser For The VIC**

**Video Graphics And The GTIA: Atari, Part II**

**An Apple Data Manager  
 A Color Computer Energy Monitor**



# JINSAM™ 8.2

Officially approved by Commodore  
For Their 8000-9000 Series Desk-Top Computers

space  
age  
micro  
software

Used at NASA,  
Kennedy Space Center  
With Multiple Applications Related  
to the Columbia Space Shuttle Project  
including rescue operations  
statistical reports, inventory and  
vehicle tracking.

## Jinsam 8.2



has broken the sort limit. Sorts are now unlimited – you may sort to any desired depth: 3,4,5,6,7 ....

We now have:

Unlimited record length, unlimited fields, and unlimited sorts, searching by key quick-scan and pattern matching, allowing limitless applications.

# JINI MICRO-SYSTEMS, Inc.

DATABASE MANAGEMENT SYSTEM DESIGN

Box 274 KINGSBRIDGE STN.  
RIVERDALE, N.Y. 10463  
(212)796-6200



# Ask The Readers

Robert Lock, Richard Mansfield,  
And Readers

**COMPUTE!** welcomes questions, comments, or solutions to issues raised in this column. Write to: Ask The Readers, **COMPUTE!** Magazine, P.O. Box 5406, Greensboro, NC 27403. **COMPUTE!** reserves the right to edit or abridge published letters.

## A Bigger Set Of Commands

I keep reading about this new POKE, and that new POKE, to do all sorts of wonderful things. But it seems cumbersome to me. As micros evolve, might not some scheme evolve so these memory addresses do not need to be memorized?

In other words, a much larger command set. The new commands are directly translated internally to the proper POKE, so it wouldn't require that much more memory. And it would be both easier to remember *and* more transportable.

What do your readers think? Perhaps some of them already have done such a program!

Kevin Sinclair

*Language designers face a tough decision: they must balance convenience (many commands) versus the amount of ROM or RAM granted to them (such as 8K BASIC).*

*Fortunately, many languages can be extended, permitting you to add extra, custom commands. If your language is "soft-loaded," coming off disk or tape into RAM, you can usually "patch into" (modify) the language to force it to recognize your new commands. However, the new commands will generally have to be written in machine language and reside in RAM somewhere.*

*ROM-based languages are more difficult to alter. Most Microsoft BASICs (Apple, OSI, Commodore) put a fragment of the language into RAM during their start-up sequences when you turn power on. You can put a machine language "JMP" command (a "wedge") in the midst of this fragment which causes the computer to regularly "jump" to a machine language routine of your own which would check to see if you had typed "SPECIAL" or whatever instead of a normal BASIC word.*

*The "Universal Wedge" for disk commands, Basic Aid, and other BASIC enhancement programs use this method. Non-Microsoft BASICs, such as Atari 8K BASIC, can also be made to recognize new commands, but it is a tricky business. Watch upcoming issues of **COMPUTE!** for an Atari Wedge routine.*

*For further information about adding "Wedges," see Bill Wilkinson's "Insight: Atari" column (**COMPUTE!**,*

*May, 1982 #24), "Modifying Apple's Floating Point BASIC" (**COMPUTE!**, May, 1982, #24) and, for Microsoft BASIC in general, "The Wonderful Wedge" (**COMPUTE!**, April, 1981, #11).*

## Atari Lockup Revisited

*Several readers have responded to the issue raised by Greg Kopp in Ask the Readers, May, 1982, about the occasional "lockup" where the Atari will, mysteriously, "go away" and no longer respond to the keyboard.*

*Bill Wilkinson, **COMPUTE!** columnist and one of the authors of Atari BASIC, responded that "all substantial software has bugs. If it's in ROM, the bug can't be repaired unless a new set of ROM chips are brought out. For whatever reason, Atari has never brought out a new ROM set. To be fair about it, there are bugs in the original TRS-80 which have never been fixed either."*

*We might add that the new IBM computer has a bug in the division routine. Also, the several fixes which Commodore has made to its BASIC in ROM have cured the original bugs, but brought about new problems of software compatibility between versions.*

## BASIC To BASIC

*I'm having trouble with the PET program on page 14 in Issue 23, April, 1982. I couldn't get it to work. Now that I have looked at lines 140 and 150, I'm confused. Isn't [the variable] "TI" always zero? If so...doesn't this cause line 150 just to loop? At least that's where my program gets stuck.*

Guy Lillis

*The program you refer to is a "fast-find" for cassettes, but is designed to work only on Commodore cassette drives (PET/CBM/VIC). Programs which use only the keyboard or screen can usually work (with some changes) on most computers using BASIC. However, techniques involving peripherals like tape drives tend not to be very "portable" between computer brands.*

*For example, the Commodore machines have a special variable called TI (for TIme) which is an internal clock. This variable is always being updated by the computer and can, therefore, be used to time events. In your computer, TI is an ordinary variable, always zero unless you assign a value to it.*

*The "fast-find" technique is so specific to the machinery involved that it even needs adaptations to work on the different models of the Commodore line. (See the following letter.)*

## VIC Fast-Find


*I need your help with a small problem. I entered the BASIC code for the cassette tape to locate programs on fast-forward as shown on Page 14 of the April, 1982, **COMPUTE!**, and, although you claim that it "can be adapted to any Commodore*



# A dynamic duo from SSI for the ATARI®!



**THE BATTLE OF SHILOH:** A brigade-level simulation of the first grand battle of the Civil War, pitting the Confederate Army against Grant's troops and Union gunboats.

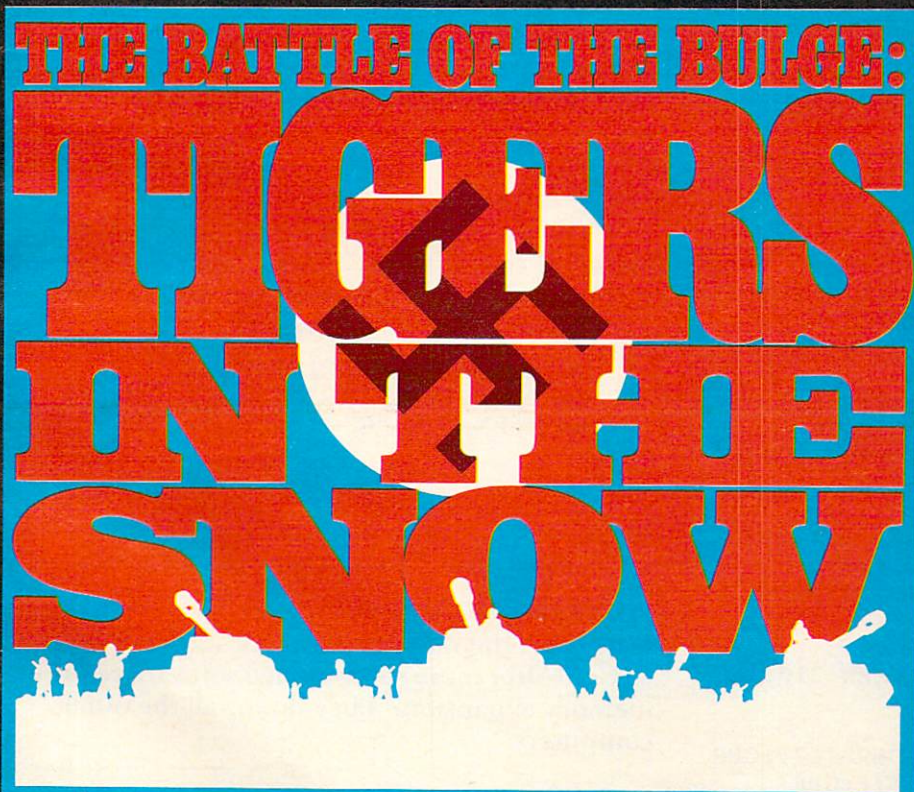

**TIGERS IN THE SNOW:** Ghostlike Nazi Tiger tanks and infantry sweep across the dark, frozen forests of the Ardennes against a surprised U.S. force in this division/regiment-level simulation of Hitler's last desperate attack.

Atari owners, rejoice!  
First, SSI brought you THE SHATTERED ALLIANCE™ and you made it the popular fantasy war-game it is today.

Now, we are proud to offer two more games for your pleasure: THE BATTLE OF SHILOH™ and TIGERS IN THE SNOW™.

In producing these games, we've taken full advantage of the Atari 400/800's brilliant graphics capability and combined it with our extensive wargame-design experience.

For example, both games have colorful map displays that can be scrolled effortlessly so you can keep track of all the action on the vast battlefields. We've also employed special rules and innovative gaming systems to enhance the sophistication, realism and playability of these simulations.

And the result of all this hard work? Two strategy games that will truly challenge and excite your game-loving mind!

At \$39.95 each (available in either cassette or disc version\*), they are waiting for you at your local computer/game store today!

VISA and M/C holders can order by calling 800-227-1617, ext. 335 (toll free). In California, call 800-772-3545, ext. 335.

To order by mail, send your check to: Strategic Simulations Inc, 465 Fairchild Drive, Suite 108, Mountain View, California 94043.

All our games carry a 14-day money-back guarantee.

\*TIGERS: 40K mini floppy disc or 40K cassette for the Atari 400/800 with Atari BASIC cartridge. SHILOH: 40K mini floppy disc or 32K cassette for same. When ordering, please specify disc or cassette version.

Atari is a registered trademark of Atari Inc.



STRATEGIC SIMULATIONS INC

As part of our demanding standards of excellence, we use MAXELL floppy discs.



machine," I can't get it to run on the VIC-20.

I suspect that the memory addresses in the PEEK and POKE statements for the Commodore PET are different than the VIC-20, but since I don't own the PET, I don't know how to convert these few memory addresses to the VIC-20.

Since there are only three BASIC statements that refer to memory addresses, could you inform me what the VIC-20 equivalent addresses would be.

I believe that **COMPUTE!** has a wide following among VIC-20 owners and that this data would be of interest to many readers.

William E. Bender

*You're right, POKES, PEEKs, and SYSs are the least "portable" aspect of BASIC. When you try to translate a program written for one computer model or brand, these words are sure to give you problems. The following version of tape Fast Find for VIC, by Associate Editor Harvey Herman, was originally published last fall. It makes for an efficient tape management system, but must be the first program on each tape.*

```

100 REM VIC FAST FIND
110 REM
120 REM HARVEY B. HERMAN
130 REM
140 N=5:DIM A$(N):REM N IS # OF PROGRAMS ~
    ON TAPE
150 FOR I=1 TO N:READ A$(I):NEXT I
160 PRINT CHR$(147);CHR$(144);" PROGRAM"
    ::PRINT:PRINT "NUMBER NAME":PRIN
    T
170 FOR I=1 TO N:PRINT I;"      ";A$(I):NEX
    T I:PRINT
180 INPUT "FIND NUMBER";J:PRINT
190 IF J<1 OR J>N THEN 160
200 IF J=1 THEN 330
210 REM START OF ROUTINE TO FAST FORWARD
220 REM WAIT FOR RELEASE IF NECESSARY
230 IF(PEEK(37151) AND 64)=0 THEN PRINT "
    PRESS STOP ON CASSETTE"
240 IF(PEEK(37151) AND 64)=0 THEN 240
250 PRINT "PRESS FAST FORWARD":PRINT
260 IF(PEEK(37151) AND 64)=64 THEN 260:RE
    M CHECK FOR PRESS
270 PRINT "OK":PRINT:A=TI
280 IF ABS(TI-A)<(J-1)*360 THEN 280:REM F
    AST FORWARD 6 SEC PER PROGRAM
290 POKE 37148,PEEK(37148) AND 247:REM ST
    OP MOTOR
300 PRINT "RELEASE FAST FORWARD"
310 IF(PEEK(37151) AND 64)=0 THEN 310:REM
    WAIT FOR RELEASE
320 REM DYNAMIC KEYBOARD LOAD
330 PRINT CHR$(147);CHR$(17);CHR$(17);CHR
    $(17);"LOAD ";CHR$(34);A$(J);CHR
    $(34);CHR$(19)
340 POKE 198,1:POKE 631,13:END
350 DATA PROGRAM 1,PROGRAM 2,PROGRAM 3,PR
    OGRAM 4,PROGRAM5
  
```

## Hidden Adventure

Regarding Rudolph F. Lauer's query in the May issue: I am co-author of Fantasy Games Software's PET programs Swordquest and Escape From the Death Planet. We have both Original-ROM and Upgrade-ROM versions of these games.

Except for a few early orders, our cassettes include both versions. Users who have upgraded their PETs should try loading from the (unlabeled) flip-side of the cassette. If that side proves to be blank, they may send their cassettes to me with a stamped reply envelope, and I will record the Upgrade version for them at no charge.

J. L. Pietenpol

J. L. Pietenpol  
5711 Trinity Rd.  
Raleigh, NC 27607

## GETting On Atari

I'm a new Atari owner and one thing bothers me much about Atari BASIC. In Apple BASIC and in PET/CBM BASIC, one keyword is GET, in terms of strings. Atari's keyword GET has a different meaning. How can I input characters without pressing return? It would be much easier to make advanced games without just using the joysticks.

Howie Fishman

*To use Atari's GET command, you must first open a file to the keyboard, e.g. OPEN#1,4,0,"K:". You can then GET a keystroke with GET#1,A. A (or whatever variable you use) will contain the ASCII value of the key typed (A=69 for "E",97 FOR"a",etc.). GET will always wait for a keystroke.*

*You can use location 764 to see if a key has been pressed. It normally holds 255, but when a key is pressed, it will contain a "keyboard code" (not ASCII). POKEing 764 with a 255 will reset the register.*

```

100 IF PEEK(764)=255 THEN 100
110 POKE 764,255
10 OPEN #1,4,0,"K"
  
```

} Waits for  
a key

```

100 GET#1,A
  
```

Gets a key

## VIC Expansion Software


Why don't the manufacturers of software for the VIC-20 offer more sophisticated software requiring memory expansion? They do for all the other computers.

Scott Barber

*The VIC is a new machine and memory expansion is even newer. Its library of software is building quickly, however, as the many ads in **COMPUTE!** illustrate. For predictions and information about VIC software, see Jim Butterfield's "Whither VIC?" in this issue.*




**THEY LAUGHED AT ME WHEN I SAT DOWN AT THE KEYBOARD ...  
BUT OH, WHEN I BEGAN TO PLAY!      HERE'S WHAT THEY SAID:**

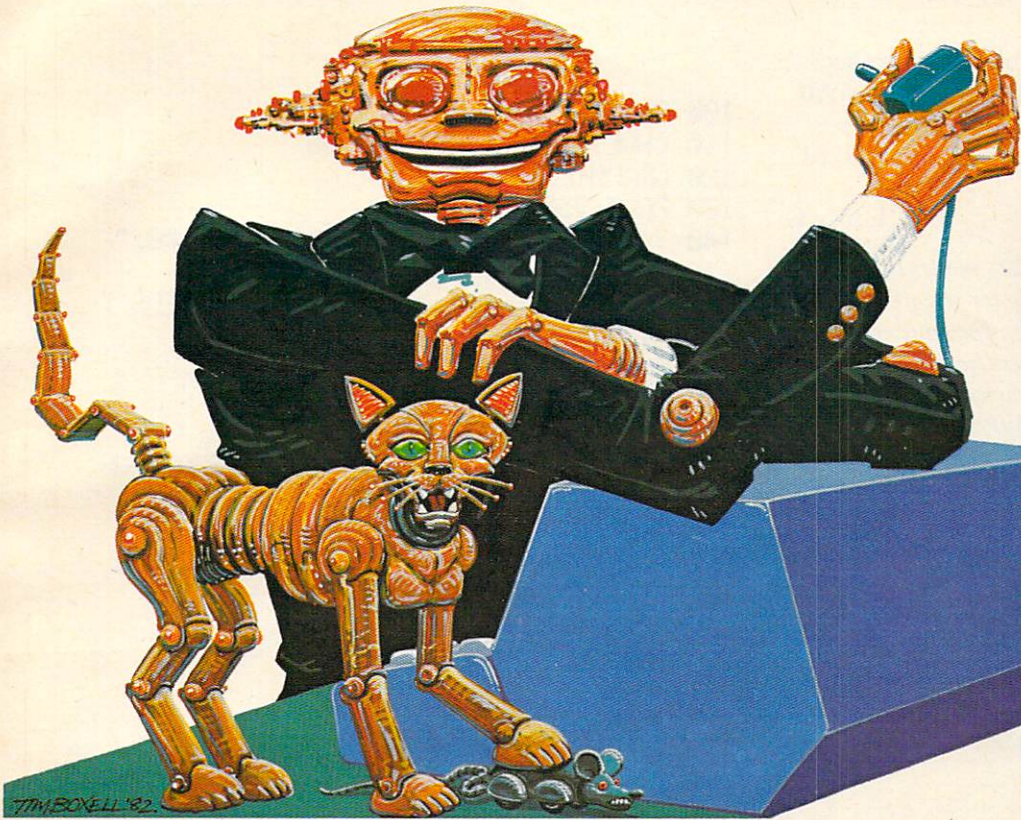

BPL-ATON I — "I've had to replace three electro-universal wristcouplers since I got it."

**PROTECTOR.**

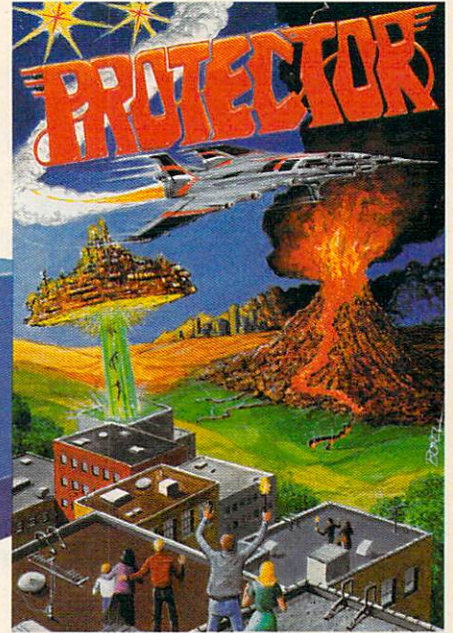


CORGUS I — "Even with a class II embryonic neurolifter, it is disgustingly difficult to play."

**SLIME.**




ADM-MARK II+ — "More fun than kicking the servonic katdroid."

**CHICKEN.**

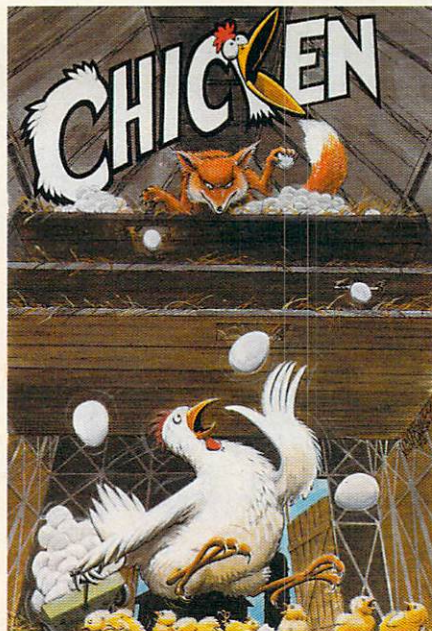

ELF-X2 — "Can I be a submarine when I grow up?"

**NAUTILUS.**

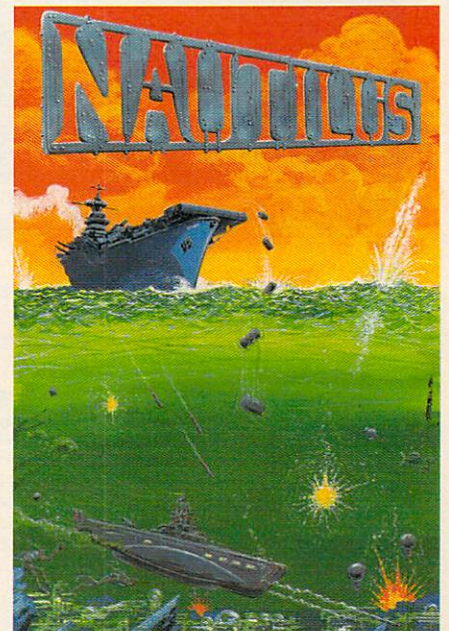

NAUTILUS, PROTECTOR, CHICKEN AND SLIME ARE ALL TRADEMARKS OF SYNAPSE SOFTWARE.

**synapse**  
SOFTWARE

820 Coventry Rd.  
Kensington, CA 94707  
(415) 527-7751

FOR THE ATARI\* HOME COMPUTER.

\*ATARI IS A REGISTERED TRADEMARK OF ATARI, INC.



## An Attack Of Hearts

When I do a POKE 756,226, enabling lowercase and control characters to be printed on the screen in graphics mode 1 or 2, the computer fills the screen with a bunch of hearts. How do I get rid of them?

Larry L.

*The alternate character set for Graphics modes one and two is the bottom half of the full character set, i.e., lowercase, graphics, and control symbols. Unfortunately, the heart (CHR\$(0)), maps into the place where SPACE is encoded, resulting in a screen full of hearts. The usual cure is to perform a SETCOLOR 0,0,0, since the SPACE (or heart) defaults to color register zero. This will make the hearts black, the default background color. Naturally, you'll have to change this if the background is not black.*

*Unfortunately, this prevents you from printing any text in the blacked-out color, reducing your available colors from five to four. A superior, if more complicated, procedure would be to modify the character set by zeroing out the heart character. This requires additional RAM to hold the new character set and POKEing 756 with the pointer to the custom character set. Here is an example program:*

```

100 CHBAS=756:CHORG=57344
110 CHSET=(PEEK(106)-8)*256
120 GRAPHICS 1
130 POKE 756,226
140 ? #6: ? #6;" now |chansinel":? #6;"
    ICHARACTERI SET"
150 FOR I=0 TO 511:REM ONLY HALF NEEDS T
    O BE TRANSFERRED
160 POKE CHSET+I,PEEK(CHORG+512+I)
170 NEXT I
180 POKE 756,CHSET/256
190 REM 'FOR W=1 TO 50:NEXT W' IS A PAUS
    E USED ONLY FOR EMPHASIS
195 REM NOT NEEDED FOR WORKING PROGRAM
200 FOR I=0 TO 7:POKE CHSET+I,0:FOR W=1
    TO 50:NEXT W:NEXT I:REM ERASE HEART
210 ? #6: ? #6;"|d0lne"
220 END
  
```

©

# More Workhorse Programs for your computer to play with!

*With these Creative Software home programs your Atari® or Vic®  
can start playing in the real world:*

### HOUSEHOLD FINANCE

- 15 income & expense categories
- Budgeting
- Monthly & yearly accounting
- Indicate tax deductible items
- Produce tables & graphs
- \$34.95 cassette
- \$39.95 disk

### LOAN ANALYZER

- Amortization tables
- Compute interest charges
- Compare various loans
- Analyze loan terms
- Manipulate loan parameters
- \$14.95 cassette
- \$19.95 disk

### HOME INVENTORY

- Catalog your possessions
- User-definable categories
- Search catalog for items
- Record serial #, purchase price
- Compute the value of items
- \$19.95 cassette
- \$24.95 disk

### DECISION MAKER

- Decide between alternatives
- Compute recommended choices
- Manipulate decision parameters
- Weigh influencing factors
- Save decisions on tape or disk
- \$19.95 cassette
- \$24.95 disk

### CAR COSTS

- Record maintenance costs
- Itemize insurance payments
- Track fuel consumption
- Summarize all costs to date
- Compute cost of a trip
- \$19.95 cassette
- \$24.95 disk



A Division of ASCI, Inc.

201 San Antonio Circle, #270  
Mountain View, CA 94040  
(415) 948-9595

*Ask about our many other recreational and home applications! TO ORDER: VISA/MasterCard, check or money order accepted. If charge, please include expiration date of card. Add \$1.50 for shipping and handling. California residents add sales tax.*



# POOL 1.5™

# ATARI™ OWNERS,

NOW YOU TOO  
CAN PLAY POOL 1.5  
ON YOUR ATARI  
48K DISK SYSTEM.

ALSO AVAILABLE FOR  
THE APPLE II™ 48K  
DISK SYSTEM.

PRICE: \$34.95

- High resolution graphics-  
Life like motion.
- Instant replay on any shot.
- Superfine aiming.
- Pool room sound effects
- Choice of 4 popular games

See your local  
computer dealer  
or order directly  
from IDSI.  
Specify ATARI  
or APPLE.

ATARI is the registered trademark of ATARI Inc.  
APPLE II is the registered trademark of  
APPLE Computer Inc.  
POOL 1.5 is trademark of IDSI.

**IDSI**

P.O. BOX 1658  
LAS CRUCES, NM  
88004  
Ph. (505) 522-7373





## A Monthly Column

# Computers And Society

David D. Thornburg  
Associate Editor

## Odds And Ends...

You folks sure love to write letters! My mail load from this column and Friends of the Turtle is large enough that I don't always get answers out right away. If you have written and haven't heard from me, don't despair – I will write as soon as I can.

I received several letters in response to the "computers and the arts" columns. Reader Ted Nemeth of New York wrote in part:

*Dear Dr. Thornburg:*

*In "Computers and Society" in the March issue of **COMPUTE!** you wrote "... Whitney saw a new medium."*

*Mary Ellen Bute (my grandmother) was the first (absolutely) to use a light pen on an oscilloscope to create animated patterns with music. She worked with Professor Theraman creating this technique. Her work received major acclaim and showed at Radio City Music Hall in New York for years.*

*I have shown her Mr. Whitney's book and while she enjoyed many of the graphics, she felt his technique of visual-sound interpretation is not all that well developed. She worked with many composers from George Gershwin to Edgard Varese in developing her theories. Since her methods did not include the use of the digital computer, her work (about 25 short films) has been all but ignored. ...*

*As for myself, I am a student at NYIT. I own an Atari 800 and am working on programs similar to my Grandmother's, except with Rock and Roll music. ...*

*Sincerely,*

*Ted Nemeth*

I found Ted's letter quite interesting. All too

often we forget to look at the progress made with technologies that preceded the ones which currently hold our interest.

Several other readers shared their favorite graphics programs with me. Among the finest graphics packages I have seen for the Atari computers is the program Graphics Master written by Courtney Goodin (distributed by Datasoft, \$49.95). This program allows the user to create pictures in either of two high resolution (320 x 192 pixel) screens. I use one screen for small graphic elements that I can then "pick up" and stand anywhere I wish on the second screen. The user can intermix text and graphics, and has several choices of text size. Symmetry operations, such as rotations and mirror reflections, can be performed as well. Since text is treated as part of the graphics screen, you can split a word in the middle of a letter if you wish. This fine program provides many features for its modest price. It is a tribute to its author that one can create superb drawings using only the Atari joystick as the input device.

I have just begun to explore a professional graphics package for the Apple – more on that in a later column.

The columns on computer games in the classroom also generated a lot of mail. Most of you who wrote agree with the idea that there is something to be learned from the arcade games. In the area of educational software, I have several new programs I am reviewing, including a beautiful set of programs from The Learning Company (formerly ALT) in Portola Valley, California. As with the graphics program for the Apple, these software reviews will have to wait for another column.

## Computer Literacy – Who Needs It?

Those of you who read this column regularly know that I am a proponent of the use of computers in the classroom. There seem to be two extremes to the use of the classroom computer – as a tool for programming the child through rote drill and practice, or as an object of study and exploration. My own bias lies toward the use of intrinsically motivating learning games to reinforce basic skills that were taught using conventional (human teacher) methods. In addition, I am a strong proponent of the idea that children should gain mastery over the computer through the use of user friendly languages such as PILOT and LOGO.

Historically, my argument has been with those who see the computer used only as a replacement for or simple adjunct to a teacher – who see the computer as a data processing tool to probe the student's skills and report all failings and progress to a human for analysis and further action. I guess that the thought of row upon row of school children



# THE MOSAIC RAM SYSTEMS FOR ATARI\*

## CLEARLY THE BEST



**MOSAIC 32K RAM**

### THE SCREEN CLARITY TEST



**THE COMPETITION**

## YOU CAN SEE THE MOSAIC DIFFERENCE

### WHAT THE EXPERTS HAD TO SAY

A.N.A.L.O.G. 400/800 MAGAZINE said in a 32K RAM board comparison test: "The Mosaic 32K RAM showed no sign of interference and gave the best screen clarity" and "Mosaic uses what we feel are the highest quality components which may improve reliability".

INTERFACE AGE said after replacing the Atari memory board with a Mosaic 32K RAM: "Once in place there is no noticeable change in screen clarity" and "in view of its excellent performance it should be a serious choice for those Atari owners intending to expand their memory."

Each Mosaic RAM board gives you more than just the best screen clarity but also the best in reliability, flexibility, and compatibility. The Mosaic RAM systems offer you the best in every way — these features prove it.

- Works in both the Atari 400\* & 800\* computers.
- 4 year guarantee.
- Complete instructions.
- Test cycled 24 hours for reliability.
- Gold edge connectors for better reliability.
- Quick no-solder installation.
- Full flexible memory configuration.
- Can be used with 8K, 16K and future products.
- Designed to take advantage of Atari 800's superior bus structure.
- Designed for inter-board communication in Atari 800.
- Allows Atari 800 to have 2 slots open for future expansion.
- Always the best components used for superior screen clarity and reliability.
- Low power design for safety and reliability.
- Available companion board (\$5) to allow running The Mosaic RAM systems independent of other boards.

### THE MOSAIC RAM SYSTEMS FOR THE SERIOUS ATARI OWNER.

#### THE MOSAIC 32K RAM

For the serious Atari owner. This is the 32K RAM board you've been hearing about. It has every feature you could want from a RAM board and more features than any other board offers. Each Mosaic 32K RAM comes with complete instructions so in a few minutes you will have expanded your Atari 800 to 48K RAM. The Mosaic 32K RAM works as well in the Atari 400, but we suggest the NEW Mosaic Expander.

#### THE MOSAIC EXPANDER

This is the most effective way you can expand to 32K RAM for your Atari 400 computer. And at almost the 16K price! The revolutionary Mosaic Expander is a memory board with 16K RAM in place and open slots to add 16K more from the Atari 16K board that comes with your Atari 400. Each board comes with complete instructions so in a few minutes you will have expanded to 32K RAM.

\*Trademark of Atari, Inc.

**MOSAIC**  
ELECTRONICS

P.O. Box 708 Oregon City, Oregon 97045  
503/655-9574



sitting in front of sterile terminals performing the same tasks that could be performed better under human guidance and supervision is just not comfortable to me.

But now, it seems, there is even another issue to deal with. There appears to be growing concern that computer literacy is not an appropriate topic for our schools to teach. According to Eric Burtis, a member of the Palo Alto, California-based Ad Hoc Committee on Basic Skills Education, the education of children in basic skills is suffering from the use of computers in the classroom. The committee states that "The suggestion that every American citizen must become computer literate is fallacious and untrue, just as it would be untrue to state that every citizen must become an airline pilot if mass air transportation is to remain available to all mankind."

If the committee is of the opinion that our children are being taught computer skills at a level commensurate with an airline pilot's training, they certainly have not been paying attention to what is happening in the classroom. It is erroneous in the extreme to suggest that those of us who are computer literate are an isolated breed that provide services to the masses (as do airline pilots). The reality is that we can either control technology ourselves, or let others control it for us.

The digital computer promises to be the most significant technological development of the twentieth century (Ada, forgive me for leaving Babbage's machine out of the discussion). Today – just a few short years into the era of the personal computer, there is almost no one who fails to come in contact with computers, if only indirectly.

If computer literacy is not appropriate subject matter for our children, then what is? Is our educational system so sound and complete that it is impervious to further improvement? The function of schools is partly to prepare our children for survival in the real world. This requires the acquisition of skills in math, reading and writing, and a sense of historical perspective, etc. It includes the development of the whole child – the creative as well as the analytical mind – in order that each child is prepared to take an active participatory role in society.

Increasingly, ours is a society governed by the flow of information. And, increasingly, this information flow is mediated by computers. By not having "computer literacy" courses in the classroom, groups such as the Ad Hoc Committee on Basic Skills Education are insuring that only children from certain economic and cultural backgrounds will have a chance to learn about this technology. To suggest that computer literacy be denied to all our children is elitism in the extreme.

In the information age, those of us who are computer literate will be at a tremendous advantage over those of us who are not. If we believe the principle of equality of opportunity so central to our national identity, then we must have the foresight to realize that this equality can only occur when we provide equivalent educational opportunities to all of our children – regardless of their economic background. The schools are the most appropriate place to do this.

### A Few Words About Innovision...

I own a company called Innovision. In the past, Innovision has made forays into the commercial marketplace with products such as the Presto-Digitizer tablet. It has also served as the umbrella company for my consulting practice, and as the haven from which I write books and articles.

The fact is that I enjoy writing a great deal, and, as an Associate Editor of **COMPUTE!** I felt a bit awkward also appearing as an occasional advertiser. While I have never done or said anything that, in my opinion, constituted a conflict of interest, it is essential that my readers know that no conflict could ever arise.

Accordingly, I have disbanded the commercial product lines of Innovision. I write, I occasionally consult, and I am involved with some new ventures run by other people. Innovision no longer has any products of its own.


While this was not an easy decision to make, it was aided by the increased time needed to answer your letters to Friends of the Turtle (I received 15 today alone). I have never failed to speak my mind from these pages, and I'm not planning on stopping now! Thank you all for your tremendous support.


©

## Scotch® Diskettes


Rely on Scotch® diskettes to keep your valuable data safe. Dependable Scotch diskettes are tested and guaranteed error-free. The low abrasivity saves your read/write heads. They're compatible with most diskette drives.

(800)235-4137





PACIFIC EXCHANGES  
100 Foothill Blvd.  
San Luis Obispo, CA  
93401. In Cal. call  
(800) 592-5935 or  
(805) 543-1037



Dealer Inquiries  
Invited



# Announcing the Printing Breakthrough of the Century: Smith-Corona TP-1™ Text Printer



• Low Cost  
Daisy Wheel Printer

**\$799<sup>00</sup>**

- Microprocessor Electronics
- Serial or Parallel Interface
- Simple, Reliable Mechanism

**ACT NOW: Limited Supply, Low, Low Cost**

Smith Corona, one of the largest manufacturers of small printers in the world, gives a whole new perspective to printing with their electronic text printer—**TP-1**. The **TP-1** is a microprocessor controlled, high quality **daisy wheel printer**. It produces perfectly formed, executive quality printouts at the speed of 120 words per minute. Typewriter quality printing at dot matrix prices.

Simple, durable and dependable, **TP-1** may be used with word processing systems, microcomputers and most small business systems. Compact and attractively



Additional daisy print wheels . . . . \$4.95



Additional ribbons . . . . . \$2.95

styled, the **TP-1** blends well with any setting.

Now, all your letters, documents forms and reports can have the crisp, professional look you demand—for business or personal use—at an affordable price. **TP-1**, the electronic text printer.

Don't delay. Order your **TP-1** TODAY at the low price of **\$799**.

**Micro Printer Marketing** offers same day shipping, nationwide service and invites dealer inquiries. Catalogues available. No shipping charges on pre-paid orders.

**Micro™  
Printer  
Marketing**

**Call Micro-Printer Marketing**

CALL TOLL FREE **1-800-523-9859** MasterCard and Visa Accepted

In PA Call Collect **215 / 433-3366**





If there's a topic that you would like to see covered in this column, send your suggestion to: *The Beginner's Page*, **COMPUTE!** Magazine, P.O. Box 5406, Greensboro, NC, 27403.

## The Beginner's Page

# Making Files Work

Richard Mansfield  
Assistant Editor

Last month we examined *files*, often the most difficult aspect of programming for the new computerist. Here we'll conclude this overview by looking at some specific details about file handling.

In general, a file is a list or a collection of information which has been saved on a tape or a disk. A list of all the people you send Christmas cards to could be "memorized" on tape/disk by the computer and would then be a file.

How is this list of names and addresses "memorized" and how, at Christmas, is it used to print the addresses on envelopes? A file by itself is incapable of *doing* anything: it is not a program, it's just a list. A separate program is needed to create, update, and make use of files.

"Mailing Address," "File Manager," and others of this type are called data base management programs. Their primary function is to build, add to, modify, or print something out from files. They manage a collection (a *base*) of data.

You can, of course, write your own custom data base manager. This would amount to writing a program (or a set of programs) which would let you manipulate the list on tape or disk.

Writing a large data base management program is not an easy task – it can involve sorting, searching, and other complex programming techniques. Nonetheless, handling Christmas card lists is something the novice can accomplish and it's well worth learning. Files do, though, represent something of a challenge. Your computer's manual will contain information on the necessary punctuation and syntax for BASIC's commands which manipulate files. However, the following brief overview might be of help.

### OPEN, PRINT#, INPUT#, And CLOSE

Where a program would be stored by the simple SAVE instruction, a file is stored by a combination of OPEN, PRINT#, and CLOSE. (On the Apple, PRINT is used in a special way instead of PRINT#. We'll get to that in a minute.) Likewise, a program

is just LOADED, but a file is "loaded" into the computer with OPEN, INPUT#, and CLOSE.

It is a bit more complicated with files, but the bonus is that you can do more manipulating with files, easier *appending* (adding to them), easier *merging* (making two files into one), and so on.

The command OPEN is generally used to communicate with a disk or tape drive. It's like pulling open a file cabinet drawer – once a file is OPENed, you can then get at the records inside. Here's what you would do to OPEN a file named "inventory" on a disk drive attached to a Commodore, Atari, or Apple:

### Commodore

**10 OPEN 1,8,8,"0:INVENTORY,S,R"**

The first number (1) means that this file will hereafter be called #1. When you pull something out of it, you would use INPUT#1 (you can have up to ten files OPEN at one time). The second number (8) means "disk drive" (a 1 in this position would mean: open a file on the cassette drive). The second eight is a "secondary address" which allows you to give additional instructions. With disk drives, just use eight.

The "0:" specifies drive zero and the "S" means *sequential* file. The Commodore disks can create other kinds of files: random, relative, and program files, but sequential is the simplest. Finally, the "R" means *read*. You will be using INPUT# to get things out of this file. (A "W" here would mean *write* and you would PRINT# to the file.) To make this "reading or writing" distinction for tape files, the secondary address is used: a one means write and a zero means read. (10 OPEN 1,1,0,"INVENTORY" would be the same as the example above, except it makes a cassette file.) No drive number is specified and the "S" is not necessary since cassette files can only be sequential files.)

### Atari

The equivalent of the disk example above is similar in Atari BASIC:

**10 OPEN#1,4,0,"D1:INVENTORY"**

Here, the second number (4) stands for *read* (use 8 for write), the next number (0) is not used by the disk drive (but is necessary to satisfy the syntax of OPEN), and the "D1" specifies the first drive (there can be up to four drives attached, D1 through D4; D: means D1:).

### Apple

To OPEN an Apple disk file, you first define a special character, D\$, which holds the "control-D" character (you cannot see it). You would type:

**10 D\$ = "(hold down both CTRL and D keys)"**  
**(or you could use 10 D\$ = CHR\$(4) instead)**  
**15 PRINT D\$;"OPEN INVENTORY"**



# THEY CAME OUT OF THE BLUE OF THE WESTERN SKY

and it's up to you to stop them!

## REAR GUARD

**FEATURING ARCADE ACTION  
GRAPHICS AND SOUND**

You know those alien residents who look like blue jello and smell like a cow pasture on a warm day? Well, they're up in arms about something and have declared war! Their weapons are Cyborg ships with their intelligent parts suspended inside. These Cyborgs pursue like crazed bats to try and kamikaze your crew pods. You're armed with an unlimited supply of Guided Energy Darts, but even when you blast 'em, their doomsday missiles come right at you! Good luck. (You'll need it!)

**REAR GUARD** features many extras which are usually found only on coin-operated video arcade machines. These include advanced play levels, running high score (with high score "clear" option), two player option, brilliant horizontal scrolling, and great sound effects.

**APPLE VERSION**  
by John Anderson



48K DISK \$29.95

**ATARI VERSION**  
by Neil Larimer  
Assisted by Sparky Starks



16K TAPE \$19.95 24K DISK \$24.95

**TRS-80 VERSION**  
by Wayne Westmoreland  
and Terry Gilman



16K TAPE \$19.95 32K DISK \$24.95

**TO ORDER!**

**Adventure**  
INTERNATIONAL  
A DIVISION OF SCOTT ADAMS, INC.

BOX 3435, LONGWOOD FL 32750  
(305) 862-6917 (QUESTIONS)  
ORDER FROM YOUR FAVORITE DEALER  
or CALL TOLL FREE (800) 327-7172  
(ORDERS ONLY PLEASE) 



In our simple example, it isn't necessary to include drive and slot numbers with the OPEN command. Line 15, however, could indicate drive one, slot six if we add "OPEN INVENTORY, S6,D1" to the quoted information. The Apple uses the format in line 15 for its disk commands; first control-D is printed and then the desired action is described within the quotes.

### Putting Something In And Taking Something Out

On the Commodore and Atari, you can put information into an OPENed file by using PRINT#. For Commodore files you could put the word "PENCILS" into the file by:

```
20 PRINT#1,"PENCILS"
```

and Atari would be:

```
20 PRINT#1;"PENCILS"
```

The Apple uses two lines:

```
20 PRINT D$;"WRITE INVENTORY"  
21 PRINT "PENCILS"
```

(After line 20, the following PRINT command will be considered a print to the file, not to the screen).

Going the other way, you get something out of an OPENed file by using INPUT# in combination with a string variable to "hold" whatever comes from the file (they come back to the computer in the order they were PRINT#ed). To get the word "PENCILS" back from a Commodore file:

```
20 INPUT#1,A$
```

(Then later you could print A\$ to see "PENCILS") and Atari is:

```
20 INPUT#1,A$
```

(You must have previously DIMed A\$).

Again, the Apple uses two lines:

```
20 PRINT D$;"READ INVENTORY"  
21 INPUT A$
```

After you are finished INPUT#ing or PRINT#ing from a file which had been OPENed as file #1, you would CLOSE1 (PET/CBM) or CLOSE#1 (Atari) or PRINT D\$;"CLOSE INVENTORY" (Apple). When you've finally CLOSED, you are free to use that file number (#1 in these examples) for some other file, with a different name. CLOSE is essential, however. Without it you could permanently lose part or all of a file, or even damage other files.

### INPUT# And PRINT# Hints

INPUT# or PRINT# work very similarly to the way INPUT and PRINT work from the keyboard and to the screen. The only catch is that PRINT# needs some special handling. It's best to give it a line all to itself:

```
20 PRINT#1,A$ (Commodore)
```

```
30 PRINT#1,B$  
20 PRINT#1;A$ (Atari)  
20 PRINT D$;"WRITE NAMEOFFILE" (Apple)  
21 PRINT A$
```

The reason for putting PRINT# on its own line is that this is an easy way to separate items in a file: with "carriage returns." Just as 10 PRINT A\$ / 20 PRINT B\$ will cause B\$ to be on the line below A\$ on the screen (since using a new line "forces" a carriage return to take place) – a separate program line puts a carriage return symbol onto the tape or disk.

### Manipulating Files

Files are usually created within loops. Here's a simple program to "write" a file to tape:

```
10 DATA BILL, SANDY, KATIE, LARRY  
20 OPEN 1,1,1,"NAMES": REM (A PET/CBM TAPE  
FILE)  
30 FOR I=1 TO 4  
40 READ A$  
50 PRINT#1,A$  
60 NEXT I  
70 CLOSE1
```

Since there are four names in this file, the loop counts up to four, READING a new A\$ from the DATA line each time through. Since PRINT#1 is by itself on line 50, it will send carriage returns to the tape each time it PRINT#s, separating the names on tape. This way, there will be no question that a name should be BILLSANDY.

When this file is later read into the computer, it would be very useful to know when it ends, how big it is. There are two easy ways to do this. You could add the word "END" to the DATA line and then change line 30 to read: FOR I=1 TO 5. Or, you could put the "count" (the number of records for this file) on the tape or disk itself, as part of the file. To do this, you would add a line: 25 PRINT#1,4.

Here's a "reader" program which brings the records from this second type of file back into the computer, finding out first what the count is:

```
10 OPEN1,1,0,"NAMES": REM (A PET/CBM TAPE  
FILE)  
20 INPUT#1,COUNT:REM THIS WAS THE FIRST  
ITEM ON THE FILE  
30 FOR I=1 TO COUNT  
40 INPUT#1,A$  
50 PRINT A$ (TO THE SCREEN)  
60 NEXT I  
70 CLOSE1
```

If you use the "END" technique, the reader program would not use line 20 and would add line: 45 IF A\$="END" THEN GOTO 70. Notice also that you can PRINT# and INPUT# both numeric and string (alphabetical) variables.

One final note about something which might not be immediately obvious: if you update a file on





# SUNRISE SOFTWARE

LEADER IN DISCOUNT SOFTWARE — 18-30% OFF

## ATARI

Action Quest	D	13.95
Adventures 1-12 ea.	T	15.95
Adventure on a Boat	D	19.95
Ali Baba & Forty Thieves	D	26.35
Angle Worms	T	12.00
Andromeda	D	31.96
Assembler Editor	C	47.95
Asteroids	C	35.95
Bishops Square	D	23.95
Black Forest	D	19.95
B-1 Nuclear Bomber	T	13.00
Bug Attack	D,T	23.95
Centipede	C	35.95
Character Generator	D	15.95
Conflict 2500	T	13.00
Compu-Read	D,T	15.95
Compu-Math/Fractions	D,T	15.95
Compu-Math/Decimals	D,T	15.95
Crush, Crumble & Chomp	D,T	23.95
Crossfire	D,T	23.95
Datestones of Ryn	D,T	15.95
Deflection	T	11.95
Dung Beetle	D	23.95
Empire of Overmind	D	28.00
Entertainer Kit	C	95.00
Fastgammon	T	15.95
Fort Defiance	T	16.00
Frogger	D	27.95
Galactic Empire	T	15.95
Galactic Trader	T	15.95
Ghost Hunter	D,T	16.78
Ghostly Manor	D	19.95
HI-RES Mission Asteroid	D	19.95
HI-RES Wiz & Princess	D	26.35
Invasion Orion	D,T	19.95
Jawbreaker	D	23.95
Kayos	D,T	27.95
K-Razy Shootout	C	39.95
Lisp Interperter	D	120.00
Lords of Karma	T	16.00
Lunar Lander	T	12.00
Match Racers	D	23.96
Missile Command	C	35.95
Mountain Shoot	T	12.00
Mouseattach	D	27.95
Next Step	D	31.95
No. Atl. Convoy Raider	T	13.00
Nukewar	T	13.00
Pac Man	C	35.95
Pathfinder	D	27.95
Planet Miners	T	13.00
Pool 1.5	D	27.95
Programmer Kit	C	63.88
Q.S. Forth	D	63.96
Raster Blaster	D	23.95
Rear Guard	T	15.95
Rescue at Rigel	D,T	23.95
Ricochet	D,T	15.95
Shattered Alliance	D	31.95
Softporn Adventure	D	23.95
Space Invaders	C	35.95
Starbase Hyperion	D	18.35
Star Raiders	C	39.95
Star Warriors	D,T	31.95
Sunday Golf	T	13.00
Tanktics	D	23.20
Temple of Apsal	D,T	31.95
Threshold	D	31.95
3D Tic-Tac-Toe	T	15.95
3D Supergraphics	D,T	31.95
Treasure Quest	T	15.95
VersaWriter Tablet	A	240.00
Visicalc	D	200.00
Warlocks Revenge	D	28.00

## PET / VIC-20

### UNITED MICROWARE

Amok	T	15.15
Alien Blitz	T	19.95
Blastoids	T	15.15
Breakout	T	12.00
Carom	T	12.00
Dragon Maze	T	13.55
Gobbler	T	19.95
Invader Fall	T	17.55
Laser War	T	15.15
Long Division	T	13.55
Meteor Run	C	47.95
Raceway	T	12.00
Robot Blasters	C	31.95
Skymath	T	12.00
Space Division	T	12.00
Spiders of Mars	C	47.95
Super Hangman	T	15.15
Stars Wars	T	13.55
3D Maze	T	12.00
ViCalc	T	11.95
ViCat	T	19.95
ViCheck	T	19.95
ViTerm A	T	15.95
RS232 Board	A	39.95
3K Cartridge	A	31.95
8K Cartridge	A	71.95

### Others

B-1 Bomber	T	13.00
Computer Acquire	T	16.00
Computer Stocks & Bonds	T	13.00
Conflict 2500	T	13.00
Conquest	D	180.00
Dragons Eye	T	15.96
Guns of Fort Defiance	T	16.00
Midway Campaign	T	13.00
N.A. Convoy Raider	T	13.00
Planet Miners	T	13.00
Thinker	D	396.00



# BONUS



# PAC MAN

## FOR ONLY \$30.00

with

## ANY ORDER OVER

## \$150!



D-Disk, C-Cartridge, A-Accessory, T-Cassette

24 HOURS A DAY  
7 DAYS A WEEK

ORDER TOLL FREE  
800-854-0561 EXT. 812  
800-432-7257 (CALIF.)

NO HASSLE!  
GUARANTEED  
REPLACEMENT POLICY



We take MASTERCARD or VISA.  
(Include card # and expiration date.) California residents add 6% tax. Include \$2.00 for postage. Prices subject to change.



## 1 Mhz - 12 Bit A/D

for your Apple II Computer

The APPLESCOPE-HR12 analog to digital converter uses a high stability buried zener voltage reference and a flash A/D to give 12 bit accuracy with a 14 bit dynamic range.

- DC to 1 Mhz Programmable Sample Rate
- 2048 Sample Buffer Memory
- Pretrigger Viewing
- Continuous or Single Sweep
- 4 Channel Software Support (requires additional power supply)
- External Trigger Input


The standard software provided with each APPLESCOPE-HR 12 includes all of the functions necessary to turn your Apple II computer into a high quality digital storage oscilloscope. In addition all of the SCOPE DRIVER options are being up-graded to handle the higher resolution data.

Price per channel

\$695

The original APPLESCOPE still provides the optimum price/performance trade off for those users requiring 8 bit converter resolution.

### APPLESCOPE INTERFACE

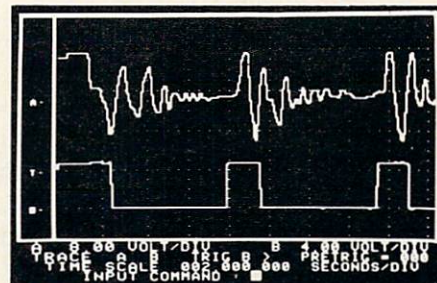

- DC to 3.5 Mhz sample rate
- 1024 byte buffer memory
- Pretrigger Viewing
- Programmable Scale Select
- Continuous and Single Sweep Modes
- Single or Dual Channel Trace


Price for the two board Applescope system is \$595

EXTERNAL TRIGGER ADAPTER \$29

SCOPE DRIVER Advanced software for the APPLESCOPE analog to digital converters makes full use of the computing power of the Apple II to create a total data acquisition system. Available options include:

- Signal Averaging-Acquires 1 to 999 signal sweeps and displays the averaged result.
- Digital Volt Meter- Allows use as real time DVM or use to measure points on an acquired sweep.
- Disk Storage - Allows automatic storage and recover of acquired data on floppy disks.
- Spectrum Analyzer-Calculates and displays frequency spectrum of acquired data.

### CHART RECORD DEMO EPSON MX80

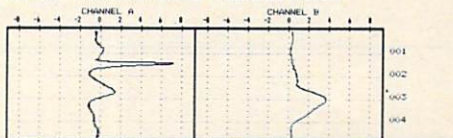

A 4.00 VOLT/DIV TRACE A B TRIGGER B A C START TIME 000.200 000 DISPLAY > 00053 + 0 COMMAND ? REPLAY

### BUS RIDER

#### LOGIC ANALYZER for the APPLE II

The BUS RIDER circuit card silently rides the Apple II peripheral bus and allows real time tracking of program flow. Software provided allows set up of trace parameters from the keyboard and read back of disassembled code after a program has been tracked.

- 32 bit by 512 sample memory buffer
- Monitors Data and Address bus plus 8 external inputs
- Trigger on any 32 bit word or external trigger
- Pretrigger viewing

The BUS RIDER is an invaluable development tool for anyone working with Apple II or Apple II+ computers.

Price \$395

### RC ELECTRONICS INC.

7265 Tuolumne Dr., Goleta, CA 93117

(805) 968-6614





a PET/CBM computer, you cannot put it back on a disk with the same name. You might have read it off the disk and into memory to make some changes. But before you OPEN-PRINT#-CLOSE it back onto the disk, you must first "scratch" (remove) the original version in order to replace it with the updated one. Again, each computer has different formats for this and your manual will describe them. Some systems, the Atari for example, automatically replace files when one "comes into" the disk with the same name as one already on the disk. This *scratching* of unwanted files is unnecessary for tape files, they will write over the old file (if you rewind the tape).


There are numerous ways to manipulate files – this is precisely why it is a challenging programming task. The programmer has more control over what is happening, but more responsibility, too. As always, start out small by perhaps just creating a file with your name on it, reading it back into memory, and printing it on the screen. Then try ten names, a mailing list, updating records, and so on. Eventually you'll become adept at file manipulation and will find many uses for these valuable programming techniques. ©

**TOLL FREE**  
**Subscription**  
**Order Line**  
**800-345-8112**  
In PA 800-662-2444

## Verbatim flexible disks

Call Free (800) 235-4137 for prices and information. Dealer inquiries invited. C.O.D. and charge cards accepted.

**PACIFIC EXCHANGES**  
100 Foothill Blvd.  
San Luis Obispo, CA  
93401. In Cal. call  
(800) 592-5935 or  
(805) 543-1037.



# FILEMANAGER 800

## The Atari 800 Disk-based File Management System

FILEMANAGER 800 is a powerful personal, as well as professional tool. The full use of graphics and sound make FILEMANAGER 800 an extremely easy-to-use file-keeping system.

### FILEMANAGER 800 provides:

- *User-defined formats*
- *Index on any field at any time*
- *Ultra fast sort*
- *Wild card search*
- *Up to 2000 characters per record*
- *Full screen input and edit*
- *Search on any combination of fields*
- *Format lists and mailing labels*
- *Single keystroke commands*
- *Full mathematical capability*
- *Computed, constant, and dollar fields*
- *Combine and convert existing files*
- *Elegant human engineering*
- *Database merge with Datasoft's Text Wizard*
- *Exclusive Datalock™ electronic key protection*
- *Compatible with Axlon's 128K Ramdisk*
- *And much, much more . . .*

Use FILEMANAGER 800 to create mailing lists, inventory and business records, customer lists all customized to your own needs!

*Requires 40K and a disk drive*

## SYNAPSE

820 Coventry Road  
Kensington, CA 94707  
(415) 527-7751



FILEMANAGER 800 is a trademark of  
SYNAPSE SOFTWARE

Atari is a registered trademark of Atari, Inc.



*This exciting action game is for the Atari and the VIC. Blast out new caverns, dig the gold, and return to the surface for your reward. If you run out of dynamite, get to the surface fast or you'll wander the mine forever. And watch out for cave-ins - they can block your exit, or worse!*

# Gold Rush!

Joseph Weber  
Rapid City, SD

After reading the fascinating article "Using The VIC Joystick," by David Malmberg (*Home and Educational Computing!*, Fall, 1981), I couldn't wait to try out what I had learned. It wasn't long after I got to the VIC keyboard that the Gold Rush game started to emerge.

After a few false starts, here it is.

The game gives you one more chance to use your joystick. In this game you have five miners to dig as much gold as you can from the Lost Goldmine. Each miner has ten sticks of dynamite (charges) to blast his way into the mine. The miner gathers them by moving to the same space as the dot (poke X,81).

The number of pieces of gold is counted and displayed at the bottom of the screen. The number of charges left is also displayed at the bottom of the screen. After gathering all the gold you can, you must move out of the mine to the Assay Office (the heart) to exchange the gold for money. When you touch the heart, the gold is exchanged for money at the rate of Gold times Remaining Charges.

## Cave-ins Can ... Put You Out Of The Game

That all sounds easy enough, but there are several things that can happen to slow up your progress. First, there are the cave-ins. Since the Lost Goldmine is very old, cave-ins occur every time you blast. These cave-ins can block your way out or (how can I put this nicely) ah... put you out of the game. When you are caved-in upon, your gold is lost and the miner is replaced with an asterisk. If you can reach the asterisk, you regain all of the gold the "dead" miner had.

Another danger can beset you if you should use up all of your charges. When this happens, you have only a short time to get back to the surface. If you cannot exit the mine, either due to a cave-in or a slow miner, then all is lost and you end up wandering the mine forever.

Let's plug in our joysticks and strike it rich. There's gold in them there hills!

## Program 1. Atari Version

### Atari Version Notes

This game simulates the appearance of the VIC version by using a custom character set in Graphics mode 1. Notice that only half of the character set in ROM needs to be transferred to RAM, since Graphics modes 1 and 2 can only access 64 characters (to allow multicolor text), so we loop from 0 to 511.

This game makes extensive use of the LOCATE command to "look at" the computer's screen, such as checking for various objects the miner finds. Also, unlike the VIC version, if you clear the mine of all gold, you can start over with a new mine when you "cash in" your gold. You get three "lives."

```

100 REM ATARI GOLDRUSH
110 REM
120 REM Custom characters:
130 DATA 56,56,16,56,84,16,40,68
140 DATA 170,85,170,85,170,85,170,85
150 DATA 0,28,60,110,126,62,28,0
160 DATA 129,66,36,24,24,36,66,129
170 DATA 128,64,32,16,8,4,2,1
180 DATA 1,2,4,8,16,32,64,128
190 DATA 16,16,124,16,16,16,56,124
200 DIM CHAR$(8),WHICH(3,2)
210 CHAR$="*+--=<>":MINER=3
220 GRAPHICS 1+16:SETCOLOR 4,6,4:SETCOLOR 0,1,10:SETCOLOR 3,4,10
230 ? #6;"GOLDRUSH!":SETCOLOR 2,3,0
240 POSITION 9,0: ? #6;"Please wait"
250 CHSET=(PEEK(106)-8)*256:CHORG=57344
260 IF PEEK(CHSET+9)<>0 THEN 340
270 FOR I=0 TO 511:POKE CHSET+I,PEEK(CHO
RG+I):NEXT I
280 FOR I=1 TO 7
290 CHPOS=CHSET+(ASC(CHAR$(I))-32)*8
300 FOR J=0 TO 7
310 READ A:POKE CHPOS+J,A
320 NEXT J:NEXT I
330 FOR I=32 TO 39:POKE CHSET+I,255-PEEK
(CHORG+I):NEXT I
340 POKE 756,CHSET/256
350 POSITION 9,0: ? #6;" (0) "
360 NUGGETS=0
370 FOR I=1 TO 22:FOR J=0 TO 19
380 IF RND(0)>0.4 THEN COLOR ASC(CHAR$(2
))+128:PLOT J,I:GOTO 400
390 IF I>3 THEN COLOR ASC(CHAR$(3)):PLOT
J,I:NUGGETS=NUGGETS+1
400 NEXT J:NEXT I
410 CHARGES=10:POSITION 9,23: ? #6;"I CHAR

```



```

GES1 ";CHARGES
420 XPOS=11:YPOS=0:EMF=0:GOTO 590
430 REM MAIN LOOP
440 ST=STICK(0):TR=STRIG(0)
450 IF PEEK(20)>15 THEN POKE 709,(INT(16
  *RND(0))*16+10):POKE 20,0
460 IF EMF THEN SOUND 1,T,10,8:T=T*(T<8)
  +2:TI=TI+1:IF TI>200 THEN SOUND 1,0,0,0:
  GOTO 1120
470 IF 1-TR THEN IF EMF=0 THEN 820
480 IF ST=15 THEN 440
490 U=-(ST=14)*(YPOS>0)+(ST=13)*(YPOS<22
  )
500 H=-(ST=11)*(XPOS>0)+(ST=7)*(XPOS<19)
510 COLOR 32:PLOT XPOS,YPOS
520 XPOS=XPOS+H:YPOS=YPOS+U
530 LOCATE XPOS,YPOS,WHAT
540 IF WHAT=32 THEN 590
550 IF WHAT=ASC(CHAR$(3)) THEN GOSUB 640
  :GOTO 590
560 IF WHAT=ASC(CHAR$(7)) THEN GOSUB 760
  :GOTO 590
570 IF WHAT=4 THEN GOSUB 670:REM CASH IN
  !
580 SOUND 0,100,12,8:FOR W=1 TO 20:NEXT
  W:SOUND 0,0,0,0:XPOS=XPOS-H:YPOS=YPOS-U:
  COLOR 138:PLOT XPOS,YPOS:GOTO 440
590 COLOR 138:PLOT XPOS,YPOS
600 IF EMF AND YPOS=0 THEN EMF=0:COLOR 3
  2:PLOT XPOS,YPOS:SOUND 1,0,0,0:GOTO 410
610 FOR W=8 TO 0 STEP -1:SOUND 0,W*5,12,
  W:NEXT W
620 GOTO 440
630 GOTO 630
640 FOR W=15 TO 0 STEP -1:SOUND 0,20,10,
  W:NEXT W:GOLD=GOLD+1:NUGGETS=NUGGETS-1:
  IF NUGGETS<0 THEN NUGGETS=0
650 POSITION 0,23:?"#6;"sold ";GOLD;" "
  ;
660 RETURN
670 REM CASH IN!
680 SOUND 2,4,10,4
690 FOR W=10 TO 5 STEP -1:FOR I=15 TO 0
  STEP -1:SOUND 0,W,10,I:NEXT I:NEXT W
700 SOUND 2,0,0,0
710 CASH=CASH+GOLD*CHARGES:GOLD=0
720 GOSUB 650
730 POSITION 14,0:?"#6;"CASH
740 IF NUGGETS=0 THEN POP:GOTO 360
750 RETURN
760 REM GET THE GOLD FROM DEAD MINER
770 FOR I=3 TO 1 STEP -1
780 IF WHICH(I,0)=XPOS AND WHICH(I,1)=YPO
  S THEN 800
790 NEXT I:RETURN
800 GOLD=GOLD+WHICH(I,2):GOSUB 650
810 RETURN
820 REM EXPLOSION
830 XP=XPOS+H:YP=YPOS+U:IF YP=0 THEN 440
840 RESTORE 3007
850 DATA 0,0,-1,-1,1,1,-1,1,1,-1
860 FOR I=1 TO 5:READ A,B
870 IF XP+A=0 AND XP+A<=19 AND YP+B>=1
  AND YP+B<=22 THEN LOCATE XP+A,YP+B,ZZ:IF
  ZZ=45 THEN NUGGETS=NUGGETS-1
880 NEXT I:COLOR ASC(CHAR$(4))
890 IF XP>0 AND XP<20 THEN PLOT XP,YP
900 COLOR ASC(CHAR$(5)):IF YP>2 AND XP>0
  THEN PLOT XP-1,YP-1
910 IF YP<22 AND XP<19 THEN PLOT XP+1,YP
  +1
920 COLOR ASC(CHAR$(6)):IF YP>2 AND XP<1
  9 THEN PLOT XP+1,YP-1
930 IF YP<22 AND XP>0 THEN PLOT XP-1,YP+
  1
940 DL=PEEK(560)+256*PEEK(561):SU=PEEK(7
  12)
950 FOR W=15 TO 0 STEP -0.5:SOUND 0,50,0
  ,W:SW=1-SW:POKE 712,SW*(4*16+6):POKE DL,
  112*SW:NEXT W
960 POKE DL,112:POKE 712,SU
970 REM
980 COLOR 32:PLOT XP,YP:IF YP>2 AND XP>0
  THEN PLOT XP-1,YP-1
990 IF YP<22 AND XP<19 THEN PLOT XP+1,YP
  +1
1000 IF YP>2 AND XP<19 THEN PLOT XP+1,YP
  -1
1010 IF YP<22 AND XP>0 THEN PLOT XP-1,YP
  +1
1020 COLOR 138:PLOT XPOS,YPOS
1030 FOR I=1 TO 20
1040 RX=INT(20*RND(0)):RY=INT(22*RND(0)+
  1)
1050 LOCATE RX,RY-1,ZZ
1060 LOCATE RX,RY,Z:IF Z=32 AND ZZ=171 T
  HEN COLOR 171:PLOT RX,RY
1070 IF Z=138 THEN 1130
1080 NEXT I
1090 CHARGES=CHARGES-1:POSITION 17,23:?"
  #6;"CHARGES;" ";
1100 IF CHARGES>0 THEN 440
1110 TI=0:EMF=1:POSITION 9,23:?"#6;"set
  out(A) "":GOTO 440
1120 REM DEAD MINER
1130 FOR I=14 TO 0 STEP -0.5:SETCOLOR 3,
  4,I:SOUND 0,I,10,I:NEXT I:RESTORE 3400
1140 READ A,W:IF A>0 THEN SOUND 0,A,10,8
  :FOR I=1 TO W*2:NEXT I
1150 IF A>0 THEN SOUND 0,0,0,0:FOR W=1 T
  O 5:NEXT W:GOTO 1140
1160 COLOR ASC(CHAR$(7)):PLOT XPOS,YPOS:
  WHICH(MINER,2)=GOLD:GOLD=0:GOSUB 650
1170 WHICH(MINER,0)=XPOS:WHICH(MINER,1)=
  YPOS:MINER=MINER-1:IF MINER=0 THEN 1210:
  REM GAME OVER
1180 SETCOLOR 3,4,10:GOTO 410
1190 DATA 100,30,100,20,100,5,100,30,85,

```



**A New Concept In BASIC**

# MASTER

## PERFORMANCE NEVER SEEN BEFORE ON A MICRO-COMPUTER

MASTER is a DEVELOPMENT TOOL as well as a SOFTWARE SECURITY TOOL totally integrated with BASIC, giving to new instructions permitting:

### GENERATION OF INDEXED- SEQUENTIAL FILES WITH:

- Keyed access
- Scan forward or backward by key
- File size limited by disk drive only
- 10 files opened simultaneously
- Hashing
- Key regeneration possible
- Instructions: open, write, read, exist, start, next, onerror

### GENERATION OF INPUT AND OUTPUT SCREEN FORMATS USING A REVOLUTIONARY SCREEN GENERATOR:

- Easy instruction to create a page: scroll, reverse, clear, line, col.
- 127 zones for input or output, completely parameterized with numeric formatting instructions: decz, rgqz, inz, outz, clearz
- Screen page creation with subsequent saving on disk instructions: load, save, copy, exchange

### REPORT FORMATS MASK FORMATTING PAGINATION

- Date control
- 22 digit precision math (+, -, /, x)
- Direct disk access
- Save programmes with a Nolist Command
- Security key

Master can be either development or a runtime system  
Master designed for CBM 4000 or 8000

Master was developed by Micco Application  
Distributed by



CANADIAN MICRO DISTRIBUTORS LTD.  
500 Steele Ave., Milton, Ontario L9T 3P7 416-878-7277



```

40,90,30,100,20,105,10,100,30
1200 DATA -1,0
1210 POSITION 0,0:7 #6;"same over"
1220 POKE 709,PEEK(53770)
1230 IF PEEK(53279)<>6 THEN 1220
1240 RUN

```

### Program 2. VIC Version

```

100 CLR:S=0:C=10:M=4:L=0:W=0
110 PRINT"{CLEAR}"
112 GOSUB300
120 POKE36879,9
130 GOSUB800
132 Z=7712:FB=0:Y=250
140 POKEZ,32
150 IFJ1THENZ=Z+22:IFPEEK(Z)=102THENZ=Z-22
160 IFPEEK(Z)=35THENZ=Z-22
170 IFJ2THENZ=Z-1:IFPEEK(Z)=102THENZ=Z+1
180 IFPEEK(Z)=35THENZ=Z+1
190 IFJ3THENZ=Z-22:IFPEEK(Z)=102ORZ<7680THE
NZ=Z+22
200 IFPEEK(Z)=35THENZ=Z+22
210 IFJ0THENZ=Z+1:IFPEEK(Z)=102THENZ=Z-1
212 IFPEEK(Z)=35THENZ=Z-1
220 IFPEEK(Z)=81THENS=S+1:GOSUB6000
222 IFPEEK(Z)=83THENGOSUB4000
224 IFPEEK(Z)=42THENGOSUB3000
230 IFFBTHENGOSUB5000:GOSUB8000
240 PRINT"{HOME}{20 DOWN}{REV}GOLD{OFF}";S;
TAB(10)"{REV}CHARGES{OFF}";C
250 POKEZ,90
260 IFC=<0THENGOSUB9000
270 DD=37154:P1=37151:P2=37152
280 GOSUB500
290 GOTO140
300 REM INSTRUCTIONS
310 PRINT"{DOWN}{04 RIGHT}{REV}VIC GOLDRUSH
{OFF}"
320 PRINT:PRINT:PRINT"{04 RIGHT}{REV}Z{OFF}
= MINER"
330 PRINT:PRINT"{04 RIGHT}{REV}Q{OFF} = GOL
D"
340 PRINT:PRINT"{04 RIGHT}{REV}*{OFF} = DEA
D MINER"
350 PRINT:PRINT"{04 RIGHT}{REV}&{OFF} = DIR
T"
360 PRINT:PRINT"{04 RIGHT}{REV}S{OFF} = ASS
AY OFFICE"
362 PRINT:PRINT:PRINT"{02 RIGHT}USE {REV}FI
RE BUTTON{OFF} TO"
364 PRINT"{02 RIGHT}BLAST"
370 PRINT"{HOME}{20 DOWN}{REV}PRESS ANY KEY
TO PLAY"
380 AS$="":GETAS:IFAS$=""THEN380
390 PRINT"{CLEAR}"
400 RETURN
500 POKEDD,127:P=PEEK(P2)AND128
510 J0--(P=0)
520 POKEDD,255:P=PEEK(P1)
530 J1--((PAND8)=0)
540 J2--((PAND16)=0)
550 J3--((PAND4)=0)
560 FB--((PAND32)=0)
570 RETURN
800 REM DRAW BOARD
810 X=7702
820 FORI=1TO22

```

```

830 POKEZ,35
840 X=X+1
850 NEXTI
860 POKE7712,32
870 X=7724
880 FORI=1TO18
890 FORJ=1TO2
900 POKEZ,35
910 X=X-1
920 NEXTJ
930 X=X+24
940 NEXTI
950 X=8098
960 FORI=1TO22
970 POKEZ,35
980 X=X+1
990 NEXTI
1000 FORI=1TO180
1010 X=INT(RND(1)*374)+7724
1012 IFPEEK(X)=35THEN1010
1014 IFPEEK(X)=102THEN1010
1020 POKEZ,102
1030 NEXTI
1040 FORI=7724TO8097
1050 IFPEEK(I)=102THEN1070
1052 IFPEEK(I)=35THEN1070
1060 POKEI,81
1070 NEXTI
1080 POKE7689,35:POKE7692,35:POKE7691,83
1090 GOSUB2000
1200 RETURN
2000 REM PLACE MINERS
2002 IFM<0THEN9500
2010 X=7680
2020 FORI=0TO4
2030 POKEZ,32
2040 X=X+1
2050 NEXTI
2060 X=7680
2070 FORI=1TOM
2080 POKEZ,90
2090 X=X+1
2100 NEXTI
2110 C=10:S=0
2120 Z=7712
2130 PRINT"{HOME}{20 DOWN}
2140 FORI=8142TO8164:POKEI,32:NEXT
2150 IF M=0THENPOKE7680,32
2200 RETURN
3000 REM DIG UP MINER
3010 S=S+1
3200 RETURN
4000 REM TALLY GOLD
4002 FORI=7694TO7701:POKEI,32:NEXT
4010 FORJ=1TO5
4020 FORI=15TO0STEP-1
4030 POKE36878,I
4040 POKE36876,230
4050 FORT=1TO10:NEXT
4060 NEXTI
4070 POKE36876,0
4080 NEXTJ
4090 C1=C:IFC1=0THENC1=1
4100 W=S*C1+W
4110 PRINT"{HOME}{REV}{WHT}{13 RIGHT}$";STR$
(W);".00{RED}"
4120 POKE7691,83
4130 M=M-1
4140 GOSUB2000
4150 RETURN

```



# All the advantages of Mupet, PLUS...

## MUPET II saves money and time too!


Mupet II offers all the advantages of Mupet, plus:

- Can protect against incorrect use of harmful disk commands.
- No more printer interface - background printing supported on IEEE, RS 232C and parallel ports included in controller.
- Programmable 32K RAM controller provides user defineable operating systems.
- Up to 16 computers may be connected to central printer and disk drives.

Integrate intra-office terminals for common data access allowing independent analysis for such functions as:

- Accounting
- Sales forecasts, budgets and orders
- Production scheduling
- Word processing

The only product available capable of serving Daisy Chained Commodore Computers up to 100 feet.

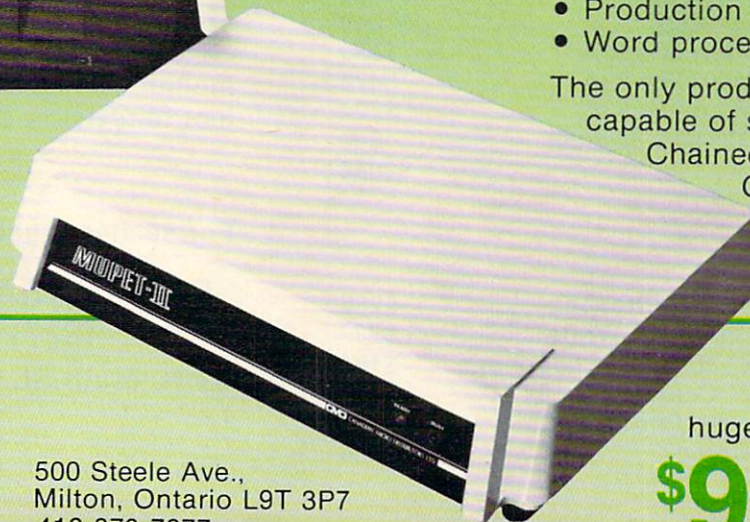

# CMD

CANADIAN MICRO  
DISTRIBUTORS LTD.

500 Steele Ave.,  
Milton, Ontario L9T 3P7  
416-878-7277

MUPET II  
a small price for  
huge capabilities, from:

# \$995.00



# Peripherals

## FANTASTIC PRICES!

# Unlimited...

OUR FAST SERVICE, PRODUCT SELECTION AND OUR CUSTOMERS' SATISFACTION MAKE US #1.

### ZENITH

Z-89-48K	\$2299
Z-90-64K DO	\$2588
Z-19 Terminal	\$777
Z-121 Monitor 12"	\$149

### EPSON PRINTERS

MX-70	\$288
MX-80 w/Graphics	\$444
MX-80 FT (Friction + Tractor)	\$544
MX-100 (15" Carriage)	\$744

Call for prices on  
Ribbons, Cables and Interfaces

### ATARI COMPUTERS

Atari 800 16K	\$688
Atari 400	\$318
Atari Interface Module	\$174
Atari 810 Single Disk	\$444
Atari 815 Dual Disk	TBA
Atari 830 Modem	\$166
Programmer	\$59
Entertainer	\$84
Star Raiders	\$34
16K Mem. Exp. for Atari	\$74
32K Mem. Exp. for Atari	\$114

### NEC-PC 8000

#### Series Microcomputer

PC-8001A Computer w/32K	\$888
PC-8012A w/32K + Exp. Slots	\$588
PC-8031A Dual Mini Disk	\$888
PC-8032A Add-on Mini Disk	\$777

Call for Software Prices

### NEC PRINTERS

7710/30 Spinwriter R/O	\$2279
7720 Spinwriter KSR	\$2649
3510/30 Spinwriter R/O	\$1699
3500 Serial Spinwriter	\$1599

#### NEC DOT MATRIX

PC-8023	\$474
---------	-------

Call for prices on ribbons, etc.

### MORE PRINTERS

Anadex 9500/9501	\$1295
Anadex DP-9000	\$1049
Okidata Microline 80A	\$339
Okidata Microline 82A	\$474
Okidata Microline 83A	\$724
Tractor (OKI 80 + 82 only)	\$60
Diablo 630	\$2044

### MONITORS

Sanyo 12" GRN Phosphor	\$266
Sanyo 12" Black + White	\$239
Amdek 12" 300 GRN Phosphor	\$164
Amdek 12" Color	\$344
NEC 12" GRN Phosphor	\$164
NEC 12" Color	\$344

# TOLL FREE

# 1-800-343-4114

### ORDERING INFORMATION

Our order lines are open 9AM to 6PM EST Monday thru Friday. Phone orders are welcome; same day shipment on orders placed before 10AM. Free use of Mastercard and VISA. Personal checks require 2 weeks clearance. Manufacturer's warranty included on all equipment. Prices subject to revision. C.O.D.'s accepted.

For service, quality and delivery call:

**PERIPHERALS UNLIMITED**  
**(617) 655-7400**

62 N. Main St. • Natick, MA 01760



```

5000 REM EXPLOSION
5002 IFC<=0THEN9000
5004 IFPEEK(Z-1)=35THEN5012
5010 POKEZ-1,86
5012 IFPEEK(Z+1)=35THEN5022
5020 POKEZ+1,86
5022 IFPEEK(Z+22)=35THEN5032
5030 POKEZ+22,86
5032 IFPEEK(Z-22)=35THEN5100
5040 POKEZ-22,86
5100 POKE36877,220
5110 FORL=15TO0STEP-1
5120 POKE36878,L
5130 FORT=1TO75:NEXT
5140 NEXTL
5150 POKE36877,0:POKE36878,0
5152 IFPEEK(Z-1)=35THEN5156
5154 POKEZ-1,32
5156 IFPEEK(Z+1)=35THEN5160
5158 POKEZ+1,32
5160 IFPEEK(Z+22)=35THEN5164
5162 POKEZ+22,32
5164 IFPEEK(Z-22)=35THEN5170
5166 POKEZ-22,32
5170 C=C-1:POKE8138,32:POKE8139,32:POKEZ,90
5300 RETURN
6000 REM DOT PICKUP
6010 POKE36878,15
6020 FORL=10TO1STEP-1
6030 POKE36876,L*25
6040 NEXTL
6050 FORL=1TO10
6060 POKE36876,L*25
6070 NEXTL
6080 POKE36876,0:POKE36878,0
6100 RETURN
8000 REM CAVE IN
8010 X=INT(RND(1)*1)+10
8020 FORI=1TOX
8030 V=INT(RND(1)*418)+7702
8032 IFPEEK(V)=35THEN8030
8034 IFPEEK(V)=90THENGOSUB8600:GOTO132
8036 IFPEEK(V)=81THEN8030
8040 POKEV,102
8050 NEXTI
8100 RETURN
8600 REM SQUASH MINER
8610 POKE36878,15
8620 FORI=255TO128STEP-4
8630 POKE36874,I
8640 FORT=1TO30:NEXT
8650 NEXTI
8660 POKE36878,0:POKE36874,0
8670 M=M-1
8680 POKEZ,42
8682 S1=S
8690 GOSUB2000
8800 RETURN
9000 REM GET OUT COUNTER
9004 IFY<128THENPOKEZ,32:GOSUB2000:GOTO132
9010 PRINT"{HOME}{21 DOWN}{02 RIGHT}{REV}TIM
E TO GET OUT{OFF}"
9020 POKE36878,15:POKE36876,Y
9030 FORT=1TO30:NEXT
9040 Y=Y-4
9050 POKE 36878,0:POKE36876,0
9100 RETURN
9500 REM PLAY AGAIN
9520 PRINT"{HOME}{21 DOWN}{WHT}{REV}PLAY AGA
IN?Y=YES N=NO{OFF}{RED}"

```

```

9530 IFA$="Y"THEN100
9540 A$="":GETA$:IFA$=""THEN9540
9560 IFA$="Y"THEN100
9999 END

```

©

## COMPUTE! The Resource.

### Space Shuttle →

LAUNCH and ASCENT TO ORBIT  
Simulation Software for the Atari 800\*

Pilot the space shuttle into orbit! Written in basic and machine language, this is the most accurate space shuttle simulation available for the Atari.

Not a game, but a serious simulation.  
(ages 12 to adult) Requires 24K RAM and 1 joystick.

Cassette only, \$12.95 (16 page booklet included)

**★ STARBOUND SOFTWARE**

P.O. Box 1123, Solvang CA 93463  
(formerly Cocoa Beach, Florida)

\* Atari is the trademark of Atari, Inc.

## ASTROWARRIORS™

FOR 16K ATARI 400/800

- A fast action player vs. player game of space combat
- Realistic gravity and orbital mechanics
- Extensive use of Atari Graphics and sounds
- 100% Machine Language
- Up to four players
- Four skill levels
- Four battle modes
- Simple joystick controls

- Disk or cassette
- \$29.95 at your local computer store, or send check or money order directly to Apogee Software.
- Dealer inquiries invited



Challenge your friends or neighborhood aliens in an out-of-this-world game of skill and daring. Attack with your Photon missiles. Protect yourself with shields. Maneuver with your thrusters or enter hyperspace to avoid damage or destruction.

Add \$1.00 for shipping.

Add 6% tax in California



9615 Farralone Ave.  
Chatsworth, CA 91311  
Phone (213) 882-9358

Atari, Atari 400, and Atari 800 are registered trademarks of Atari, Inc.



You've seen the bank ads: "Retire a Millionaire." Type in this short program (it will run on Atari, Radio Shack Color Computer, PET/CBM, VIC, and Apple) and see for yourself how IRA accounts compute. The program uses very little memory. The "^" symbol means "to the power of."

# IRA Planner

Richard and Betty Givan  
Richmond, KY

Most get-rich schemes of the past have proven to be of questionable legality and dubious worth. The latest promotion, however, is endorsed by the US Government and seems foolproof. This device is the Individual Retirement Account (IRA), expanded in 1982 to allow up to a \$2000 (\$2250 in a joint plan with a nonworking spouse) yearly deposit to be put into a private retirement account.

This amount is deductible from the person's gross income during the year deposited, decreasing the income tax accordingly. The retirement fund is then free to grow at the prevailing competitive interest rate – compounded daily and tax free – until it is withdrawn during retirement. Although taxes are then due, presumably the taxpayer will be in a lower tax bracket and so pay a lesser tax.

## The Relationship Between Inflation And Interest

The allure of the plan is in the rapid growth of the principal through compound interest at the currently high rates. Hence the ads in which banks all but guarantee that you can be a millionaire upon retirement via a \$2000 yearly deposit for 35 years at a 12% return. Actually, your account *would* be worth an astounding \$1,161,059. Such a modest sacrifice in order to retire a millionaire!

As with all get-rich plans, however, there is a catch – not a legal or even an ethical one, but a matter of economics. The IRA promotion campaigns conveniently overlook the devastating effects of inflation on your million. At the same time that compound interest is building your fortune, inflation is eroding it. Historically, the interest rate is fairly well dictated by the rate of inflation. Although temporary imbalances occur, economists generally agree that, in the long run, the interest rate will seek out a level approximately three to four percent higher than the inflation rate.

Assuming that the prevailing inflation rate (say nine percent) holds steady, your retirement fortune of \$1,161,059 from the above example will really be worth only \$56,875 in the purchasing

power of 1982 dollars. You may have a carload of dollars in the year 2017, but the Cadillac you buy to haul it home would cost \$306,000 and the gasoline to power it would be \$25 a gallon!

This is not to say that an IRA is a bad way to save. It does offer immediate tax relief, and that in itself might provide you with the incentive to put aside some funds for your golden years. But it would be well to put the numbers in perspective when planning for your future.

The program asks you several questions: the amount of money you wish to set aside each year; the tax bracket you are currently in (which can be found by reference to the IRS booklet accompanying your tax forms, but is not really essential to the rest of the program); your age when you begin and end the plan; and the average interest and inflation rates you expect to experience (here's where a crystal ball program would be nice).

The program then displays the tax savings you would receive the first year in the plan. (Income and tax rate would probably fluctuate too much to benefit from attempting to compute these over the life of your IRA.) The sum of your deposits is displayed, followed by the principal of the account increased by accumulated interest. Then the *real spending power* of your final nest egg is shown by reducing the principal to reflect the inflation rate. You can see its worth in terms of the 1982 dollar. Bear in mind that this money is taxable when withdrawn, also. You can then easily experiment with different interest and inflation rates at this point without having to answer the other questions again.

One note: the two questions about inflation and interest ask for the figures *expressed as decimals*. In other words, if you want to answer 12% inflation, you should type .12 and 6% interest would be entered as .06.

```

10 REM IRA PLANNER
30 DIM A$(1):REM THIS LINE ONLY NECESSARY ~
   FOR ATARI
40 PRINT"AT WHAT AGE DO YOU PLAN"
50 PRINT"TO OPEN AN IRA ACCOUNT";:INPUT A
60 PRINT:PRINT"AT WHAT AGE DO YOU PLAN TO ~
   RETIRE";:INPUT A1
70 Y=A1-A
80 PRINT:PRINT "HOW MUCH DO YOU PLAN TO"
90 PRINT"DEPOSIT PER YEAR";:INPUT D:C=D
100 PRINT:PRINT"WHAT IS YOUR TAX BRACKET?"
110 PRINT"(ENTER PERCENTAGE EXPRESSED":PRIN
   T"AS A DECIMAL)":INPUT P
120 PRINT:PRINT"WHAT IS THE AVERAGE INTERES
   T RATE YOU
130 PRINT"EXPECT FOR THE ACCOUNT OVER THE
140 PRINT"YEARS IT EXISTS?(ENTER PERCENTAG
   E
150 PRINT"EXPRESSED AS A DECIMAL)":INPUT R
160 PRINT:PRINT"WHAT IS THE AVERAGE INFLATI

```



# Commodore Programs Move into the Fast Lane with **PETSPPEED**

**Petspeed** — The Optimizing Basic Compiler that runs Commodore BASIC 40 times faster. You can dramatically reduce long processing times, tedious disk handling, and long print runs. No other compiler can offer the same speed, compatibility and trouble-free compiling as Petspeed.

**Compatible** — Petspeed compiles any BASIC application and is available for any combination of 4000 and 8000 series Commodore equipment.

**Faster** The key that sets Petspeed apart from other compilers is **optimization**. Where most compilers merely translate from one language to another, Petspeed analyzes your source program to eliminate unnecessary complexities, thus speeding processing time. Your program is reduced to much smaller components and reassembled into a far more efficient form. Compare these optimizing features:

- 4-Pass compiler.
- Automatically uses faster integer arithmetic when possible.
- Automatically handles frequently occurring variables and arrays.
- Subroutines no longer need be located at the beginning of your program.
- Petspeed automatically calls all subroutines at maximum speed.
- Petspeed runs twice as fast as other compilers.
- Larger programs require far less memory when compiled.

**Easy to Use** Petspeed is as easy to use as these screen displays illustrate.

Directory  
BEFORE  
compilation.

```
*** commodore basic 4.0 ***
31743 bytes free
ready.
directory d1
1 petspeed ps 30
2 "your program" prg
1961 blocks free.
ready.
```

Simply type in  
your program  
name.

```
PETSPPEED
PROGRAM NAME YOUR PROGRAM
ISSUE 2.3 (C) O.C.S.S. 1982
```

Directory  
AFTER  
compilation

```
*** commodore basic 4.0 ***
31743 bytes free
ready.
-rd1
1 petspeed ps 30
2 "your program" prg
3 "your program.gt" prg
4 "your program.w" prg
1779 blocks free.
ready.
```

It isn't necessary to add compiler directives. Simply type in the program name. In less than 2 minutes, you'll see your program run up to 40 times faster.


**Security** A security device is provided to run Petspeed, but no run-time key is necessary for compiled programs. You're free to build in your own protection. Petspeed code cannot be listed by others, so compiled programs cannot be tampered with. Your programs belong entirely to you.

Move your Commodore into the fast lane today with Petspeed. And save \$25 too! Send this coupon today to

## SSE

**SMALL SYSTEMS ENGINEERING**  
222 B View Street  
Mountain View, CA 94041  
(415) 964-8201

**Dealers: Ask for our free demo disk.**  
Price \$325

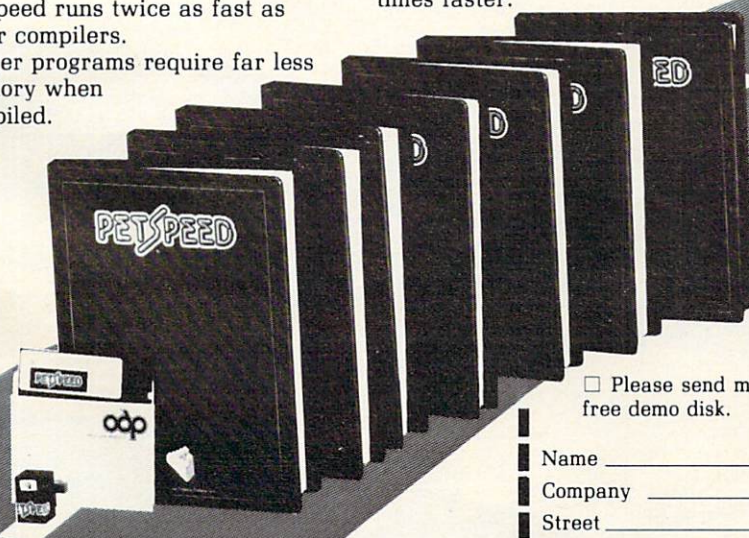

Offer Expires 8/31/82

Save \$25

Please rush Petspeed today! My disk format is  8050  4040.  
My computer is  8032  4032.

My check for \$300 (plus 6½% sales tax for CA res.) is enclosed.

Please send more information  I'm a dealer. Send me your free demo disk.

Name \_\_\_\_\_  
Company \_\_\_\_\_  
Street \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Mail to: **Small Systems Engineering**  
222 B. View St., Mountain View, CA 94041





 commodore

**CBM™**  
Model 8032

computer

**NEECO**

JUST A SAMPLE OF THE MANY PRODUCTS WE CARRY, CALL US FOR OUR NEW 80-PAGE CATALOG.  
WE WILL MATCH SOME ADVERTISED PRICES ON CERTAIN PRODUCTS LISTED UNDER SIMILAR "IN STOCK" CONDITIONS.



# Tomorrow's Technology Today

## Commodore Computer

VIC 20 Personal Computer .....	\$ 299.95
VIC 1515 Graphic Printer .....	\$ 395.00
CBM 4016 .....	\$ 995.00
CBM 4032 .....	\$1295.00
CBM 8032 .....	\$1495.00
CBM SuperPet 9000 .....	\$1995.00
CBM 8050 Dual Disk Drive .....	\$1795.00
CBM 4040 Dual Disk Drive .....	\$1295.00
CBM 2031 Single Disk Drive .....	\$ 695.00
CBM 4022 Tractor Printer .....	\$ 795.00
CBM 8010 IEEE Modem .....	\$ 279.00
CBM Datasette .....	\$ 74.95
CBM-IEEE Interface Cable .....	\$ 39.95
IEEE-IEEE Interface Cable .....	\$ 49.95

## NEC Spinwriter Printer

NEC 7730 .....	\$3085.00
NEC 7710 .....	\$3085.00
NEC 7720 .....	\$3610.00
NEC 3510 .....	\$2290.00
NEC 3500RD .....	\$1895.00


Tractor Feed Options are available

## Professional Software

WordPro™ — A Family of CBM Word Processing Programs	
WordPro 2 Plus .....	\$ 199.95
WordPro 3 Plus .....	\$ 295.00
WordPro 4 Plus .....	\$ 450.00
WordPro 5 Plus (for CBM 8096) .....	\$ 450.00
The Administrator (DataBase for CBM) .....	\$ 650.00
POWER™ (Programmer's Utility ROM) .....	\$ 89.95
InfoPro™ (DataBase for CBM) .....	\$ 295.00

## Epson Printers

MX-70 .....	\$ 299.95
MX-80 w/graphtrax .....	\$ 645.00
MX-80 FT .....	\$ 745.00
MX-100 FT .....	\$ 945.00
INTERFACE CARDS	
8141 RS-232 Interface Board .....	\$ 75.00
8145 RS-232 Interface Board w/2K Buffer .....	\$ 149.00
8151 RS-232 Interface Board w/X/ON-X/OFF .....	\$ 170.00
8161 IEEE Interface Board .....	\$ 55.00
8131 Apple Interface Card .....	\$ 85.00
8232 Apple Interface Cable .....	\$ 35.00
8220 TRS-80 Cable .....	\$ 35.00

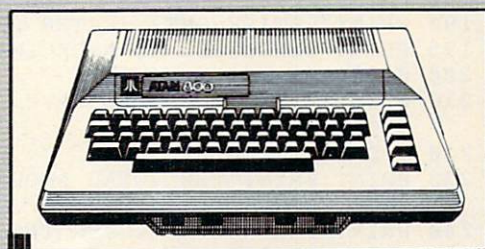

## Atari


Atari 400 16K .....	\$ 399.00
Atari 800 16K (incl. BASIC cartridge) .....	\$ 899.00
Atari 410 Recorder .....	\$ 99.95
Atari 810 Disk Drive .....	\$ 599.95
Atari 822 Thermal Printer .....	\$ 299.95

## Amdek Monitors

Video 100G (Limited Quantity) .....	\$ 179.00
Video 300G .....	\$ 200.00
Color 1 .....	\$ 449.00
Color 2 .....	\$ 999.00

## Diablo 630 Printer

Diablo 630 .....	\$2710.00
Tractor Option .....	\$ 350.00

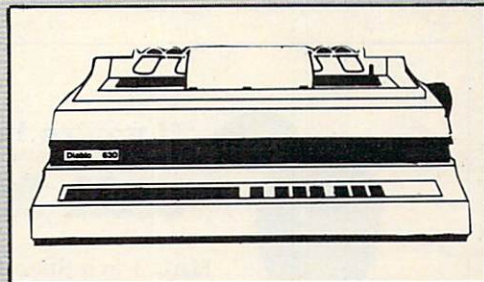

## CMD Mupet

MC-800A Mupet Controller .....	\$ 995.00
(Multi-User Controller for CBM Computers)	
CM-100 Channel Module .....	\$ 250.00
Printer Module .....	\$ 350.00

## Qume

Spring 9/45 .....	\$2495.00
Tractor Option .....	\$ 210.00

WordPro, POWER and InfoPro are registered trademarks of Professional Software Inc.



**NEECO**  
679 Highland Ave.  
Needham, MA 02194

(617) 449-1760  
TELEX: 951021

MON-FRI 9:00 - 5:30 E.S.T.



MASTERCARD \*VISA



```

ON RATE"
170 PRINT"YOU EXPECT DURING THE YEARS"
180 PRINT"BETWEEN OPENING THE ACCOUNT AND
190 PRINT"RETIREMENT? (ENTER PERCENTAGE
195 PRINT"EXPRESSED AS A DECIMAL)":INPUT I
200 S=D*P
210 PRINT:PRINT"YOU WILL SAVE $";INT(S);" O
N TAXES THIS YEAR."
220 T=D*Y
230 PRINT:PRINT"THE TOTAL AMOUNT DEPOSITED ~
INTO YOUR
240 PRINT"IRA ACCOUNT OVER THE ";Y;" YEARS ~
IS":PRINT"$";INT(T);"."
250 FOR J=1 TO Y
260 X=D*(1+R/365)^365
270 D=X+C
280 NEXT J
290 PRINT:PRINT"WHEN YOU RETIRE, THE AMOUNT
IN YOUR"
300 PRINT"ACCOUNT WILL BE $";INT(X);"."
310 Z=(1+I)^Y
320 W=X/Z
330 PRINT:PRINT"...WHICH IS WORTH $";INT(W)
;" IN 1982"
340 PRINT"DOLLARS."
350 PRINT:PRINT"WOULD YOU LIKE TO TRY THIS ~
AGAIN WITH
360 PRINT"DIFFERENT INTEREST AND INFLATION ~
RATES"
370 PRINT"(Y OR N)":;INPUT A$
380 IF A$="N" THEN END
390 D=C:GOTO 120

```

©



## Unclutter Your Desk!

Put your Commodore computer in a desk of its own. Sure it will look great, and the desk is small enough to fit almost anywhere. But the real benefits are your personal comfort and efficiency.

**The Interlink Desk System**

**Interlink**

Interlink, Inc.  
Box 134  
Berrien Springs, MI 49103  
(616) 473-3103



## If you're interested in Apples, call MAUG.

MAUG is a Special Interest Group (SIG) of Apple® users on the CompuServe Information Service. SIGs are active and growing groups of individuals who share a common interest and form an "electronic" club using the CompuServe Information Service as its communications medium. Share advice and exchange information with other Apple users across town or anywhere around the country.

We think you'll like the CompuServe Information Service: CB simulation, electronic mail, news wires, financial information, games, data bases, programming languages, big mainframe computer power and free data storage. All for a basic charge of only \$5.00 an hour nights and weekends. All you need is your Apple, a modem and some inexpensive software. The software, and a free demonstration, are available at—of all places—a Radio Shack® Computer Center. CompuServe Information Service, 5000 Arlington Centre Blvd., Columbus, Ohio 43220. (614) 457-8650.

## CompuServe

## TAKE A BYTE OUT OF YOUR SOFTWARE COST!

Save 20-40% on all  
major Brands of micro-software

- 90 day guarantee—a product satisfaction guarantee.
- Largest inventory of old and new releases.
- Next Shipping by UPS—or we pay freight. No per item handling fee.

**WARNING!!** Buying from Software Galore SAVES MONEY!

**AVAILABLE NOW!!**  
Pac-Man and Centipede

Member of the Better Business Bureau

**SOFTWARE GALORE**  
A MEMBERSHIP BUYING SERVICE

For free catalog/orders call  
213-827-1851 or 1-800-423-6326

Mail to  
P.O. Box 10005  
Marina del Rey, CA 90291





# Letter Quality Printing At Its Best

FOR APPLE, ATARI, COMMODORE, IBM,  
NEC, OSBORNE 1, TRS 80, and others

## OLYMPIA TYPEWRITER ES100/101/105

- 92 character electronic keyboard
- Dual pitch, 10 and 12
- 17.5 C.P.S.
- All settings from keyboard
- Auto. correction to full line
- Daisy type print mechanism
- 14 1/8 inches writing line
- 1400 dealers nationwide

## REN TEC ES INTERFACE

- Installation in 15 minutes using existing ES100/101/105 cables
- CMOS logic for minimal drain on power supply
- Hi or low true status bits
- Accepts RS232-C serial with 7 crystal controlled Baud rates
- Accepts Centronics parallel interface
- Selectable auto. line feed

**\$1495.00** ES100 TYPEWRITER & INTERFACE

**\$295.00** INTERFACE ONLY\*

\*COMMODORE SLIGHTLY HIGHER

Authorized Distributor for: NEC, OLYMPIA, SANYO, EAGLE, SHARP, KONAN

DEALER INQUIRIES WELCOME

# RENAISSANCE TECHNOLOGY CORPORATION

1070A SHARY CIRCLE, CONCORD, CA 94518 • (415) 676-5757

## VOICE I/O THAT WORKS!

for the COMMODORE and APPLE II computers

Voice I/O has come a long way from the barely intelligible computer speech of only a few years ago. It is now possible to enter data or commands to your computer just by talking to it and the computer can talk back with clear, pleasant, human sounding voice.


The COGNIVOX models VIO-1002 (for Commodore) and VIO-1003 (for the Apple II+) are at the forefront of a new generation of Voice I/O peripherals that are easy to use, offer excellent performance and are affordably priced.

### SOME SPECIFICATIONS

COGNIVOX can be trained to recognize up to 32 words or phrases chosen by the user. To train COGNIVOX to recognize a new word, you simply repeat the word three times under the prompting of the system.

COGNIVOX will also speak with a vocabulary of 32 words or phrases chosen by the user. This vocabulary is independent of the recognition vocabulary, so a dialog with the computer is possible. Memory requirements for voice response are approximately 700 bytes per word.

For applications requiring more than 32 words, you can have two or more vocabularies and switch back and forth between them. Vocabularies can also be stored on disk.



### HOW IT WORKS

COGNIVOX uses a unique single-chip signal processor and an exclusive non-linear pattern matching algorithm to do speech recognition. This gives reliable operation at low cost. In fact, the performance of COGNIVOX in speech recognition is equal or better to units costing many times as much.



For voice output, COGNIVOX digitizes and stores the voice of the user, using a data compression algorithm. This method offers four major advantages: First there are no restrictions to the words COGNIVOX can say. If a human can say it, COGNIVOX will say it too. Second, it is very easy to program your favorite words. Just say them in the microphone. Third, you have a choice of voices: male, female, child, foreign. Fourth and foremost, COGNIVOX sounds very, very good. Nothing in the market today can even come close to the quality of COGNIVOX speech output. You can verify this yourself by calling us and asking to hear a COGNIVOX demo over the phone. Hearing is believing.

### A COMPLETE SYSTEM

COGNIVOX comes assembled and tested and it includes microphone, software, power supply, built in speaker/amplifier and extensive user manual. All you need to get COGNIVOX up and running is to plug it in and load one of the programs supplied.

It is easy to write your own talking and listening programs too. A single statement in BASIC is all that you need to say or recognize a word. Full instructions on how to do it are given in the manual.

COGNIVOX model VIO-1002 will work with all Commodore computers with at least 16k of RAM. Model VIO-1003 requires a 48k APPLE II+ with 1 disk drive and DOS 3.3.

### ORDER YOUR COGNIVOX NOW

Call us at (805) 685-1854 between 9am and 4pm PST and charge your COGNIVOX to your credit card or order GOD. Or send us a check in the mail, specifying your computer. Price for either model of COGNIVOX is \$295 plus \$4 shipping in the U.S. (foreign add 10% we ship AIR MAIL).

**VOICETEK**

P.O. Box 388, Goleta, CA 93116

## VIC-20

### VIC-20 INTERFACING BLUE BOOK

Did you know that your VIC can be used to control a 99¢ toy motor so effectively that it runs like a precision machine? Or that you can make VIC talk with an interface you can build at a total parts cost of under \$5?

These and other 18 interfacing projects selected for ease of construction and low cost are detailed in the VIC-20 Interfacing Blue Book a veritable gold mine of practical information on how to build interfaces to sense levels, dial telephones, detect liquid levels, control lights, do A/D and D/A conversion and many more.

Written by a college professor in a friendly and easy going style, the Blue Book gives you theory of operation, schematics, program listings, parts lists, construction hints and sources of materials for each one of the 20 projects.

If you want to get the most out of your VIC this book is a must. Cost is \$14.95 (less than 75¢ per project!).

### WORD WHIZ

Here is a no frills word processor that does the job and is so small it leaves plenty of memory for your text. Yet it offers full screen editing and easy save of work in progress. This pocket-rocket does it by taking advantage of VIC's built-in text manipulation capabilities. It delivers outstanding performance for letters and short manuscripts (up to 10 pages).

WORD WHIZ is all that is likely to need for word processing in your VIC and costs only \$14.95.

Above prices include postage in the U.S. CA res. add 6% tax. Foreign add \$2.

**microsignal**

900 Embarcadero Del Mar, Unit A  
Goleta, CA 93117



*With versions of this excellent game for PET/CBM Microsoft and Atari BASICs, this should provide hours of amusement. It will run on computers with 8K or more of RAM memory.*

# Maze Race

Mike Peterson  
Cheyenne, WY

I was impressed by the Maze algorithm that appeared in **COMPUTE!**, December, 1981, #19. After watching the maze form several times, I had an idea for a program that incorporated the maze algorithm.

First, I modified the routine so that two symmetrical mazes would be formed. One starts in the upper left corner of the screen while the other starts in the lower right. By POKing a 32 (\$20) in the center of the screen, identical (but opposite) mazes are formed. As one goes left, the other goes right. And as one goes down, the other goes up. This continues until the screen is full and the algorithm completed. The mazes are then linked together in the screen's middle and a "target" character is POKed in the center.

Now, depending upon your choice of options during initialization, you race against a human opponent (or the computer) to the center of the maze. If you select the two-player option, I strongly recommend the use of joysticks. The program will process both player's joystick input during each cycle. On the keyboard, one player can prevent the other's input by holding a key pressed.

With the one-player version, you will always be on the right and use the right joystick or the number pad to control your movement. The computer will not begin until after your first input. Since the computer doesn't know the best path to follow, and strays down dead-end paths, it is easy to beat. My daughter loses just often enough to keep her interested and make each game a new challenge.

Through experimentation with the joysticks, I found that the left joystick sets the high four bits and the right joystick sets the low four bits of the byte at address 59471 (\$E84F). The byte, A, can be separated into a left value and a right value with : A = PEEK(59471) : L = (A/16) AND 15 : R = A AND 15. If both joysticks are in the same position, L = R. An array with 15 elements can be used to determine the new position of each player, move there if not off the screen, and then erase the previous position. The following table shows all

possible joystick values, positions, and screen movement offsets:

L or R	POSITION	OFFSET
0	not used	0
1	left/button	-1
2	right/button	+1
3	button	0
4	not used	0
5	left/up	-41
6	right/up	-39
7	up	-40
8	not used	0
9	left/down	+39
10	right/down	+41
11	down	+40
12	not used	0
13	left	-1
14	right	+1
15	center	0

**Note:** with the button pressed only the row can be determined.

Another feature of this program is the "flipping" of the marker that arrives in the center of the screen's maze first. This is performed by XORing the byte in the center screen address with 128 (\$80). The result of an XOR with 128 is that RVS characters become normal characters and vice versa.

Since BASIC doesn't provide us with an XOR function, I consulted a Boolean Algebra text and found the AND, OR, and NOT gates used to produce the XOR truth table. In BASIC, XOR would be this : Y = ((X AND (NOT 128)) OR ((NOT X) AND 128)).

## Program 1. Atari Version

### Atari Notes

After the dual maze has been generated, select the number of players (player vs. computer or player vs. player) by pressing SELECT. When ready to play, press START. To re-start the game, press START. Use joysticks plugged into jacks one and two to play.

```

100 REM *** MAZE RACE ***
110 REM *** ATARI VERSION ***
120 DIM A(3):REM SET UP DIRECTION TABLE
130 A(0)=2:A(1)=-80:A(2)=-2:A(3)=80
140 WL=128:HL=0:SC=PEEK(88)+256*PEEK(89)
:A=SC+43:C=SC+877
150 GRAPHICS 0:POKE 752,1:SETCOLOR 2,INT
(16*END(0)),4:POKE 712,PEEK(710)
160 FOR I=1 TO 23

```




# Turn To The Future With **COMPUTE!** Publications

## The Beginner's Guide To Buying A Personal Computer

A Novice's handbook of useful, helpful information designed to teach you the basics of evaluating and selecting a personal computer. Written in plain English for the interested beginner. Complete with personal computer specification charts and buyer's guide. Applicable to home, educational, and small business buyers. ISBN 0-942386-03-5. Paperback. \$3.95.

## COMPUTE!'s First Book Of Atari

192 pages of useful, informative applications and programs from **COMPUTE!** magazine issues now out of print. Includes previously unpublished information including Memory Map. Contents include such articles and programs as "Adding A Voice Track to Atari Programs," "Designing Your Own Atari Graphics Modes," and "Inside Atari BASIC." Spiral bound for ease of access to listings. For Beginner level to Advanced Atari users. ISBN 0-942386-00-0. Paperback. \$12.95.

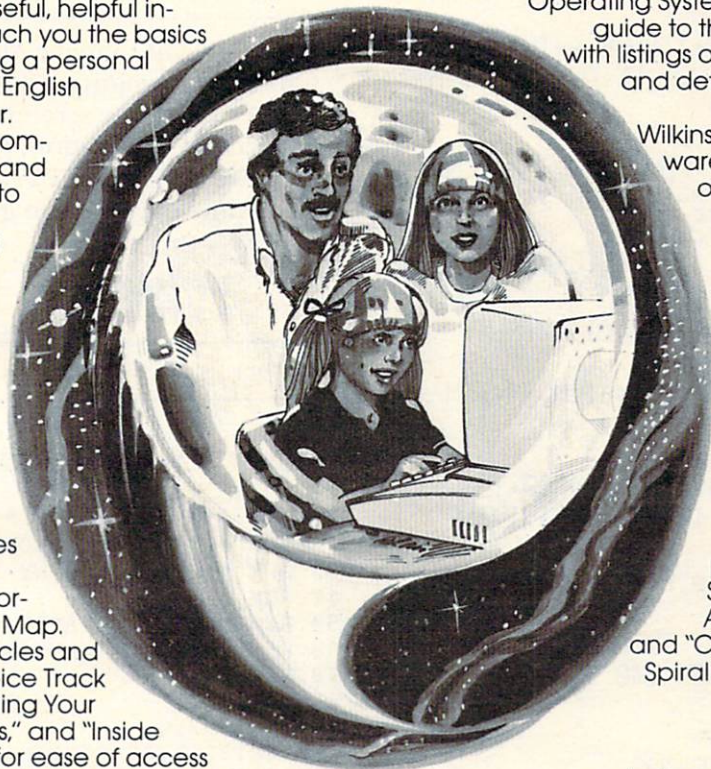

## Inside Atari DOS

From the authors of the Atari Disk Operating System, an exciting step-by-step guide to the DOS software. Complete with listings of commented source code and detailed explanations of each module of code. Author: Bill Wilkinson, Optimized Systems Software, Inc. Spiral bound for ease of access to listings. For Intermediate to Advanced Atari Users. ISBN 0-942386-02-7. Paperback. \$19.95

## COMPUTE!'s First Book Of PET/CBM

256 pages of Commodore PET and CBM articles from **COMPUTE!** magazine issues now in print. Includes such classic articles and programs as "Feed Your PET Some Applesoft," "Disk Lister: A Disk Cataloging Program," and "Cross Reference For The PET." Spiral bound. ISBN 0-942386-01-9. Paperback. \$12.95

**COMPUTE! Books** invites dealer inquiries. Call the Toll Free Number below for Dealer Information.

## COMPUTE! Magazine

A Monthly encyclopedia of informative applications articles and programs. **COMPUTE!** features articles, programs, and columns covering the spectrum of home and educational computing. Monthly reviews, complete BASIC and machine language listings of games, utilities, applications such as "Programming Your Home Insurance Inventory," "Real Estate Investment Analysis," "Telecommunications: How To Use A Modem," and much more. Written for children and parents, educators, novices to advanced programmers. Principal editorial coverage is Atari, Apple, Commodore PET/CBM, and VIC-20. Editorial coverage is expanding to include TI-99/4A, Sinclair ZX-81, and Radio Shack Color Computer. Latest issue: 224 pages.

Mail to: **COMPUTE!** Publications, P.O. Box 5406, Greensboro, NC 27403 USA

### COMPUTE! MAGAZINE

My Computer Is:

- Commodore PET/CBM  
 VIC-20  
 Apple  
 Atari  
 AIM
  OSI  
 Radio Shack Color Computer  
 TI 99/4A  
 Other \_\_\_\_\_  
 Don't yet have one

For Fastest Service  
Call Our **Toll-Free**  
US Order Line  
**800-345-8112**  
In Pennsylvania Call  
**800-662-2444**

- \$20.00 One Year US Subscription  
 \$36.00 Two Year US Subscription  
 \$54.00 Three Year US Subscription  
 \$25.00 Canada and Int'l Surface Mail  
 \$38.00 Europe Air Delivery (Foreign orders must be pre-paid in US Funds)

Payment Enclosed  
 VISA  
 MasterCard  
 American Express  
 Acct. No. \_\_\_\_\_ Expires \_\_\_\_/\_\_\_\_/\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Country \_\_\_\_\_

### COMPUTE! Books

For fastest service, in the US call **Toll Free 800-334-0868**.  
In NC call **919-275-9809**.

Quantity	Price	Shipping/Handling
_____ <b>Beginner's Guide</b>	\$ 3.95 ea. +	\$ 1.00 ea. _____
_____ <b>First Book of Atari</b>	12.95 ea. +	2.00 ea. _____
_____ <b>Inside Atari DOS</b>	19.95 ea. +	2.00 ea. _____
_____ <b>First Book of PET/CBM</b>	12.95 ea. +	2.00 ea. _____
Total _____		

All orders must be prepaid (money order, check or charge). All payments must be in US funds. (Outside the US add \$4.00 shipping and handling for air mail, \$2.00 for surface mail.) NC residents add 4% sales tax.

Payment Enclosed  
 VISA  
 MasterCard  
 American Express  
 Acct. No. \_\_\_\_\_ Expires \_\_\_\_/\_\_\_\_/\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Country \_\_\_\_\_

Allow 4-6 weeks for delivery. Foreign surface delivery 2-3 months.



```

170 PRINT "I
      |"
180 NEXT I
190 REM GENERATE THE MAZE!
200 POKE A,5:POKE C,2:POKE SC+499,HL
210 J=INT(RND(8)*4):X=J
220 B=A+(C(J)):D=C-(C(J)):IF PEEK(B)<>WL THEN
N 240
230 POKE B,J+1:POKE D,J+1:POKE A+INT((C(J)
)/2),HL:POKE C-INT((C(J)/2),HL:A=B:C=D:GO
TO 210
240 J=(J+1)*(J/3):IF J<>X THEN 220
250 J=PEEK(A):POKE A,HL:POKE C,HL:IF J<5
THEN A=A-(C(J-1)):C=C+(C(J-1)):GOTO 210
260 A=SC+43:C=SC+877:J=2
270 POKE A,84:POKE C,111:POKE SC+459,10:
POKE SC+460,HL:POKE SC+458,HL
280 DIM M(15):FOR I=0 TO 15:M(I)=0:NEXT
I:NP=0
290 M(14)=-40:M(13)=40:M(11)=-1:M(7)=1:M
(10)=-41:M(6)=-39
300 M(9)=39:M(5)=41:PLR=1
310 DIM MS$(20):MS$="Maze Race":FOR I=1
TO LEN(MS$):POSITION 0,I+5:MS$(I,I):NE
XT I
320 POSITION 9,23:?"One Player Vs. Come
puter";
330 K=PEEK(53279):IF K=7 THEN 330
340 IF K=PEEK(53279) THEN 340
350 IF K=6 THEN 400
360 IF K=3 THEN 330
370 NP=1-NP:IF NP=0 THEN 320
380 POSITION 9,23:?" Player Vs. Player
";
390 GOTO 330
400 PLR=1-PLR
410 IF PLR=0 OR NP THEN 440
420 B=A+INT((C(J)/2):Y=PEEK(B):IF Y=HL OR
Y=10 THEN POKE B,84:POKE A,HL:A=B:J=(J+
2)-4*(J/1)
430 J=(J-1)+4*(J=0):GOTO 480
440 IF PLR THEN 470
450 D=C+M(STICK(PLR)):IF PEEK(D)=HL OR P
EEK(D)=10 THEN POKE D,111:POKE C,HL:C=D
460 GOTO 480
470 B=A+M(STICK(PLR)):IF PEEK(B)=HL OR P
EEK(B)=10 THEN POKE B,84:POKE A,HL:A=B
480 REM SOMEONE WON
490 IF A<>SC+459 AND C<>SC+459 THEN 400
500 P=PEEK(SC+459):PF=0
510 FOR I=1 TO 50:POKE SC+459,P+128*PF:P
F=1-PF:NEXT I
520 REM
530 IF C=SC+459 THEN 560
540 IF NP THEN POSITION 9,23:?" Play
er 2 Won! ";:GOTO 580
550 POSITION 9,23:?" I WIN!
";:GOTO 580

```

```

560 IF NP THEN POSITION 9,23:?" Playe
r 1 Won! ";:GOTO 580
570 POSITION 9,23:?" You win!
";
580 IF PEEK(53279)<>6 THEN 580
590 RUN

```

If you want to make Maze Race (for Atari) more challenging, add the following lines. They cause the screen to blank out during the maze generation, preventing a "sneak preview." A side effect is that this decreases the time necessary to generate the maze:

```

155 POKE 559,0
325 POKE 559,34

```

## Program 2. Microsoft Version

```

10 REM *** MAZE RACE ***
20 REM * MIKE PETERSON *
30 REM ** CHEYENNE,WY **
40 REM
50 REM MAZE GENERATOR BY CHARLES BOND
60 REM COMPUTE! : DECEMBER, 1981
70 REM
80 GOTO120
90 POKE167,0
100 GETZ$:IFZ$=""THEN100
110 PRINTZ$:Z=VAL(Z$):POKE167,1:RETURN
120 PRINT"{CLEAR}{05 DOWN}":PRINTTAB(15)"MA
ZE RACE{02 DOWN}"
130 PRINTTAB(5)"HOW MANY PEOPLE ARE PLAYING
?{LEFT}";:GOSUB90:NP=Z-1:PRINT
140 IFZ>2THENPRINTTAB(5)"SORRY, ONLY 2 CAN ~
PLAY.{DOWN}":GOTO130
150 IFZ=0THENPRINTTAB(5)"PLEASE ENTER 1 OR ~
2.{DOWN}":GOTO130
160 PRINTTAB(7)"ARE YOU USING JOYSTICKS ?{L
LEFT}";:GOSUB90:PRINT
170 IFZ$="Y"THENJJ=1:GOTO190
180 IFZ$<>"N"THENPRINTTAB(7)"PLEASE ENTER Y
OR N.{DOWN}":GOTO160
190 IFNPTHENPRINT"{DOWN}LEFT PLAYER = Q :RI
GHT PLAYER = W":GOTO210
200 PRINT"{DOWN}I AM THE Q :YOU ARE THE W"
210 IFJJTHENPRINT"{DOWN}USE THE JOYSTICK TO
MOVE AROUND":GOTO250
220 IFNPTHENPRINT"{DOWN}Q USES W FOR UP,A F
OR LEFT,D FOR RIGHT,"
230 IFNPTHENPRINT"AND X FOR DOWN."
240 PRINT"{DOWN}W USES 8 FOR UP,4 FOR LEFT,
6 FOR RIGHT, AND 2 FOR DOWN."
250 PRINT"{DOWN}PRESS ANY KEY TO BEGIN *{LE
LEFT}";:GOSUB90
260 DIMM(255):JS=151:IFJJTHENJS=59471:GOTO2
90
270 M(18)=40:M(42)=-1:M(41)=1:M(50)=-40
280 M(24)=40:M(48)=-1:M(47)=1:M(56)=-40:GOT
0300
290 M(7)=-40:M(11)=40:M(13)=-1:M(14)=1

```




```

300 DIMA(3):A(0)=2:A(1)=-80:A(2)=-2:A(3)=80
    :WL=160:HL=32:SC=32768
310 BLS="{REV}
    {OFF}"
320 A=SC+81:C=SC+917
330 PRINT"{CLEAR}":FORI=1TO23:PRINTBLS:NEXT
340 POKEA,4:POKEC,1:POKESC+499,HL
350 J=INT(RND(TI)*4):X=J
360 B=A+A(J):D=C-A(J):IFPEEK(B)<>WLTHEN380
370 POKEB,J:POKED,J:POKEA+A(J)/2,HL:POKEC-A
    (J)/2,HL:A=B:C=D:GOTO350
380 J=(J+1)*-(J<3):IFJ<>XTHEN360
390 J=PEEK(A):POKEA,HL:POKEC,HL:IFJ<4THENA=
    A-A(J):C=C+A(J):GOTO350
400 POKESC+498,HL:POKESC+499,42:POKESC+500,
    HL:A=SC+81:C=SC+917
410 POKEA,81:POKEC,87:J=2:K=2
420 PP=PEEK(JS):IFPP=255THEN420
430 PP=PEEK(JS)
440 IFNPTHEN470
450 B=A+A(J)/2:Y=PEEK(B):IFY=HLORY=42THENPO
    KEB,81:POKEA,HL:A=B:J=(J+2)+4*(J>1
    )
460 J=(J-1)-4*(J=0):GOTO510
470 IFJJTHEN500
480 IFPP<>24ANDPP<>48ANDPP<>47ANDPP<>56THEN
    520
490 B=A+M(PP):IFPEEK(B)=HLORPEEK(B)=42THENP
    OKEB,81:POKEA,HL:A=B:GOTO510
500 Q=(PP/16)AND15:B=A+M(Q):IFPEEK(B)=HLORP
    EEK(B)=42THENPOKEB,81:POKEA,HL:A=B
510 IFJJTHEN540
    
```

```

520 IFPP<>18ANDPP<>42ANDPP<>41ANDPP<>50THEN
    550
530 D=C+M(PP):IFPEEK(D)=HLORPEEK(D)=42THENP
    OKED,87:POKEC,HL:C=D:GOTO550
540 Q=(PPAND15):D=C+M(Q):IFPEEK(D)=HLORPEEK
    (D)=42THENPOKED,87:POKEC,HL:C=D
550 IFA<>SC+499ANDC<>SC+499THEN430
560 FORI=0TO99:W=PEEK(SC+499):X=(WAND(NOT12
    8))OR((NOTW)AND128):POKESC+499,X
570 NEXT
580 PRINT"ANOTHER GAME ?{LEFT}":GOSUB90
590 IFZ$="Y"THEN320
600 IFZ$<>"N"THENPRINT"{02 UP}":GOTO580
    
```

FORTH  
 programmers:  
**COMPUTE!**  
 is looking for  
 screens and  
 applications  
 articles.




A Warner Communications Company

400 16K .....	\$319.00
400 YOURS to 32K or 48K .....	CALL
800 (16K) .....	659.00
410 RECORDER .....	84.00
810 DISK DRIVE .....	449.00
850 INTERFACE .....	169.00
830 MODEM .....	149.00
825 PRINTER .....	575.00
481 ENTERTAINER KIT .....	85.00
482 EDUCATOR KIT .....	125.00
483 PROGRAMMER'S KIT .....	60.00
484 COMMUNICATOR KIT .....	309.00

Prices subject to change without notice.  
 Shipping extra. No tax out of state.  
 Ca. residents add appropriate taxes.

WE ARE AN AUTHORIZED ATARI SALES AND  
 SERVICE CENTER




**COMPUTERTIME, INC.**

P.O. Box 216  
 Kentfield, CA 94914

CALL TOLL-FREE 800-227-2520  
 In California 800-772-4064

"The most baffling challenge of the century"  
 the **Rubick's Cube**  
 HAS BEEN CRACKED!



**SoliCube**

Complete computer analysis and solution for arbitrary initial configuration  
 • For novices & experts alike • 3-D animation • sound effects • the more you use it, the more you will like it.

The **SoliCube** kit (including disk, cube & documentation) ..... \$49.95  
 is available now for **CBM/PET**™ (40 column, at least 16k) from

**COMQUEST**

221 E. Camelback, Suite 1  
 Phoenix, Arizona 85012  
 Telephone 602-264-0324

For Visa & MC orders only call **TOLL-FREE** (24 hrs)  
**800-824-7888**  
 (in CA 800-852-7777)

**and ask for Operator 348**

Please add \$2.90 for h&s per order, and indicate ROM and RAM.


\* TM of Ideal Toy Corporation      \*\* TM of Commodore Machines, Inc.



**SPECIALS on INTEGRATED CIRCUITS**

6502	7.45	10/6.95	50/6.55	100/6.15
6502A/6512A	8.40	10/7.95	50/7.35	100/6.90
6520 PIA	5.15	10/4.90	50/4.45	100/4.15
6522 VIA	6.45	10/6.10	50/5.75	100/5.45
6532	7.90	10/7.40	50/7.00	100/6.60
2114-L200	2.45	25/2.30	100/2.15	
2114-L300	2.25	25/2.10	100/2.00	
2716 EPROM	5.50	5/5.15	10/4.80	
2532 EPROM	9.90	5/9.45	10/8.90	
6116 Hitachi 2Kx8 CMOS RAM	9.90	5/9.45	10/8.90	
4116-200 ns RAM			8 for 15	
Zero Insertion Force 24 pin Socket				2.00
S-100 Wire Wrap Socket				2.40

**A P Products 15% OFF**  
**A P Hobby-Blox 15% OFF**



**MODEM SPECIAL \$99**

**SIGNALMAN Mk1** from Anchor Automation  
 DIRECT CONNECT Modem with RS232 Cable and Connector included. Fully compatible with all Bell 103 modems. 0 to 300 bps. full duplex, frequency shift keyed modulation, automatic ANSW/ORIG selection, direct connect, audible tone carrier detect indicator, self-contained battery powered.

**PET/CBM Version (Mk1P) \$169**  
**ATARI Version \$99**

**COMPACT INTELLIGENT TERMINAL PACKAGE \$115**  
 Combines intelligent RS232 port hardware from cgrs Microtech with EHS Intelligent Terminal software to allow you to connect any RS232 Modem to PET/CBM.

**RS232 MODEM - STAR SALE \$128**  
**IEEE 488 MODEM - STAR SALE \$199**

**We carry Apple II+ from Bell & Howell**



**16K RAM Card for Apple 95**

**fullFORTH+ for Apple II \$75**  
 A full-featured FORTH with enhancements. Conforms to FORTH Interest Group standards.

REVERSAL (Spracklen)	32K Apple	28.00
Data Manager (Lutus)	24K Apple	40.00
Data-Graph (Boyd)	48K Apple	40.00
Apple II User's Guide (Osborne)		12.00
Introduction to Pascal (Sybex)		10.30
Pascal Handbook (Sybex)		12.00
Musical Applications of Micros (Chamberlin)		20.00
User Guide to the Unix System		13
6502 Assembly Language Subroutines		11
PET Fun and Games		8

**commodore**



**CBM-PET SPECIALS**

	list	SALE
8023 Printer - 136 col. 150cps bi-directional	(995)	775
8300 Daisy Wheel - 40 cps bi-directional	(2250)	1750
8032 80 x 25 CRT, business keyboard	(1495)	1100
Super Pet	(1995)	1600
8096 Board (extra 64K RAM for 8032)	(500)	400
8050 Dual Disk Drive - 1 megabyte	(1795)	1345
8250 Dual Disk Drive - 2 megabyte	(2195)	1760
CBM IEEE Modem	(395)	199
4016 full size graphics keyboard	(995)	795
4032 full size graphics keyboard	(1295)	999
4040 Dual Disk Drive - 330,000 bytes	(1295)	999
2031 Single Disk Drive - 165,000 bytes	(695)	550
4022 Tractor Feed Printer	(795)	630
C2N External Cassette Deck	(75)	65
Used CBM/PET Computers		CALL

**WE WILL MATCH ANY ADVERTISED PRICE**

**\*\*\* EDUCATIONAL DISCOUNTS \*\*\***

Buy 2 PET/CBM Computers, receive 1 FREE

**PETSCAN I \$345 base price.**

Allows you to connect up to 20 CBM/PET Computers to shared disk drives and printers. Completely transparent to the user. Perfect for schools or multiple word processing configurations. Base configuration supports 3 computers.

VIC 20	259	VIC Superslot	24
VIC 1515 Printer	335	VIC Super Alien	24
VIC 3K RAM	36	VIC Maze in 3-D	12
VIC 8K RAM	54	VIC Cosmic Debris	9
VIC 16K RAM	112	VIC Amok (UMI)	17
VIC 1540 Disk Drive	500	VIC Snakman	13
VIC Invaders	24	VIC Rubik's Cube	13
VIC Jupiter Lander	24	VIC Night Rider	11

TNW 1000 Serial Interface	110
TNW 488/103 with DAA	450
Compute!'s First Book of PET /CBM	11
WordPro 3 Plus - 32K CBM, disk, printer	195
WordPro 4 Plus - 8032, disk, printer	300
VISICALC for PET, ATARI, or APPLE	190
<b>SM-KIT - PET ROM UTILITIES</b>	<b>40</b>
Programmers Toolkit - PET ROM Utilities	35
PET Spacemaker II ROM Switch	36
2 Meter PET to IEEE or IEEE to IEEE Cable	40
Dust Cover for PET	8
IEEE-Parallel Printer Interface for PET	110
IEEE-RS232 Printer Interface for PET	120
The PET Revealed	12
Library of PET Subroutines	12

**4 PART HARMONY MUSIC SYSTEM for PET**

The Visible Music Monitor, by Frank Levinson, allows you to easily enter, display, edit, and play 4 part harmony music. Includes whole notes thru 64ths (with dotted and triplets), tempo change, key signature, transpose, etc. The KL-4M unit includes D to A converter and amplifier ready to hook to your speaker.

**KL-4M Music Board with VMM Program \$60**

**DISK SPECIALS**



SCOTCH (3M) 5"	10/2.45	50/2.35	100/2.30
SCOTCH (3M) 8"	10/2.60	50/2.45	100/2.40

**WE STOCK VERBATIM DISKS**

Try the new Verbatim Head Cleaner Kits

BASF 5" or 8"	10/2.00	20/1.95	100/1.85
Wabash 5"	10/2.00	20/1.95	100/1.85
Wabash 8"	10/2.00	20/1.95	100/1.85

**WE STOCK MAXELL DISKS**

Diskette Storage Pages		10 for 3.95
Disk Library Cases	8" - 2.85	5" - 2.15
Disk Hub Rings	8" - 50 @ 7.50	5" - 50 @ 6.00

**CASSETTES - AGFA PE-611 PREMIUM**

High output, low noise, 5 screw housings.

C-10	10/56	50/50	100/48
C-30	10/73	50/68	100/66

**SPECIALS**

<b>EPSON MX-80 Printer</b>	<b>440</b>
<b>EPSON MX-80 F/T Printer</b>	<b>540</b>
<b>EPSON MX-70 Printer</b>	<b>300</b>
<b>EPSON MX-100 Printer</b>	<b>695</b>
Centronics 739 Printer with dot graphics	575
<b>STARWRITER Daisy Wheel Printer F10</b>	<b>1445</b>
Zenith ZVM-121 Green Phosphor Monitor	119
DC Hayes Smartmodem	230
Watanabe Intelligent Plotter 1195	6-Pen 1445
BMC BM12A Green Phosphor Monitor	99
BMC BM1400BLUC 13" Color Monitor	285
BMC RGB 13" Color Monitor	329
POWERMATE Multiple Outlet Power Strips	
ISOBAR Isolated and Filtered Outlet Strips	

**ALL BOOK and SOFTWARE PRICES DISCOUNTED**

**Synertek Systems**

<b>SYM-1 Microcomputer</b>	<b>SALE 199</b>
SYM BAS-1 BASIC or RAE 1/2 Assembler	85
KTM-2/80 Synertek Video and Keyboard	349
KTM-3/80 Synertek Tubeless Terminal	385

**ZENITH data systems**

Z90-80 64 K	2170
Z90-82 64K, 1 double dens. drive	2395
Z89-0 48K	1950
Z89-1 48K, 1 drive	2150
Z67 10 Megabyte + Floppy Drive	4495
Z37 1.3 Megabyte Dual Floppy	1495
Z25 High Speed Printer	1195
Z19 Video Terminal (VT-52 compatible)	695
ZVM-121 Green Phosphor Monitor	119
All Zenith Software discounted	



800 Computer	675	Microsoft BASIC	72
400 - 16K	330	<b>MISSILE COMMAND</b>	<b>32</b>
810 Disk Drive	440	<b>ASTEROIDS</b>	<b>32</b>
825 Printer	629	<b>STAR RAIDERS</b>	<b>37</b>
850 Interface	170	Space Invaders	32
Inside Atari DOS	18	Music Composer	45
Paddle Pair	19	<b>MODEM for Atari</b>	<b>99</b>
Joystick Pair	19	Super Breakout	30
16K RAM	69	<b>PAC-MAN</b>	<b>36</b>
32K RAM	99	<b>CENTIPEDE</b>	<b>36</b>
Pilot	68	First Book of Atari	11

Write for prices on other Atari items.

**WRITE FOR CATALOG**

Add \$1.25 per order for shipping. We pay balance of UPS surface charges on all prepaid orders. Prices listed are on cash discount basis. Regular prices slightly higher. Prices subject to change.

252 Bethlehem Pike  
 Colmar, PA 18915

215-822-7727

**A B Computers**



## KMMM Pascal for PET/CBM \$85

A subset of standard Pascal with extensions.  
 - Machine language Pascal Source Editor with cursor oriented window mode  
 - Machine Language P-Code Compiler  
 - P-Code to machine language translator for optimized object code  
 - Run-time package  
 - Floating point capability  
 - User manual and sample programs  
 Requires 32K Please specify configuration.

## EARL for PET (disk file based) \$65

**Editor, Assembler, Relocator, Linker**  
 Generates relocatable object code using MOS Technology mnemonics. Disk file input (can edit files larger than memory). Links multiple object programs as one memory load. Listing output to screen or printer. Enhanced editor operates in both command mode and cursor oriented "window" mode.

## RAM/ROM for PET/CBM 4K or 8K bytes of soft ROM with optional battery backup. \$85

RAM/ROM is compatible with any large keyboard machine. Plugs into one of the ROM sockets above screen memory to give you switch selected write protectable RAM. Use RAM/ROM as a software development tool to store data or machine code beyond the normal BASIC range. Use RAM/ROM TO LOAD A ROM image where you have possible conflicts with more than one ROM requiring the same socket. Possible applications include machine language sort (such as SUPERSORT), universal wedge, Extramon, etc.  
 RAM/ROM -- 4K \$85  
 RAM/ROM -- 8K 120  
 Battery Backup Option 30

## SUBSORT by James Strasma \$35

Subsort is an excellent general purpose machine language sort routine for PET/CBM computers. Sorts both one and two dimensioned arrays at lightning speed in either ascending or descending order. Other fields can be subsorted when a match is found, and fields need not be in any special order. Sort arrays may be specified by name, and fields are random length. Allows sorting by bit to provide 8 categories per byte. The routine works with all PET BASICs, adjusts to any memory size, and can co-exist with other programs in high memory.

## SuperGraphics 2.0 NEW Version with TURTLE GRAPHICS

SuperGraphics, by John Fluharty, provides a 4k machine language extension which adds 35 full featured commands to Commodore BASIC to allow fast and easy plotting and manipulation of graphics on the PET/CBM video display, as well as SOUND Commands. Animations which previously were too slow or impossible without machine language subroutines now can be programmed directly in BASIC. Move blocks (or rocketships, etc.), or entire areas of the screen with a single, easy to use BASIC command. Scroll any portion of the screen up, down, left, or right. Turn on or off any of the 4000 (8000 on 8032) screen pixels with a single BASIC command. In high resolution mode, draw vertical, horizontal, and diagonal lines. Draw a box, fill a box, and move it around on the screen with easy to use BASIC commands. Plot curves using either rectangular or polar co-ordinates (great for Algebra, Geometry and Trig classes).

The SOUND commands allow you to initiate a note or series of notes (or even several songs) from BASIC, and then play them in the background mode without interfering with your BASIC program. This allows your program to run at full speed with simultaneous graphics and music.

Seven new TURTLE commands open up a whole new dimension in graphics. Place the TURTLE anywhere on the screen, set his DIRECTION, turn him LEFT or RIGHT, move him FORWARD, raise or lower his plotting pen, even flip the pen over to erase. Turtle commands use angles measured in degrees, not radians, so even elementary school children can create fantastic graphic displays.

Specify machine model (and size), ROM type (BASIC 3 or 4)  
 SuperGraphics (disk or tape) \$ 40  
 SuperGraphics in ROM 55  
 Volume discounts available on ROM version for schools.



for PET/CBM Computers

## Self Calculating DATA BASE REPORT WRITER MAILING LIST

FLEX-FILE is a set of flexible, friendly programs to allow you to set up and maintain a data base. Print files with a versatile Report Writer or a Mail Label routine. Programmers will find it easy to add subroutines to their own programs to make use of Data Base files.

**RANDOM ACCESS DATA BASE**  
 Record size limit is 250 characters. The number of records per disk is limited only by the size of each record and the number of records per disk is limited only by the size of each record and the amount of free space on the disk. File maintenance lets you step forward or backward through a file, add, delete, or change a record, go to a numbered record, or find a record by specified field. The Find command locates any record when you enter all (or a portion of) the desired key. Field lengths may vary from record to record to allow maximum packing of information. Files may be sorted by any field, and any field may be specified as a key. Sequential files from other programs may be converted to Flex-File format, and Flex-File records may be converted to sequential (WordPro, PaperMate, other word processors may also use Flex-File data). Maximum record size, fields per record, and order of fields may be changed at any time.

**MAILING LABELS**  
 With typical record size of 127 characters, each disk can handle over 1000 records (about 2800 with 8050 drive). Labels may be printed any number wide, and may begin in any column position. There is no limit on the number or order of fields on a label, and two or three fields may be joined together on one line (like first name, last name, and title). A "type of customer" field allows selective printing.

**REPORT WRITER**  
 Print any field in any column. For numeric fields, use decimal point justification (and round to any accuracy). Define any column as a series of mathematical functions performed on other columns. These functions include arithmetic operations and various log and trig functions. Pass results of operations such as running total from row to row. At the end of the report, print total and/or average for any column. Complete record selection, including field within range, pattern match, and logical functions can be specified individually or in combination with other parameters.

**FLEX-FILE BY Michael Riley \$80**  
 Please specify equipment configuration when ordering.

**COLORCHART Color Video Board \$125**  
 Up to 8 colors and high resolution graphics (128 x 192 in 2 colors). Generates composite video for use with monitor.

**PEDISK II from cgrs Microtech**

5" 40 track, 1 drive, 143K	\$525
5" 40 track, 1 drive, 286K	690
8" IBM 3740 format, 77 track, 250K	995

**PROGRAM YOUR OWN EPROMS \$79**  
**Branding Iron for PET/CBM**  
 EPROM Programmer with software for all ROM versions. Includes all hardware and software to program or copy 2716 and 2532 EPROMs.

**PORTMAKER DUAL RS232 SERIAL PORT 63**  
 Two ports with full bipolar RS232 buffering. Baud rates from 300 to 4800. For PET/CBM, AIM, SYM.

**CBM Software**

Legal Time Accounting Package	445
Medical Accounting Package	
Dow Jones Portfolio Management	129
Personal Tax Calculator	65
Wordcraft 80 Wordprocessor Package	325
Pascal Development Package	235
Assembler Development Package	99
Intelligent Terminal Emulator	30
Softpac-1 (Competitive Software)	29


## FORTH for PET BY L. C. Cargile and Michael Riley \$50

Features include:  
 full FIG FORTH model.  
 all FORTH 79 STANDARD extensions.  
 structured 6502 Assembler with nested decision making macros.  
 full screen editing (same as when programming in BASIC).  
 auto repeat key.  
 sample programs.  
 standard size screens (16 lines by 64 characters).  
 150 screens per diskette on 4040, 480 screens on 8050.  
 ability to read and write BASIC sequential files.  
 introductory manual.  
 reference manual.

Runs on any 16K or 32K PET/CBM (including 8032) with ROM 3 or 4, and CBM disk drive. Please specify configuration when ordering.

Available soon:  
**Metacompiler for FORTH \$30**  
 simple metacompiler for creating compacted object code which can be executed independently (without the FORTH system).

## PaperMate 60 COMMAND WORD PROCESSOR by Michael Riley



Paper-Mate is a full-featured word processor for CBM/PET. Paper-Mate incorporates 60 commands to give you full screen editing with graphics for all 16K or 32K machines (including 8032), all printers, and disk or tape drives.

For writing text, Paper-Mate has a definable keyboard so you can use either Business or Graphics machines. Shift lock on letters only, or use keyboard shift lock. All keys repeat.

Paper-Mate text editing includes floating cursor, scroll up or down, page forward or back, and repeating insert and delete keys. Text block handling includes transfer, delete, append, save, load, and insert.

All formatting commands are imbedded in text for complete control. Commands include margin control and release, column adjust, 9 tab settings, variable line spacing, justify text, center text, and auto print form letter (variable block). Files can be linked so that one command prints an entire manuscript. Auto page, page headers, page numbers, pause at end of page, and hyphenation pauses are included. Unlike most word processors, CBM graphics as well as text can be used. Paper-Mate can send any ASCII code over any secondary address to any printer.

Paper-Mate functions with 16/32K CBM/PET machines, with any printer, and with either cassette or disk. To order Paper-Mate, please specify configuration.

**Paper-Mate on disk or tape 40.00**

**BASIC INTERPRETER \$200**  
 Designed to support the CBM 8096 (8032 with add-on 64K board). A full interpreter implementation to automatically take advantage of the extra memory available to the 8032.

BPI General Ledger - 8032/8050	300
BPI Accounts Receivable - 8032/8050	300
BPI Inventory - 8032/8050	300
BPI Job Costing	300
BPI Payroll	300

**JINSAM Data Base Management System for CBM.** Comprehensive version available for most configurations.

**Hayden Software**

Complex Mathematics	12.70
Engineering Mathematics	12.70
General Mathematics	12.70
MCAP: Circuit Analysis Program	21.00
Energy Miser	24.50

**CASH MANAGEMENT SYSTEM \$45**  
 Easy to use. Keeps track of cash disbursements, cash receipts, cash transfers, expenses for up to 50 categories.

## WRITE FOR CATALOG

Add \$1.25 per order for shipping. We pay balance of UPS surface charges on all prepaid orders. Prices listed are on cash discount basis. Regular prices slightly higher. Prices subject to change.

252 Bethlehem Pike  
 Colmar, PA 18915

215-822-7727

**A B Computers**



# Test RAM For Bad Bits, Nondestructively

Leo J. Scanlon  
Inverness, FL

In a recent article in this magazine (**COMPUTE!**, April, 1981 #23) I presented a 6502 assembly language program that tests the integrity of a selected portion of RAM. That program was designed to detect "dead" bits or bytes, pattern sensitivity, crosstalk, and a variety of other error conditions. It could also be used to detect soft errors, in which the memory accepts the test data, but reverts back to its previous state after some period of time.

As useful as it is, that program has one possible shortcoming: it clobbers the contents of the portion of memory being tested. Clearly, that doesn't matter if you are just verifying a newly installed memory board, but is unacceptable if a program or some data is sitting within the test area. In this article, I present another kind of program, one that performs a *nondestructive* test on RAM memory. That is, a program that alters memory, but subsequently restores all locations to their previous (pre-test) values.

## The Test Algorithm

Essentially, the test program described here validates RAM by comparing the actual contents of memory to the known data that should be contained within it. To make this comparison, the program uses a method that is often employed for testing punched paper tape and read only memories (ROMs) – the *checksum*. A checksum is that value produced by taking the exclusive-OR of all bytes in test memory (see box).

Briefly, here is the sequence of operations for the test program:

1. Calculate a checksum value for the entire range of test memory, by exclusive-ORing all bytes.
2. Invert the state of the first bit in test memory – Bit 7 of the "start" location – but leave all other bits unchanged.
3. Calculate a new checksum value.
4. Invert the state of the altered bit position in the new checksum.
5. Compare the new (altered) checksum with

the initial checksum.

6. The result of this comparison can cause either of two things to take place:

*If the checksums are different*, the program jumps to an error routine, to print out the bit position and address of the bad bit.

*If the checksums are identical*, the program restores the state of the test bit – by re-inverting it – then branches back to Step 2, to test the next bit (Bit 6 of the "start" location).

This process continues until all bits have been tested, or until a mismatch is detected.

Will this nondestructive test program catch all of the fault conditions that can be detected by the previously published destructive test program? Probably not all of them. The nondestructive test program will not detect pattern sensitivity or soft errors (unless you modify the program to include a time delay), but it should be able to detect most other types of errors.


## Program Flowchart

Now that you understand *what* the test program must do, and know *how* the program will do it, it's time to look at the structure of the program itself. This program is comprised of three parts: a main program loop, a checksum calculating subroutine and an error printout routine.

A flowchart for the main program loop is shown in Figure 1. As you can see, this flowchart is nothing more than a detailed version of the algorithm we defined in preceding Steps 1 through 6. The program begins by calculating the byte count, then calls the checksum subroutine (CHKSUM) to generate the initial value of the checksum. This done, the base address and byte index are initialized to reference the first byte in test memory.



















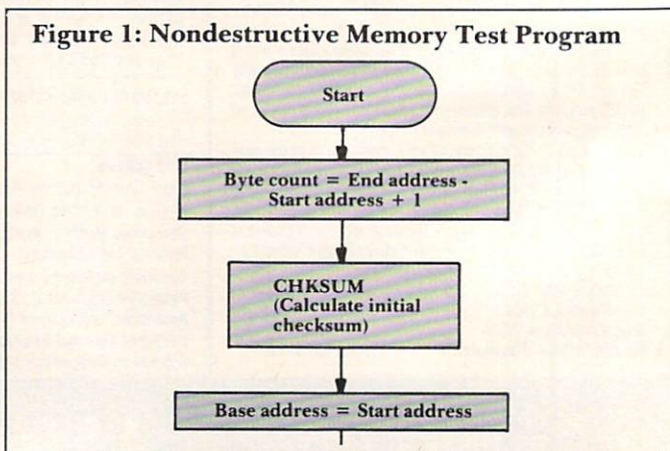
















Next, the bit mask index is initialized to reference the most significant bit, Bit 7. With this initialization out of the way, the program inverts the current test bit. The first time through the loop, this will be Bit 7 of the Start location. Now the

Figure 1: Nondestructive Memory Test Program





# It's hard to picture all of DYNACOMP's software

				
GIN RUMMY	SHAPE MAGICIAN	CHESSMASTER	BLACK HOLE	MIDWAY
				
FOURIER ANALYZER	RINGS OF THE EMPIRE	LEM LANDER	STOCKAID	HODGE POGGE
				
FOREST FIRE	QUINTOMINOES	STARBASE 3.2	GO FISH	HARMONIC ANALYZER
				
CHECKERS 3.0	HODGE POGGE	TRIPLE BLOCKARD	CHOMPELO	NYINDEX
				
TEACHER'S AIDE	SPACE TRAP	STOCK MASTER STOCK PLOT	BACCARAT	SUPER SUB CHASE
				
MAIL MASTER	VALDEZ (MAP)	STOCK MASTER STOCK PLOT	GIN RUMMY	SPACE LANES
				
ESCAPE FROM VOLANTIUM	BREAKUP	INTRUDER ALERT	PERSONAL FINANCE SYSTEM	CRYSTALS

TURN TO NEXT PAGE...



# DYNACOMP

## Quality software for\*:

APPLE II Plus	ALTAIR****
OSBORNE-I	NEC PC-8000
NORTH STAR***	TRS-80 (Level II)**
ATARI	SUPERBRAIN*****
PET/CBM	CP/M Disks/Diskettes (See Availability box) (MBASIC/CBASIC)

## CARD GAMES

**BRIDGE MASTER** (Available for all computers) Price: \$21.95 Diskette  
If you liked DYNACOMP'S BRIDGE 2.0, you will absolutely love BRIDGE MASTER. BRIDGE MASTER is a comprehensive bridge program designed to provide hours of challenging competition. Bidding features include the Blackwood convention, Stayman convention, pre-emptive opening, and recognition of demand bids and jump-shift responses. After playing a specific hand, you may replay the same hand, with the option of switching cards with your computer opponent. This feature allows you to compare your bidding and playing skills to BRIDGE MASTER. Bonuses for game contracts and slams are awarded as in duplicate bridge. Doubled contracts are scored based upon a computer assigned vulnerability. A score card is displayed at the conclusion of each hand. The score card displays a summary of total hands played, total points scored, number of contracts made and set, and % bids made. BRIDGE MASTER is clearly the best computer bridge program available.  
DYNACOMP'S previous BRIDGE 2.0 customers may upgrade to BRIDGE MASTER for a nominal charge of \$5.00 plus postage and handling (see ordering information box).

**BACCARAT** (Atari only) Price: \$18.95 Cassette/\$22.95 Diskette  
This is the European card game which is the favorite of the Monte Carlo jet set. Imagine yourself at the gaming table with 007 to your left and Goldfinger to your right. Learn and play BACCARAT at your leisure on the Atari. Contains full high resolution color graphics and matching sound. Runs in 16K. Requires one joystick.

**GIN RUMMY** (Apple diskette only) Price: \$22.95 Diskette  
This is the best micro computer implementation of GIN RUMMY existing. The computer plays exceptionally well, and the HIREs graphics are superb. What else can be said?

**POKER PARTY** (Available for all computers) Price: \$19.95 Cassette/\$23.95 Diskette  
POKER PARTY is a draw poker simulation based on the book, POKER, by Oswald Jacoby. This is the most comprehensive version available for microcomputers. The party consists of yourself and six other (computer) players. Each of these players you will get to know them is a different personality in the form of a varying propensity to bluff or fold under pressure. Practice with POKER PARTY before going to that expensive game tonight! Apple cassette and diskette versions require a 32 K (or larger) Apple II.

**GO FISH** (Available for all computers) Price: \$14.95 Cassette/\$18.95 Diskette  
GO FISH is a classic children's card game. The opponent is a friendly computer with enough that is simple enough for small children to easily master. The Apple and Atari versions employ high resolution graphics for the display of hands. A must for children! Runs in 16K.

**BLACKJACK COACH** (32K TRS-80 only) Price: \$29.95 Cassette/\$33.95 Diskette  
BLACKJACK COACH is both a game and an educational tool. With this program you may quantitatively test standard and special playing and betting methods, including the several card count schemes. You can simply play, play with the computer as a coach, or statistically test your method under long run automatic play. All the standard player choices are included: insurance, splitting pairs, double downs and surrender (optional). The computer analyzes the technique and provides detailed summary reports which statistically pinpoint the strengths and weaknesses of your play. Don't risk your money at the tables until you have practiced with BLACKJACK COACH!

## THOUGHT PROVOKERS

**MANAGEMENT SIMULATOR** (Available for all computers) Price: \$25.95 Cassette \$29.95 Diskette  
This program is both an excellent teaching tool as well as a stimulating intellectual game. Based upon similar games played at graduate business schools, each player or team controls a company which manufactures three products. Each player attempts to outperform his competitors by setting selling prices, production volumes, marketing and design expenditures etc. The most successful firm is the one with the highest stock price when the simulation ends.

**FLIGHT SIMULATOR** (Available for all computers) Price: \$17.95 Cassette/\$23.95 Diskette  
A realistic and extensive mathematical simulation of take-off, flight and landing. The program utilizes aerodynamic equations and the characteristics of a real aircraft. You can practice instrument approaches and navigation using radials and compass headings. The more advanced flyer can also perform loops, half-rolls and similar aerobically maneuvers. Although this program does not employ graphics, it is exciting and very addictive. See the software review in COMPUTRONICS. Runs in 16K Atari.

**VALDEZ** (Available for all computers) Price: \$17.95 Cassette/\$21.95 Diskette  
VALDEZ is a computer simulation of super-tanker navigation in the Prince William Sound/Valdez Narrows region of Alaska. Included in this simulation is a realistic and extensive 256 x 256 element map, portions of which may be viewed using the ship's alphanumeric radar display. The motion of the ship itself is accurately modeled mathematically. The simulation also contains a model for the tidal patterns in the region, as well as other traffic (outgoing tankers and drifting icebergs). Chart your course from the Gulf of Alaska to Valdez Harbor! See the software reviews in 80 Software Critique and Personal Computing.

**BACKGAMMON 2.0** (Available for all computers) Price: \$19.95 Cassette/\$23.95 Diskette  
This program tests your backgammon skills and will also improve your game. A human can compete against a computer or against another human. The computer can even play against itself. Either the human or the computer can double or generate dice rolls. Board positions can be created or saved for replay. BACKGAMMON 2.0 plays in accordance with the official rules of backgammon and is sure to provide many fascinating sessions of backgammon.

**CHESS MASTER** (North Star and TRS-80 only) Price: \$19.95 Cassette/\$23.95 Diskette  
This is one of the most powerful programs available for microcomputers. It includes casting, an opponent capable of evaluation of pawns. Additionally, the board may be written before the start of play, permitting the examination of "book" plays. To maximize execution speed, the program is presented in assembly language (by SOFTWARE SPECIALISTS of California). Full graphics are employed in the TRS-80 version, and two widths of alphanumeric display are provided to accommodate North Star users. See review in onComputing.

**FOREST FIRE!** (Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
Using excellent graphics and sound effects, this simulation puts you in the middle of a forest fire. Your job is to direct operations to put out the fire while compensating for changes in wind, weather and terrain. Not protecting valuable structures can result in startling penalties. Life-like variables are provided to make FOREST FIRE! very suspenseful and challenging. No two games have the same setting and there are 3 levels of difficulty.

**BLACK HOLE** (Apple only) Price: \$15.95 Cassette/\$19.95 Diskette  
This is an exciting graphical simulation of the problems involved in closely observing a black hole with a space probe. The object is to enter and maintain, for a prescribed time, an orbit close to a small black hole. This is to be achieved without coming so near the anomaly that the tidal stress destroys the probe. Control of the craft is realistically simulated using side jets for rotation and main thrusters for acceleration. This program employs Hi-Res graphics and is educational as well as challenging.

**SPACE EVACUATION!** (Available for all computers) Price: \$15.95 Cassette/\$19.95 Diskette  
Can you colonize the galaxy and evacuate the Earth before the sun explodes? Your computer becomes the ship's computer as you explore the universe to relocate millions of people. This simulation is particularly interesting as it combines many of the exciting elements of classic space games with the mystery challenge of ADVENTURE.

**MONARCH** (Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
MONARCH is a fascinating economic simulation requiring you to survive an 8-year term as your nation's leader. You determine the amount of acreage devoted to industrial and agricultural use, how much food to distribute to the populace and how much should be spent on pollution control. You will find that all decisions involve a compromise and that it is not easy to make everyone happy. Runs in 16K Atari.

**CHOMPELO** (Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
CHOMPELO is really two challenging games in one. One is similar to NIM; you must bite off part of a cookie, but avoid taking the poisoned portion. The other game is the popular board game REVERSI. It fully uses the Atari's graphics capability, and is hard to beat. This package will run on a 16K system.

## AVAILABILITY

DYNACOMP software is supplied with complete documentation containing clear explanations and examples. Unless otherwise specified, all programs will run within 16K program memory space (ATARI requires 24K). Except where noted, programs are available on ATARI, PET, TRS-80/Level II, NEC and Apple (AppleSoft) cassette and diskette as well as North Star single density (double density compatible) diskette. Additionally, most programs can be obtained on standard (IBM 3740 single density) double density compatible 8" CP/M floppy disks for systems running under MBASIC or CBASIC (for example, Altos, Xerox 8020, Heath/Zenith and many others). 5 1/4" CP/M diskettes are available for the North Star, SuperBrain and Osborne computer systems.

\*ATARI, PET, CBM, NORTH STAR, CP/M, IBM, OSBORNE, SUPERBRAIN, NEC PC-8000 and XEROX are registered trademarks and/or trademarks.  
\*\*Except where noted, all TRS-80 Model II software is available on cassette (only) for the TRS-80 Model III. Exceptions: VALDEZ, CRIBBAGE, GRAFIX, CHESSMASTER, TRS-80 diskettes are not supplied with either DOS or BASIC.  
\*\*\*For most North Star disk-based systems.  
\*\*\*\*For Altair systems having Microsoft BASIC.  
\*\*\*\*\*For SUPERBRAIN systems running under MBASIC or CBASIC (state which).

## DYNACOMP OFFERS THE FOLLOWING

- Widest variety
- Guaranteed quality
- Fastest delivery
- Friendly service
- Free catalog
- Toll free order phone

## AND MORE...

**STARBASE 3.2** (Available for all computers) Price: \$13.95 Cassette/\$17.95 Diskette

This is the classic space simulation, but with several new features. For example, the Croylins now shoot at the Invincible without warning while also attacking starbases in other quadrants. The Croylins also attack with both light and heavy cruisers and move when shot at. The Invincible is hectic when the Invincible is besieged by three heavy cruisers and a starbase S.O.S. is received! The Croylins get even! See the software reviews in A.N.A.L.O.G., 80 Software Critique and Game Merchandising.

**LIL' MEN FROM MARS** (Atari only) Price: \$19.95 Cassette/\$23.95 Diskette  
Defend yourself! The little men from Mars are out to get you if you don't get them first. This is a hilarious high resolution animated graphics (arcade) game which exercises much of the Atari's power. Requires one joystick.

**SPACE TILT** (Apple and Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
Use the game paddles to tilt the plane of the TV screen to "roll" a ball into a hole in the screen. Sound simple! Not when the hole gets smaller and smaller! A built-in timer allows you to measure your skill against others in this habit-forming action game.

**ESCAPE FROM VOLANTIUM** (Atari only) Price: \$15.95 Cassette/\$19.95 Diskette  
Bring the action and excitement of an arcade into your home with ESCAPE FROM VOLANTIUM! To escape you must maneuver your space ship around obstacles and laser blast the guardian (without being eaten). If he is killed with a direct shot (not just a big lipped off), a door opens to the outside. However, the door does not stay open indefinitely. If you fail to escape in time, the door closes and a new guardian appears. Sometimes you can smash through the door by repeatedly chopping away at it. Other times it is impervious. At the higher levels of play more obstacles and guardians appear, adding to the excitement. Uses high resolution graphics and sound. Runs in 16K.

**ALPHA FIGHTER** (Atari only) Price: \$13.95 Cassette/\$17.95 Diskette  
Two excellent graphics and action programs in one! ALPHA FIGHTER requires you to destroy the alien starships passing through your sector of the galaxy. ALPHA BASE is in the path of an alien UFO invasion; let five UFO's get by and the game ends. Both games require the joystick and get progressively more difficult the higher you score! ALPHA FIGHTER will run on 16K systems.

**THE RINGS OF THE EMPIRE** (Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
The empire has developed a new battle station protected by rotating rings of energy. Each time you blast through the rings and destroy the station, the empire develops a new station with more protective rings. This exciting game runs on 16K systems, employs extensive graphics and sound and can be played by one or two players.

**INTRUDER ALERT** (Atari only) Price: \$15.95 Cassette/\$19.95 Diskette  
This is a fast paced graphics game which places you in the middle of the "Dreadstar" having just stolen its plans. The droids have been alerted and are directed to destroy you at all costs. You must find and enter your ship to escape with the plans. Five levels of difficulty are provided. INTRUDER ALERT requires a joystick and will run on 16K systems.

**MIDWAY** (Atari 32K only) Price: \$14.95 Cassette/\$18.95 Diskette  
MIDWAY is an exciting extension of the game of Battleship. It mixes the challenges of strategy and chance. Your opponent can be another human or the computer. Color graphics and sound are both included. Runs in 16K.

**TRIPLE BLOCKADE** (Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
TRIPLE BLOCKADE is a two-to-three player graphics and sound action game. It is based on the classic video arcade game which millions have enjoyed. The object is to direct your blockading line around the screens and prevent the enemy from running into your opponent(s). Although the concept is simple, the combined graphics and sound effect lead to "high anxiety".

**GAMES PACK I** (Available for all computers) Price: \$14.95 Cassette/\$18.95 Diskette  
GAMES PACK I contains the classic computer games of BLACKJACK, LUNAR LANDER, CRAPS, HORSESHOE, SWITCH and more. These games have been combined into one large program for ease in loading. They are individually accessed by a convenient menu. This collection is worth the price just for the DYNACOMP version of BLACKJACK.

**GAMES PACK II** (Available for all computers) Price: \$14.95 Cassette/\$18.95 Diskette  
GAMES PACK II includes the games CRAZY EIGHTS, JOTTO, ACEY-DUCEY, LIFE, WUMPLUS and others. As with GAMES PACK I, all the games are loaded as one program and are called from a menu. You will particularly enjoy DYNACOMP'S version of CRAZY EIGHTS.  
Why pay \$7.95 or more per program when you can buy a DYNACOMP collection for just \$10.95!

**MOON PROBE** (Available for all computers) Price: \$12.95 Cassette/\$16.95 Diskette  
This is an extremely challenging "lunar lander" program. The user must drop from orbit to land a predetermined target on the moon's surface. You control the thrust and orientation of your craft plus direct the rate of descent and approach angle. Runs in 16K Atari.

**SPACE TRAP** (Atari only, 16K) Price: \$14.95 Cassette/\$18.95 Diskette  
This galactic "shoot'em up" arcade game places you near a black hole. You control your spacecraft using the joystick and attempt to blast as many of the alien ships as possible before the black hole closes about you.

**CHIRP INVADERS** (PET/CBM only) Price: \$14.95 Cassette/\$18.95 Diskette  
CHIRP INVADERS is an addictive game using action graphics. A Federation space station must be reached before the Chirps conquer the Earth. Stationary obstacles, moving meteors, and the attacking Chirps must all be avoided for a successful journey. Good luck. 40 column PET/CBM only.

**SUPER SUB CHASE** (Atari only) Price: \$19.95 Cassette/\$23.95 Diskette  
SUPER SUB CHASE simulates a search and destroy mission. Set your course and keep an eye on the sonar readings as you hunt for the hidden submarine. Set the depth charge explosion depth and watch them sink toward the sub. This is an addictive game which takes advantage of the Atari's graphics and sound capabilities. One or two players. Joystick(s) required.

## ADVENTURE

**CRANSTON MANOR ADVENTURE** (North Star, SuperBrain and CP/M only) Price: \$19.95 Diskette  
At last! A comprehensive Adventure game for North Star and CP/M systems. CRANSTON MANOR ADVENTURE takes you into mysterious CRANSTON MANOR where you attempt to gather fabulous treasures. Lurking in the manor are wild animals and robots who will not give up the treasures without a fight. The number of rooms is greater and the associated descriptions are much more elaborate than the current popular series of Adventure programs, making this game the top in its class. Play can be stopped at any time and the status stored on diskette. Not available in 5 1/4" CP/M format.

**GUMBALL RALLY ADVENTURE** (North Star only, 48K) Price: \$21.95 Diskette  
Take part in this outlaw race from the east coast to the west coast. The goal is to find your way to the finish line while maintaining the highest possible speed. You may choose one of five cars available at the garage. The choice will affect your speed and range. Remember to take over passes and don't get caught speeding!

**UNCLE HARRY'S WILL** (North Star only, 40K) Price: \$24.95 Diskette  
Uncle Harry has died and has left you everything. However, he has neglected to mention where everything is! Instead, his will consists of a poem which contains clues. You will have to travel all over the United States both by car and on foot to solve the puzzle, and there are over 300 locations to probe. Be careful and watch out for red herrings!

## TYPE 'N' TALK

DYNACOMP is now distributing the new and revolutionary TYPE-'N'-TALK™ (TNT) speech synthesizer from Votrac. Simply connect TNT to your computer's serial interface, enter text from the keyboard and hear the words spoken. TNT is the easiest-to-program speech synthesizer on the market. It uses the least amount of memory and provides the most flexible vocabulary available anywhere!

TYPE-'N'-TALK List price \$375. DYNACOMP'S price \$319.95 plus \$5.00 for shipping and handling.

**TALK TO ME** (TNT Atari only, 24K) Price: \$14.95 Cassette/\$18.95 Diskette  
This program presents a superb tutorial on speech synthesis using the Atari 800 and TYPE-'N'-TALK™. TALK TO ME will illustrate normal word generation as well as phoneme generation. The documentation includes many helpful programming tips. TALK TO ME has been demonstrated on network (CBS) TV.  
OTHER TNT PROGRAMS: MOON PROBE, TNT, CHOMPELO, TNT

## MISCELLANEOUS

**CRYSTALS** (Atari only) Price: \$14.95 Cassette/\$18.95 Diskette  
A unique algorithm randomly produces fascinating graphics displays accompanied with tones which vary as the patterns are built. No two patterns are the same, and the combined effect of the sound and graphics are mesmerizing. CRYSTALS has been used in local stores to demonstrate the sound and color features of the Atari. Runs in 16K Atari.

**NORTH STAR SOFTWARE EXCHANGE (NSSE) LIBRARY**  
DYNACOMP now distributes the 23 volume NSSE library. These diskettes each contain many programs and offer an outstanding value for the purchase price. They should be part of every North Star user's collection. Call or write DYNACOMP for details regarding the contents of the NSSE collection.  
Price: \$9.95 each/\$8.95 each (4 or more)  
The complete collection may be purchased for \$159.95

**5 1/4" DISKETTES** (soft sector/ten sector) Price: \$39.95/20 Diskettes  
As you might imagine, DYNACOMP purchases diskettes in large quantities and at wholesale prices. As we want to pass the savings along to you!



## BUSINESS and UTILITIES

- MAILMASTER (Atari diskette only)** Price: \$39.95 Diskette  
MAILMASTER is a very versatile software package for managing and manipulating mail lists and mini data bases. Each disk can hold over 600 customer entries containing name, address, 38 letter key words and a phone number. The display is marked so that entries may be made and edited with ease. The status (e.g., disk space left, options, etc.) is shown at all times. Labels may be printed 1, 2 or 3 up, and all sorting (top code and alphabetically) is performed by a fast machine language program.
- PERSONAL FINANCE SYSTEM (Available for all computers)** Price: \$39.95 Diskette  
PFS is a single disk, menu-oriented system composed of ten different programs. Besides recording your expenses and tax defined items, PFS will sort and summarize expenses by month, and display information on expenditures by any of 26 user described codes by month or by payer. PFS will even produce monthly bar graphs of your expenses by category! This powerful package requires only one disk drive, minimal memory (24K Atari, 32K North Star) and will store up to 600 records per disk (and over 1000 records per disk by making a few simple changes to the program). You can record checks plus cash expenses so that you can finally see where your money goes and eliminate guesswork and tedious hand calculations. Contains high speed machine language sort. PFS has been demonstrated on network (CBS) TV!
- FAMILY BUDGET (Apple and Atari only)** Price: \$34.95 Diskette  
FAMILY BUDGET is a very convenient financial record-keeping program. You will be able to keep track of cash and credit expenditures as well as income on a daily basis. You can record tax deductible items and charitable donations. FAMILY BUDGET also provides a continuous record of all credit transactions. You can make daily cash and charge entries to any of 21 different expense accounts as well as to a payroll and tax accounts. Data are easily retrieved giving the user complete control over an otherwise complicated (and unorganized!) subject.
- INTELINK (Atari only)** Price: \$49.95 Diskette  
This software package contains a menu-driven collection of programs for facilitating efficient two-way communications through a full duplex modem (required for use). In one mode of operation you may connect to a data service (e.g., the SOURCE or MicroNet) and quickly load data for such as stock quotations on your diskette for later viewing. This greatly reduces "connect time" and thus the service charge. You may also record the complete contents of a communications session. Additionally, programs written in BASIC, FORTRAN, etc. may be built off-line using the support text editor and later "up-loaded" to another computer, making the Atari a very smart terminal. Even Atari BASIC programs may be uploaded. Further, a command file may be built off-line and used later as controlling input for a time-share system. This is, you can set up your sequence of time-share commands and programs, and the Atari will transmit them as needed; batch processing. All this adds up to saving both connect time and your time.
- PAYFIVE (Apple II plus diskette, two drives required)** Price: \$149.95  
This is an enormously flexible employee payroll system with extraordinarily good human engineering features. PAYFIVE prints checks and compiles the required federal, state and local forms for up to 148 employees! The pay method may be hourly, salary, commission or any combination. There are multiple options for pay periods, and they also can be used in any combination. PAYFIVE includes many other features and comes extremely well documented with a 200 page manual. The manual may be purchased separately for \$30, and that payment later applied to the software purchase.
- SHOPPING LIST (Atari only)** Price: \$12.95 Cassette/\$16.95 Diskette  
SHOPPING LIST stores information on items you purchase at the supermarket. Before going shopping, it will remind you of all the things you might need, and then display (or optionally print) your shopping list and the total cost. Adding, deleting, changing and storing data is very easy. Runs with 16K.
- TAX OPTIMIZER (Available for all computers)** Price: \$59.95 Diskette  
The TAX OPTIMIZER is an easy-to-use, menu oriented software package which provides a convenient means for analyzing various income tax strategies. The program is designed to provide a quick and easy data entry. Income tax is computed by all tax methods (regular, income averaging, maximum and alternate minimum tax). The user may immediately observe the tax effect of critical financial decisions. TAX OPTIMIZER has been thoroughly field tested in CPA offices and comes complete with the current tax tables in its data files. TAX OPTIMIZER is tax deductible!
- UTIL (Apple only, 48K)** Price: \$19.95 Diskette  
UTIL is a disk-oriented utility system which permits examining and changing of the contents of DOS 3.2 and 3.3 diskettes at the bit (table or byte) level. With UTIL, you can easily examine the contents of a diskette sector by sector, restructure the sector pointers, reallocate sectors (e.g. bad sectors may be "hidden"), and perform many other sophisticated operations. For the experienced programmer.
- TURNKEY AND MENU (Atari only)** Price: \$17.95 Diskette  
TURNKEY is a utility program which allows you to create auto-boot/autorun diskettes easily. Simply load and run TURNKEY to create the program and answer the questions! The TURNKEY diskette also comes with DOS 2.0 and includes another program, MENU. MENU lists the contents of your diskette alphabetically, and permits the running of any BASIC program on the diskette by typing a single key. TURNKEY and MENU provide you with the ability to run any program on your diskette by simply turning on the computer and pressing a single key.
- STOCKAID (Atari only)** Price: \$29.95 Diskette  
STOCKAID provides a powerful set of tools for stock market analysis. With STOCKAID you can display point and figure charts, as well as bar charts with oscillators. You can also examine long term moving averages and on-balance volume features. STOCKAID allows you to input daily data with a single diskette storage capability of 239 days x 16 stocks. Included are stock dividend and split adjustment capabilities. A very professional package!
- SHAPE MAGICIAN (Apple II, 48K, diskette only)** Price: \$29.95  
At last! A utility for painlessly creating graphics shapes for the Apple. Create, edit and save up to 30 shapes which can then be used to develop arcade games or to simply enhance your programs. Add that professional touch!

## EDUCATION

- HODGE PODGE (Apple 48K and Atari diskette only)** Price: \$14.95 Cassette/\$18.95 Diskette  
Let HODGE PODGE be your child's teacher. Pressing any key on your Apple will result in a different and intriguing "happening" related to the letter or number of the chosen key. The program's graphics, color and sound are a delight for children from ages 1 1/2 to 7. HODGE PODGE is a non-intimidating teaching device which brings a new dimension to the use of computers in education. See the excellent reviews of this very popular program in INFOWORLD and SOFTALK.
- TEACHERS' AIDE (Atari only)** Price: \$13.95 Cassette/\$19.95 Diskette  
TEACHERS' AIDE consists of three basic modules contained in one program. The first module provides addition and subtraction exercises of varying levels of difficulty. The second module consists of multiplication problems in which the student may be tested both on the final answer and/or on the subtotal answers in the long hand procedure. Several levels of complexity are provided here as well. The third module consists of division problems; one particularly nice feature of the division module is that the long hand division steps can be displayed along with the remainder in order to clearly demonstrate the procedure by which the remainder is derived. Using TEACHERS' AIDE is not merely a drill, but rather a learning experience.
- PHARMACOLOGY UPDATE (PET only)** Price: \$169.95 Cassette/\$149.95 Diskette  
This is DYNACOMP's first educational software entry for the medical profession (more are coming!). PHARMACOLOGY UPDATE was written by a R.N. as a masters project, with the aid of a practicing pharmacist and an electronics instructor. This package comes in two parts. The first part is a 200 page manual which is divided into 11 sections. Each of these sections provides both concise information and probing questions. The second part consists of 11 programs that are keyed to the text and which test the degree of your understanding of the text material. This package has great educational value for the beginning student as well as the professional interested in an efficient way to review and update his or her knowledge. Available on cassettes (11) or diskette.
- TEACHER'S GRADEBOOK (Apple 48K dual/single drive)** Price: \$49.95 Diskette  
TEACHER'S GRADEBOOK is a complete password-protected record-keeping system for the classroom. It supports up to nine users, and each user may have data for up to nine classes on one disk (which is up to 90 students per class). Typical information which can be entered, edited and processed includes rosters, averages and grades. Summary reports may be displayed (on the screen) or printed in various ways, with automatic weighted averaging and conversion to letter grades. This system has been tested ("goof-proofed") in the class environment and is both well-written and well-documented.

## ORDERING INFORMATION

All orders are processed and shipped within 48 hours. Please enclose payment with order and include the appropriate computer information. If paying by VISA or MasterCard, include all numbers on card. Purchase orders accepted.

### Shipping and Handling Charges

Within North America: Add \$2.00  
Outside North America: Add 15% (Air Mail)

### Quantity Discounts

Deduct 10% when ordering 3 or more programs; 20% when ordering 5 or more. Dealer discount schedules available upon request.

### 8" CP/M Disks

Add \$2.50 to the listed diskette price for each 8" floppy disk (IBM soft sector CP/M format). Programs run under Microsoft MBASIC or BASIC-80.

### 5 1/4" CP/M Disks

All software available on 8" CP/M disks is also available on 5 1/4" disks, North Star and Osborne format.

Ask for DYNACOMP programs at your local software dealer. Write for detailed descriptions of these and other programs from DYNACOMP.

## DYNACOMP, Inc. (Dept. E)

1427 Monroe Avenue

Rochester, New York 14618

24 hour message and order phone: (716) 442-8731

Toll free order phones: (800) 828-6772

(800) 828-6773

Office phone (9AM-5PM EST): (716) 442-8960



New York State residents please add 7% NYS sales tax.

## STATISTICS and ENGINEERING


- DIGITAL FILTER (Available for all computers)** Price: \$39.95 Cassette/\$43.95 Diskette  
DIGITAL FILTER is a comprehensive data processing program which permits the user to design his own filter function or choose from a menu of filter forms. In the explicit design mode the shape of the frequency transfer function is specified by directly entering pole/zero locations. In the menu mode, ideal low pass, high pass and bandpass filters may be approximated to varying degrees according to the number of points used in the calculation. These filters may optionally also be smoothed with a Hanning function. In addition, multi-stage Butterworth filters may be selected. Features of DIGITAL FILTER include plotting of the data before and after filtering, as well as display of the chosen filter functions. Also included are convenient data storage, retrieval and editing procedures.
- DATA SMOOTHER (Not available for Atari)** Price: \$19.95 Cassette/\$23.95 Diskette  
This special data smoothing program may be used to rapidly derive useful information from noisy business and engineering data which are equally spaced. The software features choice in degree and range of fit, as well as smoothed first and second derivative calculation. Also included is automatic plotting of the input data and smoothed results.
- FOURIER ANALYZER (Available for all computers)** Price: \$19.95 Cassette/\$23.95 Diskette  
Use this program to examine the frequency spectra of limited duration signals. The program features automatic scaling and plotting of the input data and results. Practical applications include the analysis of complicated patterns in such fields as electronics, communications and business.
- TFA (Transfer Function Analyzer)** Price: \$19.95 Cassette/\$23.95 Diskette  
This is a special software package which may be used to evaluate the transfer functions of systems such as hi-fi amplifiers and filters by examining their response to pulsed inputs. TFA is a major modification of FOURIER ANALYZER and contains an engineering-oriented decibel versus log-frequency plot as well as data editing features. Whereas FOURIER ANALYZER is designed for educational and scientific use, TFA is an engineering tool. Available for all computers.
- HARMONIC ANALYZER (Available for all computers)** Price: \$24.95 Cassette/\$28.95 Diskette  
HARMONIC ANALYZER was designed for the spectrum analysis of repetitive waveforms. Features include data file generation, editing and storage/retrieval as well as data and spectrum plotting. One particularly unique facility is that the input data need not be equally spaced or in order. The original data is sorted and a cubic spline interpolation is used to create the data file required by the FFT algorithm.
- FOURIER ANALYZER, TFA and HARMONIC ANALYZER** may be purchased together for a combined price of \$51.95 (three cassettes) and \$63.95 (three diskettes).
- REGRESSION I (Available for all computers)** Price: \$19.95 Cassette/\$23.95 Diskette  
REGRESSION I is a unique and exceptionally versatile one-dimensional least squares "polynomial" curve fitting program. Features include very high accuracy; an automatic degree determination option; an extensive internal library of fitting functions; data editing; automatic data, curve and residual plotting; a statistical analysis (e.g. standard deviation, correlation coefficient, etc.) and much more. In addition, new fits may be tried without reentering the data. REGRESSION I is certainly the cornerstone program in any data analysis software library.
- REGRESSION II (Available for all computers)** Price: \$19.95 Cassette/\$23.95 Diskette  
PARAFIT is designed to handle those cases in which the parameters are imbedded (possibly nonlinearly) in the fitting function. The user simply inserts the functional form, including the parameters (A11, A12, etc.) as one or more BASIC statement lines. Data, results and residuals may be manipulated and plotted as with REGRESSION I. Use REGRESSION I for polynomial fitting, and PARAFIT for those complicated functions.
- MULTILINEAR REGRESSION (MLR) (Available for all computers)** Price: \$24.95 Cassette/\$28.95 Diskette  
MLR is a professional software package for analyzing data sets containing two or more linearly independent variables. Besides performing the basic regression calculation, this program also provides easy to use data entry, storage, retrieval and editing functions. In addition, the user may interrogate the program by supplying values for the independent variables. The number of variables and data size is limited only by the available memory.
- REGRESSION I, II and MULTILINEAR REGRESSION** may be purchased together for \$51.95 (three cassettes) or \$63.95 (three diskettes).
- ANOVA (Not available on Atari cassette or for PET/CBM)** Price: \$39.95 Cassette/\$43.95 Diskette  
In the past the ANOVA (analysis of variance) procedure has been limited to the large mainframe computers. Now DYNACOMP has brought the power of this method to small systems. For those conversant with ANOVA, the DYNACOMP software package includes the 1-way, 2-way and N-way procedures. Also provided are the Yates 2<sup>k</sup>-P factorial designs. For those unfamiliar with ANOVA, a do-it-yourself manual, including the accompanying documentation was written in a tutorial fashion (by a professor in the subject) and serves as an excellent introduction to the subject. Accompanying ANOVA is a support program for building the data base. Included are several convenient features including data editing, deleting and appending.
- BASIC SCIENTIFIC SUBROUTINES, Volumes 1 and 2 (Not available for Atari)**  
DYNACOMP is the exclusive distributor for the software keyed to the popular text BASIC SCIENTIFIC SUBROUTINES, Volumes 1 and 2 by F. Ruckdeschel (see advertisements in BYTE magazine). These subroutines have been assembled according to chapter and included with each collection is a menu program which selects and demonstrates each subroutine.
- Volume 1:**
- Collection #1: Chapters 2 and 3 - Data and function plotting; complex variables and functions.
  - Collection #2: Chapter 4 - Extended matrix and vector operations.
  - Collection #3: Chapters 5 and 6 - Random number generators (Poisson, Gaussian, etc.), series approximations.
- Price per collection: \$19.95 Cassette/\$20.95 Diskette.  
All three collections are available for \$44.95 (three cassettes) and \$53.95 (three diskettes).
- Volume 2:**
- Collection #1: Chapter 1 - Linear, polynomial, multidimensional, parametric least squares.
  - Collection #2: Chapter 2 - Series approximation techniques (economization, inversion, reversion, shifting, etc.).
  - Collection #3: Chapter 3 - Function approximations by iteration and recursion.
  - Collection #4: Chapter 4 - CORDIC approximations to trigonometric, hyperbolic, exponential and logarithmic functions.
  - Collection #5: Chapter 5 - Table interpolation, differentiation and integration (Newton, LaGrange, splines).
  - Collection #6: Chapter 6 - Methods for finding the real roots of functions.
  - Collection #7: Chapter 7 - Methods for finding the complex roots of functions.
  - Collection #8: Chapter 8 - Optimization by steepest descent.
- Price per collection: \$14.95 Cassette/\$18.95 Diskette.  
All eight collections are available for \$99.95 (eight cassettes) and \$129.95 (eight diskettes).  
Because the texts are a vital part of the documentation, BASIC SCIENTIFIC SUBROUTINES, Volumes 1 and 2 are available from DYNACOMP:
- BASIC SCIENTIFIC SUBROUTINES, Vol 1 (319 pages): \$19.95 + 75¢ postage
  - BASIC SCIENTIFIC SUBROUTINES, Vol 2 (790 pages): \$23.95 + \$1.50 postage
- See reviews in KILOBAUD and Dr. Dobbs.
- SOFTNET (Apple II, 48K, diskette only)** Price: \$129.95  
SOFTNET may be used to create models of liquid pipeline systems to evaluate their flow performance. Up to 150 nodes with up to 150 connecting elements may be simulated, and models may be combined to form yet larger models. If you are involved in water distribution systems, chemical fluid flow problems, building plumbing, or similar situations, this is an ideal analysis tool.
- MATCHNET (TRS-80 only)** Price: \$19.95 Cassette/\$23.95 Diskette  
It often takes days to iteratively optimize an L, P or T matching network for a particular application. Take a few minutes with MATCHNET and you will have the Q, frequency response and reflection coefficients for any of twelve matching networks. You input the source and load impedances and MATCHNET calculates the R, C, (and L) values and plots (and/or prints) the frequency response and reflection coefficients for each configuration. The reviewer of this program remembers when he used to do this by hand and loves MATCHNET!
- ACTIVE CIRCUIT ANALYSIS (ACAP) (48K Apple only)** Price: \$35.95 Cassette/\$39.95 Diskette  
With ACAP you may analyze the response of an active or passive component circuit. The circuit may be probed at equal steps in frequency, and the resulting complex voltages at each component junction examined; the frequency response of a filter or amplifier may be completely determined with respect to both amplitude and phase. In addition, ACAP prints a statistical analysis of the range of voltage responses which are due to tolerance variations in the components. ACAP is easy to learn and use. Circuit descriptions may be saved onto cassette or diskette to be recalled at a later time for execution or editing. ACAP should be part of every circuit designer's program library.
- LOGIC SIMULATOR (Apple only; 48K RAM)** Price: \$35.95 Cassette/\$39.95 Diskette  
Test your complicated digital logic designs with respect to given set of inputs to determine how well the circuit will operate. The elements which may be simulated include multiple input AND, OR, NOR, EXOR, EXNOR and NAND gates, as well as inverters, J-K and D flip-flops, and one-shots. Inputs may be clocked in with varying clock cycle lengths/displacements and delays may be introduced to probe for glitches and race conditions. A timing diagram for any given set of nodes may be plotted using HIRSH graphics. Save your breadboarding until the circuit is checked by LOGIC SIMULATOR.
- NUMBERCRUNCHER (TRS-80 only)** Price: \$69.95 Cassette/\$73.95 Diskette  
This program is the most complete numerical analysis system available for the TRS-80. It can handle up to 255 data sets, each set having a six character name. It includes complete data editing facilities and convenient data input/output capability. The analyses available are multiple linear regression and correlation determination of residuals, data transformations and extensive graphics generation, including naming, and more. The supporting documentation is extremely well written and well organized, and includes appendices which describe the numerical procedures used in the program.
- STATSORT (TRS-80 only)** Price: \$39.95 Cassette/\$43.95 Diskette  
STATSORT consists of several menu selected programs which allow the user to create (build, edit, merge), format and print files, (machine) sort them on any field, and numerically analyze (maximum, minimum, average, variance, standard deviation) tabulated data. STATSORT is well documented and easy to use. The cassette version can also be employed to create a data type which can be read by the Radio Shack Advanced Statistical Package.
- STATTEST (Not available on Atari cassette or for PET/CBM)** Price: \$19.95 Cassette/\$23.95 Diskette  
This is a statistical inference package which helps you make wise decisions in the face of uncertainty. In an interactive fashion you can build and edit data files and test the differences in means, variances and proportions. STATTEST will also load data analysis as well as do linear correlation and regression. This menu-directed statistical workbook is rounded out with a chi-square contingency test and a (uniform and normal) random sample generator. The documentation is written out by a college professor who guides you through the various tests.

## ABOUT DYNACOMP

DYNACOMP is a leading distributor of small system software with sales spanning the world (currently in excess of 40 countries). During the past three years we have greatly enlarged the DYNACOMP product line, but have maintained and improved our high level of quality and customer support. The achievement in quality is apparent from our many repeat customers and the software reviews in such publications as COMPUTATIONS, 80 Software Critique, A.N.A.L.O.G., Softalk, Creative Computing and Kiobaud. DYNACOMP software has also been chosen for demonstration on network television. Our customer support is as close as your phone. It is always friendly. The staff is highly trained and always willing to discuss products or give advice.



Figure 1. (cont'd)

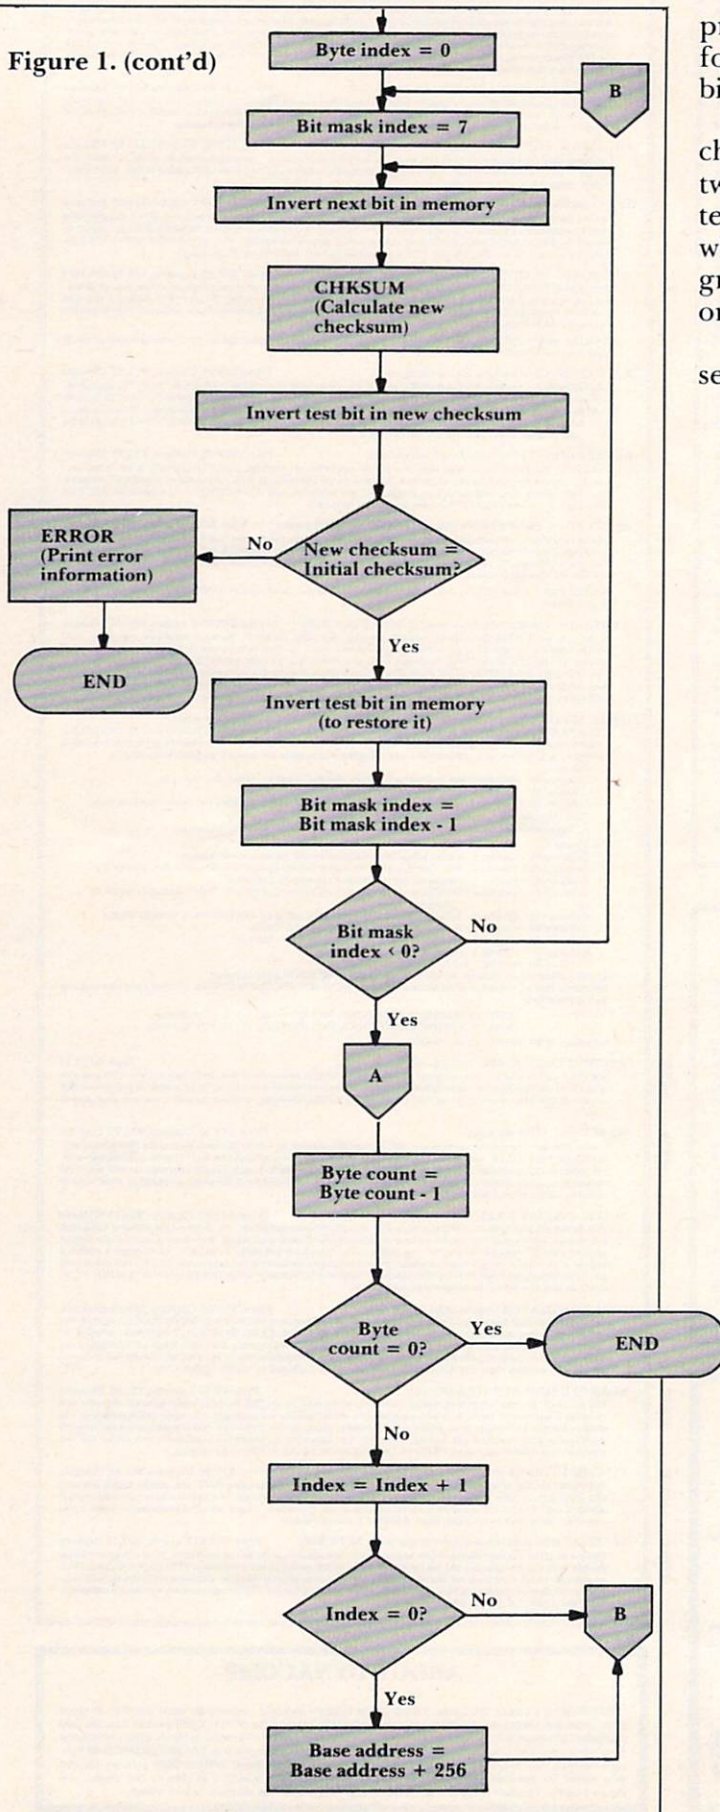


program calls CHKSUM again, to get the checksum for memory with one bit inverted, and inverts that bit position in the checksum.

This invert operation should make the new checksum identical to the initial checksum. If the two checksums are not identical, the program terminates by printing the bit position and address where the error was detected. Otherwise, the program reinverts the current test bit, to restore its original state.


The remainder of the program involves a series of three counter/index adjustment opera-

Figure 2: Checksum-Calculating Subroutine (CHKSUM)

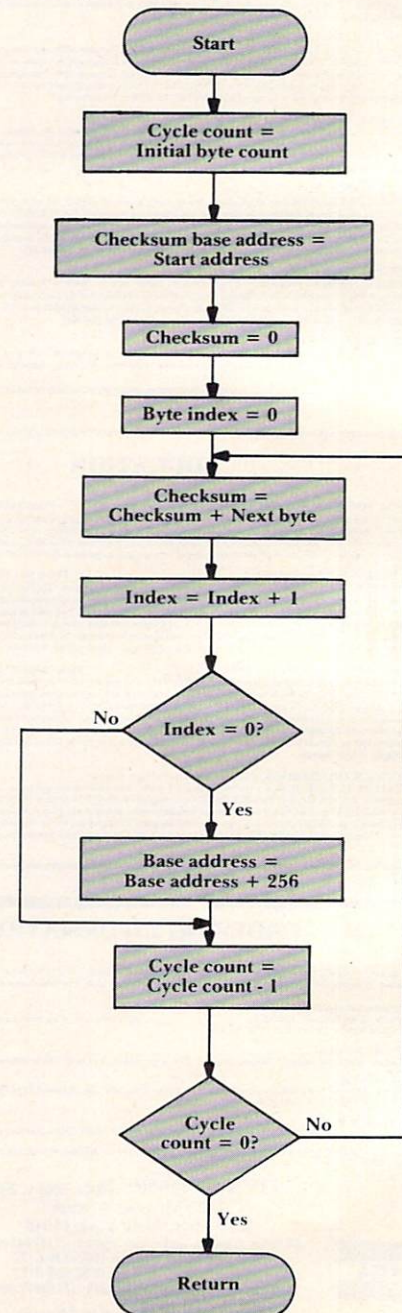



# 6.6 SECONDS

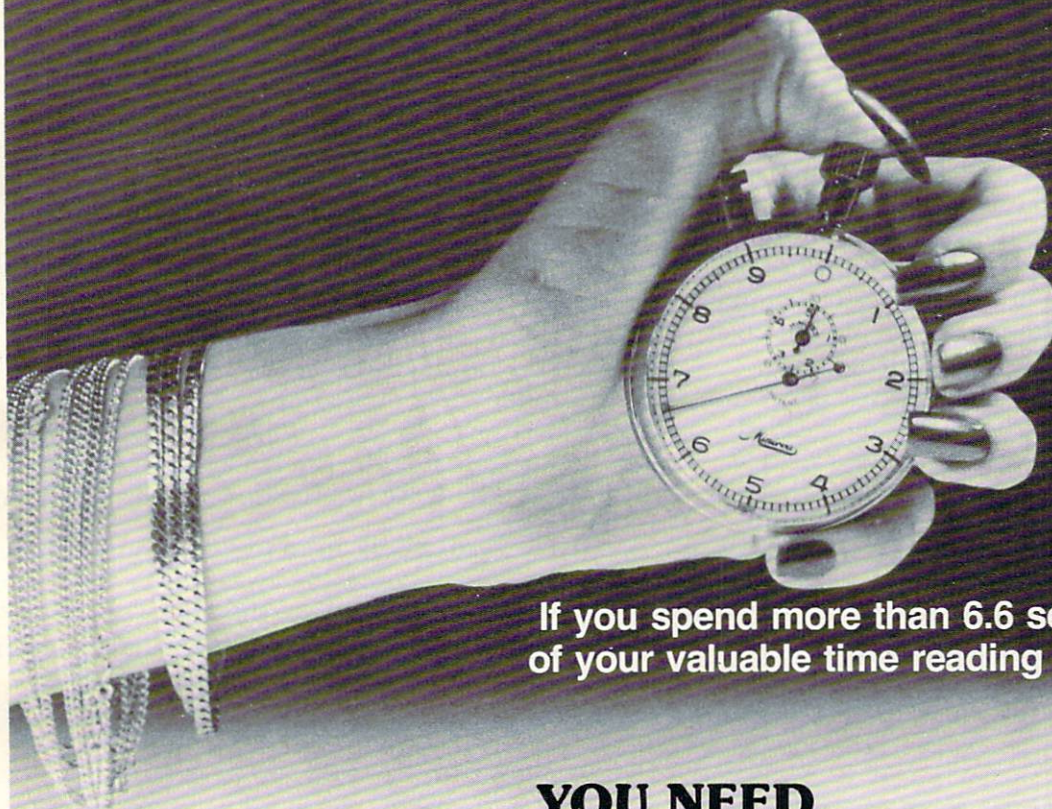

If you spend more than 6.6 seconds  
of your valuable time reading this ad.

**YOU NEED**

## ***SpeedRead+***

- Optimized Systems Software, the company that brought you BASIC A+ and OS/A+, proudly presents another "PLUS".
- **SpeedRead+** is the *world's first* speed reading tutor designed for use on your personal computer.
- **SpeedRead+** begins with training your eyes and mind to function as the incredible precision machine they were meant to be.
- **SpeedRead+** goes beyond mere words — it trains you to recognize phrases and columns instantly — it exercises your peripheral vision — it increases your comprehension.
- **SpeedRead+** matches *your* pace — now and in the future.

**AVAILABLE NOW!**


For 16K ATARI® computers with disk, Introductory Price ..... \$59.95  
Coming soon for APPLE II®. Inquire about availability of TRS-80® and cassette versions.

**SEE YOUR DEALER TODAY!**

Call or write for a descriptive brochure of **SpeedRead+**™ and other fine OSS products, such as OS/A+, BASIC A+, and TINY C®.

ATARI, APPLE II, TRS-80, and TINY C are trademarks of Atari, Inc., Apple Computer, Inc., Radio Shack, and Tiny C Associates, respectively. **SpeedRead+** is a trademark of Eagle Software and Optimized Systems Software.

**Optimized Systems Software, Inc., 10379 Lansdale Ave., Cupertino, CA 95014, (408) 446-3099**





tions, with each followed by a branch/no-branch decision. In the first of these operations, the bit mask index is decremented; if it is nonnegative, the program branches back to invert the next bit. Otherwise, the byte count is decremented; if all bytes have been tested, the program terminates, error free. Otherwise, the byte index is incremented. The byte index is eight bits long, and can hold values from 0 to 255 (decimal). If the incrementation caused the byte index to overflow to zero, the program increments the high order byte of the base address, then branches back to reinitialize the bit mask index. Otherwise, the branch takes place with no change to the base address.

Figure 2 shows the flowchart for the checksum subroutine, CHKSUM. This subroutine is called from two places in the program: (A) it is called at the beginning of the program, to calculate the initial checksum, and (B) it is called from within the main loop, to calculate a new checksum after a test bit has been inverted. This second source of call requires the subroutine to maintain its own, separate byte count and base address, so as not to disturb the current values of these parameters in the main program. In the flowchart, these "working" parameters are labeled *cycle count* and *checksum base address*, respectively.

To start, cycle count is set equal to initial byte count, checksum base address is set equal to test start address, and the checksum and byte index are initialized to zero. The rest of the subroutine is just one big loop. In this loop, the checksum is accumulated, byte by byte, with intervening index and cycle count adjustments. The loop is terminated when all bytes have been processed; that is, when cycle count has been decremented to zero.

### The Test Program

Now that you understand the criteria of the program and its sequences, we can look at the program itself. Program 1 shows the source code for the nondestructive test program, which was flow-charted in Figure 1. Note that before executing the program, the starting address must be stored in locations 00 and 01 (00 holds low byte) and the ending address must be stored in locations 02 and 03 (02 holds low byte).

Besides these four locations, the program uses 13 other zero page locations, as working storage. These include six parameters that are used in the main program – initial byte count (IBYTES), byte count (BYTES), base address (BADDR), initial checksum (CSUM) and temporary storage for the X and Y registers (SAVEX and SAVEY), and two parameters that are used in the checksum subroutine, a working copy of the byte count (CYCLES) and a checksum base address (CBADDR). Of these

parameters, only IBYTES and CSUM remain unchanged throughout the program; all six other parameters will change during execution.

Following these reserve equates come three equates that reference subroutines in the AIM 65 monitor: CRLOW initializes the display and printer to their START positions; NUMA prints the contents of the accumulator, as two ASCII digits; OUTPRI sends one character to the print buffer. Other 6502-based computers have equivalent subroutines.

The actual code that follows is straightforward, so you should have no problem following it if you studied the flowchart in Figure 1. Some readers may wonder why I chose to save X and Y in zero page (locations SAVEX and SAVEY), rather than on the stack, during the call to CHKSUM in the main loop. There are two reasons why this was done:

1. The instructions used to save X and Y in zero page execute eight cycles faster than those to save X and Y on the stack (12 cycles versus 20 cycles). If you consider that for each byte tested, CHKSUM is called eight times – once for each bit position – saving X and Y in zero page saves 64N microseconds for an N-byte test run.
2. We need to use the checksum contents of the accumulator upon return from CHKSUM, and a pull from the stack (PLA) always loads the stack information into the accumulator. If the 6502 had the instructions PHX, PHY, PLX and PLY, the stack would have been the likely place to hold X and Y, but unfortunately it has no such instructions.

Programmers may also be interested in the way the bit masks are accessed by the EOR BMASK,X instructions that follow the labels INVERT and NXTBIT. The bit mask table, BMASK (shown at the end of Program 2), is arranged by *ascending* bit position. That is, the mask for Bit 0 comes first, followed by the mask for Bit 1, and so on. However, this table is accessed in *descending* order; Bit 7 is tested first and Bit 0 is tested last. This allows us to initialize the bit mask index to 7 (LDX #7 at label IBMSK), then decrement this index until it goes negative. Otherwise, working with a descending table and an incrementing index, the program would have to include a CPX #8 instruction to make the done/not done branch decision. By using the ascending table and decrementing index approach we've eliminated that compare instruction. Since the CPX #8 instruction executes in just two cycles, the difference in approaches is not significant, but the backwards access is a handy gimmick for your programming bag of tricks.



# THE MILLION DOLLAR WINNER WORDCRAFT ULTRA


The word processing package that's EAS\$Y to use

Used on thousands of COMMODORE\$, the micro  
computer that's EAS\$Y to operate

It's EAS\$Y to \$ell and only sold through Dealers

## The reasons it's 7 ways EAS\$Y

1. Screen layout matches printed document.
2. Designed for stenographers and secretaries to use.
3. Full choice over horizontal and vertical spacing.
4. True inter-character proportional spacing.
5. Multiple-user:— up to 8 screens can be connected.
6. Full text communication between Wordcraft users with automatic error recovery.
7. Comes complete with comprehensive manual & self-pace training guide.

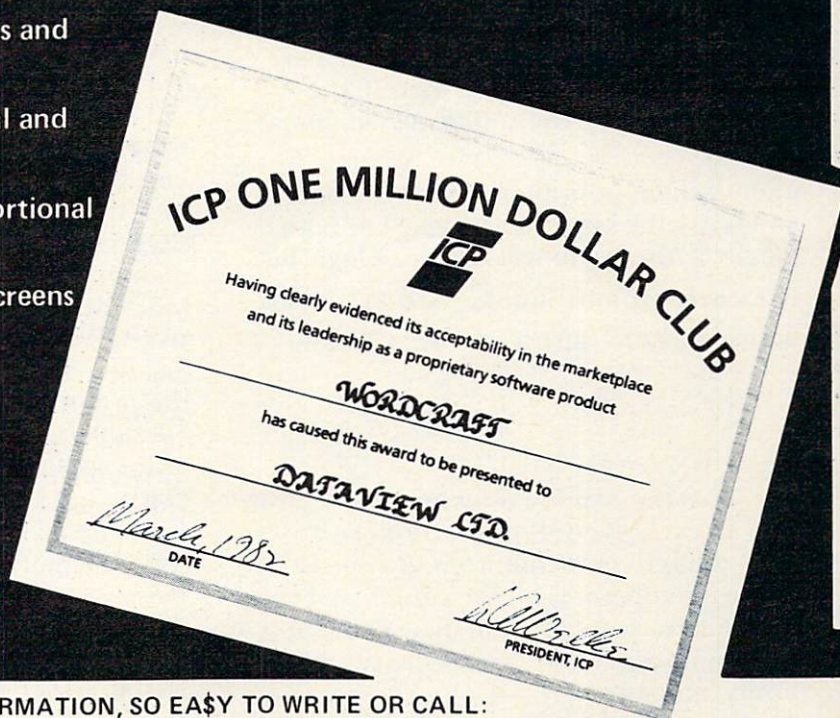

FOR INFORMATION, SO EAS\$Y TO WRITE OR CALL:

### WE\$T COA\$T: CIMARRON

666, Baker Street,  
Suite 319  
Costa Mesa, CA. 92626

Telephone: (714) 641 1156

### EAS\$T COA\$T: COMPUTER MARKETING \$ERVICE\$

300, W. Marlton Pike,  
Cherry Hill, N.J. 08002

Telephone: (609) 795 9480



Program 2 shows the code for the checksum calculating subroutine, CHKSUM, which was flowcharted in Figure 2. It follows the flowchart closely, and needs no additional explanation. Program 2 also includes the previously mentioned bit mask table, BMASK, and the text for the error message.

This program will produce one of two messages. If the test memory is error free, the message *OKAY!* will be printed, otherwise an error message of the form *BIT n OF LOC. aaaa* will be printed. In the error message, the bit position and address that are printed identify the bit that was being tested when the checksum mismatch occurred. It's possible, of course, that inverting that bit actually caused some other bit in the memory to be inverted, due to crosstalk, so the printout position may not be the actual culprit. One way of finding out is to run a second test, starting at the location following the printout location; that is, rerun the test starting at "aaaa + 1."

### Execution Times For The Test Program

As you can see from the listings, the program occupies slightly less than a page of memory; to be exact, it occupies 245 bytes. Of even greater significance, however, is the amount of time it takes to execute. That is, the amount of time it takes to test a selected portion of memory. In a test that I ran, the program took just over four minutes to check out a 1K portion of memory (1024 bytes).

At first I suspected that something was wrong with the program, but after a few calculations I became convinced that this was indeed a respectable time, in light of what the program was doing. First, consider that in a 1K byte test, the CHKSUM subroutine is called 8193 times; once to get the initial checksum, then once more for each of the 8192 bit positions in the 1024 byte test memory. The CHKSUM subroutine takes  $28 + (29 \times N)$  cycles to calculate the checksum for an N-byte memory, so it takes 29,724 cycles (microseconds) for a 1024 byte memory. Cranking out the math, we find that with

### Exclusive-ORs And Checksums

An exclusive-OR is a logical operation in which two byte operands are combined to produce a result byte with these characteristics:

- For each bit position in which the operands are different (one is logic 0, the other is logic 1), the result will contain a logic 1.
- For each bit position in which the operands are the same (both logic 0 or both logic 1), the result will contain a logic 0.

These rules can be summarized as follows:

Bit Operand #1	Bit Operand #2	Result Bit
0	0	0
0	1	1
1	0	1
1	1	0

All of the popular 8-bit microprocessors have an exclusive-OR instruction. In the 6502, it has the mnemonic *EOR*. The *EOR* instruction operates on the contents of the accumulator with an immediate value or a value in memory, and leaves the result in the accumulator.

For example, if the accumulator contains the value \$AB (where \$ denotes hexadecimal) and location \$40 contains the value \$0F, the instruction *EOR \$40* will produce a value of \$A4 in the accumulator. The binary arithmetic looks like this:

```

0000 1111  Contents of location $40 = $0F
⊕ 1010 1011 Contents of accumulator = $AB
---
1010 0100  Result in accumulator = $A4

```

Note what has happened here. The value \$0F in location \$40 has caused the four low order bits (0 through 3) to be *inverted*, but has left the four high order bits (4 through 7) intact.

This shows one of the primary uses for the *EOR* instruction: to invert some selected bits, but leave all other bits unchanged. In fact, the test program in this article uses the *EOR* instruction to invert a single bit in memory, by reading the appropriate memory byte into the accumulator, then exclusive-ORing it with a "mask" value that has just one bit set to logic 1. To invert Bit 7, the program applies a mask value of  $10000000_2$  (\$80); to invert Bit 6, the program applies a mask value of  $01000000_2$  (\$40); and so on.

The program in this article also uses a series of *EOR* instructions to calculate a *checksum* value. As mentioned in the article, the checksum is the exclusive-OR of all bytes being tested. For example, if locations \$0400, \$0401 and \$0402 are being tested, the program will perform this type of operation:

```

0010 1101  ($0400) = $2D
1010 0011  ($0401) = $A3
⊕ 0001 1000  ($0402) = $18
---
1001 0110  Checksum = $96

```



8193 calls, the program spends about 4.06 minutes in the CHKSUM subroutine!

Since the program is spending virtually all of its time in the CHKSUM subroutine, the total

execution time of the program is directly dependent on the efficiency of this subroutine. If any readers have suggestions on how to streamline CHKSUM, I'd be happy to hear from them.

### Program 1: Source Code for Nondestructive Test Program

```

LINE#  ADDR  OBJECT  LABEL  SOURCE  PAGE 0001
01-0010 2000          ; THIS PROGRAM PERFORMS A NONDESTRUCTIVE TEST
01-0020 2000          ; ON RAM MEMORY, BY CALCULATING A SERIES OF CHECKSUMS.
01-0030 2000          ; BEFORE EXECUTING, STORE THE STARTING ADDRESS
01-0040 2000          ; AT LOCS. 00 AND 01, AND THE ENDING ADDRESS
01-0050 2000          ; AT LOCS. 02 AND 03.
01-0060 2000          ; IF THE TEST IS SUCCESSFUL, AN "OKAY!" MESSAGE
01-0070 2000          ; IS PRINTED. OTHERWISE, THE BAD BIT POSITION
01-0080 2000          ; AND ADDRESS ARE PRINTED.

01-0100 2000          ; USER-SUPPLIED PARAMTERS

01-0120 2000          ;
01-0130 0000          ; START *=*+2          ; STARTING ADDRESS
01-0140 0002          ; END   *=*+2          ; ENDING ADDRESS

01-0160 0004          ; EQUATES FOR WORKING STORAGE IN ZERO PAGE

01-0180 0004          ; IBYTES *=*+2          ; INITIAL BYTE COUNT
01-0190 0006          ; BYTES  *=*+2          ; BYTE COUNT
01-0200 0008          ; CYCLES *=*+2          ; WORKING COPY OF BYTES
01-0210 000A          ; BADDR  *=*+2          ; BASE ADDRESS
01-0220 000C          ; CBADDR *=*+2          ; BASE ADDRESS FOR CHECKSUM SUBR.
01-0230 000E          ; CSUM   *=*+1          ; INITIAL CHECKSUM
01-0240 000F          ; SAVEX *=*+1          ; TEMP. STORAGE FOR X REGISTER
01-0250 0010          ; SAVEY *=*+1          ; TEMP. STORAGE FOR Y REGISTER

01-0270 0011          ; AIM 65 MONITOR SUBROUTINES

01-0290 0011          ; CRLOW  = $EA13          ; RESET DISPLAY & PRINTER
01-0300 0011          ; NUMA   = $EA46          ; PRINT A, AS TWO ASCII CHARS.
01-0310 0011          ; OUTPRI = $F000          ; OUTPUT A TO PRINT BUFFER

01-0330 0011          ;
01-0340 0200 38          ; SEC          ; BYTE COUNT = END ADDR. - START
                                ; ADDR. + 1

01-0350 0201 A5 02          ; LDA END
01-0360 0203 E5 00          ; SBC START
01-0370 0205 85 04          ; STA IBYTES
01-0380 0207 85 06          ; STA BYTES
01-0390 0209 A5 03          ; LDA END+1
01-0400 020B E5 01          ; SBC START+1
01-0410 020D 85 05          ; STA IBYTES+1
01-0420 020F 85 07          ; STA BYTES+1
01-0430 0211 E6 04          ; INC IBYTES
01-0440 0213 E6 06          ; INC BYTES
01-0450 0215 D0 04          ; BNE GETSUM
01-0460 0217 E6 05          ; INC IBYTES+1
01-0470 0219 E6 07          ; INC BYTES+1
01-0480 021B 20 B1 02      ; GETSUM JSR CHKSUM          ; CALCULATE INITIAL CHECKSUM
01-0490 021E 85 0E          ; STA CSUM          ; AND SAVE IT IN MEMORY
01-0500 0220 A5 00          ; LDA START          ; BASE ADDRESS = START ADDRESS
01-0510 0222 85 0A          ; STA BADDR
01-0520 0224 A5 01          ; LDA START+1
01-0530 0226 85 0B          ; STA BADDR+1

01-0540 0228 A0 00          ; LDY #0          ; BYTE INDEX = 0
01-0550 022A A2 07          ; IBMSK LDX #7          ; BIT MASK INDEX = 7

```



```

01-0560 022C B1 0A      INVERT LDA (BADDR),Y      ; INVERT NEXT BIT IN MEMORY
01-0570 022E 5D DF 02      EOR BMASK,X
01-0580 0231 91 0A      STA (BADDR),Y
01-0590 0233 86 0F      STX SAVEY                ; SAVE X AND Y IN MEMORY
01-0600 0235 84 10      STY SAVEY
01-0610 0237 20 B1 02      JSR CHKSUM                ; CALCULATE NEW CHECKSUM
01-0620 023A A6 0F      LDX SAVEX                ; RETRIEVE X AND Y
01-0630 023C A4 10      LDY SAVEY
01-0640 023E 5D DF 02      EOR BMASK,X              ; INVERT TEST BIT IN NEW CHECKSUM
01-0650 0241 C5 0E      CMP CSUM                  ; NEW CHECKSUM = INITIAL CHECKSUM?
01-0660 0243 D0 39      BNE ERROR                  ; NO. PRINT ERROR INFO.
01-0670 0245 B1 0A      NXTBIT LDA (BADDR),Y      ; YES. INVERT TEST BIT IN MEMORY
01-0680 0247 5D DF 02      EOR BMASK,X
01-0690 024A 91 0A      STA (BADDR),Y
01-0700 024C CA          DEX                        ; NO. DECREMENT BIT MASK INDEX
01-0710 024D 10 DD      BPL INVERT                ; BIT MASK INDEX NEGATIVE?
01-0720 024F C6 06      DEC BYTES                  ; YES. DECREMENT BYTE COUNT
01-0730 0251 E4 06      CPX BYTES
01-0740 0253 D0 02      BNE BCNT0
01-0750 0255 C6 07      DEC BYTES+1
01-0760 0257 A6 06      BCNT0 LDX BYTES            ; BYTE COUNT = 0?
01-0770 0259 D0 1B      BNE INCIDX
01-0780 025B A6 07      LDX BYTES+1
01-0790 025D D0 17      BNE INCIDX
01-0800 025F A0 00      LDY #0                    ; YES. ALL DONE, WITH NO ERRORS
01-0810 0261 B9 70 02      OKLOOP LDA OKMSG,Y
01-0820 0264 20 00 F0      JSR OUTPRI
01-0830 0267 C8          INY
01-0840 0268 C0 06      CPY #6
01-0850 026A D0 F5      BNE OKLOOP
01-0860 026C 20 13 EA      JSR CRLOW
01-0870 026F 00          BRK

01-0890 0270 20 4F      OKMSG .BYT 'OKAY!'

01-0910 0276 C8          INCIDX INY                ; NO. INCREMENT BYTE INDEX
01-0920 0277 D0 B1      BNE IBMSK                ; BYTE INDEX=0?
01-0930 0279 E6 0B      INC BADDR+1              ; YES. ADD 256 TO BASE ADDRESS
01-0940 027B 4C 2A 02      JMP IBMSK
01-0950 027E

01-0970 027E          ; THIS ROUTINE PRINTS OUT THE BIT POSITION
01-0980 027E          ; AND ADDRESS AT WHICH THE MISMATCH OCCURRED

01-1000 027E 20 13 EA      ERROR JSR CRLOW            ; RESET DISPLAY & PRINTER
01-1010 0281 A0 00      LDY #0                    ; PRINT FIRST PART OF TEXT
01-1020 0283 B9 E7 02      LOOP1 LDA MSG,Y
01-1030 0286 20 00 F0      JSR OUTPRI
01-1040 0289 C8          INY
01-1050 028A C0 05      CPY #5
01-1060 028C D0 F5      BNE LOOP1
01-1070 028E 8A          TXA                        ; PRINT BIT PATTERN
01-1080 028F 09 30      ORA #$30
01-1090 0291 20 00 F0      JSR OUTPRI
01-1100 0294 B9 E7 02      LOOP2 LDA MSG,Y            ; PRINT SECOND PART OF TEXT
01-1110 0297 20 00 F0      JSR OUTPRI
01-1120 029A C8          INY
01-1130 029B C0 0E      CPY #14
01-1140 029D D0 F5      BNE LOOP2
01-1150 029F A5 10      LDA SAVEY                ; ERROR ADDRESS = BASE ADDRESS + INDEX

01-1160 02A1 18          CLC
01-1170 02A2 65 0A      ADC BADDR
01-1180 02A4 48          PHA
01-1190 02A5 A9 00      LDA #0
01-1200 02A7 65 0B      ADC BADDR+1
01-1210 02A9 20 46 EA      JSR NUMA                ; PRINT ERROR ADDRESS

```



```

01-1220 02AC 68          PLA
01-1230 02AD 20 46 EA   JSR NUMA
01-1240 02B0 00          BRK                ; RETURN TO MONITOR

```

---

**Program 2: Source Code for CHKSUM Subroutine**

```

LINE#  ADDR  OBJECT  LABEL  SOURCE  PAGE 0004
01-1260 02B1          ; THIS SUBROUTINE ACCUMULATES THE CHECKSUM,
01-1270 02B1          ; BY EXCLUSIVE-ORING ALL BYTES

01-1290 02B1 A5 04      CHKSUM LDA IBYTES      ; CYCLE COUNT = BYTE COUNT
01-1300 02B3 85 08          STA CYCLES
01-1310 02B5 A5 05      LDA IBYTES+1
01-1320 02B7 85 09      STA CYCLES+1
01-1330 02B9 A5 00      LDA START              ; BASE ADDRESS = START ADDRESS
01-1340 02BB 85 0C      STA CBADDR
01-1350 02BD A5 01      LDA START+1
01-1360 02BF 85 0D      STA CBADDR+1
01-1370 02C1 A9 00          LDA #0                 ; CHECKSUM = 0
01-1380 02C3 A0 00          LDY #0                 ; BYTE INDEX = 0
01-1390 02C5 51 0C      ACCUM EOR (CBADDR),Y  ; CHECKSUM = CHECKSUM EOR NEXT BYTE
01-1400 02C7 C8          INY                   ; INCREMENT INDEX
01-1410 02C8 D0 02      BNE DECCYC            ; INDEX = 0?
01-1420 02CA E6 0D      INC CBADDR+1          ; YES, ADD 256 TO BASE ADDRESS
01-1430 02CC A2 FF      DECCYC LDX #$FF        ; NO, DECREMENT CYCLE COUNT
01-1440 02CE C6 08      DEC CYCLES
01-1450 02D0 E4 08      CPX CYCLES
01-1460 02D2 D0 02      BNE CYCZ
01-1470 02D4 C6 09      DEC CYCLES+1
01-1480 02D6 A6 08      CYCZ  LDX CYCLES      ; CYCLE COUNT = 0?
01-1490 02D8 D0 EB      BNE ACCUM             ; NO, GO PROCESS NEXT BYTE
01-1500 02DA A6 09      LDX CYCLES+1
01-1510 02DC D0 E7      BNE ACCUM
01-1520 02DE 60          RTS                   ; YES, RETURN WITH CHECKSUM IN A

01-1550 02DF          ; MASKS USED TO INVERT BITS IN MEMORY

01-1570 02DF 01          BMASK .BYT 1,2,4,8,$10,$20,$40,$80
01-1570 02E0 02
01-1570 02E1 04
01-1570 02E2 08
01-1570 02E3 10
01-1570 02E4 20
01-1570 02E5 40
01-1570 02E6 80

01-1590 02E7          ; ERROR MESSAGE TEXT

01-1610 02E7 20 42      MSG  .BYT ' BIT '
01-1620 02EC 20 4F      .BYT ' OF LOC. '
01-1630 02F5          .END

ERRORS = 0000

END OF ASSEMBLY = 02F4
;

```

---

Dealers — Reserve your copies of  
**COMPUTE!**'s first Atari and PET/CBM books  
today. Call 919-275-9809 for ordering information.



A simple game illustrating a most sophisticated topic. The idea of recursive subroutines is one of the more complex notions in programming — a subroutine which is its own subroutine. "Towers of Brahma," a child's game with pegs and disks, is used to illustrate how recursion works with versions here for PL/I and Microsoft (Commodore, Apple, OSI) and Atari BASICs.

# Recursive BASIC Subroutines

Earl Wuchter  
Catasauqua, PA

**Recursive** (adj): of, relating to, or constituting a procedure that can repeat itself indefinitely, or until a specified condition has been met.

**Subroutine** (n): a sequence of computer instructions for performing a specified task that can be used repeatedly in a program or in different programs.

— Webster's New Collegiate Dictionary

Used together, these two words describe one of the most powerful, and most fascinating entities in programming, but it is a rare bird.

Recursive subroutines are most useful in compiled languages, but are seldom allowed. On the other hand, an interpreted language like BASIC can't help but allow a subroutine to reenter itself, but some serious problems must be overcome before the technique is of any use.

The problem with BASIC is that all variables are *global*. (When any variable is changed in a subroutine it is changed for the whole program.) To see what is missing in BASIC, look at a *call* statement and a subroutine statement in a typical compiled language. The variables in parentheses are called arguments or parameters:

```
CALL TRY (A,X)
SUBROUTINE TRY (A,Z)
```

When TRY is invoked, A and Z will take on the values of A and X from the calling routine. On return, A and X will receive the values of A and Z. Even though both routines use the variable A, the A in the calling routine will not be changed until a return is executed. The status (global or local) of other variables is normally up to the programmer.

BASIC subroutines do not have arguments. The normal programming practice is to have the

calling routine assign values to subroutine variables before the GOSUB is executed. To prevent a subroutine from inadvertently affecting any other routine, we give it a set of local variables by using names that do not appear in any other routine.

## A Solution to Passing BASIC Variables

Now you can see the problem with recursive code. How can we give a subroutine a set of variables that are different from those in the calling routine when they are one and the same routine?


There is a solution. We can create an array of arguments and have each generation of the subroutine use its own "row" in the array.

## The Towers Of Brahma

The "Towers of Brahma" is one problem that is best solved with a recursive subroutine. The solution, in turn, best illustrates the capability of recursive code. The two seem to have been made for each other.

This interesting mathematical problem is often found disguised as a child's toy: a board with

### Towers of Brahma

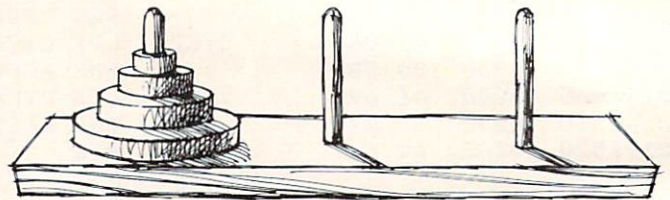

three pegs and four or five disks of varying diameters that fit on the pegs. The disks are initially arranged on the first peg in order of their diameters, with the smallest one on top. They are to be moved one at a time, always keeping the smaller ones on top, until they are on the third peg.

When the recursive solution to this problem is coded in the proper language, it is a thing of beauty. A PL/I version of the subroutine is shown below. This will be the model for a BASIC version. The main routine is not shown. The main routine simply inputs the number of disks and makes the initial call:

```
CALL MOVE (NDISKS,1,3);
```

Note: In this version of PL/I, arguments passed in as expressions become dummy arguments and do not change anything in the calling routine. Adding zero to a variable makes it an expression without altering its value. This feature provides for extremely compact code.

```
MOVE: PROCEDURE (N,F,T) RECURSIVE;
IF N=0 THEN RETURN;
CALL MOVE (N-1,F+0,6-F-T);
PUT SKIP DATA (N,F,T);
```



# SYSRES™

THE ULTIMATE RESIDENT PROGRAM MANIPULATION SYSTEM FOR PET™/CBM™ MICROCOMPUTERS

**SO COMPLETE,  
EVEN THE BEST OF  
THE COMPETITION  
DOESN'T COMPARE!**

## EXTENDED DOS SUPPORT

@ (type "N" keyboard) These commands may be used  
< (type "B" keyboard) interchangeably, to perform  
! (original keyboard) the following dos support  
> (for 'wedge' users) functions.

Command	Function
@	Display disk status / send command
@N	Format (header) a new diskette
@I	Force initialize diskette
@V	Validate diskette (collect)
@D	Duplicate diskette
@C	Copy or concatenate disk file(s)*
@R	Rename file
@S	Scratch file(s)*
@\$	List directory*
@U:	Reset disk drive
@L	List disk file or BASIC program*

\* Added/enhanced disk command.

## EXTENDED EDITOR

Command	Function
/	Quick load from disk
↑	Quick load from disk with auto run
APPEND	Append from disk to end of current program
AUTO	Auto line number (allows header)
BLOAD	Load machine language (binary) file
BRUN	Load and execute machine language program
CHANGE	Change pattern to another pattern
CLOSE	Close one or all files
CMD	Set output to file (does not send "READY.")
DELETE	Delete a range of lines from program
DUMP	Dump all scalar variables to screen or file
EXEC	Execute a file as keyboard commands
FIND	Find occurrences of a pattern
GET	Read a sequential file into editor
KEY	Define a key as a special function
KEYS	Turn key functions on
KILL	Disable SYSRES™
KILL*	Disable SYSRES™ and unreserve memory
LIST	Improved BASIC LIST command
LOAD	Defaults to disk drive
MERGE	Merge from disk into current program
MON	Break to current machine language monitor
OLD	Restore program after "NEW"
PUT	Send program to disk as text file
RENUMBER	Renumber all or part of program
RUN	Run current program, ignores screen garbage
SAVE	Defaults to disk drive, allows replace
SETD	Set disk device #, allows multiple drives
SETP	Set printer channel, format mode, paging
TRACE	Select 1 of 3 trace/step modes and speed
VERIFY	Compare current program against disk/tape
WHY	Print position of last error
WHY?	List line of break or error
*	Send output to printer
#	Display current version of SYSRES™

## COMPARE SPECIFICATIONS!

	SYSRES™	POWER™
Number of ADDED commands	33	13
Number of IMPROVED BASIC commands	7	none
Number of DOS SUPPORT commands	11	none
Approximate added syntax options	1200	60
Instruction manual length	86 pages	75 pages
Instruction manual style	structured	conversational
Re-loadable?	yes	no
Use on more than one (any) PET/CBM™	yes	no
Upgradable	yes	no

## COMPARE FEATURES!

	SYSRES™	POWER™
Automatic printer output?	yes	no
Selectable ASCII conversion?	yes	no
List programs without loading them?	yes	no
Formatted program listings?	yes	no
Dump SEQUential/RELative files?	yes	no
Edit data files?	yes	no
True program merge?	yes	no
Auto number with AUTO TEXT?	yes	no
Load machine language programs?	yes	no
Auto-execute machine language programs?	yes	no
Directory (menu) file commands?	yes	no

## COMPARE "EQUIVALENT" FUNCTIONS!

**Function: Change occurrences of one pattern to another.**

Feature	SYSRES™	POWER™
Command word	CHANGE	@
'Wild cards' in search string?	yes	yes
'Wild cards' in replace string?	yes	no
Selectable range?	yes	yes
Match in entire text?	yes	yes
Match in commands only?	yes	no
Match exact variable names?	yes	no

**Function: Define special one-key functions.**

Feature	SYSRES™	POWER™
Command word	KEY	REM"
Requires BASIC program changes?	no	yes
Destroys variables?	no	yes
Re-define any key?	yes	no
Maximum string length	255	73
Quotes and carriage-return allowed	yes	no
Re-define any token key?	yes	no
Retain user keys from program to program?	yes	no

## JUST A FEW OF THE FEATURES OF SYSRES™

- \* Fast up/down scrolling which works!
- \* Advanced repeat-key routine!
- \* Re-define any or all keys as any keyword (full or short form) or as any string up to 255 characters long!
- \* Auto line numbering which can feed a string of up to 127 characters as well!
- \* Extended DOS support (requires DOS 2A or greater)!
- \* Never enter another file name! All file commands work from the directory!
- \* Supports multiple disk drives!
- \* List BASIC programs, sequential and relative files without loading them into memory!
- \* TRUE PROGRAM MERGE (overlay). Supports subroutine libraries!
- \* Load and run machine language programs with parameter passing!
- \* Supports multiple printers!
- \* Automatic printer output with paging plus formatted listings with full ASCII code conversion including cursor control and special characters for non-CBM™ printers!
- \* Edit text files and assembler source code without leaving BASIC!
- \* Renumber part of a program or even change the order of lines!
- \* Over 700 FIND/CHANGE commands including variable names ("A\$" will not match "BA\$"), pattern matching with "wild-cards", and even commands to remove spaces and REM's!
- \* Three TRACE modes including trace variables!
- \* Does not affect BASIC program operation!
- \* One AUTO-BOOT DISKETTE works for ALL PET™ or CBM™ computers (BASIC 2.0 or greater with at least 16k of RAM). SYSRES™ requires NO ROM SPACE or extra boards, so you can take it with you if you want to use another computer. It may be put above the screen if you have RAM there. It boots automatically without disturbing any program in RAM!
- \* If, for any reason, you are not satisfied with the SYSRES™ system, you may return it along with any back-up disks (within 30 days) for a full refund. Your disks will be erased and returned to you.
- \* Diskette and Extensive Manual - only \$95 (Please specify disk drive model when ordering.)

**CALL US FOR THE NAME OF YOUR NEAREST DEALER**

We are pleased to announce the acquisition of the author, Don Lekei, and the rights to SYSRES™. Don is now hard at work producing versions of our STOCKFILE™ series of integrated INVENTORY CONTROL, POINT OF SALE, ORDER

**CANADA**  
Tel: (604) 984-0477  
#6, 144 West 15th St.  
North Vancouver, B.C.  
Canada V7M 1R5

**ENTRY, and BILL OF MATERIALS** packages for the PET/CBM™ computers. The best inventory control system for the APPLE ][™ will soon be available for the CBM™. See your local dealer for details!

**UNITED STATES**  
Tel: (206) 734-3744  
#204, 4202 Guide Meridian  
Bellingham, WA  
U.S.A. 98226

SYSRES™ is a trademark of Solidus International Corp.  
(POWER™ is a trademark of Professional Software Inc.)



**SOLIDUS INTERNATIONAL CORPORATION**



## Brief Definitions

*Some of the terms used in this article might be unfamiliar. Here's a short description of the main ideas:*

**CODE** – Refers to the statements, the lines, or the entirety of a program, as in the phrase “there’s an error in your code at line 110.” Also used as a verb, as another word for programming: “I’m coding a subroutine.”

**COMPILED LANGUAGE** – Unlike BASIC (an *interpreted language*) there are three steps to getting a program to run when you’re working with a compiled language: 1. Write it. 2. Compile it. 3. Run it. After you write the program, a separate program called a *compiler* translates what you’ve written into a form of *machine language*. This results in a program which can then be executed (run).

Some examples of compiled languages are FORTRAN, COBOL, and PL/I. The language the program is written in (step 1, above) is called the *source language* and when you finish typing it you’ve got not surprisingly, the *source program*. Step 2 is where you instruct the compiler to “examine” and transform the source program into an *executable* (it can be executed) program called the *object* or *target* program.

You can write, easily read, and easily modify source programs, but you can’t run them. Object programs, on the other hand, do run, but they are difficult to read (they’re not written in words like PUT IF THEN DECLARE, but rather in machine or assembly language.)

**INTERPRETED LANGUAGE** – Step 2 (above) does not take place in an interpreted language. There are only two steps to writing an interpreted language program (BASIC is an example): 1. Write it. 2. RUN it. However, while the program is RUNning, a separate program in the computer is “interpreting” the meaning of words like PRINT and INPUT. In other words, the computer slows down somewhat while the interpreter decides what PRINT means and just what kind of PRINT is involved (to the screen, the printer, a disk file?). Then the interpreter sets up pointers and flags and variables and momentarily sends control to the machine language subroutine (in a library of such subroutines) which can do a PRINT.

All of this translating and interpreting is going on *during* the RUN of the program. It’s obvious why interpreted programs tend to RUN more slowly than compiled programs. On the other hand, because you can write it/RUN it, it is easier to test parts of a program immediately and make the necessary changes to the program itself. Debugging is easier simply because

the program you write is the same program that you will RUN.

**PARAMETER PASSING** – This generally refers to the ways that variables are made available to several programs at once, (or, if the variables are local, to several parts of the same program at once). For example, if the variable CASH “holds” 15.98, we might want to “pass” that value (15.98, the parameter) to another program. Some computers will cancel all variables when a new program is LOADED into RAM memory. How can the 15.98 be “passed” to the new program?

Likewise, if variables are local, the value of CASH will be different in subroutines from what is in the main body of the program unless 15.98 is “passed” to the subroutines.

Passing parameters is handled in different ways depending on which computer or language is being used. Compiled languages often allow you to put the variables in parentheses on the same line as a CALL to or RETURN from a subroutine. The example CALL SUB3 (CASH, TOTAL) *passes* the values of CASH and TOTAL to the subroutine SUB3. It can later pass variables back to the main routine in the same way, using parameters (also called *arguments*).

**PL/I** – A “high level” language (as opposed to lower level, closer to machine language) which combines attributes of FORTRAN and COBOL.

**DUMMY ARGUMENTS** – Parameters which have no effect other than to take up some necessary space. An example is the FRE(1) statement in Microsoft BASIC where the value within the parentheses can be anything. It’s just there because the computer will not recognize FRE().

**NESTING** – When something is contained by something else. FOR I=1 TO 10: FOR J=1 TO 2: NEXT J: NEXT I. This J loop is said to be *nested* within the I loop.

**STACK** – The computer must be able to remember “return addresses.” 100 GOSUB 500 will turn over control to whatever is on line 500, but eventually there will be a RETURN. So, before GOSUBbing, the “address” to RETURN to is put on the computer’s *stack* and later pulled off the stack by RETURN. There is a limit to how many return addresses can be pushed on the stack. This is normally no problem since most subroutines go right back via RETURN, relieving the stack of the address number. Recursive, self-calling subroutines, however, aren’t RETURNing. It’s GOSUB-GOSUB-GOSUB, etc. Unless the recursion is carefully managed, the stack could quickly fill with return addresses and is then said to *overflow*.





# Skyles Electric Works

## Epson-PET/CBM Graphic ROM Pack

### For PET/CBM Owners Who Want:

**Complete Program Listing Printouts**  
**Complete Screen Graphic Printouts**  
**Graphic Printouts From Programs**

on your Epson Printer

Order the Skyles Electric Works EPSON-PET GRAPHIC ROM Package. The ROM when installed in an EPSON MX80, MX80FT, or MX100 with Graftrax Plus printer will reproduce most of the PET/CBM graphics characters. Most importantly when using the accompanying high speed machine language program, the Epson-PET Graphic ROM pack gives a complete program listing with all screen controls shown (cursor, home, clear, etc.). This high speed machine language program for program listing, screen image printout (screen dumps) and BASIC program controlled printing (i.e. PRINT ) automatically translates the PET-ASCII characters to the EPSON-GRAPHIC ROM characters. A BASIC sample program and PRINT subroutine, that may be incorporated into any existing BASIC program, completes this "complete solution" package.

EPSON MODEL

MX70  
 MX80 (serial no. to 359999)  
 MX80 (serial no. after 360000)  
 MX80FT  
 MX80 Graftrax  
 MX80 Graftrax Plus  
 MX80FT Graftrax Plus  
 MX100  
 MX100 Graftrax Plus

ROM MODEL

Not Available  
 EPG80 (EPG82, 3 ROM Version)  
 EPG81 (EPG83, 3 ROM Version)  
 EPG8F  
 Not Available  
 EPG8G+  
 EPG8G+  
 Not Available  
 EPG10G+

The Epson-PET Graphics ROM Pack has been designed to furnish you with PET/CBM graphics printing in the easiest way possible. This is done by furnishing a high speed machine language program that is "hidden" at the top of your PET/CBM memory.

The machine language program serves 3 major functions.

- 1: Translates PET-ASCII code to ASCII code for program listing.
- 2: Translates screen code to ASCII code for screen image printouts.
- 3: Translates PET-ASCII code strings to ASCII strings for normal program printout. This feature may also be used for making ASCII files for your disk or tape recorder.

**INSTALLATION:** Installs into your Epson printer

**PRICE:** Epson-PET Graphics ROM Pack EPG80, EPG81, EPG8F.....\$75.00

Please specify your Epson printer model type and serial number when ordering.

For all PET/CBM's BASIC 2.0/Revision 3, or BASIC 4.0

**AVAILABILITY:** Immediately from your LOCAL DEALER

or

VISA, MASTERCARGE ORDERS CALL (800) 227-9998 (except California residents)  
 CALIFORNIA ORDERS PLEASE CALL (415) 965-1735



# Skyles Electric Works

231E South Whisman Road  
 Mountain View, CA 94041  
 (415) 965-1735



```
CALL MOVE (N-1,6-F-T,T+0);
END MOVE;
```

The BASIC program has arrays for variables N, F, and T. Variable G serves as the index to the arrays. G represents the number of nested GOSUBS. The subroutine increments G on each entry and decrements it on each return, thereby keeping count of its own generation number. Arguments are passed to the next generation by putting values into the arrays at (G+1) before each GOSUB. The variable G is always the current subscript for any generation of the subroutine.

This method of using arrays requires that you know beforehand what the maximum nesting depth will be in order to dimension the arrays. This number is a function of the problem, but may be limited by the BASIC interpreter.

### Solving 21 Disks Would Take More Than Eight Days

The program runs in less than 2K. The internal stack size of my PET restricts the number of disks to 21. When I try to run more than 21 I get an "OUT OF MEMORY" message. Your system may allow more or less, but don't expect to run this many disks to completion. The time required to complete 21 disks (at a rate of approximately three moves per second) will be more than eight days, and one more disk would double that.

The BASIC program here shows the moves to be made, along with a plot of the nesting level made down the left side of the screen. Each increase in the length of the plotted line indicates a GOSUB. Each decrease in length indicates a RETURN. You can see a more detailed view of the process by replacing the plot with a printout of the current array variables.

### Program 1. Microsoft Version


```
10 REM TOWERS OF BRAHMA (RECURSIVE)
11 DIM N(22),F(22),T(22)
12 P$="-----+-----+-----+-----+--"
13 INPUT "N DISKS (1 TO 21) ";N(1)
14 IFN(1)<1 OR N(1)>22 THEN 13
15 F(1)=1
16 T(1)=3
17 GOSUB 31
18 END ::::::::::::::::::::::::::::
31 G=G+1
32 PRINT LEFT$(P$,G)
33 IF N(G)=0 THEN 43
34 N(G+1)=N(G)-1
35 F(F+1)=F(F)
36 T(G+1)=6-F(G)-T(G)
37 GOSUB 31
38 PRINT TAB(19) "DISK#"N(G) "FROM" F(
  G) "TO" T(G)
```

```
39 N(G+1)=N(G)-1
40 F(G+1)=6-F(G)-T(G)
41 T(F+1)=T(F)
42 GOSUB 31
43 G=G-1
44 PRINT LEFT$(P$,G)
45 RETURN
```

### Program 2. Atari Version

```
11 DIM N(22),F(22),T(22),P$(20)
12 P$="-----+-----+-----+-----"
13 ? "N DISKS (1 TO 21)";:INPUT T:N(1)=T
14 IF T<1 OR T>21 THEN 13
15 F(1)=1
16 T(1)=3
17 GOSUB 31
19 END
31 G=G+1
32 IF G THEN ? P$(1,G)
33 IF N(G)=0 THEN 43
34 N(G+1)=N(G)-1
35 F(G+1)=F(G)
36 T(G+1)=6-F(G)-T(G)
37 GOSUB 31
38 ? ",DISK #";N(G);" FROM ";F(G);" TO "
  ;T(G)
39 N(G+1)=N(G)-1
40 F(G+1)=6-F(G)-T(G)
41 T(G+1)=T(G)
42 GOSUB 31
43 G=G-1
44 IF G THEN ? P$(1,G)
45 RETURN
```


©



## MEMOREX FLEXIBLE DISCS

**WE WILL NOT BE UNDER-SOLD!** Call Free (800)235-4137 for prices and information. Dealer inquiries invited and C.O.D.'s accepted.


PACIFIC EXCHANGES  
100 Foothill Blvd.  
San Luis Obispo, CA  
93401. In Cal. call  
(800) 592-5935 or  
(805) 543-1037











# Friends Of The Turtle

David D. Thornburg  
Associate Editor

## A Fractal Of My Former Self...


As I was going to St. Ives,  
I met a man with seven wives.  
Each wife carried seven sacks;  
And in each sack was seven cats;  
And with each cat was seven kits.  
Kits, cats, sacks, and wives,  
How many were going to St. Ives?

If you remember this puzzle from your childhood you probably remember that the answer is one.

Well, that may not be very exciting; but suppose you are walking to St. Ives and you want to know how far it is from some other location – Here, for example. The first thing we might do is look at a map.


From the map we see that St. Ives and Here are both coast towns located near bays. In between, the coast juts out to sea.

Figure 1.

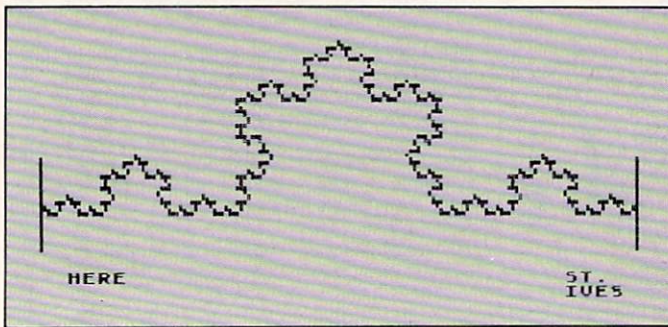


How long is the coastline between the towns of Here and St. Ives? If we set a pair of dividers to span the distance between the two towns we get one measurement. This distance is one kilometer.

Figure 2.

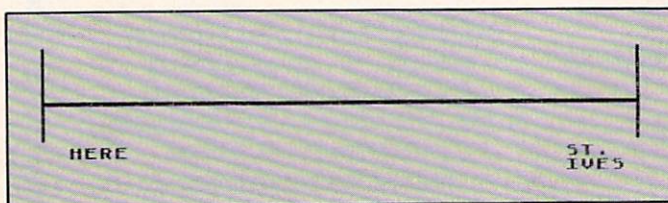


But this path doesn't take us along the coast. If we set our dividers to measure in units of  $1/3$  of a kilometer, we can trace a path which more closely follows the coastline.

Figure 3.

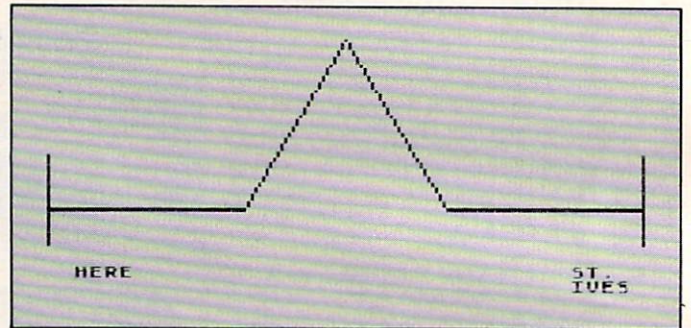

By counting each  $1/3$  kilometer increment we can see that this path is  $4/3$  kilometers in length. Next, let's set the dividers to  $1/9$  of a kilometer and measure the distance again.

Figure 4.

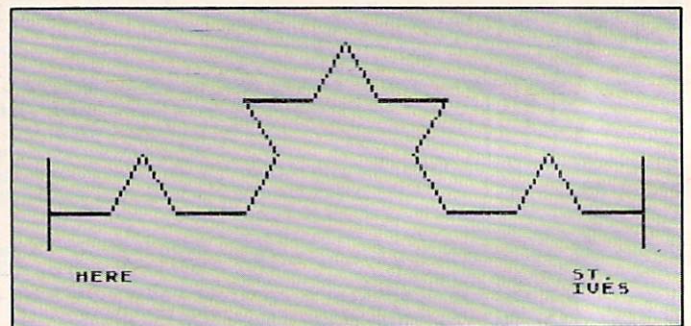

This looks more like the actual coastline and gives us a distance of  $16/9$  kilometers. Since we replaced each straight line in Figure 3 with a replica of Figure 3, we can see that the length of the coast in Figure 4 can be written as  $4/3 * 4/3$ .

Now let's set the dividers to  $1/27$  of a kilometer and measure again.





# THE BIG MATH ATTACK™

Challenging new math program . . .

Sharpen your skills by entering the correct answer before the equation 'lands' on your city! Provides hours of educational entertainment.

Features:

- Full color
- High resolution graphics
- Animation
- Sound
- Four math functions (+, -, X, ÷)
- Two levels for each function

Recommended for grades 1-6. Available for the ATARI & APPLE II.

ATARI 16K (cass.) . . . . . \$20.00

ATARI 24K (disk) . . . . . \$25.00

Requires ATARI BASIC cartridge

APPLE II (disk) DOS 3.2/3.3 . . . . . \$25.00

Requires Applesoft Basic in ROM.

Ask for it at your local computer store.



or order direct:

**I.H.E.S.I.S.**

P.O. Box 147  
Garden City, MI 48135  
(313) 595-4722

Please add:  
\$1.50 shipping/handling  
\$1.50 C.O.D.

WRITE FOR FREE CATALOG  
DEALER INQUIRIES WELCOME

# LOGO

© M.I.T.

## Krell's LOGO for APPLE II\* Includes: our new low price and

1. Two copies of Krell's LOGO for Apple II\*
  2. A UTILITY disk containing M.I.T.'s extremely valuable demonstration material, a series of pre-defined shapes which may be substituted for the LOGO TURTLE, and Krell's timesaving library of pre-defined procedures.
  3. ALICE IN LOGOLAND, a twenty program tutorial series for intermediate and experienced programmers new to the LOGO language.
  4. The technical manual LOGO for Apple II\* by H. Abelson & L. Klotz. This is the official technical manual issued by M.I.T.
  5. LOGO FOR THE APPLE II\* by Harold Abelson, Byte Books. A complete instructional manual for intermediate and advanced users of LOGO.
  6. THE ALICE IN LOGOLAND PRIMER, a step by step, lavishly illustrated introduction to LOGO for those who are new to both programming and to LOGO. (available in May and sent free to all purchasers of Krell's LOGO for Apple II\*).
  7. A comprehensive wall chart that portrays, explains and graphically illustrates the LOGO commands in action.
  8. A one-year's free subscription to the LOGO & EDUCATIONAL COMPUTING NEWSLETTER. (Regularly \$30.00 per year). A new authoritative source of information about the structure, classroom application and capabilities of LOGO, plus an up to the minute forum on the most significant new ideas and issues in educational computing.
- \$149.95**

## College Board SAT\* Prep Series

TRS-80, APPLE, PET, ATARI, CP/M, PDP-11 Based on past exams, presents material on the same level of difficulty and in the same form used in the S.A.T.

S.A.T., P.S.A.T., N.M.S.Q.T. — Educator Edition set includes 25 programs covering Vocabulary, Word Relationships, Reading Comprehension, Sentence Completion, and Mathematics. \$229.95  
INDEPENDENT TESTS OF S.A.T. SERIES PERFORMANCE SHOW A MEAN TOTAL INCREASE OF 70 POINTS IN STUDENTS' SCORES.

GRADUATE RECORD EXAM Series — Educator Edition includes 28 programs covering Vocabulary, Word Relationships, Reading Comprehension, Sentence Completion, Mathematics, Analytical Reasoning, and Logical Diagrams. **\$289.95**

## Micro-Deutsch

MICRO-DEUTSCH set includes 24 grammar lessons, covering all materials of an introductory German course. Four test units also included. Grammar lessons use substitution transformation drills, item ordering, translations and verb drills. Drill vocabulary based on frequency lists. Suitable for use with any high school or college textbook. Extensively field tested at SUNY, Stony Brook. APPLE\*, PET\*. **\$179.95**

## Isaac Newton + F.G. Newton

Perhaps the most fascinating and valuable educational game ever devised - ISAAC NEWTON challenges the players to assemble evidence and discern the underlying "Laws of Nature" that have produced this evidence. Players propose experiments to determine if new data conform to the "Laws of Nature". FULL GRAPHICS NEWTON - presents all data in graphic form. This game is suitable for children. Players may select difficulty levels challenging to the most skilled adults. **Both Games \$49.95**

## Krell Software Corp.



"The State of the Art in Educational Computing"

1320 STONY BROOK ROAD / STONY BROOK NY 11790 / (516) 751-5139

Krell Software Corp. has no official ties with the College Entrance Examination Board or the Educational Testing Service. Krell is, however, a supplier of products to the E.T.S.

PROGRAMS AVAILABLE FOR THE TRS80, APPLE II, PET & ATARI.

\*Trademarks of Apple Comp Corp., Tandy Corp., Commodore Corp., Atari Corp.

**micromath**

## MICROMATH revolutionizes the teaching of math!

MicroMath is the only full, one-semester course of its kind in North America and is highly praised by instructors who use it.

### Grade 8 to College Level

MicroMath is a complete review mathematics course which will be of value to students from Grade 8 to college level.

### 93 Lessons, 16 Tests, 150 Page Workbook

Students can choose from 93 separate lessons (each with pre-test and lesson) and work comfortably at their own speed, with peers or individually. Each unit has its own post-test and the entire package is supplemented with a 150 page workbook.

### Runs on COMMODORE PET 16K and APPLE II +

Versions are available for all DOS formats.

### \$500 for Complete Package

A demonstration disk, consisting of 8 sample lessons and 2 tests, is available for only \$25 (refundable upon purchase of complete package).


### For more information:

Write - Mr. E.H. Bangay  
SHERIDAN COLLEGE  
Trafalgar Road  
Oakville, Ontario  
Canada L6H 2L1

or Call - (416) 845-9430



Figure 5.

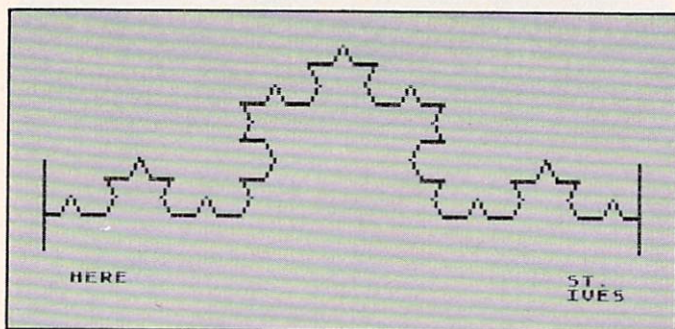

This brings us even closer to the coastline and gives us a distance of  $4/3 * 4/3 * 4/3$  or  $64/27$  kilometers – more than twice our original estimate.

By now it should be obvious that each time we reduce the setting of our dividers by  $1/3$ , the path length increases by a factor of  $4/3$ . If we were to walk along the coast by following every nook and cranny, the distance would be  $4/3 * 4/3 * 4/3 * 4/3 * 4/3, \dots$  etc. In other words, the length is infinite.

The reason for this is that each part of the coastline is an infinite set of replicas of the overall shape shown in Figure 3: If you were to look at a high magnification view of the coastline it would be just as bumpy as a lower magnification view.

Real coastlines don't have infinite lengths, of course, but our imaginary coastline does because it is made from a type of self-similar curve called a *fractal*. Mathematical expressions of this type have been known for some time but were not studied much because mathematicians thought their properties were too strange. For an insight into just how strange these functions are, you might want to look at the book *Fractals: Form, Chance, and Dimension* by Benoit Mandelbrot (Freeman 1977). This book discusses the properties of curves such as the one I chose for the imaginary coastline. This function is called a Triadic Koch curve and was discovered by von Koch in the early 1900's.

Mandelbrot's book provides an interesting glimpse of this strange mathematical world, but is quite frustrating in that he doesn't show the reader how to express these curves so that a computer could draw them.

Have you guessed that the turtle might hold the key to drawing fractals?

First, let's look at Figure 3, since this is the basic building block from which all the other curves are made. A procedure for creating this figure is shown below in both Apple LOGO and Atari PILOT. (This also lets you see the similarities and

differences between these two languages.)

#### Apple LOGO

```
TO F0 :SIZE
FORWARD :SIZE
LEFT 60
FORWARD :SIZE
RIGHT 120
FORWARD :SIZE
LEFT 60
FORWARD :SIZE
END
```

#### Atari PILOT

```
*F0
GR: DRAW #A
GR: TURN -60
GR: DRAW #A
GR: TURN 120
GR: DRAW #A
GR: TURN -60
GR: DRAW #A
E:
```

If you move the turtle to the left edge of the screen and turn it to face right, then, by using the procedure F0, a replica of the curve in Figure 3 should appear on your display. For a line length of 81 units (a good size for Apple LOGO) you would type F0 81. In Atari PILOT you might want to use a line length of 54 units (because of screen resolution differences between the Atari and Apple graphics). To do this, just type:

```
C: #A=54
U: *F0
```

and you should see a curve similar to that in Figure 3.

Now, what about Figure 4? In our coastline, each straight line section is replaced with a copy of Figure 3 which has been reduced by one-third. Let's call the procedure to do this F1.

#### Apple LOGO

```
TO F1 :SIZE
F0 :SIZE/3
LEFT 60
F0 :SIZE/3
RIGHT 120
F0 :SIZE/3
LEFT 60
F0 :SIZE/3
END
```

#### Atari PILOT

```
*F1
U: *F0
GR: TURN -60
U: *F0
GR: TURN 120
U: *F0
GR: TURN -60
U: *F0
E:
```


Suppose we next want to draw the next level of this curve. All we need to do is create a copy of F1 (called F2) in which references to F0 are replaced by references to F1. Each time this procedure is used it will use F1 which will use F0. If you follow this process a few more times, you might make a procedure called F20 which uses F19, and so on.

How far do we need to go? If our original curve (Figure 3) used a line length of 27, for example, then each line should be 9 units long for F1, 3 units long for F2 and 1 unit long for F3. Since the display can't show lines less than 1 dot long, it hardly makes sense for use to try to make this curve with any finer resolution.

In a future column we will show how LOGO lets you create these curves with just one procedure. Meanwhile, you can test your abilities by using a different figure as a starting pattern:



Figure 6.

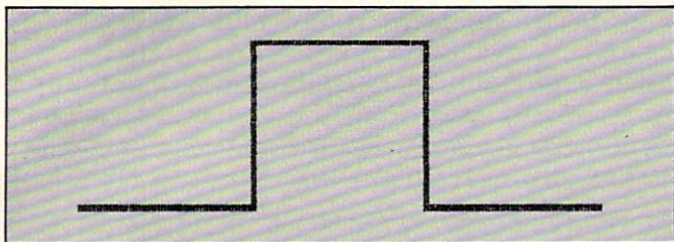

Because of the 90 degree turns in this figure, those of you with WSFN will also be able to make this fractal curve.

Here is the first procedure you will need:

<b>Apple LOGO</b>	<b>Atari PILOT</b>
TO F0 :SIZE	*F0
FORWARD :SIZE	GR: DRAW #A
LEFT 90	GR: TURN -90
FORWARD :SIZE	GR: DRAW #A
RIGHT 90	GR: TURN 90
FORWARD :SIZE	GR: DRAW #A
RIGHT 90	GR: TURN 90
FORWARD :SIZE	GR: DRAW #A
LEFT 90	GR: TURN -90
FORWARD :SIZE	GR: DRAW #A
END	E:

In WSFN you would create the procedure \*A


this way:

```
=*A(F6RF2RF2RF6RF)
```

(You might want to have the turtle move forward more with each step for the first few levels so you can see what is going on more easily.)

Here is what you should get for your final picture:

Figure 7.

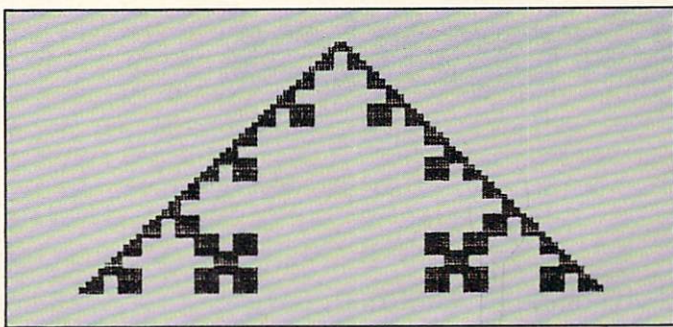

Keep experimenting with other patterns – and let me know how you are doing.

*Friends of the Turtle*  
P.O. Box 1317  
Los Altos, CA 94022

©

## Good news for kids of all ages . . .



*Robby looks great in color.*

SubLOGIC is pleased to announce the release of 4 new programs for the Atari® 800™ computer:

AT-AG1 (arcade game)

### ROBBY THE ROBOT CATCHER

Baby robots are falling from the skies. Catch them if you can. 32K

AT-FA1 (fantasy adventure)

### ADVENTURE ON A BOAT

Go fishing for points in the waters of Fantasy where anything can happen. 32K

AT-FA2

### GHOSTLY MANOR

Find a magic key to defeat the evil spirits, before they can do the same to you. 32K

AT-FA3

### THE BLACK FOREST

Explore the Black Forest in search of the life-giving waters of Amrita. And beware of demons along the way. 48K

**High Quality, Pure Fun . . .**

for anyone who is young at heart. \$24.95.

**See your dealer.**

For direct orders add \$1.50 and specify UPS or first class mail. Illinois residents add 5% sales tax. Visa and MasterCard accepted.

# subLOGIC

Communications Corp.  
713 Edgebrook Drive  
Champaign, IL 61820  
(217) 359-8482  
Telex: 206995



*How to move and rotate objects on screen. These ideas are adaptable to many computer graphics problems and can ease the task of creating games, simulations, etc. An Atari and Commodore version are presented as complete programs and the author describes the modifications necessary for other computers.*

# Screen Graphics

Ian Paull  
Rochester, NY

Many computer simulations and games use graphics to represent a mathematical event or model in the program. In a lunar lander program, for example, the lander position is first calculated by the model (taking operator input into account) and then displayed. Another simulation might calculate how a machine or robot should be responding to computer control, and then graphically display this information.

Programs of these general types can benefit from graphics routines which can illustrate an object at any location on a video screen (translation) and at any angle (rotation). The BASIC program presented here uses a 25 x 40 screen area to display a user-generated figure at any location and angle that the screen can represent.

The screen is treated as an X Y coordinate system, with the X axis running from left to right, the Y axis running from top to bottom, and the origin (0,0) located at the upper left corner. (See Figure 1.) The plotting routine is the main section which can be modified. Briefly, line 1060 clears the screen. Line 1080 computes the memory address to be POKEd, from the X and Y values computed elsewhere. The POKEd address is the screen position which will be turned on. Line 1090 insures that only points on the screen will be POKEd. This line may be deleted for slightly faster running time if you are sure to always remain on screen.

Lines 1070 to 1110 form a loop that plots all points in the figure to be displayed. For computers with continuous memory mapped display, you may need to change the values of SS (screen start address), SE (screen end address), RL (row length), and the character code for a completely lit cell (160 for the PET, line 1100). The PET can support greater resolution (50 x 80) with additional software, replacing the PLOT subroutine. (See refer-

ences 1 and 2.)

## Visible Errors

Note that due to the coarseness of the display, rotated lines will often appear warped. This is because, with only a limited number of points on the screen to choose from, the computer must pick points as close as it can to the spot where the point should go, often resulting in visible error. This

---

**The ten point example does one rotation in little more than one second.**

---

program is thoroughly REMarked, so the user should have little difficulty changing or omitting statements to suit his particular needs or computer.

The subroutines actually doing the graphics manipulations begin at line 830 for rotation and 970 for translation. Since translation is simpler, let's look at it first.

In moving a point from one spot on a graph to another, the X and Y processing can be handled separately. (See Figure 2.) In travelling from point  $X_0, Y_0$ , to  $X_1, Y_1$ , the difference in X (shown as  $\Delta X$ ) is simply added to  $X_0$ , and the difference in Y, a negative value in this example (shown as  $\Delta Y$ ), is added to  $Y_0$ . For this single point translation, then:

$$\begin{aligned} X_1 &= X_0 + \Delta X \\ Y_1 &= Y_0 + \Delta Y \end{aligned}$$

Subroutine 970 performs these additions for each translation of X and Y, for each point in the figure, and replaces the old X and Y values for each point with the new values. It also keeps a running total on the X and Y translation, to be used in the Rotation subroutine. Also, the Plot routine is called here to display the new, translated points.

The Rotation subroutine at line 830 is more complicated. The relationship between an existing point ( $X_0, Y_0$ ) and the new computed point ( $X_1, Y_1$ ) can be expressed as:

$$\begin{aligned} X_1 &= X_0 \cos(a) - Y_0 \sin(a) \\ Y_1 &= X_0 \sin(a) + Y_0 \cos(a) \end{aligned}$$

where  $a$  is the angle of rotation. For details on the derivation of these relationships, see reference 3.

## The Method Of Rotation

These equations describe rotation of a point about the origin. On initial entry of data for the pattern to be displayed, coordinates are chosen so the axis of rotation is at the origin. Then, if we later wish to



# MOONBASE IO

● the battle for the moons of Jupiter ●



Blast your way through the alien mine fields! Defend the moonbases from an attacking alien armada! It won't be easy. To win you will need to mount a heroic assault on the alien mother ship.

**Moonbase Io** combines three exciting arcade adventures in one exciting game. The machine-language program by John


Konopa uses advanced graphics and sound effects. Action is fast and exciting — varying levels of skill required to go from one part of the game to the next.



BEYOND SOFTWARE's arcade-adventures are the next generation in computer games for the ATARI™ computer. A voice-activated program will help you meet and overcome the challenge — it may be an alien invasion, a fiendish murderer preying on a country village or a treasure trove buried deep in the shark-infested sea.

**Moonbase Io** is available at fine computer dealers. Or, directly from PDI for \$29.95 plus \$2.00 shipping and handling.

Requires 24K ATARI™ computer with disk and cassette.  
Cassette version available soon.



Program Design, Inc., 11 Idar Court, Greenwich, CT. 06830 203-661-8799

ATARI™ is a registered trademark of Atari, Inc.



**CALL TOLL FREE  
800-424-2738**



**ATARI**

# CHICKEN

From Synapse (C)

There's trouble in the barnyard, and this machine-language, arcade game will challenge even the most experienced arcade player. You try to help Ma Hen save the eggs and chickens from the wily fox. The action gets faster and faster as eggs turn into chicks, feathers fly, chickens squawk, and all bedlam breaks loose. You'll really have to think fast to outwit this fox.

16K Tape ..... ~~\$29.95~~ **Save 20%!**

**NOW THROUGH AUGUST 1 ONLY: ... PAY JUST \$23.96**

## the PROGRAM STORE™



# FROGGER

From On Line Systems

Based on arcade game Frogger. Dodge traffic and jump the moving logs in the stream to get home. Fantastic graphics.

48K Tape or Disk ..... ~~\$39.95~~ **Save 20%!**

**NOW THROUGH AUGUST 1 ONLY: ... PAY JUST \$27.96**

# REAR GUARD



By Neil Larimer from Adventure Int.

A space battle between your cruiser and wave-after-wave of enemy ships. You can destroy them with your energy darts or you can ram them—as long as your shields are intact. The action takes place on a continuous horizontal landscape. You control the altitude and speed of your craft as you pursue the enemy. Skill level 1 is exciting, and there are four more levels available.

16K Tape ..... ~~\$19.95~~ **Save 20%!**

**NOW THROUGH AUGUST 1 ONLY: ... PAY JUST \$15.96**

24K Disk ..... ~~\$29.95~~

**NOW THROUGH AUGUST 1 ONLY ... PAY JUST \$19.96**



# LANGUAGE TEACHER

By Cindy and Andrew Bartorillo from Acorn

Learn the basics of a foreign language. LANGUAGE TEACHER offers hundreds of word combinations, verb conjugations and phrases. There is an option for having multiple-choice answers and for being retested on missed items. Full printer capability and a great deal of "human engineering" further enhance the programs. Teachers will appreciate the ample documentation and the ability to get printouts of quizzes. Currently available languages are: French, and Spanish. Italian & German available soon.

32K Disks ..... \$29.95 for each program.



# TEMPLE OF APSHAI

From Automated Simulations

The first of the DujonQuest series, and still one of the most popular. In exploring over 200 rooms in the magical labyrinth, you will encounter more than 30 kinds of fearsome monsters guarding over 70 treasures. Some of the treasures will help you in your quest, but you must still watch out for the many monsters and traps that spring out from the walls and shadows.

32K Tape or Disk ..... \$29.95

# SpeedRead+

From Optimized Systems

Improve your reading speed and comprehension at home with a short practice session each day. Offers 4 modes for reading: (1) Single phrase for developing phrase recognition at high reading speed; (2) double phrase recognition at high speed; (3) random phrase for peripheral vision; (4) column phrase for newspapers and magazines. Start at beginning level and proceed at your own pace. Choice of 3 classical texts.

16K Disk ..... \$59.95



By Bill Budge from Budgeco

An exciting, challenging Video pinball simulation game for from one to four players. You get advanced game features found only in state-of-the-art electromechanical pinball machines. There's full color graphics, animation and sound effects, seeming to occur simultaneously. Choose from "Easy" or "Hard" games. Great Graphics!

32K Disk ..... \$29.95



An Interlogic (TM) Adventure

Your greatest adventure awaits you in the Great Underground Empire of Zork! You'll face perils and puzzles as you try to escape from Zork I with the Twenty Treasures and your life. You'll experience challenges in their most realistic sense—you can communicate in complete sentences with the largest vocabulary and range of command options anywhere. Challenges change as you make your moves. Beware mysterious objects and beware the Thief! "Save the game" feature.

32K Disk ..... \$39.95

Zork II also available \$39.95.



# CONTROLLER

From Microcomputer Games (Avalon Hill)

You are the air traffic controller who must make quick decisions...or you might cause a mid-air crash and lose hundreds of lives! All actions are in REAL TIME—aircraft will maneuver, use fuel and respond to your commands as a real plane would—the computer won't wait for you. Aircraft are plotted on realistic "radar scope." Heading, velocity and altitude displayed on separate chart. Select up to 8 planes; choose from 3 types with 3 levels of difficulty.

40K Disk ..... \$29.95



By Warren Schwader & Ken Williams

You, alone, can save the Earth Federation from the lawless aliens who roam our galaxy. Not only have these invaders been attacking our home planet—they're also raiding our space colonies! Space travel has become increasingly dangerous, as has friendly trade. But supplies must go through. As the pilot of the Federation fighter THRESHOLD, it's all up to you! High resolution graphics and sound plus "save the game" feature.

40K Disk ..... \$39.95



# DEADLINE

An Infocom (TM) Adventure

You have only 12 hours to solve the mystery of the dead man and the locked door—or the killer will strike again...and this time, you may be the victim! Working from an actual dossier on this clever and baffling crime, you must piece together the many clues and watch out for the suspects—one of them is the killer! Use complete sentences and more than 600 words of vocabulary. "Save the game" feature.

32K ..... \$49.95

# POOL 1.5

By Hoffman, St Germain & Morock from IDS

A remarkable action-simulation of the real thing, this program allows full control of your "cue-stick" for english, aim and control. Play four different types of pool at your choice of table speed, with "instant replay" of any shot! HI-RES color graphics are used throughout this real-time game.

48K Disk ..... \$34.95

Visit our other stores: Seven Corners Center • Falls Church, VA & W. Bell Plaza • 6600 Security Blvd. • Baltimore, MD



**TO ORDER CALL TOLL FREE 800-424-2738**

For information  
Call (202) 363-9797

# THE PROGRAM STORE

4200 Wisconsin Avenue, NW, Dept. U207 Box 9609  
Washington, D.C. 20016

MAIL ORDERS: Send check or M.O. for total purchase price, plus \$1.00 postage & handling. D.C., MD. & VA.: add sales tax. Charge cards: include all embossed information on the card.



Get the most from your micro with software and accessories from one of the world's largest selections.

CALL TOLL FREE  
800-424-2738

THE PROGRAM STORE  
Summer Arcade Madness



**GALACTIC CHASE**

From Spectrum Computers

An all maching language arcade game that combines challenging play with great graphics and sound. Insect-like alien ships form ranks above you, moving back and forth as they ready their assault. Suddenly they start breaking formation to swoop down on you, the lone defender. Fight them off with swift missiles...until their invisible ray slows your missiles down. May be played by 1 or 2 players, with two skill levels.

16K Tape ..... ~~\$24.95~~ 32K Disk ..... ~~\$29.95~~

NOW THROUGH AUGUST 1 ONLY: ..... PAY JUST *Save 20%!* \$19.96 (16K Tape) \$23.96 (32K Disk)



**PROTECTOR**

From Synapse Software

The planet's inhabitants are endangered by a malevolent alien that beams them to his ship and transports them to an active volcano. You must pick them up one-by-one with your rescue/attack ship and transport them to another city while dodging lasers and rough terrain. After you save as many as possible, the volcano erupts. You must then move each person to a volcano-proof vault in the mountains! Great graphics and sound in this arcade game.

32K Tape ..... ~~\$24.95~~ 32K Disk ..... ~~\$27.50~~

NOW THROUGH AUGUST 1 ONLY: ..... PAY JUST *Save 20%!* \$19.96 (32K Tape) \$22.00 (32K Disk)

**ACTION QUEST**

From JV Software

You are the ghost of the mansion in this arcade adventure. Using your joystick, you move through the rooms in quest of prizes. You must elude monsters and solve puzzles along the way. Dexterity and reasoning skills are required to be successful in this fast-moving game.

16K Tape or Disk ..... ~~\$29.95~~ *Save 20%!*

NOW THROUGH AUGUST 1 ONLY: ... PAY JUST \$23.96

**CAVERNS OF MARS**



By Greg Christensen from APEX

An award-winning arcade game that will challenge your skill for many, many plays. You command the fighter Helicon VII on a mission to invade the Martian high command. The headquarters are located deep in the caverns, so you must descend through radar, rockets, laser gates, and space mines to reach your destination. Once there, you activate the fusion bomb and try to get out before it detonates. Good luck! Joystick required.

16K Tape ..... ~~\$29.95~~  
16K Disk ..... ~~\$37.95~~




**HOCKEY**

From Gamma Software

A high-speed video action game for 2, 3, or 4 players. You use joysticks to control the players. The offensive player with the puck and the nearest defensive player are automatically assigned to a joystick; Players not so controlled become "smart" players who play automatically. The action is fast and furious, the color graphics and sound are realistic. Perfect for family entertainment.

16K Tape or Disk ..... ~~\$29.95~~

**SHOOTING GALLERY**



From Analog

A remarkably realistic shooting gallery, complete with carnival music. Use your joystick to shoot at moving owls, rabbits, ducks, and clay pipes. Hit stars and targets for more shots. If you can shoot them all, you'll get a try at the raging bear, if any ducks fly south, they'll eat your bullets. Great family fun.

16K Tape ..... ~~\$21.95~~ Disk ..... ~~\$24.95~~

**RICOCCHET**

DeKoven & Connelley from Mind Toys

A unique new approach to computer gaming. RICOCCHET combines diabolical strategy with fast action to yield a game that satisfies your intellect as well as your senses. You have 6 playing pieces to move around, plus 2 ball launchers. Each turn consists of either repositioning the pieces or launching a ball. Points are scored each time the ball ricochets. Simple? Deceptively so. Easy to master? Definitely not! 1 or 2 players.

32K Disk ..... ~~\$19.95~~

**K-RAZY SHOOT OUT**



From K-Byte

Get this collector's item while you can: It's the first non-Atari game in a ROM cartridge. Just slip the cartridge into the slot and you can instantly be playing this action-packed arcade game. The object is to move your Space Commander through the Alien Control Sectors, shoot the Alien Droids and escape from the sectors. The sectors are a maze of passages and barriers that can be used for protection, but don't let your commander touch them—they're electrified!

ROM Cartridge ..... ~~\$49.95~~



**GHOST HUNTER**

From Arcade Plus

The exciting haunted house maze game where you must get the ghosts before they get you! When you eat the pulsating "energizers," the ghosts start pulsating and become vulnerable to your attack. 51 different game variations keep things interesting. Play alone or in the "head-to-head" mode.

16K Tape ..... ~~\$29.95~~ 16K Disk ..... ~~\$34.95~~



By John Harris from On-Line

If you like arcade games with action, you'll love JAWBREAKER. Guide your chompers through a candystore maze, eating "wifesavers" as you go. You are pursued by variously colored "smilies," determined to knock your teeth out. Eat a jawbreaker and the "smilies" turn to blue "frownies," and you can eat them! It's one of the best examples of Atari graphics and sound we've seen...you'll love it!

16K Disk or Tape ..... ~~\$29.95~~

**LUNAR LANDER**



By Wall, Moncrief & Jessee from A.I.

Grab your joystick and sweat out the touch-down of your LEM. Choose from four lunar landscapes, with many choices for landing sites. Select a more difficult site and get more points—if you can land successfully. You have complete control of your LEM via main engines and small side thrusters, and five successful landings are heralded with a patriotic event. Great fun!

24K Tape ..... ~~\$14.95~~ 32K Disk ..... ~~\$20.95~~

**EASTERN FRONT 1941**

By Chris Crawford from APE

A map-based simulation of Operation Barbarossa, the German invasion of Russia. A complex and accurate war game, EASTERN FRONT pits you, as German Commander, against the terrain, the weather, and the Russian forces. Good use of colorful graphics and sound, and well written documentation make this game a winner!

16K Tape or 32K Disk ..... ~~\$29.95~~

THE PROGRAM STORE • Dept. U207 Box 9606 • 4200 Wisconsin Avenue, NW • Washington, D.C. 20016

Item _____	Price _____	Postage \$1.00 _____	name _____
_____	_____	Total _____	address _____
_____	_____	<input type="checkbox"/> CHECK <input type="checkbox"/> VISA	city _____ state _____ zip _____
_____	_____	<input type="checkbox"/> MASTERCARD	Card # _____ Exp _____



rotate about this axis after the figure has been translated elsewhere on the screen, we must first translate the figure back to the origin, do the rotation, and then translate back to where the figure had been. Naturally, these intermediate steps are not displayed on the screen.

The pattern of points which makes up the displayed figure is in the DATA statement of line 230. The first number is an X value, next comes its associated Y value, and so on until all points are described. The sequence in which points are described here is the sequence with which they will be plotted. (See Figure 3.)

Before branching to the ROTATION subroutine, the following variables must be initialized:

NP = Number of points in displayed pattern.

IA = Incremental angle of rotation, in radians.

AX, AY = Absolute X and Y values that the axis of rotation has been translated from the origin.

XP (NP), YP (NP) = Arrays containing X Y coordinates.

Before branching to the Translation subroutine, you must initialize:

XT, YT = Value of X and Y translation.

NP, XP (NP), YP (NP) = As before.

Note that AX and AY are normally updated in the Translation subroutine and should be set to zero at the start of the program.

When entering this program, the user can, if desired, omit all REMarks, since there are no branches to REM statements. When running the program, the figure will first appear in the upper left of the screen, partially hidden by the screen edge and wrapped around the display. Pressing the numeric keys translates the figure, a lop-sided plus sign, according to the standard scheme of Figure 4. In addition, pressing the zero will rotate the pattern 15 degrees counter-clockwise, and pressing the five will rotate 15 degrees clockwise.

As with most BASIC programs which manipulate graphics, these routines work slowly with large numbers of points. The ten point example does one rotation in little more than one second. If the program must rotate quickly, either the incremental angle of rotation can be increased, or sections of this program can be rewritten in machine language.

#### References

- 1) *High-Resolution Plotting for the PET*, J. Sherburne, Micro No. 10, March 1979, Machine language routine.
- 2) *Workbook 3*, Total Information Services, Basic routine for hi-res. plotting, PET.
- 3) *The Mathematics of Computer Graphics*, J. Posdamer, Byte Vol. 3, No. 9, Sept. 1978.


#### Notes For Atari Users

The Atari version of this routine closely parallels the PET version. Instead of screen POKEs, ordinary X,Y PLOTting is used, and instead of using the numeric keypad to generate the values for the translation routine, this program uses a joystick to move (translate) the figure around the screen. The less-than "<" and greater-than ">" keys are used to rotate the figure. Because of the general nature of this program, it can be run in Applesoft BASIC with only minor changes, such as changing GRAPHICS 3+16 to GR ; COLOR 1 to COLOR = 1, TRAP to ONERR GOTO, GET #1,A to GET A\$:A = ASC(A\$), etc., and using the keyboard, paddles, or a joystick to get the values for XT and YT (1,0, or -1).

#### Other Machines:

If your BASIC supports X,Y PLOTting, use the Atari version as a guide, otherwise modify variables SS, SE, and RL in the PET/CBM version if you have a memory-mapped text display. (See the article for details.)

Figure 1.

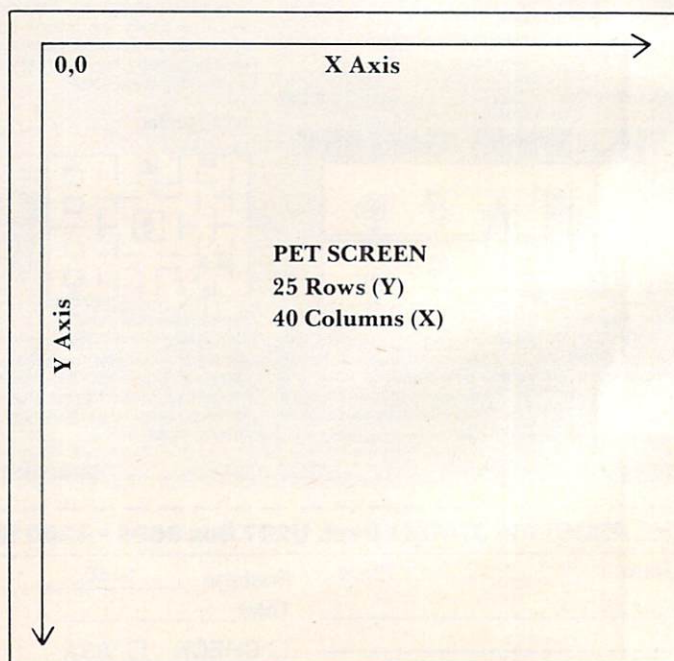



# It's Here! The Computer Strategy Game with Bounce!

For:  
Apple  
Atari  
TRS-80



Have you ever seen a fast action game combined with the intense strategy of chess, backgammon or Othello? Ricochet...the first abstract strategy game designed **exclusively** for the computer owner...is both. And loads of fun!

You and your opponent each have six opposing blocks to maneuver and two launchers to fire. Your shots ricochet off the blocks, changing their position with every hit, while earning you points on the way to their targets. The longer your shot ricochets, the more points you get.

You don't have to play alone, either. Play against any of four different computer opponents, (each a different personality), or another human. Five game variants to choose from—each requires a different strategy.

Ricochet is truly competitive...if you want it to be. A "smart clock" lets you

put more pressure on your opponent by forcing him to play faster than you. But you've got to win two out of three (or three out of five) games to claim victory.

Your computer rates you after each match, so you can compare your mastery of the game with that of other players. In the long run, you're trying to rack up points for your personal Ricochet Rating.

Get Ricochet now at your local dealer for your Atari, Apple or TRS-80. Suggested retail price: \$19.95.



Another Mind Toy  
From **EPYX**  
COMPUTER GAMES  
THINKERS PLAY



\* APPLE, ATARI and TRS-80 are trademarks of Apple Computer, Inc., Atari, Inc. and Tandy Corp., respectively.

© 1981, AUTOMATED SIMULATIONS, INC.  
P.O. Box 4247, Mountain View, CA 94040.



Figure 2.

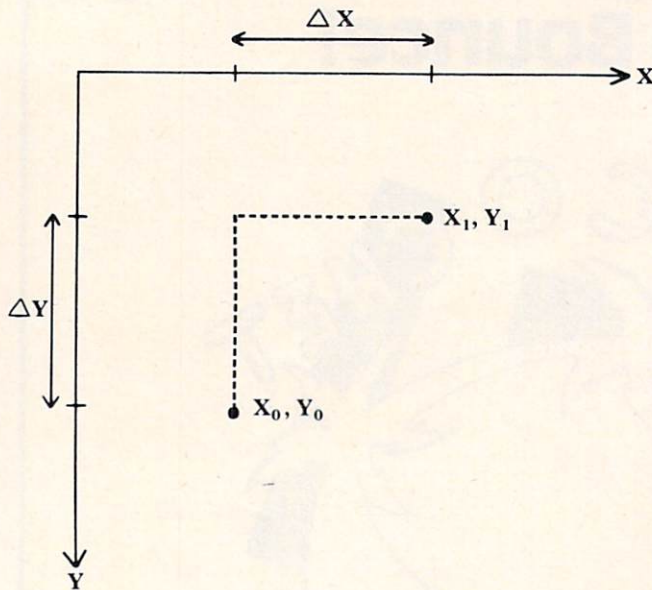


Figure 3.


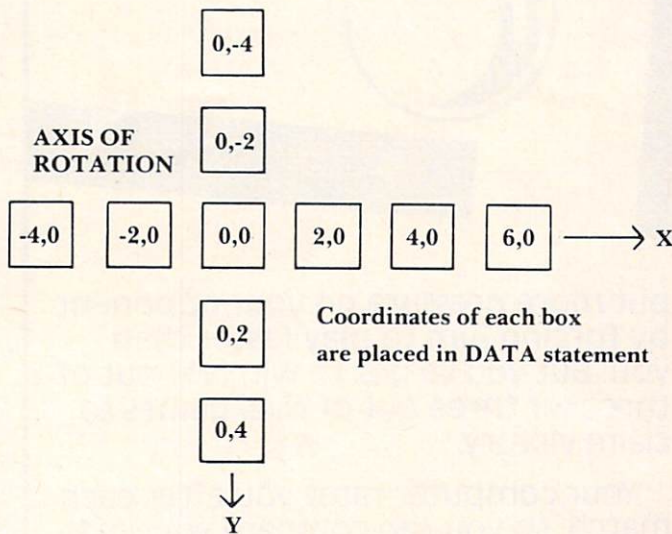


Figure 4.

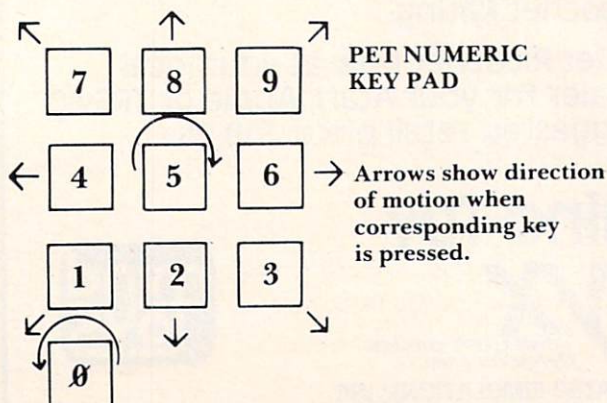

## Program 1. Commodore Microsoft Version

```

100 REM 2-D GRAPHICS SUBROUTINE DEMO
110 REM BY IAN PAULL
120 PRINT"{CLEAR}":REM CLEAR SCREEN
130 DIM XP(10),YP(10):REM ENLARGE FOR MORE ~
    POINTS
140 REM INITIALIZE
150 POKE 59468,12:REM PUTS PET IN STANDARD ~
    CHARACTER MODE
160 NP=10:SS=32768:SE=33767:RL=40:AX=0:AY=0

170 REM NP=NUMBER OF POINTS; SS=SCREEN STAR
    T ADDRESS; SE=SCREEN END ADDRESS
180 REM RL=ROW LENGTH; AX,AY=ACCUMULATED X ~
    AND Y VALUES (NET XLATION SO FAR)
190 FOR KZ=1 TO NP:REM READ FIGURE COORDS
200 READ XP(KZ),YP(KZ)
210 NEXT KZ
220 REM DATA BELOW ARE FIGURE COORDS. FORMA
    T FOR EACH POINT IS X,Y
230 DATA-4,0,-2,0,0,0,2,0,4,0,6,0,0,4,0,2,0
    ,-2,0,-4
240 GOSUB 1060:REM PLOT
250 GETA$:IFA$=""THEN250:REM LOOPS UNTIL AN
    INPUT
260 A=VAL(A$)+1:REM CONVERTS STRING INPUT T
    O NUMERIC VALUE
270 ON A GOTO 290,370,420,470,520,330,570,6
    20,670,720
280 REM CCW ROTATE, FIXED ANGLE 15 DEG
290 IA=-(15/360)*(2*):REM =PI
300 GOSUB 780:REM ROTATE ROUTINE
310 GOTO 250
320 REM CW ROTATE, FIXED ANGLE 15 DEG
330 IA=(15/360)*(2*):REM =PI
340 GOSUB 780:REM ROTATE ROUTINE
350 GOTO 250
360 REM XLATE DOWN AND LEFT
370 XT=-1
380 YT=1
390 GOSUB 970:REM XLATE ROUTINE
400 GOTO 250
410 REM XLATE DOWN
420 XT=0
430 YT=1
440 GOSUB 970:REM XLATE ROUTINE
450 GOTO 250
460 REM XLATE DOWN AND RIGHT
470 XT=1
480 YT=1
490 GOSUB 970:REM XLATE ROUTINE
500 GOTO 250
510 REM XLATE TO LEFT
520 XT=-1
530 YT=0
540 GOSUB 970
550 GOTO 250
560 REM XLATE TO RIGHT
570 XT=1
580 YT=0
590 GOSUB 970
600 GOTO 250
610 REM XLATE UP AND LEFT
620 XT=-1
630 YT=-1
640 GOSUB 970
650 GOTO 250
660 REM XLATE UP
670 XT=0

```



```

680 YT=-1
690 GOSUB 970
700 GOTO 250
710 REM XLATE UP AND TO RIGHT
720 XT=1
730 YT=-1
740 GOSUB 970
750 GOTO 250
760 REM ROTATE CONTROL
770 REM FIRST, XLATE TO ORIGIN
780 FOR KZ=1 TO NP
790 XP(KZ)=XP(KZ)-AX
800 YP(KZ)=YP(KZ)-AY
810 NEXT KZ
820 REM DO ROTATION ABOUT 0,0
830 SA=SIN(IA):CA=COS(IA)
840 FOR KZ=1 TO NP
850 KN=XP(KZ)
860 XP(KZ)=KN*CA-YP(KZ)*SA
870 YP(KZ)=KN*SA+YP(KZ)*CA
880 NEXT KZ
890 REM XLATE BACK
900 FOR KZ=1 TO NP
910 XP(KZ)=XP(KZ)+AX
920 YP(KZ)=YP(KZ)+AY
930 NEXT KZ
940 GOSUB 1060: REM PLOT
950 RETURN
960 REM XLATE
970 AX=AX+XT:REM KEEP TRACK OF ABS X
980 AY=AY+YT:REM KEEP TRACK OF ABS Y
990 FOR KZ=1 TO NP:REM SHIFT X AND Y
1000 XP(KZ)=XP(KZ)+XT
1010 YP(KZ)=YP(KZ)+YT
1020 NEXT KZ
1030 GOSUB 1060: REM PLOT
1040 RETURN
1050 REM PLOT
1060 PRINT"{CLEAR}":REM CLR SCREEN
1070 FOR KZ=1 TO NP:REM FIGURE ADDRESSES TO
    BE POKED
1080 LOC=(SS+RL*INT(YP(KZ)+.5)+INT(XP(KZ)+.5
    ))
1090 IF LOC<SS OR LOC>SE THEN NEXT KZ:RETURN
    :REM DON'T POKE OFF SCREEN
1100 POKE LOC,160:REM LIGHT CHARACTER CELL A
    T SCREEN LOCATION 'LOC'
1110 NEXT KZ
1120 RETURN
1130 END

```

### Program 2. Atari Version

```

110 OPEN #1,4,0,"K"
120 GRAPHICS 3+16
130 DIM XP(10),YP(10):REM ENLARGE DIMENS
    ION FOR MORE POINTS
140 REM INITIALIZE
160 AX=0:AY=0:NP=10:PI=3.1415927
170 REM NP=NUMBER OF POINTS
190 FOR KZ=1 TO NP
200 READ T:XP(KZ)=T:READ T:YP(KZ)=T
210 NEXT KZ
220 REM DATA BELOW ARE FIGURE COORDS.
225 REM FORM FOR EACH POINT IS X,Y

```

```


230 DATA -4,0,-2,0,0,0,2,0,4,0,6,0,0,4,0
    ,2,0,-2,0,-4
240 GOSUB 1060:REM PLOT
250 IF PEEK(764)<255 THEN 300
260 ST=STICK(0):IF ST=15 THEN 250
270 XT=-(ST>8 AND ST<12)+(ST>4 AND ST<8)
280 YT=(ST=9 OR ST=5 OR ST=13)-(ST=10 OR
    ST=14 OR ST=6)
290 GOSUB 970:REM XLATE ROUTINE
295 GOTO 250
300 GET #1,A
310 IF A<>60 AND A<>62 THEN 250
320 IA=(-(A=60)+(A=62))*(15/360)*(2*PI)
330 GOSUB 780:REM ROTATE ROUTINE
340 GOTO 250
760 REM ROTATE CONTROL
770 REM FIRST, XLATE TO ORIGIN
780 FOR KZ=1 TO NP
790 XP(KZ)=XP(KZ)-AX
800 YP(KZ)=YP(KZ)-AY
810 NEXT KZ
820 REM DO ROTATION ABOUT 0,0
830 SA=SIN(IA):CA=COS(IA)
840 FOR KZ=1 TO NP
850 KN=XP(KZ)
860 XP(KZ)=KN*CA-YP(KZ)*SA
870 YP(KZ)=KN*SA+YP(KZ)*CA
880 NEXT KZ
890 REM XLATE BACK
900 FOR KZ=1 TO NP
910 XP(KZ)=XP(KZ)+AX
920 YP(KZ)=YP(KZ)+AY
930 NEXT KZ
940 GOSUB 1060:REM PLOT
950 RETURN
960 REM XLATE
970 AX=AX+XT:REM KEEP TRACK OF ABS X
980 AY=AY+YT:REM KEEP TRACK OF ABS Y
990 FOR KZ=1 TO NP:REM SHIFT X AND Y
1000 XP(KZ)=XP(KZ)+XT
1010 YP(KZ)=YP(KZ)+YT
1020 NEXT KZ
1030 GOSUB 1060:REM PLOT
1040 RETURN
1050 REM PLOT
1060 GRAPHICS 3+16:SETCOLOR 0,0,10:COLOR
    1
1070 FOR KZ=1 TO NP
1080 TRAP 1090
1085 PLOT XP(KZ),YP(KZ):TRAP 40000
1090 NEXT KZ
1100 RETURN
1130 END

```



## A Monthly Column

# The World Inside The Computer

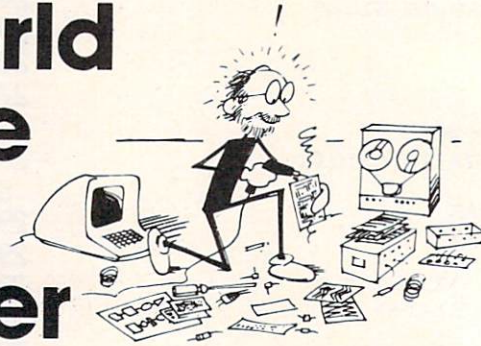

Fred D'Ignazio is a computer enthusiast and author of several books on computers for young people. He is presently working on two major projects: he is writing a series of books on how to create graphics-and-sound adventure games. He is also working on a computer mystery-and-adventure series for young people. As the father of two young children, Fred has become concerned with introducing the computer to children as a wonderful tool rather than as a forbidding electronic device.


## The Computer Playground

Fred D'Ignazio  
Associate Editor

Eric ran over to the royal-blue sliding board, standing like a petrified monolith in the corner of his school playground. He looked up, searching

for the top of the sliding board. It was lost somewhere in the drifting clouds. The metal rail glistened in the sun, resembling the arm of a giant crane. The dirty blue stairs seemed to go up and up, maybe ending somewhere in heaven.

Although Eric was only three, he confidently grabbed onto the sliding board's steel handrail and began clinging the steep metal stairs. After he got to the top, Eric stopped, panted like a puppy, and surveyed his playmates, screeching and dashing around the playground. His friends

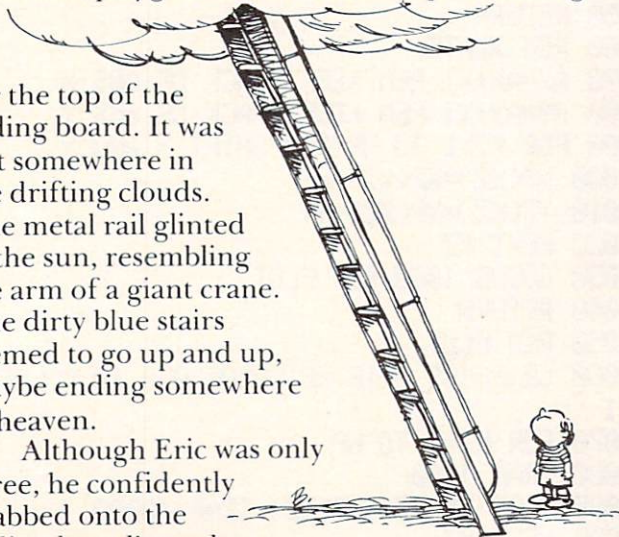

looked strangely small, since Eric was so high up.

Eric stretched on his tip-toes and grabbed the chinning bar above the sliding board. He swung back and forth wildly.

"Karla, watch!" he yelled to his teacher.

Halfway through each arc, he smacked his feet against the top of the sliding board. Loud percussion noises echoed across the playground.

Suddenly, Eric let go and went flying down the sliding board. He slid dizzily round and round the board's corkscrew spirals. He flew off the end of the board, sailed across a mud puddle, and demolished a sand castle being built by two of his friends. His friends went crying to their teacher. Eric howled. When he landed on the sandpile, he had scraped his bottom on the tip of an upturned shovel.

Moments later, the two kids were at work on another sand castle, undisturbed about the prospect of new children falling from the sky.


Eric was far away, on the opposite side of the playground. His cheeks were splashed with gritty tears, and his ears were filled with sand, but he was smiling. He had a new project. He was crab crawling across the green-shingled roof of the school's playhouse, trying to work up his courage to jump into the old rowboat beached under the house's eaves. Eric thought maybe he could do it. After all, what's jumping off a roof to a three-year-old who can climb to heaven and drop from clouds and clobber castles?

### The Computer Alchemists

The dark-suited men were frowning and fiercely



# Micro-Ed is EXPANDING!

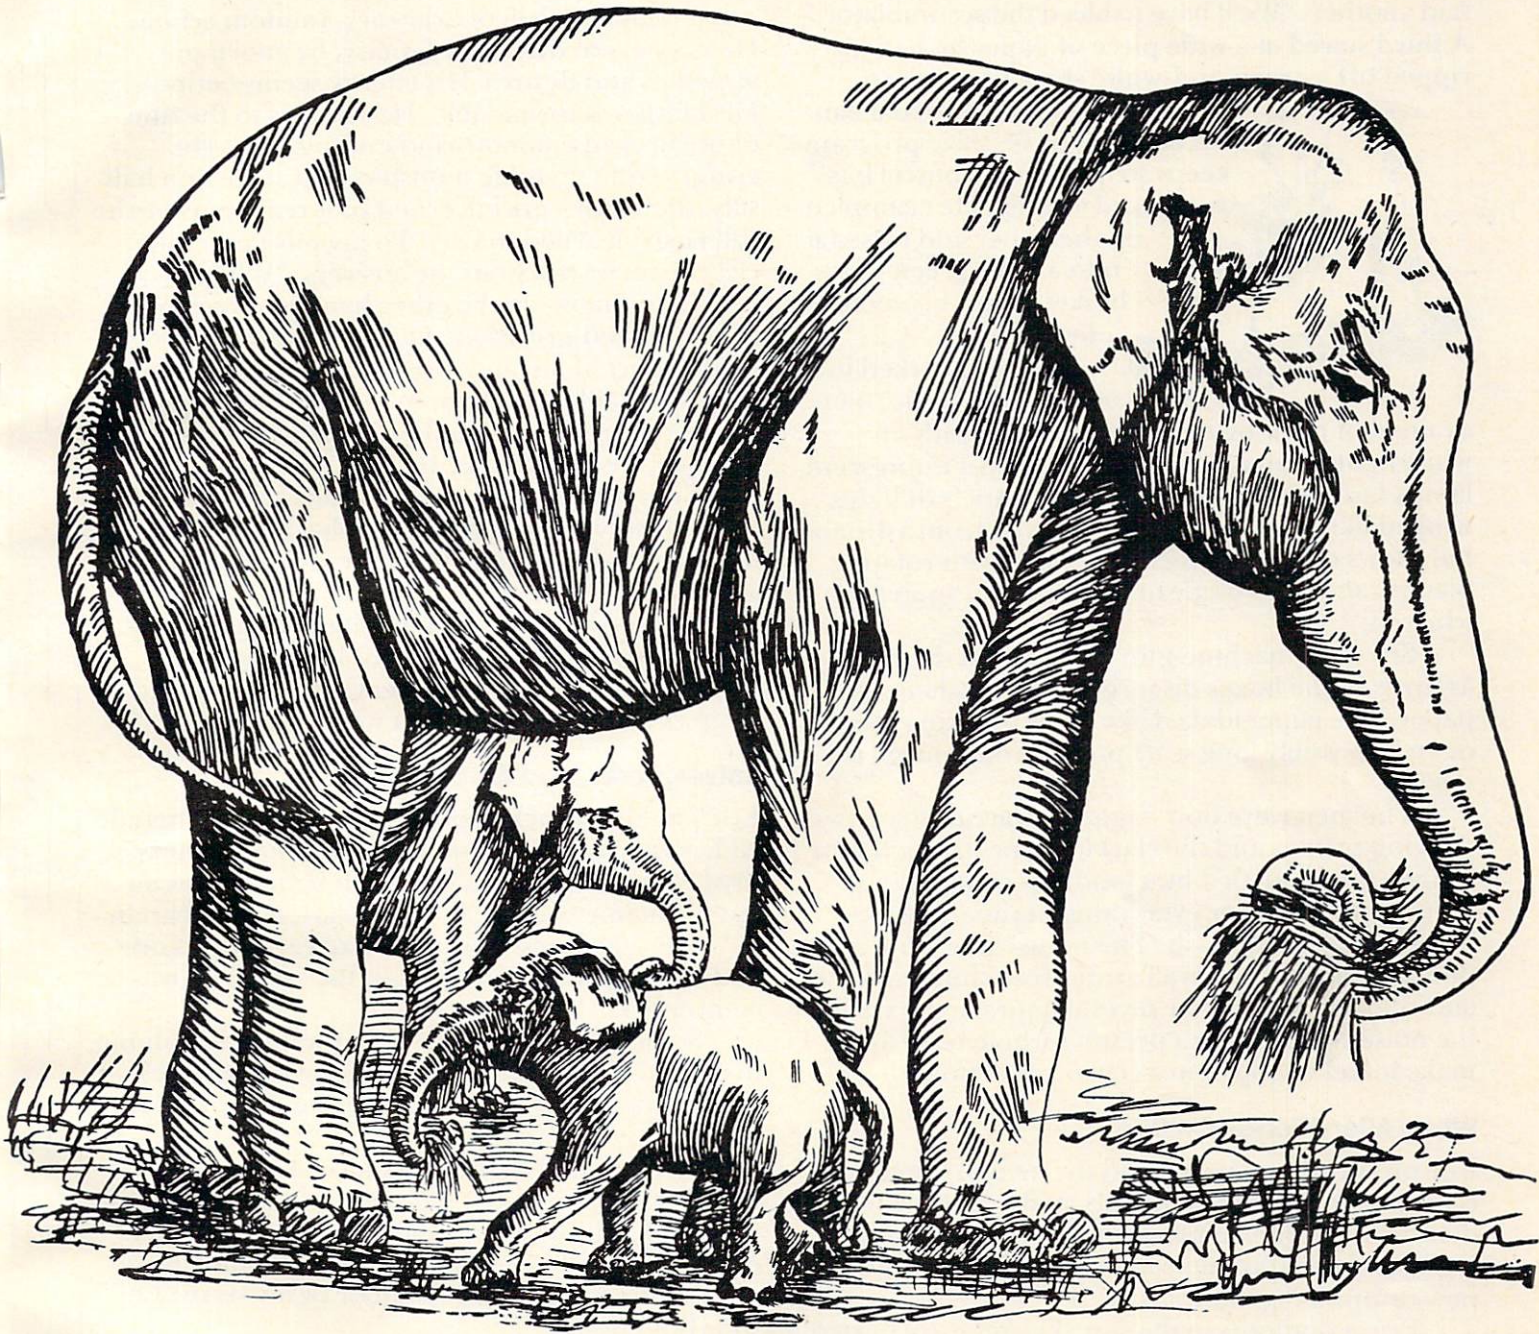

Send for free educational catalogs \*

\* Specify: Pet • Vic • TI • Apple • TRS-80  
• The New Commodore 64 color computer

you can telephone us  
at

612-926-2292


Micro-Ed, Inc.

PO Box 24156

Minneapolis, MN 55424



intent. They spoke a cryptic, arcane language. "Disk error in sector five," said one. "Uh-huh," said another. "We'll have to bleed the accumulator." A third stared at a wide piece of paper he had just ripped off a green-and-white sheet of paper so

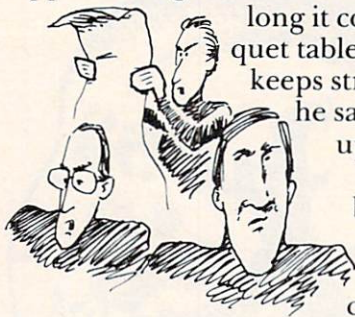

long it could have covered a banquet table." The OS slave program keeps stripping the control bits!" he said angrily. He crumpled up the paper and tossed it into a navy-green wastebasket under his spotless desk.

The men worked in a cool, almost Arctic room,

drained of color by the overwhelming bath of white light emanating from the banks of fluorescent lamps fastened to the ceiling. Tall panels of lights winked like a city's streetlights viewed from a distant hill. Rows of metal boxes were filled with rotating platters and reels of gleaming tape that spun and whirred.

Staccato, machine-gun noises filled the room, as three of the boxes disgorged endless sheets of paper. The paper looked like a giant, jerking tongue or an impossibly long scarf pulled from a magician's sleeve.

The men were only vaguely aware of the tap-dancing printer and the clacking tape drives. These sounds were muffled by a loud whooshing noise that seemed to cover everything in the room like an invisible volcanic ash. The noise came from air pouring through the wall grates from huge cooling and filtering fans. After several hours in the room, the noise could numb a person's whole body and make it feel wrapped in a cocoon of cotton candy.

### When Alien Worlds Collide

Eric on the sliding board and the men in the cotton-candy room seem to be worlds apart. Eric is a toddler having fun on a playground. The men are high-level programmers and analysts designing a new computer system.

Eric is outdoors in the sun. The men are buried deep in the bowels of the Pentagon, in a guarded, windowless computer room.

Eric is covered with dirt and sand, and sweating from his exertions. The men are covered with plastic badges that proclaim their dedication and their utter seriousness about their craft. Dust and dirt are not permitted in their room. Only, sweat — cold sweat.

I used to be one of those men. And Eric is my son. Now Eric's world and the world where I once worked have intersected, like alien worlds colliding.

When did the collision take place? It occurred when I first turned Eric loose on my home

computer.

The shock was antic. It was also profound.

Eric is a person of arbitrary, random action. He is a person driven by fantasy, by enormous appetites and desires. His energy seems boundless. His temper is formidable. He vibrates to the tune of unchecked emotions and enthusiasms. He cringes from invisible monsters that scare him half silly, then walks unconcerned past real monsters he still hasn't learned to fear. To my most careful, clearly put instructions, he answers, "What?"

Computers, on the other hand, are creatures of reason and precision. They are powerful tools, the product of advanced technology. Computers are predictable. If we put in the right command, we get the right answer. Or, if we feed the computer garbage, we get garbage back.

Computers and three-year-olds seem worlds apart. Just imagine a computer that acted like a three-year-old. Or imagine a three-year-old that acted like a computer.

Three-year-olds are hardy and tough. Computers are finicky and delicate. Three-year-olds revel in dirt, mud, and grime. Computers like to be clean. They work better that way.

### Knives, Forks, And Attila The Hun

Eric has lots of nicknames: Little Hulk, Commando Kid, Tank, and the Lone Ranger, among others. My favorite, though, is Attila the Hun. This is an apt nickname because Eric, at heart, is a barbarian.

Can a barbarian ever learn to eat with a knife and fork? Can he be trusted in the same room as a computer?

Sometime, over a year ago, I was on the phone in the kitchen talking with someone in California. I was trying to obtain some photos for a book I was writing.

Eric was home with me all day, back then, while his mommy went to work and his sister went to school. I didn't worry about Eric while I talked on the phone, since Eric was busy crayoning on a piece of scrap paper on the floor of my study. Or so I thought.

I was deeply engrossed in the conversation, trying hard to visualize the Californian's robot turtle, which I had never seen. Then I happened to look up, and my heart stopped.

There, on the kitchen floor, Eric was hard at work, creating a flagstone sidewalk made out of my floppy disks. My *floppy disks*. I had stored all my books and programs on those disks. Eric must have known how important the disks were because he had carefully removed each disk from its protective case and gently dropped it on the floor. He had placed all the disks in a neat row that ended at the refrigerator. Now that he was finished building his



# QUALITY SOFTWARE FOR TRS-80 COLOR AND OSI



**QUEST** — A NEW IDEA IN ADVENTURE GAMES! Different from all the others. Quest is played on a computer generated map of Alesia. Your job is to gather men and supplies by combat, bargaining, exploration of ruins and temples and outright banditry. When your force is strong enough, you attack the Citadel of Moorlock in a life or death battle to the finish. Playable in 2 to 5 hours, this one is different every time.  
16K COLOR-80 OR TRS-80 or 12KOSI.  
\$14.95.


**BASIC THAT ZOOMS!!**  
**AT LAST AN AFFORDABLE COMPILER FOR OSI AND TRS-80 COLOR MACHINES!!!** The compiler allows you to write your programs in easy BASIC and then automatically generates a machine code equivalent that runs 50 to 150 times faster.

It does have some limitations. It takes at least 8K of RAM to run the compiler and it does only support a subset of BASIC—about 20 commands including FOR, NEXT, END, GOSUB, GOTO, RETURN, END, PRINT, STOP, USR(X), PEEK, POKE, \*, /, +, -, X, X, =, VARIABLE NAMES A-Z, A SUBSCRIPTED VARIABLE, and INTEGER NUMBERS FROM 0 - 64K. **TINY COMPILER** is written in BASIC. It generates native, relocatable 6502 or 6809 code. It comes with a 20 page manual and can be modified or augmented by the user. \$24.95 on tape or disk for OSI or TRS-80 Color.

**LABYRINTH** — 16K EXTENDED COLOR BASIC — With amazing 3D graphics, you fight your way through a maze facing real time monsters. The graphics are real enough to cause claustrophobia. The most realistic game that I have ever seen on either system. \$14.95. (8K on OSI)



**VENTURER!**—A fast action all machine code Arcade game that feels like an adventure. Go berserk as you sneak past the **DREADED HALL MONSTERS** to gather treasure in room after room, killing the **NASTIES** as you go. Great color, high res graphics, sound and Joystick game for the TRS-80 Color or OSI machines. (black and white and silent on OSI.) Tape only. \$19.95.

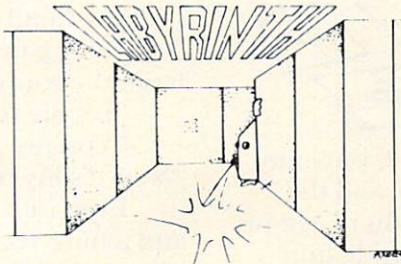

Send \$1.00 for complete catalog of Games, Utilities & Business Software.



**AARDVARK - 80**

2352 S. Commerce, Walled Lake, MI 48088

(313) 669-3110



TRS 80 COLOR

OSI

LET COMPUTERMAT TURN YOUR VIC-PET-CBM INTO A HOME ARCADE

## VIC SOFTWARE PET/CBM

**ALIEN INVASION** — Arcade style excitement for your VIC. Look out here they come. Aliens are descending from the sky. Move your laser into position and defend the earth. The attacks are unending — can you survive or will Vader rule the galaxy. Many extras on this one. 20 levels of play... \$9.95

**CATTLE-ROUNDUP** — The cows are loose in the maze. You have 2 minutes to get each cow back into the corral. You can push, coax and call the cows. Some cows are not very smart and some are very stubborn. You will have to help them. Be careful that you don't leave the corral gate open. Color graphics and sound. Eight levels of play and a time limit. \$9.95

**HEAD ON** — Your car moves forward around the race track. You can move up, down, right and left. Try to score points by running over the dots on the track. Watch out for the crusher — if you crash you lose a car. Four cars and bonus levels. Full color graphics and sound. Fast action and very addicting. 9 levels of play. \$9.95

**SNAKEOUT** — Blocks appear on the screen at random. You move up, down, right and left and try to move your snake over the blocks. Each block that you get raises your score. Keep building your score but watch out because the escape routes keep getting smaller. Time limit, color graphics and sound. 3 games on this cassette. Snakeout 2 player Snakeout and Trapper. 9 Levels of Play. \$9.95

**TARGET COMMAND** — Move your laser into position and get ready for some quick action. Different types of missiles are dropping. How many can you shoot down. They all travel at different speeds and different levels. You must be fast on the trigger to get them all. Time limit, bonus points and very addicting. Color graphics and sound. Arcade style fun. 10 levels. \$9.95

**BOMB'S AWAY** — Can you stop him? The crazy bomber drops the bombs from the top of the screen. You get 3 buckets to catch them. Before you know it bombs are falling so fast you wonder when he will stop. Just when you think you have him under control your bucket gets smaller. Is your hand quicker than your eye?

Cass. 8K..... \$9.95

**ASTEROIDZ** — Its your ship vs. a swarm of killer gammaroidz. You are on a collision course and must destroy them before they blast you into the next galaxy. Four levels of play. Has hyperspace keys that move you around. Arcade style entertainment at its finest. Great graphics and sound.

Cass. 8K..... \$9.95

**MUNCHMAN** — How many dots can you cover? It's you against the computer munchers ZIP and ZAP. Can you clear the maze first or will they get you? Number keys move you up, down, right and left. GREAT GRAPHICS AND SOUND.

Cass. 8K..... \$9.95

**TARGET COMMAND** — Its you against a barrage of enemy lazars that are aimed at your ammo dumps. Sight in on the targets and score as many hits as you dare. As your skill increases so does the the difficulty — (5 levels to select). This is an arcade style game with great graphics and sound effects. A must for your PET CBM.

Cass. 8K..... \$9.95

VIC AND PET ARE TRADEMARKS OF CBM

ALL VIC SOFTWARE RUNS IN  
STANDARD 3K VIC.

PET/CBM SOFTWARE IS DESIGNED TO RUN ON  
40 CHR SCREEN AND STANDARD 8K.

COMPUTERMAT • BOX 1664, DEPT C  
LAKE HAVASU CITY, ARIZONA 86403

WRITE FOR FREE CATALOG OF VIC PET SOFTWARE  
PLEASE ADD \$1.00 PER ORDER FOR SHIPPING



sidewalk, he began to walk on the disks. Then he started to hop! "Eric!" I screamed. I gagged something inarticulate to the person at the other end of the phone and hung up. I charged across the kitchen floor. Eric fled to his bedroom.

I knelt beside the floppy disks. I was in shock. I was certain that the information they contained was squished, trampled, ruined. Several of the disks were covered with small dusty footprints.

Did I flog Eric?  
Was my information destroyed?

Happily, no.

But that was only the first of a brief, but emotional, series of incidents involving Eric and the floppy disks. The problem was he couldn't keep his hands off them. Something perverse inside him told him he had me by the throat. All he had to do was point to a disk, and I flew into a tizzy. Every time I left my study, he would sneak in and rob several disks and hide them under his bed. For awhile, things got so bad, I began sealing my disk drawer shut with strapping tape, just to thwart Eric.

Then I had an inspiration. I gave Eric a disk of his own. It was an old disk that was no longer reliable. I wrote Eric's name on the disk in big green, magic-marker letters. I wrapped the disk up and gave it to him as a present.

He was delighted. He still keeps the disk in a place of honor on his bookshelf.

And he stopped robbing my disks.

### Now You See It, Now You Don't!

I have two kids. Eric, of course, and Catie, who is six.

I have several computers, and I have turned my study into a videogame arcade and a computer programming workshop for neighborhood kids.

The kids can use all the computers in the room except one, my writing computer. That computer is supposed to be off limits.

One day, while the kids were banging away at the other computers, I got up from my computer to stretch and make a snack in the kitchen. On my way back into the room, five minutes later, I happened to glance at my computer screen. Before I left, the screen had been filled with words – a section of a new book chapter I was writing. Now the screen was empty.

I panicked. I ran into the room yelling at the kids. "Who messed with my computer?" I hollered.

"My chapter's gone. I've lost hours of work."

Then I checked the computer. I was sure it had been turned off, but it was still on. I did some more checking. Finally, I noticed the screen brightness switch. I turned it. Magically, my words reappeared. My chapter was untouched. Nothing was lost.

Just then, a very contrite five-year-old boy came up to me with his head drooping. "I did it, Mr. D'Ignazio," he said. "I didn't mean to kill your computer."

### Joystick Tug Of War

Another time, I was in the kitchen eating dinner with my family. Several children were still playing computer games in the study. All of a sudden, from the study came shouts and scuffling noises.

"It's my turn to blast them!" one child cried.

"You just blasted them!" cried another child.

"Now it's my turn!"

I ran into the study and found a six-year-old and a nine-year-old (brother and sister) doing their best to rip two joysticks out of a computer.

"What are you two doing?" I shouted.

The kids turned toward me. Frightened, they dropped their joysticks. One broke open on the study's hardwood floor.

"Out! Out!" I yelled.

They dashed past me and ran out the front door of the house.

### How Come This Doesn't Fit?

Another time, I was in the kitchen preparing dinner for my family. It was close to five-thirty, and my wife, Janet, would be home soon from the office. As usual, the study was filled with kids playing with the computers.

I was slicing up some carrots for the salad, when I heard strange grunting noises coming from the study. Were the kids in there wrestling among the computers?


Hurriedly I dried my hands and went to see what was the matter.

When I got to the study door, I couldn't believe what I saw. A five-year-old boy was standing in front of one of the floppy disk drives. That was okay. I had taught all the kids – even Eric – how to insert disks properly into the drive.

But this kid wasn't inserting a disk. He was trying to shove a game cartridge into the drive. He was trying to squeeze an inch-thick plastic box into a hole designed for a disk only a sixteenth of an inch thick. He grunted loudly because he was trying so hard. He knew it was a tough thing to do, and he was giving it his best shot.

### Strategies For Survival

Given these tales of abused and violated computers,

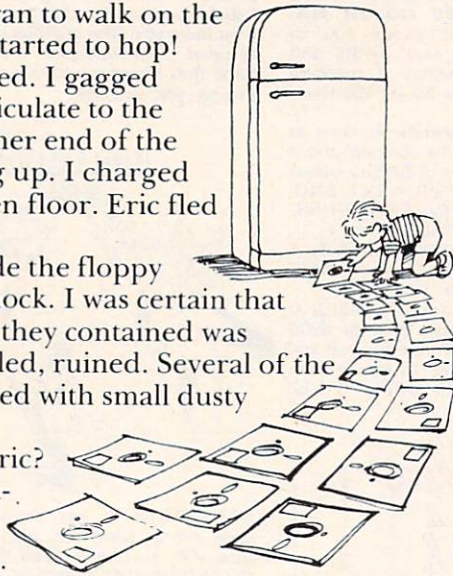



what is the best strategy for mixing young people and computers?

You could put a lock on the computer room door until the kids all turn sixteen. Or until they leave home.

You could keep the computer in the car trunk and only bring it in the house after the kids are asleep.


You could even fortify the computer, beef it up, and make it indestructible, the way the military does with computers onboard tanks, guided missiles, and submarines.

You could do these things, but I would advise against it. In their place, I would advise a "Computer Orientation Session," followed by frequent "refresher" courses. I would also recommend a few simple precautions. And trust — lots of trust.

Based on my experience, I know that even toddlers can be taught to use computers properly.

Sure, there are lapses. (Oh, boy, are there lapses.) But, for the most part, Eric and his little friends do an amazing job with the computers. They turn them on and off. They adjust the TV screen. They insert and remove disks and cartridges, even tapes. They know how to call up programs and operate the keyboard, joysticks, and other controls.

But they must be taught first. You need to sit them down and go over the "etiquette" of using a computer. Compare it to the family pet. You shouldn't pull its tail or try to ride on it. It wouldn't like that.

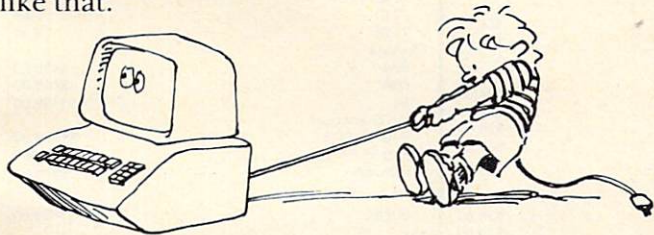

Instead, you need to be gentle with it and take care of it. If you do the right things, it will be nice to you and give you pleasure.

Frequent drills on specific rules help a lot, here.

It would help if you give the kids some responsibilities for the computer's care that are just their own. Like keeping the keyboard free of cookie crumbs. Keeping the screen wiped clean of fingerprints and all sorts of unmentionable objects. Or reporting any irregularities such as wires in the wrong place, or anything that looks dangerous.

Remind the kids frequently that computers run on electricity, and that electricity, like fire, can serve them or hurt them.

Also, if you can afford it, give them their own floppy disk, cartridge, or tape. Help them store their favorite programs and games. Give them a

small case to store their printouts, game instructions, and other computer-related materials. This way, the computer will become partly theirs. As its owners, they will try harder to care for the computer and protect it.

The following precautions, like the advice above, are just common sense. For example, I learned to put rugs on my study floor. Then, when computer objects dropped, there was a smaller chance that they'd actually break.

Also, back up *all* your important programs and files. Then keep those backup copies in your office, your bedroom, or in a locked safe. I can tell you, it's a lot easier to keep your cool when your child puts your floppy disk in the toaster, if you have a backup to the disk.

Keep all plugs, wires, and cables (anything electric) hidden and out of the line of fire. My kids could trip on a paper clip. How about yours?

Put all your equipment on top of large, sturdy tables, surrounded by lots of sturdy chairs.

Keep your cartridges, disks, tapes, manuals, programs, etc. organized. Make everything accessible to your children. But make them respect and adhere to your organization.

Teach them standards. All devices must be shut off after use. Disks and tapes must not be left out after use. Everything has a place. (Nag them about this rule, if only to preserve your sanity.)

Two last elements of strategy. First, try hard not to get upset when it looks like your kids have done something to the computer. Most of the time things are a lot better than they seem at first. We've had dozens of accidents with computers here at the "D'Ignazio Arcade," yet we've never broken a computer. At least not completely.

Second, don't push your kids to use the computers. Your three-year-old doesn't have to use educational programs to benefit from the computer. Your six-year-old doesn't have to learn to program.

Just the exposure to computers is doing your kids a world of good. Just switching buttons off and on. Or typing letters and shapes on the keyboard and watching them appear on the screen.

If you make kids' computer time synonymous with drudgery, with work, with tension, or with pressure, the kids won't like computers.

Don't push the kids. Just open the door, and sit back and watch. Computers fascinate kids, and that fascination will motivate them to learn on their own.

And congratulate yourself on your accomplishment. You are bringing together two very different worlds. And the results? The results are anybody's guess.



# ATARI HOME COMPUTERS



**ATARI 800**  
 16K ... \$669  
 32K ... \$749  
 48K ... \$779

**ATARI 400**  
 16K ... \$329  
 32K ... \$419  
 48K ... \$519

410 Recorder	\$76.00
810 Disc Drive	\$449.00
822 Printer	\$269.00
825 Printer	\$629.00
830 Modem	\$159.00
820 Printer	\$269.00
850 Interface	\$169.00
New DOS 2 System	\$29.00
CX30 Paddle	\$18.00
CX40 Joy Stick	\$18.00

CX853 16K RAM	\$77.95
Microtek 16K RAM	\$64.95
Microtek 32K RAM	\$99.95
Ramdisk (128K)	\$429.95
Intec 48K Board	\$199.95
Intec 32K	\$99.95

All RAM prices good through July 1982 only

One year extended warranty	\$70.00
481 Entertainer	\$69.00
482 Educator	\$130.00
483 Programmer	\$49.00
484 Communicator	\$344.00

## ATARI HOME COMPUTER PROGRAMS

<b>HOME OFFICE</b>	
CX404 ATARI Word Processor	\$119.00
CX8102 Calculator	\$29.00
CX412 Dow Jones Investment Evaluator	\$99.00
CX4109 Graph II, Joystick optional	\$17.00
CX4104 Mailing List	\$20.00
CX4115 Mortgage & Loan Analysis	\$13.00
CX4103 Statistics 1	\$20.00
CX8107 Stock Analysis	\$20.00
CXL4015 TeleLink 1	\$23.00

<b>HOME STUDY</b>	
CX4101 An Invitation to Programming 1	\$20.00
CX4106 An Invitation to Programming 2	\$23.00
CX4117 An Invitation to Programming 3	\$23.00
CX4107 Biorhythm	\$13.00
Conversational Languages (ea.)	\$46.00
CX4121 Energy Czar	\$13.00
CX4114 European Countries & Capitals	\$13.00
CX4108 Hangman, Joystick optional	\$13.00
CX4102 Kingdom	\$13.00
CXL4007 Music Composer	\$34.00
CX4123 Scram, uses joystick	\$20.00
CX4112 Slates & Capitals	\$13.00
CX4110 Touch Typing	\$20.00


<b>HOME ENTERTAINMENT</b>	
<b>PAC MAN</b>	\$35.00
<b>CENTIPEDE</b>	\$35.00
<b>CAVERNS OF MARS</b>	\$32.00
CXL4013 Asteroids	\$29.00
CXL4004 Basketball	\$27.00
CX4105 Blackjack	\$13.00
CXL4009 Computer Chess	\$29.00
CXL4012 Missile Command	\$29.00
CXL4008 Space Invaders	\$29.00
CXL4011 Star Raiders	\$39.00
CXL4006 Super Breakout	\$29.00
CXL4010 3-D Tic-Tac-Toe	\$27.00
CXL4005 Video Easel	\$24.00

<b>PROGRAMMING LANGUAGES AND AIDS</b>	
CXL4003 Assembler Editor	\$47.00
CXL4002 ATARI BASIC	\$47.00
CX8126 ATARI Microsoft BASIC	\$70.00
CXL4018 PILOT	\$72.00
CX405 PILOT (Educational)	\$105.00

## ATARI PROGRAM EXCHANGE:

Eastern Front '41	\$25.50
Avalanche	\$15.50
Outlaw	\$15.50
747 Landing Simulation	\$15.50
Babel	\$15.50
Dog Daze	\$15.50
Downhill	\$15.50
Attack!	\$15.50
Blackjack-Casino	\$15.50
Reversi II	\$15.50
Domination	\$15.50
Solitaire	\$15.50
Disk Fixer	\$15.50
Supersort	\$15.50
Data Management	\$15.50
Chameleon	\$15.50
Instedit	\$15.50
Insomnia	\$15.50
My First Alphabet	\$25.50
Mapware	\$18.00
Number Blast	\$11.50
Family Cash Flow	\$15.50
Weekly Planner	\$15.50
Bowler's Data Base	\$13.00
Banner Generator	\$11.50
<b>Crystal Software</b>	
Bermuda Fantasy	\$26.00
Beneath Pyramids	\$20.00
Galactic Quest	\$26.00
House of Usher	\$20.00
Forgotten Island	\$26.00
Haunted Palace	\$33.00
Compumax (Acct. Rec., Gen. Ledger, Inventory, Payroll, ea.)	\$110.00
<b>Synapse</b>	
File Manager 800	\$69.95
Dodge Racer	\$19.00
Chicken	\$24.00
Slime	\$24.00
Nautilus	\$24.00
Disk Manager	\$24.00
Fort Apocalypse	\$24.00
Assembler	\$39.00
Protector	\$24.00
<b>EXPY (Automated Simulation)</b>	
Ricochet	\$14.50
Crush Crumble & Chomp	\$24.00
Star Warrior	\$29.00
Rescue at Rigel	\$24.00
Datstones	\$16.00
Invasion Orion	\$18.50
Mission Asteroid	\$22.00
<b>OnLine</b>	
Jaw Breaker	\$27.00
MouskATTACK	\$31.00
The Next Step	\$34.00
Softporn	\$27.00
Wizard & Princess	\$29.00
<b>Arcade Plus</b>	
Ghost Hunter (cassette)	\$24.00
Ghost Hunter (disk)	\$30.00
<b>K-Byte</b>	
K-BYTE Krazy Shoot Out (ROM)	\$39.00
K-DOS	\$69.00
Visicalc	\$179.00
Letterperfect (Word Processor)	\$109.00
Data Soft Textwizzard	\$89.00

## Texas Instruments



**TI-99/4A \$299**

PHA2100 R F Modulator	\$29.00
PHP 1600 Telephone Coupler	\$179.00
PHP 1200 Peripheral Expansion Box	\$199.00
PHP 1220 RS 232 Card	\$143.00
PHP 1240 Disk Controller	\$199.00
PHP 1250 Disk Drive	\$319.00
PHP 1100 Wired Remote Controllers (Pair)	\$31.00
PHP 1260 32K RAM	\$229.00
PHP Printer Solid State	\$319.00
PHM 3006 Home Financial Decisions	\$26.00
PHM 3013 Personal Record Keeping	\$43.00
PHD 5001 Mailing List	\$60.00
PHD 5021 Checkbook Manager	\$18.00
PHM 3008 Video Chess	\$60.00
PHM 3010 Physical Fitness	\$26.00
PHM 3009 Football	\$26.00
PHM 3018 Video Games I	\$26.00
PHM 3024 Indoor Soccer	\$26.00
PHM 3025 Mind Challengers	\$22.00
PHM 3031 The Attack	\$35.00
PHM 3032 Blast	\$22.00
PHM 3033 Blackjack and Poker	\$22.00
PHM 3034 Hustle	\$22.00
PHM 3036 Zero Zap	\$18.00
PHM 3037 Hangman	\$18.00
PHM 3038 Connect Four	\$18.00
PHM 3039 Yahtzee	\$22.00
Tombstone City 21st Century	\$34.00
Munch Man	\$34.00
T I INVADERS	\$34.00
CAR WARS	\$34.00

## Printers

Smith Carona TP1	\$699.00
Centronics 739-1	\$519.00
Centronics 739-3	\$619.00
Diablo 630 Special	\$1799.00
<b>Epson</b>	
MX80 w/Graftrax	\$449.00
MX80FT	Call
MX100	Call
<b>NEC</b>	
8023	\$549.00
7730	Call
7720	Call
7710	Call
<b>OkiData</b>	
82A	\$499.00
83A	\$749.00
84	\$1129.00
<b>Citoh Starwriter</b>	
F10-40 CPS	\$1469.00
F10-55 CPS	Call
Prowriter	\$479.00
<b>Talley</b>	
8024-L	\$1629.00
<b>IDS</b>	
Prism	\$Call
MPC Apple Parallel Board & Cable	\$69.00
2 Meter RS232-RS232	\$29.95

## Computer Covers

ATTRACTIVE DUST COVERS FOR YOUR COMPUTER AND DISK DRIVE.

Atari 400	\$6.99	Commodore VIC-20	\$6.99
Atari 800	\$6.99	Commodore 8032	\$14.99
Atari 810	\$6.99	Commodore	
All Atari Covers are		8050/4040	\$10.99
Beige.		All Commodore covers	
		are Royal Blue.	

Most software for Atari 400/800 available on cassette or disk.

# computer mail order west

CALL TOLL FREE


# 800-648-3311

Franco  
 Habla  
 Espanol

IN NEVADA, CALL (702) 588-5654

P.O. BOX 6689, STATE LINE, NEVADA 89449





## HP-85 \$1899

HP-86	call
HP-87	\$1769.00
HP-125	\$1999.00
HP-85 16K Memory Module	\$169.00
5 1/4" Dual Master Disc Drive	\$1769.00
Hard Disk w/Floppy	\$4349.00
Hard Disk	\$3440.00
"Sweet Lips" Plotter	\$1149.00
80 Column Printer	\$799.00
87 CP/M	\$399.00
87 128K Memory	\$610.00
87 Visicalc	\$205.00
HP-41CV Calculator	\$239.00
41C	\$189.00
11C	\$104.00
12C	\$114.00
34C	\$114.00
38C	\$114.00
HP-41 Printer	\$340.00
HPIL CALCULATOR PERIPHERALS	
IL Modulal	\$104.00
Digital Cassette	\$449.00
Printer/Plotter	\$419.00
Card Reader	\$164.00
Optical Wand	\$99.00

## NEC

8001-A	\$749.00
8031	\$749.00
8012	\$549.00
Accounts Receivable	\$295.00
Word Processing	\$395.00
General Accounting	\$295.00
Inventory Control	\$295.00
Job Cost	\$295.00

## Disks

Maxell	
MD I (box of 10)	\$36.00
MD II (box of 10)	\$46.00
MFD I (8")	\$44.00
MFD II (8" Double Density)	\$54.00
Syncom (box of 10)	\$29.00

## Apple

Call for availability and prices on all Apple computers and peripherals.

## Televideo

910	\$579.00
912C	\$699.00
920C	\$749.00
925C	\$749.00
950	\$939.00
Call for computers	
802	call
802H	call
816	call
806	call



## BUSINESS MACHINES

### SOFTWARE

Word Pro 5 Plus	\$319.00
Word Pro 4 Plus	\$299.00
Word Pro 3 Plus	\$199.00
Commodore Tax Package	\$589.00
Visicalc	\$179.00
Medical Billing	\$449.00
The Source	\$89.00
OZZ Information System	\$289.00
Dow Jones Portfolio	\$129.00
Pascal	\$239.00
Legal Time Accounting	\$449.00
Word Craft 80	\$289.00
Power	\$79.00
Socket-2-Me	\$20.00
Jinsam	\$Call
MAGIS	\$Call
CPA	\$Call
Real Estate Package	\$Call
The Manager	\$209.00
Softrom	\$129.00
BPI Inventory Control	\$319.00
BPI Job Costing	\$319.00
BPI Payroll	\$319.00
BPI General Ledger	\$329.00
Creative I SAM	\$79.00
Creative General Ledger	\$229.00
Creative Accounts Receivable	\$229.00
Creative Inventory	\$229.00



## CBM 8032 \$1039

4032	\$969.00
4016	\$769.00
8096 Upgrade Kit	\$369.00
Super Pet	\$1599.00
2031	\$529.00
8250 Doubled Sided Disk Drive	\$1699.00
5 Megabyte Hard Disk	\$2399.00
8050	\$1299.00
4040	\$969.00
8300 (Letter Quality)	\$1799.00
8023	\$769.00
4022	\$599.00
Pet to IEEE Cable	\$37.00
IEEE to IEEE Cable	\$46.00
Tractor Feed for 8300	\$240.00

## VIC 20 \$239

COMPLETE  
CALL FOR AVAILABILITY AND PRICE  
FOR NEW VIC-64

VIC 6 Pack Program	\$44.00
VIC 1530 Commodore Datasheet	\$69.00
VIC 1540 Disk Drive	\$499.00
VIC 1515 VIC Graphic Printer	\$339.00
VIC 1210 3K Memory Expander	\$32.00
VIC 110 8K Memory Expander	\$53.00
16K VIC Expansion	\$99.00
VIC 1011 RS232C Terminal Interface	\$43.00
VIC 1112 VIC IEEE-488 Interface	\$86.00
VIC 1211 VIC 20 Super Expander	\$53.00
VT 232 ViTerm I Terminal Emulator	\$9.00
VIC 1212 Programmers Aid Cartridge	\$45.00
VIC 1213 VICMON Machine Language Monitor	\$45.00
VIC 1901 VIC AVENGERS	\$23.00
VIC 1904 SUPERSLOT	\$23.00
VIC 1906 SUPER ALIEN	\$23.00
VIC 1907 SUPER LANDER	\$23.00
VIC 1908 DRAW POKER	\$23.00
VIC 1909 MIDNIGHT DRIVE	\$23.00



Terminal	\$13.00
Un Word	\$13.00
Grafix Menagerie	\$11.00
VIC PICS	\$15.00
Ticker Tape	\$13.00
Banner Headliner	\$13.00
RS 232	\$39.00
VT 106A Recreation Pack A	\$44.00
VT107A Home Calculation Pack A	\$44.00
VT 164 Programmable Character/Gamegraphics	\$12.00
Household Finance	\$27.00
VIC Games	\$19.00
VIC Home Inventory	\$13.00
VIC Rec/Ed II	\$13.00
VL101 Introduction to Computing	\$19.00
VL 102 Introduction to BASIC Programming	\$19.00
VM110 VIC 20 Programmers Reference Guide	\$15.00

In-stock items shipped same day you call. No risk, no deposit on C.O.D. orders. Pre-paid orders receive free shipping within the continental United States with no waiting period for certified checks or money orders. All prices shown are cash prices. Add 3% for Mastercard and Visa. NV and PA residents add sales tax. All items subject to availability and price change.

## Monitors

BMC 12" Green	\$85.00
Amdek	
300G	\$169
Color I	\$339
Color II	\$699
Color III	\$429
Ti 10" Color	\$349.00
Zenith 9 inch (Green)	\$119.00

## Modems

Hayes	
Smart	\$239.00
Chronograph	\$199.00
Micromodem II	\$279.00
Micromodem 100	\$309.00
Novation Auto	\$239.00
D Cat	\$169.00
Cat	\$159.00

Nev. & Pa. residents add sales tax.

# computer mail order east

CALL TOLL FREE **800-233-8950**

INTERNATIONAL CALLS AND IN PA. CALL (717) 327-9575  
477 E. THIRD ST., WILLIAMSPORT, PA 17701

Patricio  
Habla  
Español



With versions for the VIC and Atari computers, this program illustrates how to make games and learning programs easy for preschoolers to use.

# Answer Selection With Joysticks

Stephen Levy  
Bowie, MD

One of my major objectives in purchasing a computer was to create educational programs for my young son. Realizing that a preschool child might have difficulty using the keyboard, I decided that using the joystick to input responses was the answer. Not that learning to use the keyboard is not important, but if that is not the purpose of the program, it might get in the way and cause frustration.

Al Baker's two articles in *COMPUTE!'s First Book Of Atari* gave me ideas and the little extra push I needed.

The purpose of this educational program is to give a young child practice in deciding which of four words is different from the other three on the screen. The child uses the joystick to make his selection and is allowed as many tries as needed. Once the correct response is picked, a short explanation appears and the child can then decide whether to do another problem or to end the program. All this is done with the joystick.

The program is very straightforward. All data for problems are in lines 20 to 199, with even-numbered lines containing the words and explanations in the odd-numbered lines. I have included only four series of words (lines 20,22,24,26) so that the reader may add his own. You must adjust line 220 to equal the number of even-numbered data lines (total series of words); in my example there are only four.

**example: 220 Q=INT(RND(0)\*A)+10:RESTORE Q\*2**  
where A equals the number of problems.

Lines 210-215 randomly select the background colors.

Since my purpose is to demonstrate the use of the joystick in an educational program, I have not added any graphic displays, but I would suggest "dressing up" the program for use with young children in order to maintain their interest. Below

is an explanation of the program by line.

## Lines

- 5-10 Initialization.
- 20-27 Data for questions.
- 28-199 To be used for additional data for questions. Data placed as follows:  
Four choices, then joystick position of correct answer. In the order that they appear in data line. If the first answer is correct then the number should be, 14; second, 11; third, 7; fourth, 13.
- 200 Sets mode and turns off cursor.
- 210-215 Randomly selects background color and print.
- 220 Randomly selects data to be used. The number multiplied by RND(0) should be equal to the number of questions.
- 230-270 Reads data and positions words on screen.
- 300-350 Positions @ symbol in the direction of user's answer.
- 360 Checks for correct answer.
- 385-390 Clears @ from incorrect answer.
- 395 Gives user another try at the same question.
- 400-420 Reads and prints explanations on screen.
- 440-470 Gives user the option of another problem.


## Program 1. Atari Version

```

1 REM D:JOYSTICK
2 REM STEPHEN LEVY
3 REM 3511 MORLOCK LN, BOWIE, MD.20715
4 REM 301-464-2052
5 DIM Q1$(20),Q2$(20),Q3$(20),Q4$(20),E$(40),B$(1),C$(1),CLEAR$(1)
10 B$=" ":CLEAR$=CHR$(125):C$="@ "
15 GOTO 200
20 DATA APPLE,PEAR,HAT,ORANGE,7
21 DATA HAT IS NOT A FRUIT
22 DATA A,E,I,S,13
23 DATA 'S' IS NOT A VOWEL
24 DATA BLUE,GREEN,RED,SAD,13
25 DATA THESE WORDS ARE COLORS
26 DATA APE,APPLE,ATE,FUN,13
27 DATA THESE WORDS BEGIN WITH 'A'
200 GRAPHICS 2:POKE 752,1
210 C=RND(0)*16:SETCOLOR 1,9,2:SETCOLOR 4,C,8:SETCOLOR 2,11,8
215 SETCOLOR 0,C,1
220 Q=INT(RND(0)*4)+10:RESTORE Q*2
230 READ Q1$,Q2$,Q3$,Q4$,A
240 POSITION 10-INT((LEN(Q1$))/2),1:PRINT #6:Q1$
250 POSITION 10-INT((LEN(Q4$))/2),9:PRINT #6:Q4$
260 POSITION 14,5:PRINT #6:Q3$
270 POSITION 7-LEN(Q2$),5:PRINT #6:Q2$
280 PRINT :PRINT :PRINT "PUSH STICK IN THE DIRECTION OF"
```



# ARTWORX. IT'S A WHOLE NEW WORLD OF SOFTWARE.

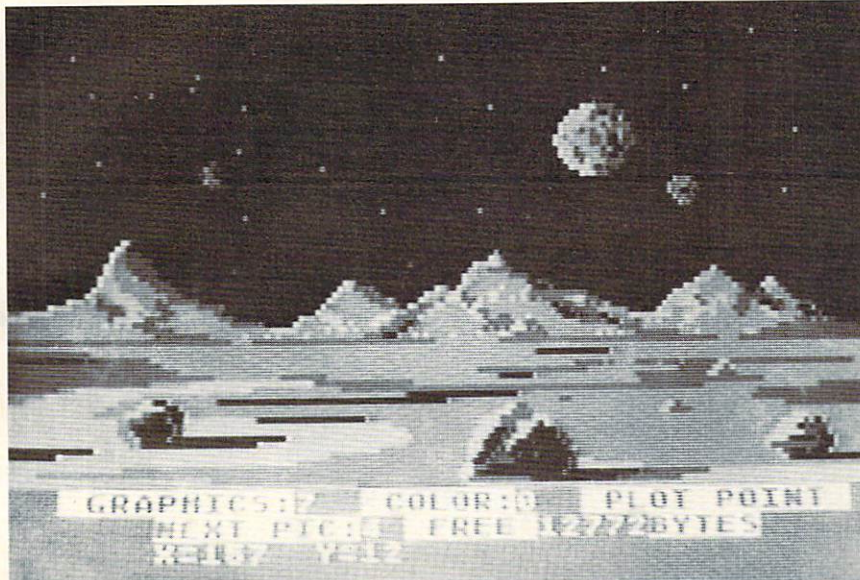

Scene from BETA FIGHTER during creation using the DRAWPIC graphics editor.

## HODGE PODGE: by Marsha Meredith

(Atari and Apple)

**NOW AVAILABLE FOR ATARI!!!** This captivating program is a marvelous learning device for children from 18 months to 6 years. HODGE PODGE consists of many cartoons, animation and songs which appear when any key on the computer is depressed. A must for any family containing young children.

**PRICE** ..... \$19.95 diskette

## PM EDITOR: by Dennis Zander (Atari, 16K)

Create your own fast action graphics game for the Atari 400 or 800 using its player missile graphics features. By using player data stored as strings, players can be moved or changed (for animation) at machine language speed. All this is done with string variables (PO\$(Y)=SHIP4). This program is designed to permit creation of up to 4 players on the screen, store them as string data and then immediately try them out in the demo game included in the program. Instructions for use in your own game are included. PM EDITOR was used to create the animated characters in ARTWORX RINGS OF THE EMPIRE and ENCOUNTER AT QUESTAR IV.

**PRICE** ..... \$29.95 cassette \$33.95 diskette

## ROCKET RAIDERS: by Richard Petersen (Atari 24K)

Defend your asteroid base against pulsar bombs, rockets, lasers, and the dreaded "stealth saucer" as aliens attempt to penetrate your protective force field. Precise target sighting allows you to fire at the enemy using magnetic impulse missiles to help protect your colony and its vital structures.

**PRICE** ..... \$19.95 cassette \$23.95 diskette

## FOREST FIRE TWO: by Richard Petersen (Atari 24K)

FOREST FIRE has been enhanced and now offers a two player mode for head to head competition to see who can survive, suffer the least damage and put their fire out first. User input now determines landscape, wind and weather conditions, offering limitless game variation. FOREST FIRE's excellent color graphics have been made even better, turning your computer into a super-detailed fire scanner.

**PRICE** ..... \$16.95 cassette \$20.95 diskette

## GIANT SLALOM: by Dennis Zander (Atari, 16K)

Bring the Winter Olympics to your computer anytime of the year! Use the joystick to guide your skier's path down a giant slalom course consisting of open and closed gates. Choose from three levels of difficulty. Take practice runs or compete against from two to eight additional skiers.

**PRICE** ..... \$15.95 cassette \$19.95 diskette

## THE PREDICTOR: by Thomas Barker

(Apple, Atari, TRS-80, North Star and CP/M (M-BASIC)) This is a complete package that covers least squares fitting of parameters for two or more variables. THE PREDICTOR can be used for predicting sales and process behavior, trend analysis, model building and many other uses calling for multilinear regression techniques. Each option in the program is prompted with simple YES/NO commands making it very easy to use.

**PRICE** ..... \$29.95 diskette

## PILOT: by Michael Piro (Atari, 16K)

Pilot your small airplane to a successful landing using both joysticks to control throttle and attack angle. PILOT produces a true perspective rendition of the runway, which is constantly changing. Select from two levels of pilot proficiency.

**PRICE** ..... \$16.95 cassette \$20.95 diskette

## TEACHER'S PET: by Arthur Walsh (Atari, Apple, TRS-80, PET, North Star and CP/M (MBASIC) systems)

This is an introduction to computers as well as a learning tool for the young computerist (ages 3-7). The program provides counting practice, letter-word recognition and three levels of math skills.

**PRICE** ..... \$14.95 cassette \$18.95 diskette

## MAIL LIST 3.0: (Atari, Apple and North Star)

The very popular MAIL LIST 2.2 has now been upgraded. Version 3.0 offers enhanced editing capabilities to complement the many other features which have made this program so popular. MAIL LIST is unique in its ability to store a maximum number of addresses on one diskette (typically between 1200 and 2500 names!). Entries can be retrieved by name, keyword(s) or by zip codes. They can be written to a printer or to another file for complete file management. The program produces 1, 2 or 3-up address labels and will sort by zip code (5 or 9 digits) or alphabetically (by last name). Files are easily merged and MAIL LIST will even find and delete duplicate entries! The address files created with MAIL LIST are completely compatible with ARTWORX FORM LETTER SYSTEM.

**PRICE** ..... \$49.95 diskette

## THE VAULTS OF ZURICH: by Felix and Greg Herlihy (Atari, 24K, PET)

Zurich is the banking capital of the world. The rich and powerful deposit their wealth in its famed impregnable vaults. But you, as a master thief, have dared to undertake the boldest heist of the century. You will journey down a maze of corridors and vaults, eluding the most sophisticated security system in the world. Your goal is to reach the Chairman's Chamber to steal the most treasured possession of all: THE OPEC OIL DEEDS!

**PRICE** ..... \$21.95 cassette \$25.95 diskette

## BRIDGE 2.0: by Arthur Walsh (Atari (24K), Apple TRS-80, PET, North Star and CP/M (MBASIC) systems)

Rated #1 by Creative Computing, BRIDGE 2.0 is the only program that allows you to both bid for the contract and play out the hand (on defense or offense!). Interesting hands may be replayed using the "duplicate" bridge feature. This is certainly an ideal way to finally learn to play bridge or to get into a game when no other (human) players are available.

**PRICE** ..... \$17.95 cassette \$21.95 diskette

## ENCOUNTER AT QUESTAR IV: by Douglas McFarland (Atari, 24K)

As helmsman of Rikar starship, you must defend Questar Sector IV from the dreaded Zentarians. Using your plasma beam, hyperspace engines and wits to avoid Zentarian mines and death phasers, you struggle to stay alive. This BASIC/Assembly level program has super sound, full player missile graphics and real time action.

**PRICE** ..... \$21.95 cassette \$25.95 diskette

## NEW PROGRAMS!

### HAZARD RUN: by Dennis Zander (Atari, 16K)

The sheriff has spotted you and you must make the treacherous run through Crooked Canyon past Bryan's Pond to the jump at Hazard Creek and safety. You can even put the joystick-controlled GEE LEE car upon two wheels to make it through some tight spots. A lead foot is not always the answer as you dodge trees, rocks and chickens in this nerve-racking game. HAZARD RUN employs full use of player/missile graphics, re-defined characters and fine scrolling techniques to provide loads of fast action and visual excitement.

**PRICE** ..... \$27.95 cassette \$31.95 diskette

### BETA FIGHTER: by Douglas McFarland (Atari, 16K)

See who will be the ace gunner in this action game set on a spectacular Martian landscape. BETA FIGHTER can be played with one or two players and uses player/missile graphics and delightful sound effects.

**PRICE** ..... \$16.95 cassette \$20.95 diskette

### DRAWPIC: by Dennis Zander (Atari 16K)

DRAWPIC provides the user with an unbelievably easy way to create screens in graphics modes 3-7. Just sit back with your joystick and use POINT PLOT, DRAW LINE, RUBBER BAND fill and COLOR SET to create beautiful images on your Atari. Full or partial screen images are saved as string data in the program and can be instantly recalled and combined into new images using machine language subroutines. These graphic images can be easily incorporated into your own programs. The images of HODGE PODGE and the landscape of BETA FIGHTER were made using DRAWPIC.

**PRICE** ..... \$29.95 cassette \$33.95 diskette

### POKER TOURNAY: by Edward Grau

(Atari 32K, Northstar)

You are entered in a high stakes Draw Poker Tournament facing six opponents including Lake-wood Louie, Shifty Pete and Dapper Dan. Each has his own style of play and of bluffing. POKER TOURNAY utilizes the Joker, has true table stakes play and each hand is played based on pot odds. The Atari version's graphics and sound are superb of course (programmed by Jerry White) making POKER TOURNAY the class program of its type.

**PRICE** ..... \$18.95 cassette \$22.95 diskette

## ORDERING INFORMATION

Call ARTWORX toll-free number to order direct:

800-828-6573

In New York, Alaska, Hawaii call:

(716) 425-2833

All orders are processed and shipped within 48 hours.

Shipping and handling charges:

Within North America: Add \$2.00

Outside North America: Add 10% (Air Mail)

New York State residents add 7% sales tax

Quantity Discounts:

Deduct 10% when ordering 3 or more programs

Ask for ARTWORX at your local computer store.

Write for FREE Catalogue listing more information about these and other quality ARTWORX programs.

# Artworx

150 North Main Street Fairport, NY 14450



```

290 PRINT :PRINT "      CORRECT ANSWER."
300 IF STICK(0)=15 THEN POSITION 10,5:PR
INT #6;C$:GOTO 300
310 IF STICK(0)<>15 THEN POSITION 10,5:P
RINT #6;B$
315 SOUND 0,90,10,10:FOR S1=1 TO 20:NEXT
S1
320 IF STICK(0)=14 THEN POSITION 10,3:PR
INT #6;C$
330 IF STICK(0)=11 THEN POSITION 8,5:PRI
NT #6;C$
335 SOUND 0,60,10,8:FOR S1=1 TO 20:NEXT
S1
340 IF STICK(0)=7 THEN POSITION 12,5:PRI
NT #6;C$
345 SOUND 0,0,0,0
350 IF STICK(0)=13 THEN POSITION 10,7:PR
INT #6;C$
360 IF STICK(0)=A THEN GOTO 400
370 PRINT CLEAR$:PRINT :PRINT "PLEASE TR
Y ANOTHER ANSWER"
372 FOR X=1 TO 100:NEXT X
375 FOR S1=1 TO 150:SOUND 0,200,10,8:NEX
T S1
380 FOR S1=1 TO 100:SOUND 0,230,10,8:NEX
T S1
381 SOUND 0,0,0,0
385 FOR X=3 TO 7 STEP 4:POSITION 10,X:PR
INT #6;B$:NEXT X
390 POSITION 8,5:PRINT #6;B$:POSITION 12
,5:PRINT #6;B$
395 GOTO 280
400 RESTORE (Q*2)+1
410 READ E$
420 PRINT CLEAR$;"GOOD, ";E$
425 FOR S2=1 TO 70:S3=INT(RND(0)*50)+50:
SOUND 0,S3,10,8:FOR S1=1 TO 7:NEXT S1
427 SOUND 0,0,0,0:NEXT S2
440 PRINT :PRINT "PRESS BUTTON FOR ANOTH
ER PROBLEM"
450 PRINT :PRINT "      PUSH STICK TO END
"
460 IF STRIG(0)=0 THEN GOTO 200
470 IF STICK(0)=15 THEN GOTO 460
480 PRINT :PRINT :PRINT "      G
AME OVER"
490 FOR X=1 TO 1000:NEXT X
500 GRAPHICS 0

```

```

23 DATA 'S' IS NOT A      VOWEL
24 DATA SAD,BLUE,GREEN,RED,-2
25 DATA THESE WORDS ARE COLORS
26 DATA APE,FUN,ATE,APPLE,-1
27 DATA THESE WORDS      BEGIN WITH 'A'
200 PRINT"{CLEAR}"
210 Q=INT(4*RND(1)+1)
220 RESTORE
230 FOR I=1 TO Q
240 READ Q1$,Q2$,Q3$,Q4$,A,ANS$
250 NEXT
260 PRINT"{RED}";TAB(11-LEN(Q1$)/2);Q1$;"{0
5 DOWN}"
270 PRINT"{GRN}"TAB(11-LEN(Q4$)/2);Q4$;"{04
UP}"
280 PRINTTAB(14);"{PUR}"Q3$
290 PRINT"{UP}{CYN}"TAB(7-LEN(Q2$));Q2$;"{B
BLU}"
300 PRINT"{04 DOWN}PUSH STICK IN":PRINT"DIR
ECTION OF THE"
310 PRINT"CORRECT ANSWER
320 PRINT"{HOME}{04 DOWN}";TAB(10);"Q"
330 GOSUB 500:IFH=0ANDV=0THEN330
340 PRINT"{HOME}{04 DOWN}";TAB(10);" "
350 PRINT"{HOME}{03 DOWN}";LEFT$("{02 DOWN}
",1+V);TAB(10+H);"Q"
360 IF(V*2+H)=A THEN 400
370 PRINT"{CLEAR}PLEASE TRY AGAIN"
380 GOTO 220
400 PRINT"{07 DOWN}":PRINT"{REV}GOOD, ";ANS
410 PRINT:PRINT
415 GOSUB500:IF(V*2+H)=ATHEN415
420 PRINT"{DOWN}PUSH STICK FOR ANOTHERPROBL
EM"
430 PRINT"PUSH {RED}BUTTON{BLU} TO END"
440 GOSUB500:IF(HORV)THEN200
450 IFFB=0THEN440
460 PRINT"{DOWN}      GAME OVER"
499 END
500 REM JOYSTICK SUB
510 POKEDD,127:P=PEEK(P2)AND128
520 H=- (P=0)
530 POKEDD,255:P=PEEK(P1)
540 V=- ((PAND8)=0)
550 H= ((PAND16)=0)+H
560 V= ((PAND4)=0)+V
570 FB=- ((PAND32)=0)
580 RETURN

```


©

### Program 2: VIC Version


```

10 DD=37154:P1=37151:P2=37152
15 GOTO 200
20 DATA APPLE,PEAR,HAT,ORANGE,1
21 DATA HAT IS NOT A      FRUIT
22 DATA A,E,I,S,2

```




**Solve your disc problems. buy 100% surface tested Dysan diskettes. All orders shipped from stock, within 24 hours. Call toll FREE (800) 235-4137 for prices and information. Visa and Master Card accepted.**



**PACIFIC EXCHANGES**  
100 Foothill Blvd  
San Luis Obispo, CA  
93401 (In Cal. call  
(805) 543-1037)



FOR ATARI

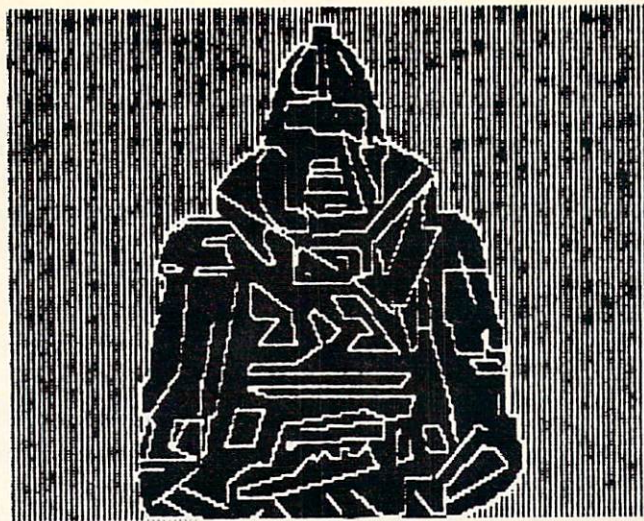

FOR ATARI

The above is a graphics 8 screen printout on the EPSON, with our new AESD II(tm).  
It was drawn with Versawriter graphics tablet.



**002 ATARI EPSON SCREEN DUMP II**  
This is a screen dump program which allows you to copy anything from the screen. It also supports all graphics modes and text modes. It supports all the features of the EPSON(tm) MX-80 and MX-100. The program is in machine language and is relocatable. .... (C) \$26.95  
(D) \$29.95

**005 BINARY LOAD CASSETTE TO DISK**  
This utility will take binary load cassette files like SPACE INVADERS (tm) and allow their transfer to disk. No more waiting for loading! The duplicate is AUTO-BOOTING and uncopyable. .... (D) \$21.95

**007 DOWNLOADER**  
This is a true SMART TERMINAL EMULATOR PROGRAM which allows you to upload and download files between computers and save to DISK, CASSETTE, or a PRINTER. ALSO WORKS WITH THE D.C. HAY'S SMARTMODEM.  
(C) \$26.95  
(D) \$29.95

**009 ELECTRONIC CALCULATOR**  
This program is a tool for the electronics hobbyist. It makes the necessary resistive and capacitive calculations for both series and parallel circuits. It shows formula, decodes resistors, plus power calculations for both AC and DC circuits. .... (C) \$19.95  
(D) \$21.95

**011 ELBBARCS**  
This is a word game program which is in high resolution graphics. .... (C) \$19.95  
(D) \$21.95

**012 UTILITY PAK 1**  
These four utility's are for the serious programmer. XREF is a variable cross reference utility which tells you where and when a variable is used in a program. VARIABLE-CHANGER is a program that allows you to easily change the name of any or all of the variables in your program. Lister and Denumber are also included. .... (C) \$19.95  
(D) \$21.95

**013 PIE BAR UTILITY**  
This utility is designed to provide a screen dump capability for the ATARI® GRAPH IT(tm) using EPSON® MX-80 printer. Features STORAGE and RECALL of both Pie and Bar Charts. Runs in 32K of RAM Screen Dump feature can be used separately in 24K of RAM. .... (C) \$19.95  
(D) \$21.95

**014 BACKUP MASTER**  
A machine language program that allows you to make backup copies of boot load diskettes. Also displays any sectors that the disk drive had trouble reading and skips over them. .... (D) \$39.95

# COMPUTER AGE SOFTWARE

9433 GEORGIA AVE.  
SILVER SPRINGS, MD 20910  
(301) 588-6565

CASH, CERTIFIED CHECK,  
MASTERCARD & VISA ACCEPTED  
FOR IMMEDIATE SHIPMENT.

PERSONAL CHECKS  
ALLOW 10 DAYS TO CLEAR.



# Learning With Computers

## Teaching Johnny To Program

Glenn Kleiman

Teaching Tools: Microcomputer Services  
Palo Alto, CA

I expect within the next few years someone will write a book charging many schools with a misguided approach to teaching children about computer programming. This book, probably entitled *Why Johnny Can't Program*, will claim that teaching LOGO is the only proper approach, and that teaching BASIC is almost evil. Such extreme claims have already been made. For example, Seymour Papert, a leading advocate of LOGO, has written in *Mindstorms: Children, Computers and Powerful Ideas*:

[It is] as unacceptable for children to enter the computer culture by learning computer languages such as BASIC as it would be to confine their access to English poetry to pidgin English translations (p. 211).

BASIC is the standard language for all personal computers. LOGO is a newer language, available for Apple II and TI 99/4 computers and being developed for several others. The advocates of LOGO claim it should, and will, replace BASIC — especially for teaching children. In order to evaluate this claim, we first must consider what features we want in a computer language taught to children.

### What Children Need

1. The language should make small but interesting programs easy to write. This is useful for motivating students and alleviating anxieties about programming.

2. The language should make it easy to debug programs. Beginners quickly realize the need for exactness in programming but have trouble getting all the details right. Clear error messages and other features that facilitate debugging prevent a lot of frustration in teaching and learning.

3. The language should be designed for working with pictures and words. Most people, particularly young people, would rather use computers to create pictures and dialogues than to solve mathematical problems.

4. Learning the language should provide a good basis for learning more advanced programming. The students should master concepts common to all computer languages and develop good programming techniques.

5. The language should be compatible with the ways children think, and working with the language should facilitate the development of general thinking skills.

### Comparing BASIC and LOGO

Now that we have some criteria, how do BASIC and LOGO compare?

*Ease of getting started.* BASIC and LOGO were both designed with novice programmers in mind. In either language, you can write small programs with a few simple commands. The programs will be of different types. A typical first BASIC program performs simple mathematical operations such as converting between centigrade and fahrenheit degrees. A typical first LOGO program creates shapes such as squares and triangles.

*Ease of debugging.* BASIC and LOGO are both interactive or conversational languages. When using an interactive language, you can get immediate responses from the computer without having to go through any other steps (such as the compiling step required with many languages). This makes it easier to find and correct errors in programs. With either BASIC or LOGO you can stop a program at any time, ask the computer questions such as the values of variables, and then continue the program from where it was stopped. The two languages also give helpful information about exactly where errors occur.

*Working with pictures.* LOGO contains an excellent Turtle Graphics system which makes it easy to create pictures. The child commands a "turtle" marker to move and draw on the screen. The commands include move forward or backward a number of steps, turn left or right a number of degrees, select a pen of a specified color, and raise or lower the pen to control whether the turtle draws as it moves. Here is a simple program to draw a square:

```
TO SQUARE
FORWARD 40
RIGHT 90
FORWARD 40
RIGHT 90
FORWARD 40
RIGHT 90
FORWARD 40
RIGHT 90
END
```

This program can be condensed to:

```
TO SQUARE
REPEAT 4 [FORWARD 40 RIGHT 90]
END
```



Turtle graphics, originally developed as part of LOGO, has since been incorporated into other languages, including Atari PILOT which I will review in next month's column. See Dave Thornburg's Friends of the Turtle column for more examples of turtle graphics.

BASIC typically uses a coordinate graphic system in which you specify the horizontal and vertical locations of things to appear on the screen. Here is a BASIC program to draw a square:

```
100 DRAW 0,0 TO 40,0
110 DRAW 40,0 TO 40,40
120 DRAW 40,40 TO 0,40
130 DRAW 0,40 TO 0,0
```

Each DRAW command draws a line between the coordinates specified.

There are many dialects of BASIC. In some the graphic commands are limited to plotting points and drawing lines. Others, such as the Radio Shack Color Computer Extended BASIC and the IBM Personal Computer BASIC, include more powerful graphic commands for drawing circles, arcs and boxes, filling areas with color, and moving pictures on the screen to create animations. The ease of creating pictures in BASIC depends to a large extent on which version is used.

*Working with words.* In BASIC, sets of letters are grouped together to form strings. Commands are available for testing whether strings match, for combining strings and for selecting parts of strings.

In LOGO, letters combine to form words, which are analogous to strings in BASIC. In addition, LOGO has lists. A list consists of an ordered set of words or simpler lists. That is, you can have a list of lists, or a list of lists of lists, and so on. This is very useful for working with language – a list of words forms a sentence, a list of sentences forms a paragraph, and a list of paragraphs forms a discourse. LOGO contains procedures for checking whether a list contains a specified word, testing whether two lists match, combining lists and selecting parts of lists. The commands for working with language in LOGO are far more powerful than those in BASIC.

*Learning general programming concepts.* When learning either BASIC or LOGO, children become familiar with many concepts important in all programming. These concepts include variables, branching, iteration (repetition of sets of commands), conditionals (if/then decisions), and modules (subroutines or procedures). LOGO adds the concept of recursion (procedures that call themselves).


*Learning good programming techniques.* Programming techniques have advanced since BASIC was

developed, and BASIC is often faulted for not encouraging good programming practices. As computers have become faster and memory less expensive, emphasis has shifted from writing programs which execute quickly and take little memory, to programs that are easy to write, understand, test, debug and modify.

An important part of good programming is dividing the overall goals of the program into simpler subgoals, each of which can be handled in its own part of the program. This is called modular programming. While modular programming is possible in BASIC, the language does not facilitate this approach.

LOGO was designed for modular programming. You define procedures, each of which tells the computer how to do something. Once a procedure is defined, it can be used in other procedures in exactly the same way as any of the "primitive" procedures built into the language. That is, each procedure you create can be used as a module in a larger program. For example, once the SQUARE procedure given above is created, it can be used in a procedure to create a more complex picture such as:

```
REPEAT 8 [SQUARE RIGHT 45]
```

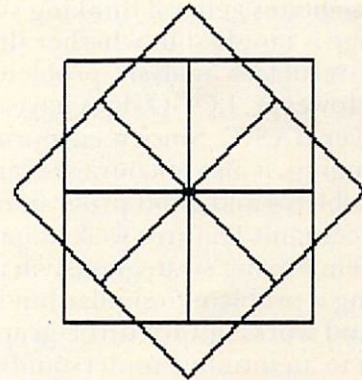

Since a created procedure can be used just like a built-in one, LOGO lets you design your own language by creating a set of procedures to suit your purposes.

*Compatibility with children's ways of thinking.* Children are best able to understand things in terms of concrete images and their own actions, rather than in terms of abstract concepts. Turtle graphics therefore provides an excellent means of introducing programming to children. Commands to the turtle are in terms of processes children can act out. A child might create a SQUARE procedure by first drawing a square with a pencil and paper (or walking the shape of a square) and observing his own movements. The child can then tell the turtle how to follow the same pattern of movement. In contrast, the graphics commands typical of



BASIC require an understanding of the coordinate system and do not reflect the processes of drawing.

While the turtle graphics component of LOGO suits children very well, I am less certain about the rest of LOGO. The commands for working with words are powerful but may not be simple for children to use. Most teachers using LOGO have so far focused on turtle graphics. I am waiting for more information from teachers and children who are exploring the non-graphics aspects of LOGO.

In BASIC, children generally find it easy to understand the individual string processing commands and to write small programs with them. However, the difficulty of BASIC programming increases rapidly as the size of the program increases.

*Developing thinking skills.* To program in any language, one must analyze the task the computer is to perform, divide it into sub-steps, carefully communicate the sub-steps to the computer, and test and debug the program. Many teachers report that when children learn programming they also acquire ways of approaching many types of problems and gain an appreciation of the need for careful work. This leads to improvements in much of their school work.

I believe the critical factor in whether learning to program facilitates general thinking skills is not which language is taught, but whether the teaching encourages careful task analysis, problem solving, and testing. However, LOGO does have some advantages over BASIC. Since it encourages modular programming, it also encourages careful analysis of problems and good programming practices. LOGO contains features well adapted to certain problem solving strategies (such as progressively reducing a problem to similar but simpler problems). And working with turtle graphics can lead children to an intuitive understanding of concepts of geometry and symmetry.

### **Which Language Should Children Be Taught?**

More people know BASIC than any other computer language and there are a greater number of books and programs available to help teach BASIC. I know many children and adults who have gotten a great deal out of learning BASIC – knowledge about computers, an understanding of general concepts of programming, appreciation of the need for careful thinking and attention to details, and joy and pride in being able to control the computer with their own programs.

LOGO has been used in a number of test projects and is beginning to be tried in many classrooms. As I've discussed, it has several excellent features for teaching children, particularly in the turtle graphics component. I expect materials to

help learn and teach LOGO will become available rapidly.

Children enjoy and benefit from learning either BASIC or LOGO. Why shouldn't they learn both?

### **Versions Of LOGO For Apple II Computers**

Two versions of LOGO are now available for Apple computers, one developed at MIT and the other developed by Logo Computer Systems, Inc. (LCSI). LCSI LOGO is marketed by Apple through its dealers. Two companies market the MIT version: Terrapin Inc. (678 Massachusetts Ave. #205, Cambridge MA 02139), and Krell Software (21 Millbrook Drive, Stony Brook, NY 11790). Both versions require a 48K Apple II with a 16K RAM card (or language card) and one disk drive. The two versions have far more similarities than differences, but each has several features not found in the other.

The MIT version has three features which are particularly useful with children: (1) The ability to change the shape of the turtle. This is useful for animations – you can create your own shape and move it on the screen with turtle commands. (2) A trace function which lets you run a program step-by-step. This is useful for carefully analyzing programs and for finding bugs. (3) The ability to save pictures to disk and retrieve them from a program. MIT LOGO also has a feature for machine language programmers: it lets you add your own machine language routines.

LCSI LOGO, while not having the features mentioned above, has several features not found in the MIT version. These include more advanced list processing capabilities, convenient ways of working with sets of procedures, the ability to re-define primitive commands, and good error trapping capability. These features are particularly useful for advanced programmers.

An important part of a LOGO package is the documentation. LCSI LOGO comes with two manuals, an excellent turtle graphics tutorial and a good reference manual. Terrapin has its own tutorial, which covers both turtle graphics and language processing. I only have a draft available for review, but it looks like a very useable manual. Krell provides a minimal amount of written documentation and a tutorial on disk. The Krell tutorial is severely lacking – it demonstrates many of the capabilities of LOGO but does not teach anyone how to use them.

The prices of the three LOGO packages, with documentation and back-up copy, are: LCSI – \$175; Terrapin – \$165 (\$150 + \$15 for back-up disk); Krell – \$179. I recommend either LCSI or Terrapin. Krell cannot be recommended due to



the lack of adequate documentation.

**LOGO Books**

Four books that tell you more about LOGO are available:

*Logo* by Harold Abelson (Byte/McGraw Hill Publishers, 1982). A guide to using LOGO which is a good addition to the LCSi and Terrapin manuals.

*Special Technology for Special Children* by Paul Goldenberg (University Park Press, 1979). Discusses uses of LOGO with severely handicapped children.

*Mindstorms: Computers, Children and Powerful Ideas* by Seymour Papert (Basic Books, 1980). The case for LOGO, strongly stated.

*Turtle Geometry* by Harold Abelson and Andrea diSessa (MIT Press, 1980). A technical book on using turtle graphics to teach concepts of plane geometry, vectors and topology and other areas.

**An Inexpensive Turtle Graphics Program**

Many people want to try turtle graphics without investing in the full package and the necessary memory expansion. An excellent program which lets you do so was published in *Nibble* magazine

(Vol. 3, No. 1, 1982). This program, written in Applesoft by David Krathwohl, provides the main turtle graphics commands, the ability to write procedures and call them from other procedures, iteration, some minimal use of variables, and saving programs to disk. You can find a copy of the magazine and type the program into your Apple or order a disk (with documentation and two other programs) for \$29.95 plus \$1.50 postage from Nibble: Box 325, Lincoln MA 01773. ©

**ACCU - WRITE**  
 THE WORD PROCESSOR FOR  
**ATARI 400/800**  
 WITH CASSETTE DRIVE

ACCU-WRITE IS FOR USE WITH THE ATARI 400 800 COMPUTER AND THE EPSOM MX-80 PRINTER. FULL DOCUMENTATION ALLOWS USER MODIFICATIONS TO SUPPORT OTHER PRINTERS AND COMPUTERS. THE SUGGESTED RAM IS 32K.


ACCU-WRITE FEATURES INCLUDE:

ON SCREEN CORRECTIONS	AUTO-CENTER TITLES
INSERT, DELETE LINES	LINE COUNTER
OUTLINE FORMAT, PARAGRAPH, SUBPARAGRAPH	

FULL DOCUMENTATION & CASSETTE -- \$49.95  
 VISA AND MASTER CHARGE ACCEPTED  
 CALL (504) 361-8594  
 DREAM PRINT HOMES INC. SUITE 705  
 1700 STUMPF BLVD. GRETNA, LA. 70053

**ORIGINAL SOFTWARE FOR THE ATARI 400/800 AND THE APPLE II/II+ FROM DON'T ASK**

Think your computer's an obedient wimp?  
 Guess again!

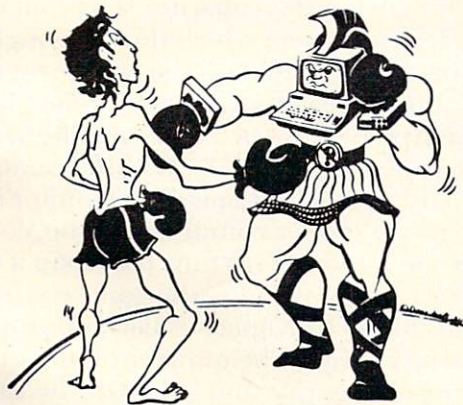

Try **ABUSE**  
 The insult program.

- Funny • Unpredictable • Interactive
- Guaranteed to call you something you've never been called before!

**\$19.95**

ATARI: 40K - disk - BASIC  
 APPLE: 48K - disk - APPLESOFT

Available at your computer store or direct from DON'T ASK  
 Include \$2.00 shipping for each program (Calif. residents add 6% tax)

ATARI is a trademark of ATARI INC.

APPLE and APPLESOFT are trademarks of APPLE COMPUTER INC.

Dealer inquiries welcome

**WORDRACE**

The high-speed dictionary game

At last, an educational game that's really fun to play! You start each turn with a word, 6 definitions, and a counter set to 600 points. As time passes the points tick away. The sooner you pick the **correct** definition, the more points you get, but the sooner you guess wrong, the more points you **lose**.

3 levels of play on one disk:

- Beginner (ages 9-14) • Regular • Challenge
- 2000 words and definitions

**\$24.95**

APPLE version speaks!

ATARI: 32K - disk - BASIC

APPLE: 48K - disk - APPLESOFT

Also available:

The next disk in the **WORDRACE** System. Use it along with your **WORDRACE** disk to play:

- **CLAIM TO FAME** (600 famous people in history)
- **SPORTS DERBY** (600 pieces of sports trivia)
- Plus more vocabulary words

**\$19.95**

Requires **WORDRACE** disk

**DON'T ASK**  
 Computer Software  
 2265 Westwood Blvd. B-150  
 Los Angeles, CA 90064  
 (213) 397-8811



# Apple Game Paddles

John K. Elberfeld  
Rochester, NY

Understanding the functions of the Apple game paddles was my first step toward interfacing the Apple with the "real world." The simplicity of the paddles is a result of the amazing versatility of the game In/Out connector (where the game paddles are plugged in) on the computer mother board. The Apple Reference Manual, pages 23, 24, 100, and 114, provides the basic facts about the paddles and the connector. This article will attempt to unify these facts into an understandable explanation of the Integrated Circuit electronics used every time Little Brick Out is RUN.


The push button control on the paddles is a normally open momentary switch. No electricity may flow through this switch until it is pushed down. As soon as it is released, the flow of electricity stops. The source of voltage is pin 1 on the game I/O connector, which supplies +5 volts through the connecting wires to one side of the switch. When the button is pressed and the switch is closed, this +5 volts passes through the switch and back through the wires to pin 2 on the I/O connector. Pin 2 is connected to a standard Transistor-Transistor Logic (TTL) Integrated Circuit (IC) on the Apple mother board. When +5 volts is applied to pin 2, this IC causes the memory location of (-16287) or (\$C061) to be greater than 128. The actual circuitry allows three push buttons to be used, but this article will supply details for button 0 only.

When pin 2 is grounded, the value of (-16287) will fall below 128. However, *not* applying +5 volts to pin 2 is *not* the same as grounding the pin. To make the pin grounded when no voltage is applied, a 560 ohm resistor is permanently connected between pin 2 and ground. Any electricity which might deceive pin 2 into thinking that 5 volts was being connected to it disappears through the resistor and into the ground. This resistor is located in the 16-pin DIP Header – the black box at the end of the paddle wires. This resistor is small enough to effectively ground pin 2 when no voltage is applied, but large enough so the current through it is very small when +5 volts is applied.

Figure 1 shows this information.

The game controller analog inputs (knobs which turn) are physically very simple. The fol-

Figure 1. Push Button

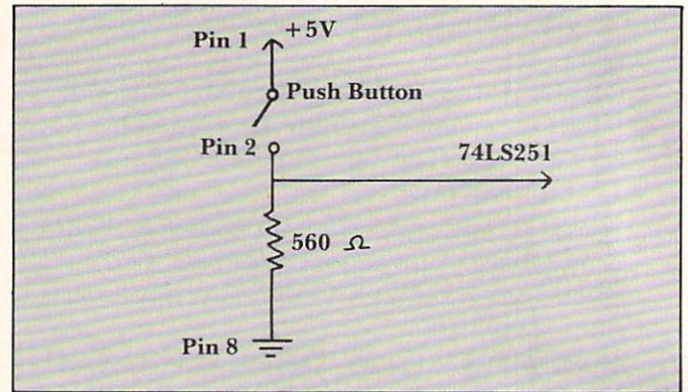

lowing details apply to PADDLE 0, but the concept is the same for all paddles. Just the pin numbers are different.

Pin 1 again supplies +5 volts through the connecting wires to one end of a 150,000 ohm variable resistor. The other end of the resistor is connected through the wires to pin 6. Turning the game control varies the resistance between the 5 volt supply voltage and pin 6 on the game I/O connector. When the resistor is turned so the resistance in the circuit is large, very little current can flow back to pin 6. A low resistance setting of the game control allows a large current to flow back to pin 6.

Pin 6 is a direct connection to a capacitor on the mother board. A capacitor is designed to store electric charge, but this capacitor starts out with *no* charge. Electric current which flows through pin 6 to the capacitor will build up the charge on the capacitor until it reaches a predetermined level. When the Apple is instructed to read the value of the game control through the BASIC command PDL(0), it uses a machine language monitor routine. This command starts a counting routine, consisting of a loop and a counter, to time how long it takes the electric current through the game controller resistor to charge the capacitor back up from its zero starting charge. The number of times that the computer executes this timing loop is the value reported when PRINT PDL(0) is RUN.

To limit the electric current flow into the capacitor when the game control is applying zero resistance, a small 100 ohm resistor is connected in series between the capacitor and the game controller. If too much current flowed into the capacitor in a very short time, the power supply or other circuits could be damaged.

How can the computer tell when a capacitor is charged? The Apple uses a 558 quad timer Integrated Circuit which is designed specifically to




accomplish this. This circuit is similar to four 555 timers on one chip and allows up to four game paddles to be used at one time. The 558 IC is carefully designed to have a high output when the capacitor is charged to *less* than 2/3 of the supply voltage, and a low output after it reaches 2/3 of the supply voltage.

The timing cycle is started when the 558 is triggered – accomplished by PEEKing at location 49264 (-16272 or \$C070). After the 558 is triggered, the output goes high, and the capacitor is allowed to charge up from the current through the game controller. When the capacitor reaches 2/3 of the supply voltage, the output goes low and remains low until triggered again. The 558 then automatically discharges the capacitor and waits for another trigger. Memory location \$C064 is high (greater than 128) while the output of the 558 timer is high, and low (less than 128) when the output of the timer is low. How a high output from the 558 affects the value in a memory location is a good topic for some other author.

Figure 2 shows the circuit used for Paddle 0 on the Apple. The other game controllers have similar circuits but different memory locations.

Figure 2. Game Control Paddle

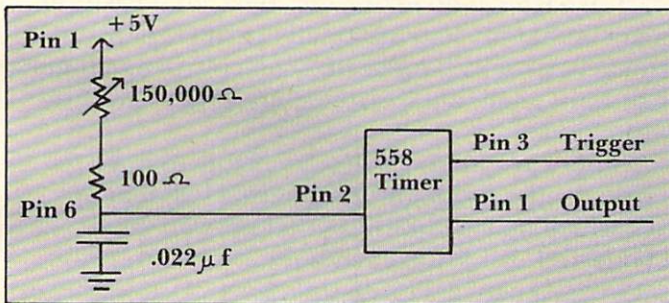

The Apple Reference Manual, Page 144, lists the following monitor routine for reading the value of the game controller. These directions are permanently stored in the Read Only Memory (ROM) of the Apple and are used during the execution of BASIC commands in regular programs. The following explanation assumes some knowledge of machine language programming.

```

PREAD LDA PTRIG
      LST ON
      LDY #$00
      NOP
      NOP
PREAD LDA PADDL0,X
      BPL RTS2D
      INY
      BNE PREAD2
      DEY
RTS2D RTS

```

PTRIG is location \$C070. LDA to this location triggers all 4 timers on the 558 chip on the mother board. This forces all the outputs of the 558 chip to go high and remain high until the capacitors are charged. This trigger also allows the capacitor to start charging.

LST ON is not a machine language command, but is probably a note to indicate that the timer has been triggered.

LDY #\$00 loads the Y register with a value of zero to initialize it for the timing loop.

NOP means no operation. These are dummy commands used to take up some time before the timing loop is entered.

LDA PADDL0,X stores in the accumulator (A) the value of the memory location indicated by PADDL0, with the location address increased by the value stored in the X register. This allows a single routine to time all four allowable game controllers. The number of the controller (0 through 4) must be loaded in the X register before the routine is entered. PADDL0 is the memory location \$C064, the memory location which is high when the current through paddle zero has not charged the capacitor. When register X has 0 stored in it, this location is read. When register X has the value "1" stored in it, the value in memory location \$C064 + 1 = \$C065 is loaded in the accumulator. \$C065 is the memory location which is high when paddle 1 is in the process of charging its capacitor.

BPL RTS2D commands the computer to branch to location RTS2D if the value loaded into A is positive. RTS2D contains the command RTS which stops the timing loop and returns control to the BASIC commands which first called in the routine. A byte is considered negative when bit 7, the eighth bit from the right, is "1," and positive when this bit is "0." This seventh bit is also used as the flag to indicate that the output of the timer is still high. While the capacitor is in the process of being charged by the current through the game controller, this seventh bit in location \$C064 is set to "1," the computer considers the value of the entire byte negative, and no branching occurs. The computer continues down the list of instructions. When the seventh bit is "0," it means the capacitor is charged enough, the timing stops with the value in Y indicating the number of times the program executed the loop, and the program branches to RTS2D which returns control back to the BASIC program. This is the normal END for this monitor subroutine.

INY commands the computer to increase the value of the Y register by 1. The Y register is now a counter which indicates how many times the computer passes this point in the loop. It is this value stored in Y which is the "value" of the game con-



troller setting.

BNE PREAD2 commands the computer to branch back in the loop to the location of PREAD2 (the LDA PADDL0,X command) if the value of the Y register is *not* equal to zero. If the resistance is very high in game controller, the Y register may have counted up to 255, the largest number it can store. (All 8 bits are set to 1). Adding 1 more to 255 does *not* result in 256, but changes all the 1's to 0's ( $255 + 1 = 0$ ). At this point the computer realizes it has gone too far, and it does not branch back to continue the loop.

DEY decreases the value of Y by one. Since Y must be zero to reach this point in the program, Y changes from 0 back to 255 because  $000 - 1 = 255$ . This is the largest number that may be a paddle reading. At this point the timing loop is halted.

RTS then returns control to the BASIC program which called the subroutine. The value in Y is the value of the paddle reading.

The loop of:

```

READ2 LDA PADDL0,X (5 CYCLES)
      BPL RTS2D (2 CYCLES—NO BRANCH)
      INY (2 CYCLES)
      BNE PREAD2 (3 CYCLES—SUCCESSFUL
                  BRANCH)
  
```

is repeated until the capacitor is charged or until Y reaches a reading of 256 (000). The loop uses 12 clock cycles or about 12 microseconds. The maximum amount of time this program can measure is 255 loops or 3060 microseconds. The time needed to charge sufficiently the .022 mfd capacitor on the mother board through 150,000 ohm game controller is  $1.1 * 150,000 * .022 E-06 = .0036$  seconds = 3600 microseconds. This extra time guarantees that the maximum value can be reached when the game controller is set for maximum resistance.

Where can this information lead? It is possible to substitute a thermistor in place of the game controller so the reading of a paddle will indicate the temperature. A game controller with a resistance differing from the 150,000 ohm Apple Controller can be adapted to this circuit. A tilt sensitive switch could replace the pushbutton to indicate changes in position. The possibilities are endless and challenging. For more information on these circuits, see:

*Mims, Forrest M.*  
 Engineer's Notebook  
 Radio Shack, 1979

*Lancaster, Don*  
 TTL Cookbook  
 Howard W. Sams, 1974

Semiconductor Reference Guide  
 Radio Shack, 1981

*In this interesting article, the author, a quadriplegic, describes techniques he has learned to effectively work with his computer. His suggestions may be of interest to other handicapped programmers and, at the end, he has a program-typing hint for everyone.*

# Computing Techniques For The Handicapped

George Leotti  
 Glenolden, PA

Being a physically disabled individual I faced some unique problems in making my computer, and peripherals, usable. First, I'd like to briefly describe my disability and then pass along some hints that may help other people, disabled and able alike.

I'm a C5-C6 quadriplegic. What that basically means is that my legs are totally paralyzed. My arms are partially paralyzed. I can't move my fingers or thumbs at all, but I can flex my wrists. Now, on to the hints.

There are many devices available to hold pencils, pens, and paintbrushes that will hold a stick which may be used to press keys on your keyboard. I use a universal holder with an L bar that holds a pencil, eraser-side down. Use whatever is comfortable for you.

To protect the faces on my small keyboard PET, I have someone cut out the fingers of a surgical glove, put them over the eraser, and tape it securely to the pencil. This way the eraser will not fragment and get stuck between the keys. Plus, wear and tear on the keys is reduced.

## A New On-Off Switch

The first problem I encountered when I bought my PET was how to turn it on and off by myself. As you know, the PET and Commodore peripherals have their power switches located on the back panels. Why? I don't know. But I do know it is impossible for me to reach them.

The solution was simple. I had another switch mounted on the front panel, above the keyboard. The new switch "jumpers" the power switch in the rear. The Commodore switch now stays in the on position. The new switch turns power on and off.



Its switch is a toggle switch which can be purchased at any Radio Shack, part number 275-651.

I had the same done on my 2023 printer. The switch is mounted an inch to the right of the paper advance button.

Who will install switches for you? My brother, an electronics engineer, installed them for me. If you have no one able to perform this operation for you I suggest you: contact a local electronics/computer store, appliance repair shop, or television repair shop. If you go this route be sure the person is insured and knows exactly what you need. If your machine is still under warranty, contact the manufacturer first. They (or the store where you bought it) may install a switch for you.

Another solution to the problem would be to have a switching center installed by a competent electrician. In this way you would not deface your machine and you could have all the power switches in one convenient location.

### Operating Tape And Disk Drives

The next problem was how to push the PLAY and RECORD keys at the same time. I found that if you put something in the jaws of a nutcracker to space the ends the proper width, and then tape the ends to hold the spacer, you have a tool that works on the tape drive. This, when held in the mouth, makes pushing those buttons easy. Since most nutcrackers are made of metal, however, it would be easier on your teeth to contact your friendly occupational therapist for something made of plastic or wood.

Just recently, I purchased a 2031 single disk drive because of an overflow of cassettes. It is a remarkable, machine, of course, very fast and efficient, but when I tried to change its diet (remove one diskette and put in another) I found I could not pull out the diskette.

Some tape and toothpicks solved this one. On the left side (front) of my diskettes I have between five and six inches of tape folded in half and fixed to the top and bottom of each diskette with a toothpick at the fold in the tape. Now I can pull out a diskette with one finger.

I used strapping tape (tape with fibers) and round toothpicks. Instead of toothpicks you could use small plastic rings that you can put a finger, or your pushstick, through. Be sure not to cover the write-protect notch on the disk.

### Shopping For Machines

If you are disabled and deciding which computer to buy, go to a computer store. Try each model or brand you are interested in. Look for accessibility. I have found that the PET has very accessible keyboards. For me, the separate numeric keypad reduces arm fatigue when entering programs man-

ually.

Also, anyone who has a disability that affects the hands should consider the tractor feed type printer. I have the problem of my paper coming out of alignment almost every time I tear a sheet out of the printer. I have to use my mouth to grip the paper and pull it. So far, I've come up with no practical solution to this problem...


### Something For Everyone

Here's a hint which might solve a general problem. When entering a program from **COMPUTE!**, do your eyes sometimes wander the page looking for your place? In the back of **COMPUTE!** you will find a card that is used for foreign subscriptions. If you live in the US, or subscribe, tear this card out.

Use a sharp hobby knife to cut out a "window" in the card. Cut out, on the address side, the words (sorry about this) **COMPUTE!** Magazine. You may need to widen it to equal a whole line of a program. Place the card on the page that has the program, leaving the lines you want, showing through the window. As you enter the program, just move the card down the page.

These ideas are offered as suggestions. Neither **COMPUTE!** nor Mr. Leotti can be held responsible for any damages resulting from their use. ©

## SWEET-TALKER, IT GIVES YOUR COMPUTER AN UNLIMITED VOCABULARY.

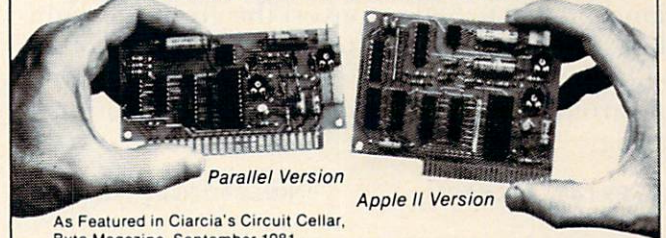

As Featured in Ciarcia's Circuit Cellar,  
Byte Magazine, September 1981.

The Sweet-Talker voice synthesizer allows you to add speech of unlimited vocabulary to your computer. Utilizing the Votrax SC-01A chip, you can output any message by programming individual phonemes. Comes in two versions: one plugs directly into your Apple II, the other connects to any computer with an 8-bit parallel printer port. + 12 volts and + 5 volts required for parallel board.

- Contains 64 different phonemes accessed by a 6-bit code. **ST01 Sweet Talker Parallel Port Board A & T.....\$139.00**
  - Automatic and manual inflection modes. **ST02 Sweet Talker Apple II plug in board.....149.00**
  - Parallel port driven or plug-in compatible with Apple II. **ST06 Text-to-Speech algorithm on disk for Apple II.....35.00**
  - Super text-to-speech algorithm on disk for Apple II. Makes Sweet-Talker equivalent to units 3 times the cost. **SC01A Votrax Speech Synthesizer chip.....70.00**
  - On board audio amplifier **UPS01 Universal Power Supply-A & T.....35.00**
  - Sample program on cassette with Apple II board.
  - Optional power supply for parallel board.
- Add \$2.00 for shipping & handling.*

To Order: Call Toll Free 1-800-645-3479  
(In N.Y. State Call: 1-516-374-6793)  
For Information Call: 1-516-374-6793



MICROMINT INC.  
917 Midway  
Woodmere N.Y. 11598





For Commodore computers, this program allows you to add very large numbers together.

# Multidigit Addition

Zoltan Szepesi  
Pittsburgh

A microcomputer generally cannot handle more than 8 to 12 digits of precision. However, special programs can be written in BASIC or machine language to increase the precision of the calculations.

In this program, Multadd, the addition is made in eight-digit groups. The two numbers to be added together (the *addenda*) are entered as two strings between lines 70 to 120, using a modified version of Gary Greenberg's simulated input routine (**COMPUTE!**, May/June, 1980, #4). This way, up to 254 digits can be entered for each number. The two addenda can have different numbers of digits. Lines 140 to 160 make them equal in length by placing zeros in front of the shorter number.

Lines 170 to 250 divide the strings into eight-digit groups and transform these substrings into numeric values. Then lines 260 to 300 do the addition, and 310 to 380 reconvert the groups to eight-digit strings, taking care to fill up the empty places with zeros, and eliminating the spacing between the groups. The result is printed out as a continuous string.

```

10 PRINT "{CLEAR}          MULTIDIGIT ADDITI
   ON"
40 PRINT "{DOWN}THE NUMBERS TO BE ADDED CAN
   HAVE MAX."
50 PRINT "254 DIGITS.TYPE THE DIGITS CONTIN
   UALLY, THEN PRESS 'RETURN'."
60 PRINT "CORRECT WRONG NUMBER WITH 'DEL'."

70 PRINT "{DOWN}          FIRST ADDENDUM:A=":PR
   INT "{RIGHT}";
80 GOSUB 500
90 A$="0"+Z1$
100 PRINT:PRINT"          SECOND ADDENDUM:B=":P
   RINT "{RIGHT}";
110 GOSUB 500
120 B$="0"+Z1$
130 T1=TI:PRINT:PRINT"          {REV}WORKING
   "

140 LA=LEN(A$):LB=LEN(B$):D$=""
150 IF LB<LA THEN LD=LA-LB:FOR I=1 TO LD:D$
   =D$+"0":NEXT I:B$=D$+B$
160 IF LA<LB THEN LD=LB-LA:FOR I=1 TO LD:D$
   =D$+"0":NEXT I:A$=D$+A$:LA=LEN(A$)
170 M=INT(LA/8):Q=LA-8*M:IF Q>0 THEN M=M+1
180 DIM A(M),B(M),C(M),D(M),R(M),R$(M),F$(M)

```

```

)
190 FOR I=0 TO M:D(I)=0:C(I)=0:R(I)=0:NEXT I
200 IF M=1 THEN A(1)=VAL(A$):B(1)=VAL(B$):G
   OTO260
210 IF Q>0 THEN A(1)=VAL(LEFT$(A$,Q)):B(1)=
   VAL(LEFT$(B$,Q)):X=1:GOTO 230
220 A(1)=VAL(LEFT$(A$,8)):B(1)=VAL(LEFT$(B$
   ,8)):X=0
230 FOR I=2 TO M
240 A(I)=VAL(MID$(A$, (I-1-X)*8+1+Q,8)):B(I)
   =VAL(MID$(B$, (I-1-X)*8+1+Q,8))
250 NEXT I
260 FOR I=M TO 1 STEP -1
270 C(I)=A(I)+B(I)+D(I)
280 D(I-1)=INT(C(I)/1E8)
290 R(I)=C(I)-D(I-1)*1E8
300 NEXT I
310 PRINT:PRINT"          THE SUM:A+B=":R$(1)=STR$(
   R(1)):IF R(1)=0 THEN R$(1)="{RIGHT}"

320 PRINT R$(1);:IF M=1 GOTO390
330 FOR I=2 TO M:R$(I)=STR$(R(I))
340 P=LEN(R$(I)):R$(I)=RIGHT$(R$(I),P-1):F$(
   I)=""
350 FOR J=8 TO 2 STEP -1
360 IF P<=J THEN F$(I)=F$(I)+"0":NEXT J
370 R$(I)=F$(I)+R$(I)
380 PRINT R$(I);:NEXT I:PRINT
390 PRINT:PRINT"          EXECUTION TIME:";IN
   T((TI-T1)*100/60+.5)/100;"SEC"
400 PRINT:PRINT"DO YOU WANT TO CONTINUE? (Y
   OR N)"
410 GET V$:IF V$=""GOTO 410
420 IF V$="Y" THEN CLR:PRINT "{CLEAR}{DOWN}"
   :GOTO 70
430 IF V$<>"N" GOTO 400
440 IF V$="N" GOTO620
500 Z$="":Z1$=""
510 PRINT " ${LEFT}";
520 GET Z$:IF Z$="" GOTO 510
530 PRINT " ${LEFT}";
540 IF Z$<>CHR$(20) GOTO 580
550 IF Z$="" GOTO 510
560 ZZ=LEN(Z1$):IF ZZ<1 GOTO 510
570 Z1$=LEFT$(Z1$,ZZ-1):PRINT " ${LEFT}";:GOT
   O510
580 IF Z$=CHR$(13) OR Z$=CHR$(141) GOTO 610
590 PRINT Z$;
600 Z1$=Z1$+Z$:GOTO 510
610 RETURN
620 END

```

©

**Get More From Your PET/CBM!**

**NEW! • DISK-O-MATE™** (Write for Price)  
A must for 2040/4040 disk owners. Write protect indicators/switches, power indicator and error beeper.

• **"Real World" SOFTWARE** (\$17 - \$25)  
Word Processor, Mailing List, Catalog, Ham Radio, Frequency Counter.

---

**"OLD" 8K PETS**

- **2114 - TO - 6550 RAM ADAPTER** (\$12 - \$25)  
Replace 6550 RAMs with low cost 2114s. *Hundreds Sold!*
- **4K MEMORY EXPANSION** (\$16 - \$62)  
Low cost memory expansion using 2114s for bigger programs.

**OPTIMIZED DATA SYSTEMS**  
Dept. C, P.O. Box 595 - Placentia, CA 92670

DISK-O-MATE trademark Optimized Data Systems -- PET/CBM trademark Commodore



For PET/CBM or Atari disk users, any memory size. This is a handy program if you ever need to update files.

# A Direct Access File Editor

Charles Brannon  
Editorial Assistant

What's in a file? A payroll program might keep a list of employees, social security numbers, status, etc., on a disk file. A check balancing program would probably save the information gathered during the run of the program such as check number, payee, and amount paid on a file.

Most files are very similar – a list of numbers and strings (words, names, etc.). Each line of the file is “sent” to the file with some variant of the PRINT statement, such as PRINT#1,A\$ or PRINT#1,ZX(I,J). [PRINT#1;A\$ on Atari.] Each line (also called a *field*) ends with a carriage return.

This carriage return is used to separate each line in the file. Otherwise, the file would be just a long block of characters, each line running into the next. These separators are called *delimiters*. On many computers, the comma and colon can also be used (but can cause trouble) as delimiters. This is important, as we will see later.

## A File Editing Tool

You probably use files every day, even if you're not a programmer. If you use any commercial software such as a word processor, or a prepackaged accounting program, you are unknowingly generating files. Such software writes files to the disk to save the results of calculations and your input, then later *reads* the file, when you run the program anew, to “restore” the original conditions and information.

Unfortunately, few programs let you *edit* this information (excepting a word processor, of course). You may have a check-balancing program that writes to disk all checks that you enter in order to use this information for taxes at the end of the year. This file simply accumulates information. If you later discover that you've made a mistake on a check entered, there is no easy way to find or correct that check. What you need is a program that can read the entire file into memory, let you view it

and make selective changes, then rewrite the corrected file back out to the disk.

The program here is a *file editor*. Basically, it asks you for the name of the file you want to edit, reads it in, and lets you “page” through the file 19 lines at a time. You can edit, replace, insert, and delete lines, as well as search the file for any sequence of characters.

This program only works with a file organized in the common “list” structure previously mentioned (which limits it to *sequential* files on the PET/CBM).

The two versions presented here, for the Atari and the PET/CBM, are different, but they both perform similar functions. After you enter the file name, the file is read into a string array. If the file is too large to fit into memory, the message “FILE TOO LONG” will appear. You can change the variable MAX (maximum number of lines in file) if you have enough memory. The file is displayed as numbered lines in the top 19 lines of the screen. Your input is taken at the bottom. When prompted for a line, always enter the *number* of the line.

## Miscellaneous

If you enter any command that you don't want to perform (such as Replace when you meant to type Edit), you can usually exit the command with a null input (just press <RETURN>) on the PET/CBM, or by pressing the ESC (escape) key on the Atari.

Since commas and colons are used as delimiters on the PET/CBM, you can't enter or edit a line containing commas. To enter such a line, hold down SHIFT when you press the command key such as SHIFT-E for Edit, SHIFT-I for Insert, etc. A quote will automatically be printed at the start of the line, permitting you to enter commas and colons without the infamous ?EXTRA IGNORED message. After you enter the line, all commas (CHR\$(44)'s) are converted to “fake commas” that look like commas, but don't work as delimiters (CHR\$(108)).

## Create A “Fake File”

You could even use this program to *create* files if you can create a “fake file” containing only one item such as:

```
OPEN 1,8,8,"0:filename" (on the PET)
PRINT#1,"X":CLOSE1
OPEN#1,8,0,"D:filename" (Atari)
PRINT#1;"X":CLOSE#1
```

You can then Replace the first line (the “X”), and use Append to add to the file.

I'll leave you with one important reminder: remember to re-SAVE a file after you edit it or your changes will have been in vain.



## Editing Commands

PET/CBM	Atari	Command	Description
<RETURN>	N	Next page	Displays the next 19 lines.
E	E	Edit	The primary "change" command. You enter the number of the line to be changed. The line is displayed at the bottom of the screen with the cursor on the first character. You can use your computer's editing keys to change the line (just like in an INPUT statement). Press <RETURN> when finished.
R	R	Replace	You just enter a completely new line to replace any line in the file.
I	I	Insert Line	For Atari: you enter the number of the line you want to insert a new line at. That line and all following lines are "pushed down," and the word "**** INSERT ****" is inserted. You can then use Replace to add a new line. For PET/CBM: you enter the number of the line you want to insert a line at, and then you enter the line you want inserted.
D	D	Delete Line	Enter the number of the line to be deleted. The following lines will be "pulled up" to fill the gap. For PET/CBM: If you use SHIFT-D (shifted D), you can enter the starting and ending lines of a block of lines you'd like deleted.
A	A	Append Line	After you type "A" you can enter a new line which will be added to the end of the file.
P	P	Print	Enter the starting and ending lines of the block of lines you would like printed to the printer. For the PET/CBM, this is device number four. You can just hit <RETURN> to both prompts to print the entire file (Atari version).
S	W	Save/Write	Stores the file on disk. PET/CBM: scratches the old file, then writes the new file. Atari: Replaces the old file, unless you save the file under another name.
X	Q	Exit/Quit	Lets you end the program.
0/1	[START]	Re-run	Atari version: If you press the START key at the prompt "Which?" you can RUN the program over again. PET/CBM version: Entering zero or one specifies which drive to use for the next file you want to edit. You can then enter the new file name.
G	G	Go to line	Lets you "skip around" in the file. Enter the number of the line you want to see.
n/a	O	Other menu	There are two menus in the Atari version, since the bottom of the screen can only hold so many commands. The other menu contains the commands Length, Search, and Next Search. You can add your own commands to this menu.
H	n/a	Help	Unlike the Atari version, the PET/CBM version doesn't constantly display all choices. Just type H to see a list of all options.
K	n/a	Kill File	Lets you scratch a file from within the program.
Z	n/a	—	Flips the character set.
F Q	S* N*	Find/Search Quick Find Next Search	You enter a series of characters you want to find in the file. In the PET/CBM version, all matching lines are displayed. Press any key to abort the search. The Atari version only displays the first occurrence of the match. The Next Search command is used to find the next occurrence of the same search string. You can search either by character or by line. The character search will search the entire file character-by-character for the string, where the line search only matches the search string with the beginning of the line, and is naturally faster. The PET/CBM version has a separate command, Quick Find, to search by line.
		<i>*Use (O)ther Menu</i>	
L	L	Length	Displays the number of lines in the file.

### Program 1. PET/CBM Version

```

100 PRINT{CLEAR}{REV}"TAB(15-20*(PEEK(213)
    =79))"*FIXFILE*"
110 PRINTCHR$(14);:POKE59468,12
120 MAX=1000:REM MAXIMUM NUMBER OF LINES AL
    LOWED
130 DIMA$(MAX):REM CHANGE TO SUIT MEMORY/FI
    LE REQUIREMENTS
140 PRINT{DOWN}ON WHICH DISK WILL WE WORK?
    ";

```

```

150 GETD$:IFD$<"0"ORD$>"1"THENK=1-K:PRINTMI
    D$("{REV}{OFF}"K+1,1);" {LEFT}";:
    GOTO150
160 PRINT{OFF}"D$
170 OPEN15,8,15:FILES$="  *"
180 INPUT"WHAT IS THE FILE'S NAME? *{03 LEF
    LEFT}";FS:IFF$="*"THENFS=MID$(FIS,
    3)
190 FIL$=D$+"":+FS
200 OPEN8,8,8,FIL$+",S,R":J=0
210 INPUT#15,EN,EMS
220 IFENTHENPRINTEMS:GOTO1420

```



**ECLECTIC SYSTEMS CORPORATION**  
Order TOLL FREE 1-800-527-3135



P.O. Box 1166 • 16260 Midway Road  
Addison, TX 75001 • (214) 661-1370

**ANNOUNCES**

# EM<sup>©</sup> for the SuperPET

## EM<sup>©</sup> is ANSI standard MUMPS

### Make your SuperPET Super-Load in EM<sup>©</sup> and Dramatically Improve your Programming Productivity



EM<sup>©</sup> is more than just a programming language. It is a well integrated data management system combining with one syntax what other operating systems would call 1) an application programming language; 2) a job control language; 3) a linkage editor; 4) a database management system; and 5) a communications monitor.

**PROGRAM MANAGEMENT:**

EM<sup>©</sup> provides all programming management facilities needed to manage programs and program files. Programs can be created, edited, cataloged and debugged from within EM<sup>©</sup>. Programs can be as large as disk capacity. A resident algorithm rids memory of least frequently used variables and program modules so that what you need off-disk normally resides in memory.

**STRING POWER:**

EM<sup>©</sup> makes string handling easy with its extensive set of string operations and functions. Variable length strings can be used routinely without the obstacles presented by most other programming languages.

**PATTERN MATCHING:**

EM<sup>©</sup> can "filter" user input with a useful pattern matching that will result in fewer user or device errors. For example: dates, zip codes and names can be tested for validity with a single statement.

**GLOBALS:**

EM<sup>©</sup> obviates the need for traditional read and write operations on secondary storage devices by allowing data elements to be directly referenced as a set of subscripts; all the details of file organization and retrieval are handled by the system.

**TIMING:**

EM<sup>©</sup> enables a programmer to associate timing constraints with several operations. This feature allows testing for terminal malfunctions as well as prompting users in time-critical dialogue.

**DATA BASE MANAGEMENT:**

Sorts and merges are not necessary as EM<sup>©</sup> automatically stores data in a dynamically allocated balanced tree structure. Random access to any data item requires at most three disk reads.

**EM<sup>©</sup> UNMATCHED IN PROGRAMMING PRODUCTIVITY:**

System houses that program in EM<sup>©</sup> (MUMPS) find that their costs are lower than those of their competitors using other languages. Fewer lines of code are necessary per application. Dimension statements are not required. Subscripts may be alpha, numeric or any legal string. Data types need not be defined and can change freely throughout as EM<sup>©</sup> can recognize when it is dealing with alpha, numeric, integer or floating-point data types. EM<sup>©</sup> gives the professional programmer a full set of software tools designed for real-life tasks and problems he consistently encounters in the production and maintenance of application software. EM<sup>©</sup> adheres rigidly to ANSI MUMPS standards, which make it transportable to larger processors manufactured by DEC, TANDOM, DATA GENERAL, HARRIS and others. Additionally EM<sup>©</sup> gives the less-experienced programmer the tools to do a professional job on formidable programming applications.

**You may order EM<sup>©</sup> or SuperPET by calling ECLECTIC SYSTEMS toll-free at 1-800-527-3135 from 10 AM to 4 PM CDT Monday through Friday, or you can order by mail using the form below. Texas residents call 1-214-661-1370.**

**ECLECTIC SYSTEMS CORPORATION**  
P.O. Box 1166, 16260 Midway Road, Addison, Texas 75001

Here's my order for EM<sup>©</sup> @ \$299 plus \$3.75 for shipping and handling (UPS surface unless specified otherwise). Residents of Texas, Louisiana, Oklahoma City and Tulsa, Oklahoma must add applicable taxes.

My certified check or money order is enclosed.

Please charge my VISA # \_\_\_\_\_ or  
MasterCard # \_\_\_\_\_ Expiration date \_\_\_\_\_

\_\_\_\_\_  
Name Signature

\_\_\_\_\_  
Address

\_\_\_\_\_  
City State Zip



```

230 CLOSE0:REM RESETS ST TO 0
240 IFST=64THEN280
250 J=J+1:INPUT#8,AS(J)
260 IFJ<MAXGOTO240
270 PRINT"{DOWN}FILE TOO LARGE":CLOSE8:END
280 CLOSE8
290 K=0:SK=1
300 PRINT"{CLEAR}":K=SK-1
310 K=K+1:IFK>JTHENK=0:GOTO360
320 IFPEEK(216)=1THENSK=K
330 N=K:GOSUB1300:PRINTNS;AS(K)
340 IFPEEK(216)>=20THEN360
350 GOTO310
360 PRINT:PRINT"COMMAND? ";
370 GETCMS:IFCMS$=""THENZ=1-Z:PRINTMID$("{RE
REV}{OFF}",Z+1,1);"{LEFT}";:GOTO3
70
380 SH=0:CM=ASC(CMS):IF(CMAND127)<>CMTHENSH
=1:CMS$=CHR$(CMAND127)
390 PRINT"{OFF}";CMS$
400 IFCMS$=CHR$(13)THENPRINT"{CLEAR}":GOTO31
0
410 IFCMS$<>"I"THEN460
420 NS=1:PRINT"{UP}INSERT AFTER WHICH ITEM"
;:GOSUB1310:IN=VAL(IN$):IFRTTHEN45
0
430 J=J+1:FORI=JTOIN+2STEP-1:AS(I)=AS(I-1):
NEXT
440 PRINT"ENTER NEW LINE.":GOSUB1310:IFRT=0
THENA$(IN+1)=IN$
450 GOTO300
460 IFCMS$="X"THENPRINT"{CLEAR}":GOTO830
470 IFCMS$<>"K"THEN510
480 INPUT"{UP}ARE YOU SURE?__ {03 LEFT}";X$:
IFX$<>"Y"THEN290
490 PRINT"{CLEAR}NOW KILLING THE FILE...":P
RINT#15,"S"+FIL$
500 PRINT FIL$" HAS NOW BEEN SCRATCHED.":GO
TO1420
510 IFCMS$<>"D"THEN590
520 NS=1:IFSH=0THENPRINT"{UP}DELETE WHICH I
TEM";:GOSUB1310:DL=VAL(IN$):D2=0
530 IFSH=0ANDDL=0THEN300
540 IFSH=1THENINPUT"{UP}DELETE WHICH ITEMS?
{03 LEFT}";IN$,D2:DL=VAL(IN$)
550 IFDL=0THEN300
560 Z=1:DI=D2-DL:IFDI<0THENDI=1:Z=0
570 J=J-DI-Z:FORI=DLTOJ:AS(I)=AS(I+DI+Z):NE
XT
580 GOTO300
590 IFCMS$<>"S"THEN640
600 PRINT#15,"S"+FIL$
610 OPEN8,8,8,FIL$+",S,W"
620 FORI=1TOJ:PRINT#8,AS(I);CHR$(13);:NEXT:
CLOSE8
630 GOTO300
640 IFCMS$<>"G"THEN680
650 PRINT"{UP}GOTO WHICH LINE";:NS=1:GOSUB1
310:IFRTTHEN300
660 L=VAL(IN$):IFL<1ORL>JTHEN640
670 K=L-1:PRINT"{CLEAR}":GOTO310
680 IFCMS$<>"R"THEN730
690 PRINT"{UP}REPLACE WHICH ITEM";:NS=1:GOS
UB1310:R=VAL(IN$):IFRTTHEN300
700 IFR<1ORR>JTHEN690
710 PRINT"ENTER NEW LINE.":GOSUB1310:IFRT=0
THENA$(R)=IN$
720 GOTO300
730 IFCMS$<>"P"THEN800
740 IFSHTHENFR=1:TU=J:GOTO760
750 DN=4
760 INPUT"FROM LINE,TO LINE";FR,TU
770 IF(FR<1ORTU<1)OR(FR>JORTU>J)OR(FR>TU)TH
EN750
780 OPEN1,DN:FORI=FRTOTU:N=I:GOSUB1300:PRIN
T#1,NS;AS(I):NEXT:CLOSE1
790 GOTO300
800 IFCMS$<>"1"ANDCMS$<>"0"THEN840
810 PRINT"{CLEAR}":IFCMS$<>D$THEND$=CMS$:GOTO
180
820 GOTO180
830 GOTO1420
840 IFCMS$<>"F"THEN920
850 PRINT"{UP}FIND WHAT";:GOSUB1310:S$=IN$:
PRINT"{CLEAR}":Z=0:IFRTTHEN300
860 FORI=1TOJ:FORK=1TOLEN(AS(I))
870 IFMID$(AS(I),K,LEN(S$))=S$THENN=I:GOSUB
1300:PRINTNS;AS(I):Z=1:GOTO890
880 NEXTK
890 GETAS:IFA$<>" "THENI=J
900 NEXTI:IFZ=0THENPRINT"NOT FOUND."
910 GOTO360
920 IFCMS$<>"E"THEN970
930 PRINT"{UP}EDIT WHICH LINE";:NS=1:GOSUB1
310:L=VAL(IN$):IFRTTHEN300
940 IFL<1ORL>JTHEN930
950 V=1:Z$=CHR$(SH*29):PRINT"? ";Z$;AS(L);"
{UP}":GOSUB1310:IFRT=0THENA$(L)=IN
$
960 GOTO300
970 IFCMS$="L"THENPRINT"FILE LENGTH.":J;"LIN
ES.{DOWN}":GOTO1290
980 IFCMS$="Q"THEN1430
990 IFCMS$<>"A"THEN1020
1000 PRINT"ENTER NEXT LINE.":GOSUB1310:IFRTT
HEN300
1010 J=J+1:AS(J)=IN$:GOTO300
1020 IFCMS$<>"H"THEN1270
1030 UL=PEEK(59468):POKE 59468,12
1040 PRINT"{CLEAR}"TAB(7)"{REV}LIST OF FIXFI
LE COMMANDS{DOWN}"
1050 PRINT"A = APPEND"
1060 PRINT"D = DELETE"
1070 PRINT"D = (SHIFT) DELETE RANGE"
1080 PRINT"E = EDIT A LINE"
1090 PRINT"F = FIND A STRING"
1100 PRINT"G = GO TO LINE #"
1110 PRINT"I = INSERT LINE"
1120 PRINT"K = KILL (SCRATCH) FILE"
1130 PRINT"L = PRINT LENGTH OF FILE"
1140 PRINT"P = PRINT FILE TO PRINTER"
1150 PRINT"Q = QUICK-FIND"
1160 PRINT"R = REPLACE LINE"
1170 PRINT"S = SAVE FILE (DON'T FORGET!)"
1180 PRINT"X = EXIT FIXFILE"
1190 PRINT"Z = SWITCH UPPER/LOWERCASE"
1200 PRINT"0 = EDIT A FILE FROM DRIVE 0"
1210 PRINT"1 = EDIT A FILE FROM DRIVE 1"
1220 PRINT"{DOWN}HOLD DOWN SHIFT WITH COMMAN
DS":PRINT"A,E,F,I,Q,R"
1230 PRINT"TO ENTER COMMAS OR COLONS."
1240 PRINT"PRESS A KEY TO CONTINUE..."
1250 GETAS:IFA$=""THEN1250
1260 POKE59468,UL:GOTO300
1270 IFCMS$="Z"THENPOKE59468,12+2*(PEEK(59468
)=12):PRINT"{02 UP}";:GOTO360
1280 PRINT"{REV}TRY{OFF} A,D,E,F,G,I,K,L,P,Q
,R,S,X,Z,1 OR 0":PRINT"OR {REV}H{O
FF} FOR HELP"
1290 PRINT"{03 UP}COMMAND? {UP}";:GOTO360
1300 NS$="{REV}"+"RIGHT$(" "+MID$(STR$(N),2
),4)+"{OFF} ":RETURN
1310 RT=0:Z$=CHR$(160+SH*126*(NS=0))

```



# The Hard & Soft of It: ATARI from ASAP

If you're into Atari, get into ASAP. When it comes to Atari, ASAP has it all — computers, a full line of accessories, and one of the most complete lines of software on the market. Whether you use your Atari for work or play, make ASAP your source. Call today.

The Atari® 800™ Computer features color graphics and English characters with truly high resolution, high quality sound, expandable memory and sleek modular appearance.

Atari® 400™ — 16K also available: \$349.00.

OPTIONAL ACCESSORIES	PRICE
ATARI® 410™ Program Recorder . . .	80.00
ATARI® 810™ Disk Drive . . . . .	455.00
ATARI® 822™ Thermal Printer . . . .	299.00
ATARI® 820™ 40-column Dot Matrix Impact Printer . . . . .	279.00
ATARI® 825™ 80-column Dot Matrix Impact Printer . . . . .	625.00
ATARI® 830™ Acoustic Modem . . .	159.00
ATARI® 850™ Interface Module . . .	175.00
ATARI® Paddle (CX30-04) and Joystick (CX40-04) (Pair) . . . . .	17.95
ASAP 16K RAM Module . . . . .	55.00

## COMPLETE SOFTWARE LIBRARY INCLUDES THESE POPULAR UNITS:

<b>Atari®</b>	
Video Easel ROM . . . . .	25.00
Music Composer ROM . . . . .	42.00
Assembler/Editor ROM . . . . .	45.00
Mortgage Loan Analysis Cassette . . . . .	15.95
Stock Analysis Disk . . . . .	19.95
Stock Charting . . . . .	22.95
Bond Analysis Disk . . . . .	22.95
Mailing List Cassette . . . . .	19.95
Touch Typing (2 Cass) . . . . .	19.95
Graph It (2 Cass) . . . . .	17.95
Word Processor . . . . .	119.00
Personal Finance . . . . .	64.95
Microsoft Basic . . . . .	75.00
Basketball ROM . . . . .	27.00
Super Breakout ROM . . . . .	30.00
Computer Chess ROM . . . . .	32.00
3D Tic Tac Toe ROM . . . . .	25.00
Star Raiders ROM . . . . .	36.00
Kingdom Cassette . . . . .	12.95
Blackjack Cassette . . . . .	12.95
Biorhythm Cassette . . . . .	12.95
Energy Czar Cassette . . . . .	12.95
Telelink ROM . . . . .	24.00
Space Invaders ROM . . . . .	30.00
Scram . . . . .	18.95
Asteroids . . . . .	32.00
Missile Command . . . . .	32.00
Caverns of Mars Disk . . . . .	30.00
Centipede Disk . . . . .	35.00
Pac-Man . . . . .	35.00
<b>Arcade Plus</b>	
Ghost Hunter Cassette . . . . .	25.00
Ghost Hunter Disk . . . . .	30.00
<b>Datasoft</b>	
Atari Mailing List Disk . . . . .	19.95
Atari Character Generator Disk . . . . .	16.95
Text Wizard Disk . . . . .	89.95
Micropainter Album 1 Disk . . . . .	16.95
Micropainter Album 2 Disk . . . . .	16.95
Le Stick Accessory . . . . .	30.00



### On-Line Systems

HI-RES Adv #0 — Mission: Asteroid Disk . . . . .	19.95
HI-RES Adv #2 — Wiz & Princess Disk . . . . .	25.00
Roadwork Disk . . . . .	29.95
Jawbreaker Disk . . . . .	25.00
Softporn Adventure (X-rated) Disk . . . . .	25.00
The Next Step Disk . . . . .	29.95

### Personal Software

Visicalc Disk . . . . .	169.00
-------------------------	--------

### FOR HOME ENTERTAINMENT SYSTEMS:

#### Activision

Dragster Cartridge . . . . .	18.50
------------------------------	-------

Boxing Cartridge . . . . .	18.50
Checkers Cartridge . . . . .	18.50
Fishing Derby Cartridge . . . . .	18.50
Skiing Cartridge . . . . .	18.50
Bridge Cartridge . . . . .	23.50
Tennis Cartridge . . . . .	18.50
Laser Blast Cartridge . . . . .	18.50
Freeway Cartridge . . . . .	18.50
Kaboom! Cartridge . . . . .	18.50
Stampede Cartridge . . . . .	18.50
Ice Hockey Cartridge . . . . .	23.50

**asap**  
computer  
products, inc.

1198 E. Willow St., Signal Hill, CA 90806

ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE. CALL FOR BEST PRICE

ASAP offers a 15-day buyer protection policy: full money-back guarantee if not totally satisfied.

Ordering information: name, address, phone; ship by: UPS or Mail. Shipping charge: add \$2.90 up to 1 lb. (UPS blue), U.S. Mail add \$1.50 (U.S. only) (\$25.00 minimum order).

Terms: We accept cash, check, money orders, Visa and Master Charge (U.S. funds only). Tax: 6% Calif. res., COD's and terms available on approval (School PO's Accepted).

Toll free outside California: (800) 421-7701. Inside California: (213) 595-6431 (714) 891-2663

Inside Canada call ASAP Computer Products, LTD., 116 Viceroy Rd., D-12 Concord, Toronto, Ontario, Canada L4K 1A9 (416) 738-0500 (800) 268-1996



```

1320 IFV=LANDSH=0THENZ$="{RIGHT}":V=0
1330 PRINT"? ";Z$;:POKE205,0:PRINT"{03 LEFT}
";
1340 IFNS=0ANDSH=1THENPOKE158,1:POKE623,ASC(
"{RIGHT}")
1350 INPUTNS
1360 IFINS=Z$THENNS=0:RT=1:RETURN
1370 IFSH=0ORNS=1THENNS=0:RETURN
1380 FORI=1TOLEN(INS):IFMID$(INS,I,1)<>","TH
EN1410
1390 REM CHR$(108) IS FAKE COMMA. SAVEABLE ~
TO DISK
1400 INS=LEFT$(INS,I-1)+CHR$(108)+MID$(INS,I
+1)
1410 NEXT:RETURN
1420 CLOSE8:CLOSE15:END
1430 PRINT"{UP}QUICK-FIND WHAT";
1440 FOUND=0:GOSUB1310:IFRTTHEN300
1450 S$=INS:L=LEN(S$):PRINT"{CLEAR}";
1460 FORI=1TOJ:IFLEFT$(A$(I),L)<>S$THEN1490
1470 N=I:GOSUB1300:PRINTNS;A$(I):FOUND=1
1480 IFPEEK(216)>20THENWAIT158,1:GETAS:PRINT
"{CLEAR}"
1490 GETAS:IFAS<>""THENI=J
1500 NEXT
1510 IFFOUND=0THENPRINT"NOT FOUND."
1520 GOTO360

```

### Program 2. Atari Version

```

100 REM FIXFILE-File Editor v1.0
110 REM Charles Brannon, 1982
120 REM
130 GRAPHICS 0:SETCOLOR 4,9,4
140 DLIST=PEEK(560)+256*PEEK(561)+4
150 POKE DLIST-1,7+64:POKE DLIST+2,6
160 POSITION 6,0:? "FIXFILE":POSITION 3+
20,0:? "a file editor"
170 DIM TEMP$(36),FILE$(14)
180 MAX=200:REM Maximum number of lines
in the file
190 DIM DISK$(MAX*35),LNKMAX),KEY$(35)
200 OPEN #1,4,0,"K":POKE 752,1
210 ? :? "(Press IRETURNI alone for dire
ctory.)":?
220 ? :? "Enter Filename - D:
(12 LEFT)";
230 GOSUB 1340:SETCOLOR 0,10,12
240 IF TEMP$="" THEN GOSUB 1080:RUN
250 FILE$="D":FILE$(3)=TEMP$
260 ? :? "{2 UP}Readline ";FILE$,
270 TRAP 280:OPEN #2,4,0,FILE$:GOTO 290
280 CLOSE #2:? :? "{UP}Error - ";PEEK(19
5),,:GOTO 220
290 TRAP 350:LINE$=0
300 INPUT #2;TEMP$
310 L=LEN(TEMP$):LNK(LINES)=L
320 DISK$(LINES*35+1,LINES*35+L)=TEMP$
330 LINES=LINES+1:IF LINES<MAX THEN 300
340 ? :? "{UP}Error - File too Large!":
GOTO 0

```

```

350 IF PEEK(195)<>136 THEN 280
360 CLOSE #2
370 CURR=0:POKE 82,0:LINE$=LINE$-1
380 GRAPHICS 0:SETCOLOR 4,9,4:POKE 752,1
:POKE 766,1
390 FOR I=CURR TO CURR+18
400 IF I>LINE$ THEN POP :GOTO 450
410 TEMP$="000":TEMP$(4-LEN(STR$(I)))=ST
R$(I)
420 FOR J=1 TO 3:TEMP$(J,J)=CHR$(ASC(TEM
P$(J))+128):NEXT J
430 ? TEMP$;" ";DISK$(I*35+1,I*35+LNK(I))

440 NEXT I
450 POKE 766,0:POSITION 0,19:? "(40 R)";

460 POKE 703,4
470 ? "{CLEAR}IEdit IRlEplace IInsert
IDelete IAlppend IPrInt IWrIte IQuit
INlExt PAsE IGlOtO IOlthEr ISTARTI"
480 ? :? "Which? ";
490 IF PEEK(53279)=6 THEN 1300
500 IF PEEK(764)=255 THEN 490
510 P=PEEK(702):POKE 702,64:GET #1,A:POK
E 702,P
520 IF A=ASC("0") THEN 1450
530 IF A<>ASC("E") THEN 580
540 ? "{CLEAR}EDITI: Which Line? ";:GOS
UB 1200:IF NK0 OR N>LINE$ THEN 540
550 ? "{CLEAR}Enter changes, press IRETU
RNI"
560 ? " ";DISK$(N*35+1,N*35+LNK(N)):?
"{UP}";:GOSUB 1180
570 GOTO 610
580 IF A<>ASC("R") THEN 620
590 ? "{CLEAR}REPLACEI: Which Line? ";:
GOSUB 1200:IF NK0 OR N>LINE$ THEN 590
600 ? "Enter new line:":GOSUB 1180
610 LNK(N)=LEN(TEMP$):DISK$(N*35+1,N*35+L
NK(N))=TEMP$:GOTO 380
620 IF A<>ASC("I") THEN 670
630 ? "{CLEAR}Insert a line at line: ";:
GOSUB 1200:IF NK0 OR N>LINE$ THEN 630
640 ? "Patience...":LINE$=LINE$+(LINE$<M
AX):DISK$(LINE$*35)=""
650 FOR I=LINE$ TO N+1 STEP -1:TEMP$=DIS
K$(I-1)*35+1,I*35):DISK$(I*35+1,I*35+35
)=TEMP$:LNK(I)=LNK(I-1):NEXT I
660 DISK$(N*35+1,N*35+14)="** INSERT **
*":LNK(N)=14:GOTO 380
670 IF A<>ASC("D") THEN 730
680 ? "{CLEAR}Delete which line? ";:GOSU
B 1200:IF NK0 OR N>LINE$ THEN 680
690 IF N=LINE$ THEN LINE$=LINE$-(LINE$>0
):GOTO 380
700 ? "Patience...":LINE$=LINE$-(LINE$>0
):DISK$(LINE$*35+71)=""

```



# SJB DISTRIBUTORS. THE MOST COMPETITIVE PRICES ON COMMODORE PRODUCTS.



**commodore**

## AUTHORIZED SALES AND SERVICE FOR THE FOLLOWING PRODUCTS —

### HARDWARE:

SuperPET SP9000, 96K .....	\$1,599 (New)
CBM 8032 Computer, 80 Col. ....	1,069
CBM 8050 Disk Drive, 1 Mb .....	1,299
CBM 8250 Disk Drive, 2 Mb .....	1,760 (New)
CBM D9060 Hard Drive, 5 Mb .....	2,795 (New)
PET 4032 Computer, 40 Col. ....	950
CBM 4040 Disk Drive, 340K .....	969
CBM 2031 Disk Drive, 170K .....	525
CBM Memory Expansion, 64K .....	399
CBM 4022 Printer, Graphics .....	595
CBM 8023P Printer, 150 CPS .....	769
CBM 8300P Printer, Ltr. Qual. ....	1,750
Commodore 64 Computer, 64K .....	595 (New)
VIC 20 Computer, 5K .....	259
VIC Datasette Recorder .....	69
VIC 1540 Disk Drive, 170K .....	467 (New)
VIC 1515 Printer, 30 CPS .....	320
VIC 8K Memory Expansion .....	50

### MONITORS:

Panasonic CRT, 13" Color .....	\$ 405
Panasonic CRT, 9" B & W .....	144

### PRINTER PAPER:

9½" x 11" Continuous, Blank	
2700 Sheets, Carton .....	\$ 32

### SOFTWARE:

OZZ Data Base System (8050) .....	\$ 289
Silicon Office .....	995 (New)
Wordcraft 80 .....	289
Wordcraft Ultra .....	429 (New)
VisiCalc .....	199
Personal Tax Calculator .....	59
Dow Jones Portfolio	
Management System (RS232) .....	120
WordPro 4+ or 5 .....	299
The Manager .....	199
Galaxy One .....	39
Legal Time Accounting .....	449
I.R.M.A. ....	380
B.P.I. A/R, G/L, Job Cost,	
Inventory, Payroll .....	325 /pkg
VIC Games Cartridges .....	23 ea
VIC Cassette Recreation Pack .....	44
VIC Cassette Calculation Pack .....	44

### DISKETTES:

Verbatim #18158, 5¼",	
SS/DD, Hub Ring, Box of 10 .....	\$ 30
3M "Scotch" #744-0, 5¼",	
SS/SD, Hub Ring, Box of 10 .....	33
Memorex #3481, 5¼",	
SS/DD, Hub Ring, Box of 10 .....	28

*SJB carries many other lines of equipment and products. Call us for a free catalogue.*

**REGISTER FOR OUR NEW  
SOFTWARE SUPPORT SERVICE!**

**ORDER TOLL-FREE**

**800-527-4893    800-442-1048**  
(Outside Texas)    (Within Texas)

**MASTERCARD, VISA, MONEY ORDER,  
BANK CHECK, COD (ADD \$5) ACCEPTED.**

Add 3% Surcharge For Credit Cards.

In Stock Items Shipped Within 48 Hours, F.O.B., Dallas, Texas.  
All Products Shipped With Manufacturer's Warranty.



**SJB DISTRIBUTORS, INC.**

10520 Plano Road  
Suite 206  
Dallas, Texas 75238  
(214) 343-1328

*Prices are subject to change without notice.*



```

710 FOR I=N TO LINES:TEMP$=DISK$(I+1)*3
5+1,(I+1)*35+35)
720 DISK$(I*35+1,I*35+35)=TEMP$:LNK I)=LN
(I+1):NEXT I:GOTO 380
730 IF A<>ASC("A") THEN 790
740 IF LINES=MAX THEN ? "(CLEAR)Not enou
sh room!":FOR W=1 TO 200:NEXT W:GOTO 470

```

```

750 CURR=(LINES-17)*(LINES>18)
760 ? "(CLEAR)Enter line to be appended:
":GOSUB 1180:IF TEMP$="" THEN 470
770 LINES=LINES+1
780 LNK(LINES)=LEN(TEMP$):DISK$(LINES*35+
1,LINES*35+LNK(LINES))=TEMP$:GOTO 380
790 IF A<>ASC("P") THEN 870
800 ? "(CLEAR) IPRINT1: Turn on printer,
press IRETURN":GET #1,A:IF A=27 THEN 47
0
810 TRAP 820:CLOSE #2:OPEN #2,8,0,"P":G
OTO 830
820 ? "(CLEAR)(BELL)Printer not ready.":
? "(DOWN)Press IRETURN":GET #1,A:CLOSE
#2:GOTO 470
830 ? "Startine Line?":GOSUB 1200:S=N
840 ? "Endine Line?":GOSUB 1200:IF N=0
THEN N=LINES
850 FOR I=S TO N:PRINT #2:DISK$(I*35+1,I
*35+LNK I)):NEXT I
860 LPRINT :CLOSE #2:TRAP 0:GOTO 470
870 IF A<>ASC("W") THEN 970
880 ? "(CLEAR) IWRITE1: Save file to disk
"
890 ? "Use same file name? (Y/N)":
900 GET #1,A:IF A<>ASC("Y") AND A<>ASC("
N") AND A<>27 THEN 900
910 IF A=27 THEN 470
920 IF A=ASC("N") THEN ? "(CLEAR)Enter f
ile name: ":GOSUB 1340:FILE$="D:":FILE$
(3)=TEMP$
930 ? "(CLEAR)SAVING FILE TO ":FILE$
940 TRAP 950:OPEN #2,8,0,FILE$:GOTO 960
950 ? "(CLEAR)(BELL)Disk Error - ":PEEK(
195):CLOSE #2: ? ? "Press IRETURN":GET
#1,A:GOTO 470
960 FOR I=0 TO LINES:PRINT #2:DISK$(I*35
+1,I*35+LNK I)):NEXT I:CLOSE #2:TRAP 0:G
O TO 470
970 IF A<>ASC("Q") THEN 1030
980 ? "(CLEAR) IQUIT1: Are you sure? (Y/N
)":
990 GET #1,A
1000 IF A=ASC("N") OR A=ASC("n") OR A=27
THEN 470
1010 IF A=ASC("Y") OR A=ASC("y") THEN GR
APHICS 0:END
1020 GOTO 990

```

```

1030 IF A=ASC("N") THEN CURR=CURR+19:IF
CURR>=LINES THEN CURR=0
1040 IF A=ASC("N") THEN 380
1050 IF A<>ASC("G") THEN 470
1060 ? "(CLEAR)Go to which line? ":GOSU
B 1200:IF N<0 OR N>MAX THEN 1060
1070 CURR=N:GOTO 380
1080 REM IPrint directory
1090 ? "(CLEAR)":POSITION 5,0: ? "DIRECTO
RY":POSITION 20,0: ? "
"
1100 SETCOLOR 0,INT(16*RND(0)),10
1110 TRAP 1120:OPEN #2,6,0,"D:*.":GOTO
1130
1120 ? "Can't read directory":GOTO 1160
1130 TRAP 1160:INPUT #2:TEMP$
1140 ? "(TAB) ";TEMP$:IF PEEK(84)>15 TH
EN POSITION 0,1: ? "(DEL LINE)":POSITION
2,15:FOR W=1 TO 100:NEXT W
1150 GOTO 1130
1160 ? : ? ? "Press IRETURN to continue
..."
1170 CLOSE #2:GET #1,A:RETURN
1180 POKE 752,0: ? " ";INPUT TEMP$:POK
E 752,1:IF TEMP$="" THEN TEMP$=""
1190 RETURN
1200 REM GET A NUMBER
1210 TEMP$="0":FOR I=1 TO 4
1220 ? "|#| (LEFT)";
1230 GET #1,A: ? " (LEFT)":IF A=27 THEN
POP :GOTO 470
1240 IF A=126 AND I>1 THEN ? CHR$(A):TE
MP$(I-1)=" ":I=I-1:GOTO 1220
1250 IF A=155 THEN POP :GOTO 1280
1260 IF A<48 OR A>57 OR I=4 THEN 1220
1270 TEMP$(I)=CHR$(A): ? CHR$(A):NEXT I
1280 N=0:P=1:FOR I=LEN(TEMP$) TO 1 STEP
-1:N=N+(ASC(TEMP$(I,I))-48)*P:P=P*10:NEX
T I
1290 ? :RETURN
1300 ? "(CLEAR)START OVER: Are you sure?
(Y/N)":GET #1,A
1310 IF A=27 OR A=ASC("N") OR A=ASC("n")
THEN 470
1320 IF A=ASC("Y") OR A=ASC("y") THEN RU
N
1330 GOTO 1300
1340 REM GET FILE NAME
1350 TEMP$=" ":FOR I=1 TO 12
1360 FOR I=1 TO 12
1370 ? "_ (LEFT)":POKE 702,64
1380 IF PEEK(764)=255 THEN SETCOLOR 0,IN
T(16*RND(0)),10+2*INT(3*RND(0)):GOTO 138
0
1390 GET #1,A: ? " (LEFT)":IF A=155 THEN
POP :GOTO 1430

```



```


1400 IF A=126 AND I>1 THEN TEMP$(I-1)="
":I=I-1:CHR$(A):GOTO 1370
1410 IF (A<48 OR (A>57 AND A<65) OR A>90
) AND A<46 THEN 1370
1420 TEMP$(I)=CHR$(A):CHR$(A):NEXT I:
I=I-1
1430 POKE 764,255
1440 RETURN
1450 REM OTHER COMMANDS
1460 REM ADD YOUR COMMANDS HERE
1470 ? "(CLEAR)Length of search lines"
1480 ? "Any other key--Other commands"
1490 ? "Which?";
1500 P=PEEK(702):POKE 702,64:GET #1,A:PO
KE 702,P
1510 IF A<>ASC("L") THEN 1540
1520 ? "(CLEAR)Length of File: ";LINES+1
;" lines."
1530 ? :? "Press RETURN":GET #1,A:GOTO
470
1540 IF A<>ASC("S") THEN 1770
1550 ? "(CLEAR)SEARCH: Enter character
s to search for:"
1560 GOSUB 1180:IF TEMP$=" " THEN 470
1570 KEY$=TEMP$:NX=0
1580 KL=LEN(KEY$)
1590 ? "(CLEAR)By character or line?
";GET #1,A:IF A=27 THEN 470
1600 TYPE=-1
1610 IF A=ASC("C") OR A=ASC("c") THEN TY
PE=1
1620 IF A=ASC("L") OR A=ASC("l") THEN TY
PE=0
1630 IF TYPE=-1 THEN 1590
1640 ? "(CLEAR)Searching..."
1650 FOR I=NX TO LINES
1660 TEMP$=DISK$(I*35+1,I*35+LNK I):TEMP
$(LENK TEMP$+1)="
":REM 35 SPACES
1670 IF TYPE THEN 1700
1680 IF TEMP$(1,KL)=KEY$ THEN 1750
1690 GOTO 1730
1700 FOR J=1 TO 35-KL
1710 IF TEMP$(J,J+KL-1)=KEY$ THEN 1750
1720 NEXT J
1730 NEXT I
1740 ? "(CLEAR)Not found.":? "(DOWN)Pres
s RETURN":GET #1,A:GOTO 470
1750 CURR=I:I=LINES+1:NEXT I
1760 GOTO 380
1770 IF A<>ASC("N") THEN 470
1780 IF LEN(KEY$)<1 THEN 470
1790 NX=CURR+(CURR<LINES)
1800 ? "(CLEAR)SEARCH: for: "
1810 ? KEY$:GOTO 1580

```

NOW AVAILABLE FOR THE APPLE II

# Ali Baba and the forty thieves

By Stuart Smith

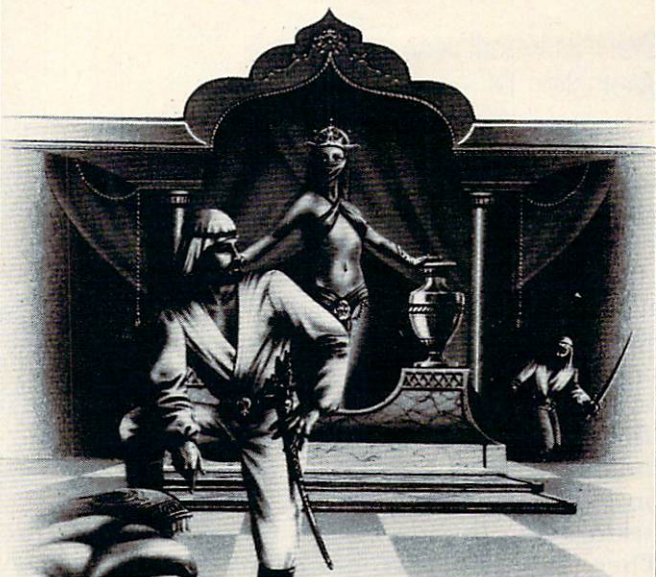

## A fantasy role-playing adventure for Apple II and Atari Personal Computers.

Encounter sultans, thieves, fierce and friendly creatures as you guide your alter ego, Ali Baba, through the thief's mountain den in an attempt to rescue the beautiful princess. Treasure, magic, and great danger await you! One or more human players can guide up to seventeen friendly characters through the many rooms, halls, and caves. Some characters wander around randomly, making each adventure a little different.

ALI BABA AND THE FORTY THIEVES is written in high resolution color graphics and includes music and sound effects. Adventures can be saved to disk and resumed at a later time.

Available for Apple II and Apple II Plus 48K or Atari 800 32K.

On diskette only — \$32.95

FOR OUR COMPLETE LINE OF APPLE AND ATARI SOFTWARE  
PLEASE WRITE FOR OUR CATALOG

ASK FOR QUALITY SOFTWARE products at your favorite computer store. If necessary you may order directly from us. MasterCard and Visa cardholders may place orders by calling us at (213) 344-6599. Or mail your check or bankcard number to the address above. California residents add 6% sales tax. *Shipping Charges:* Within North America orders must include \$1.50 for shipping and handling. Outside North America the charge for airmail shipping and handling is \$5.00. Pay in U.S. currency.

**QS** QUALITY  
SOFTWARE

6660 Reseda Blvd., Suite 105, Reseda, CA 91335 (213) 344-6599



*This extraordinarily useful Atari Disk technique lets you eliminate DUP.SYS and MEM.SAV from most of your disks and to call a function menu directly from BASIC.*

# MicroDOS

Dennis Keathley  
Webster, TX

It's late at night and you've been working on major revisions to a huge BASIC program for four hours. You finally finish and want to save it back on disk as ULTIMATE.003 (versions 001 and 002 are already on the disk). Upon SAVEing it, you get ERROR 162 (disk full). You think to yourself, "I'll save it as version 001 since that version is out of date anyway." You get another error, ERROR 167 (file locked). "Well I'll just type DOS and unlock the file. After all, MEM.SAV will preserve my program." So you type "DOS" and sit back to twiddle your thumbs for a minute or so. Wait! There's something wrong. There was no MEM.SAV file on the disk. You deleted it because you needed more free sectors. Four hours of work are lost forever.

## Save Yourself 88 Sectors And 75 Seconds

Would you like to eliminate the need for DUP.SYS and MEM.SAV on most of your disks?

The Disk Operating System, version 2.0, is a powerful and well-designed piece of software. It also allows you more free RAM for programming use than DOS 1 by moving many of the utility functions into a separate file called DUP.SYS. The Disk Utility Programs are loaded into memory only when requested by typing DOS. The trade-off is that the file DUP.SYS (42 sectors) must be on your disk in drive #1, and it requires 15 to 20 seconds to load into RAM.

Another trade-off is that the BASIC program in RAM will be lost unless you have a MEM.SAV file (45 sectors) on your disk in drive #1, and using MEM.SAV requires almost a minute longer. Eliminating the need for DUP.SYS and MEM.SAV saves you 88 sectors and 75 seconds.

When DOS is booted into RAM at power-on, the portion that remains memory-resident at all times is called the File Management System. The FMS allows you to perform some file manipulation and directory modifications. The most common way to do this is to type DOS which gives you the DOS 2.0 Menu contained in DUP.SYS. Some schemes have been developed to access the RMS functions from BASIC, but they require you to either remember the exact XIO command or to

have numerous short programs on your disk that remember them for you (more time and sectors wasted).

Wouldn't it be nice to be able to call a function menu from BASIC without using additional memory, losing your BASIC program, or performing disk I/O?

MicroDOS is a machine language program that is loaded into page six of RAM (Decimal 1536 to 1791), an area conveniently left to the user by the wizards that designed the Atari Operating System. When executed, MicroDOS gives you a menu of FMS functions, which allows you to select the function and desired filename. You may perform as many functions as you wish, and then return to BASIC. And your BASIC program is still there, intact.

Program 1 is the assembly listing. For those of you who do not have an assembler, Program 2 provides a BASIC program to accomplish the same result. If using an assembler, you may designate "D:AUTORUN.SYS" as the binary output file. This will perform automatic loading of MicroDOS when DOS is booted into RAM. If you are presently using an AUTORUN.SYS file, you may append it onto this one using the /A (append) feature of the copy (C) option of the DOS 2.0 menu. The comments in the listings make them self-explanatory.

For ease of use, we "steal" the DOS jump vector, DOSVEC (\$0A or decimal 10) and point it to MicroDOS. Perform POKE 10,0 and POKE 11,6. When you type "DOS", BASIC jumps to the address specified in DOSVEC and DOSVEC + 1 (low byte, high byte). Now it will jump to MicroDOS instead. One more detail: when SYSTEM RESET is pressed, DOS restores DOSVEC to the original value. To prevent this, POKE 5446,0 and POKE 5450,6. DOS will now reload DOSVEC with \$0600 (the start of MicroDOS) when SYSTEM RESET is pressed.

Note that the last six lines of the assembler listing before the .END statement will cause this to be done automatically when the file is loaded. In the BASIC listing, the last 16 numbers perform this. Omit them if you desire and subtract 16 from the 342 in line two. If you should desire to reset DOSVEC so that DUP.SYS may be loaded, POKE 10,159 and POKE 11,23. Now, typing "DOS" will load DUP.SYS, but SYSTEM RESET will cause DOSVEC to point to MicroDOS.

Upon typing "DOS", MicroDOS will display the menu:

```
LOCK
UNLOCK
DELETE
RENAME
```



# SWIFT

# FOR 16K

# ATARI COMPUTERS

## FLIP'N' FILE

FLIP'N' FILE is a new functional and attractive storage system for ATARI 400/800 Computer cartridges. Each desktop unit holds 10 cartridges for easy access.  
Cat No. 3790 \$29.95

## DYSAN 5 1/4" DISKETTES

Dysan diskettes, long known for their exceptional quality, are ideally suited for use on your Atari Computer (or any 5 1/4" soft sector computer). And with HW's low, low price, it's time to stack up. Dysan #104/1  
Cat No. 3966 Box of 10 \$39.95

## SYNCO WORDMANIA

Learning is not supposed to be this much fun. In WORDMANIA, one or two players compete against a rapidly burning dynamite fuse in order to unscramble anagrams. If you take too long... KABOOM! Random selection from over 1800 words and auto-adjustment of difficulty levels make WORDMANIA a game you won't soon tire of. Requires BASIC cartridge. CAUTION: This game is extremely addicting!

Cat No. 3907 cassette \$14.95  
Disk version (3908) available  
requires 24K 19.95

## SYNCO ALIEN HELL

Lucky you... you're enslaved by Aliens to work in their crystal mines. Escape is your only hope. You must search the vast underground corridors in order to find the Magic Crystals and escape. Beware! Strange creatures and deadly fireballs could be around the next corner. Alien Hell is a real-time adventure played in high resolution graphics. Requires BASIC cartridge.

Cat No. 3780 cassette, jstsk. \$14.95  
Disk version (3781) available  
requires 24K 19.95

## DATASOFT CANYON CLIMBER

You're at the bottom of the Grand Canyon and trying to scale the toughest canyon wall. You must face three difficult challenges before you reach the top. Angry sheep, threatening Indians, and attacking birds all stand in your way.  
Cat No. 3957 cassette, jstsk. \$29.95  
Cat No. 3958 diskette, jstsk. 29.95

## DATASOFT SHOOTING GALLERY

Some of the most superb graphics ever created on the Atari Computer. With a limited amount of bullets, you must shoot the elephants, ducks, rabbits, happy & sad faces, and finally the bears. If you can make it to the tenth round, a surprise awaits you.  
Cat No. 3959 cassette, jstsk. \$29.95  
Cat No. 3960 diskette, jstsk. 29.95

## DATASOFT PACIFIC COAST HWY

PCH is a fast action game in which you must safely cross PCH without getting squashed by the rush hour traffic. Once you survive the highway, you must leap from boat to raft in order to cross the mighty Pacific. One or two may play. Features excellent graphics.  
Cat No. 3961 cassette, jstsk. \$29.95  
Cat No. 3962 diskette, jstsk. 29.95

## APOGEE SOFTWARE ASTROWARRIORS

A fast action player vs. player game of space combat. ASTROWARRIORS features realistic gravity and orbital mechanics as well as extensive use of Atari graphics and sound. Attack with your Photon missiles. Protect yourself with shields. Manuever with your thrusters or enter hyperspace to avoid damage or destruction. Up to four players may battle in one of four skill levels and battle modes.  
Cat No. 3886 cassette, jstsk. \$29.95  
Cat No. 3886 diskette, jstsk. 29.95

## GAMMA SOFTWARE HOCKEY

HOCKEY is a hi-res, fast action game for two to four players. An offensive player can carry the puck, pass and shoot. A defensive player can steal the puck and intercept passes. An advanced feature of HOCKEY is the inclusion of "Smart" players who perform automatically. In case of a tie after regulation time, there is even sudden-death overtime.  
Cat No. 3988 cassette, jstsk. \$29.95  
Cat No. 3987 diskette, jstsk. 29.95

## SYNAPSE CHICKEN

There's trouble in the barnyard! Ma Hen and a pesky old fox battle it out, as you try to save the local chicken population. Seems that the fox has found Ma Hen's eggs, and she is trying to save them from his deadly clutches. The action gets faster and faster as eggs turn into chicks, feathers fly, chickens squawk, and all bedlam breaks loose!  
Cat No. 3906 cassette, jstsk. \$29.95  
Cat No. 3905 diskette, jstsk. 29.95

## ANALOG SOFTWARE RACE IN SPACE

RACE IN SPACE is a very different space game: you must not only avoid the myriad of tiny asteroids about you, but you must contend with comets zooming past, negative universes, and missiles shot by your opponent's ship. Written in machine language, RACE IN SPACE features 128 options, multi-color player/missile graphics & "outer space" sound effects.  
Cat No. 3934 cassette, jstsk(2) \$21.95  
Cat No. 3935 diskette, jstsk(2) 24.95

## COMPUTER CORE SOFTWARE YAHTZMAN

YAHTZMAN is the computerized version of a dice game (of a similar name) which has popular for years. One to four players, school age and up, may compete for the highest score. Invite your friends over and see who can beat YAHTZMAN. Requires BASIC cart.  
Cat No. 3405 cassette, jstsk. \$19.95

## HOW TO ORDER

WRITE OR PHONE. Pay by check, M/C, Visa, or C.O.D. (add \$1.50 for COD.)

SEND ORDERS TO:  
HW ELECTRONICS, INC.  
19511 BUSINESS CTR. DR.  
Dept G 7  
NORTHRIDGE, CA. 91324

TOLLFREE USA (800)423-5387  
INSIDE CALIF (213)886-9200

# HW ELECTRONICS

WHEN IN SOUTHERN CALIFORNIA, VISIT OUR RETAIL STORES

19511 Business Center Dr.  
Northridge, Ca. 91324

2301 Artesia Blvd.  
Redondo Beach, Ca. 90277

444 S. Indian Ave.  
Palm Springs, Ca. 92262

Offer expires July 31, 1982

Mention this ad and we pay shipping (UPS ground only)



**FORMAT****MENU****ADOS****BASIC**

Note: Underlined letters are inverse video.

Enter the command you desire (only the first letter is necessary). You will then see:

**FN?**

Enter your filename and press RETURN. You must enter the "D:" or "D2:" at the beginning of your filename so that FMS will know which drive to access (do *not* use quotes, as in BASIC). The function will be performed and the menu will reappear. Note: if you selected RENAME, the correct filename input is "D1:fn1,fn2". Only one "Dn:" is needed and the comma is required.

If you selected FORMAT, instead of FN? you will see:

**FD#**

to warn you that the information on the disk will be destroyed. Type "D1", RETURN (or D2, D3, etc.) to format, or anything else to abort formatting.

If you selected MENU, you will see:

**D#?**

as a prompt. Enter the drive number (single digit) from which you wish to see a disk directory, and it will scroll across the screen. Use CTRL 1 to momentarily halt the scrolling, and CTRL 1 to resume. The directory will stay on the screen until you press RETURN once more.

**Making Use Of The 6502 Stack**

Selecting ADOS will allow you to load DUP.SYS in the normal way if you have a need to do that (and you shouldn't often!). As a safety feature, to select this function you must type the first *two* letters. If you enter an invalid filename or if FMS is unable to perform the function, MicroDOS will just return to the ">" prompt. To return to BASIC, type "B" (or any other letter that is not a selection letter).

The most difficult part about writing MicroDOS was fitting it into just one *page* (256 bytes) of RAM. Due to this constraint, a Disk Directory option could not be included in page six. In order to add this feature, the MicroDOS selection menu and input buffer had to be moved to the beginning of page one. What? You thought page one of RAM was used by the 6502 microprocessor as a stack area? Well, it is, but the 6502 will never need more than the top one-third. So we will use the bottom one-third.

If you spend a portion of your time programming in BASIC, you will probably find MicroDOS well worth the time spent typing it in. It has saved me much time and frustration.

**Program 1. Source Listing**

```

0100 .TITLE "MICRO-DOS"
0110 REM COPYRIGHT 1982
0120 REM ALL COMMERCIAL RIGHTS
0130 REM RESERVED BY DENNIS KEATHLEY
0140 .OPT NOEJECT
0150 ;
0160 ;      DEFINE EQUATES
0170 ;
0180 *=$0342
0190 ICCMD *=*+2
0200 ICCMD1=ICCMD+16
0210 ICBAL *=*+1
0220 ICBAL1=ICBAL+16
0230 ICBAH *=*+3
0240 ICBAH1=ICBAH+16
0250 ICBL1 *=*+1
0260 ICBL11=ICBL1+16
0270 ICBLH *=*+1
0280 ICBLH1=ICBLH+16
0290 ICAX1 *=*+1
0300 ICAX11=ICAX1+16
0310 ICAX2 *=*+1
0320 CIOU=$E456
0330 OPEN=3
0340 CLOSE=12
0350 GETC=7
0360 PUTC=11
0370 GETR=5
0380 PUTR=9
0390 EOL=155
0400 CLR=125
0410 TAB=127
0420 ; ***** MICRODOS SOURCE CODE **
*****
0430 *=$0600
0440 ;
0450 ;      DISPLAY MENU ON SCREEN
0460 ;
0470 INIT
0480 LDY #MBUF&255
0490 LDX #E01-MBUF
0500 LDA #PUTC
0510 JSR IOE2
0520 ;
0530 ;      ACCEPT COMMAND
0540 ;
0550 GRAB
0560 JSR INPUT
0570 ;
0580 ;      EXECUTE COMMAND
0590 ;
0600 JSR IOP
0610 BPL INIT
0620 BMI GRAB If CIOU error, Y>127

```



```

0630 ;
0640 ; INPUT CONTROL ROUTINE
0650 ;
0660 INPUT
0670 ; PUT PROMPT ON SCREEN
0680 LDY #0BUF&255
0690 LDX #2
0700 JSR Q
0710 ; GET COMMAND CHOICE
0720 JSR IN
0730 LDY #6
0740 STY ICAX11 To "open directory" lat
er
0750 LOOP
0760 DEY
0770 BEQ EXIT
0780 LDA ASCII-1,Y
0790 CMP KBUF
0800 BNE LOOP
0810 LDA CMD-1,Y
0820 PHA Save command #
0830 CMP #FE
0840 BNE CONT
0850 ; VERIFY FORMAT COMMAND
0860 LDY #0BUF+5&255
0870 LDX #3
0880 JSR Q
0890 JSR IN
0900 LDA KBUF
0910 CMP #68 Is first letter a "D"?
0920 BNE EXIT No, then leave MICRO-DOS
0930 BEQ RT
0940 CONT
0950 ; PUT PROMPT ON SCREEN
0960 LDY #0BUF+2&255
0970 LDX #3
0980 JSR Q
0990 ; GET FILENAME
1000 JSR IN
1010 RT
1020 PLA Retrieve FMS command
1030 RTS
1040 ;
1050 ; PROMPT ON SCREEN ROUTINE
1060 ;
1070 Q
1080 LDA #PUTC
1090 JSR IOE
1100 RTS
1110 ;
1120 ; EDITOR LINE IN ROUTINE
1130 ;
1140 IN
1150 LDY #KBUF&255
1160 LDX #40
1170 LDA #GETR
1180 JSR IOE2
1190 RTS
1200 ;
1210 ; EXIT AND I/O ROUTINES
1220 ;
1230 EXIT
1240 LDA KBUF
1250 CMP #77 Directory Request?
1260 BNE DOS No, go to DOS
1270 LDY #0BUF+6&255
1280 LDX #3
1290 JSR Q Put D#? prompt on screen
1300 LDY #SBUF+1&255
1310 LDX #1
1320 LDA #GETR
1330 JSR IOE2 Get drive #
1340 LDY #58
1350 STY SBUF+2 Restore colon
1360 LDY #SBUF&255
1370 LDA #OPEN
1380 JSR IOP2 Open directory
1390 AGAIN
1400 LDA #19
1410 STA ICBL1
1420 LDA #GETR
1430 JSR IOP Get directory entry
1440 BMI THRU Last entry? Go to THRU
1450 LDY #KBUF-1&255 Tab is first chara
cter
1460 LDX #20
1470 LDA #PUTR
1480 JSR IOE2 Put directory entry on sc
reen
1490 BPL AGAIN Go set another entry
1500 THRU
1510 LDA #CLOSE
1520 JSR IOP Close directory
1530 JSR IN Wait for RETURN pressed
1540 JMP INIT Go to selection menu
1550 ;
1560 DOS
1570 CMP #65 Is DOS desired?
1580 BNE BASIC No, exit MICRODOS
1590 LDA #68
1600 CMP KBUF+1 Additional check for sa
fety
1610 BNE BASIC
1620 JMP 6047 Load DUP.SYS
1630 ;
1640 BASIC
1650 JMP $A04D Warm start entry
1660 ;
1670 IOE
1680 PHA
1690 LDA #0BUF/256
1700 STA ICBAH

```



```

1710 PLA
1720 ENT
1730 STY ICBAL
1740 STX ICBLL
1750 LDX #0
1760 STX ICBLLH
1770 STX ICBLLH1
1780 BEQ IO
1790 IOE2
1800 PHA
1810 LDA #KBUF/256
1820 STA ICBALH
1830 STA ICBALH1
1840 PLA
1850 BNE ENT
1860 ;
1870 IOP
1880 LDY #KBUF&255
1890 IOP2
1900 STY ICBAL1
1910 LDX #10
1920 IO
1930 STA IOCMD,X
1940 JSR CIOU
1950 RTS
1960 ;
1970 ; DEFINE MENU AND BUFFERS
1980 ;
1990 ASCII
2000 .BYTE 76,85,68,82,70
2010 CMD
2020 .BYTE $23,$24,$21,$20,$FE
2030 QBUF
2040 .BYTE 29,">FN?",198,"D#?"
2050 ; PUT THE REST IN PAGE 1
2060 *=$100
2070 SBUF
2080 .BYTE "D1:*.%",EOL,TAB
2090 KBUF
2100 *=$+29
2110 MBUF
2120 .BYTE CLR,204,"OCK",EOL
2130 .BYTE 213,"NLOCK",EOL
2140 .BYTE 196,"ELETE",EOL
2150 .BYTE 210,"ENAME",EOL
2160 .BYTE 198,"ORMAT",EOL
2170 .BYTE 205,"ENU",EOL
2180 .BYTE 193,196,"OS",EOL
2190 .BYTE 194,"ASIC",EOL
2200 EOM
2210 *=$10
2220 .BYTE 0,6
2230 *=$446
2240 .BYTE 0
2250 *=$450
2260 .BYTE 6

```

2270 END

## Program 2. BASIC Loader

```

1 OPEN #1,8,0,"D:MICRODOS.OBJ"
2 FOR I=1 TO 342
3 READ A
4 PUT #1,A
5 NEXT I
6 END
10 DATA 255,255,0,6,253,6,160,37,162,50,
169,11,32,209,6,32,19,6,32,221,6,16,239,
48,246,160,245,162,2,32,84,6,32,90
20 DATA 6,160,6,140,90,3,136,240,63,185,
234,6,205,8,1,208,245,185,239,6,72,201,2
54,208,19,160,250,162,3,32,84,6,32
30 DATA 90,6,173,8,1,201,68,208,30,240,1
0,160,247,162,3,32,84,6,32,90,6,104,96,1
69,11,32,186,6,96,160,8,162,40
40 DATA 169,5,32,209,6,96,173,8,1,201,77
,208,62,160,251,162,3,32,84,6,160,1,162,
1,169,5,32,209,6,160,58,140,2
50 DATA 1,160,0,169,3,32,223,6,169,19,14
1,88,3,169,5,32,221,6,48,11,160,7,162,20
,169,9,32,209,6,16,233,169,12
60 DATA 32,221,6,32,90,6,76,0,6,201,65,2
08,10,169,68,205,9,1,208,3,76,159,23,76,
77,160,72,169,6,141,69,3,104
70 DATA 140,68,3,142,72,3,162,0,142,73,3
,142,89,3,240,19,72,169,1,141,69,3,141,8
5,3,104,208,228,160,8,140,84,3
80 DATA 162,16,157,66,3,32,86,228,96,76,
85,68,82,70,35,36,33,32,254,29,62,70,78,
63,198,68,35,63,0,1,7,1,68
90 DATA 49,58,42,46,42,155,127,37,1,86,1
,125,204,79,67,75,155,213,78,76,79,67,75
,155,196,69,76,69,84,69,155,210,69
100 DATA 78,65,77,69,155,198,79,82,77,65
,84,155,205,69,78,85,155,193,196,79,83,1
55,194,65,83,73,67,155,10,0,11,0,0
110 DATA 6,70,21,70,21,0,74,21,74,21,6

```



ALL ATARI® HARDWARE 15%-25%  
OFF LIST PRICE



Atari 800 16K .....	740.00
Atari 400 16K .....	359.00
Atari 410 Cassette .....	80.00
Atari 810 Disk .....	480.00

## ATARI® ACCESSORIES 10%-20% OFF LIST PRICE

8K Memory Board .....	40.00
16K Memory Board .....	80.00
Joysticks (pair) .....	19.00
Paddles (pair) .....	19.00



To order: Call 617 964 3080  
Ask for mail order, or write:

**BBI Mail Order**

P.O. Box 365  
Newton Highlands, MA 02161  
(617) 964 3080

PLUS 10%-20% OFF  
ALL ATARI® SOFTWARE  
ALSO 3rd PARTY HARDWARE  
AND SOFTWARE AT  
COMPARABLE SAVINGS



# tele-communications for the Atari 400/800

Send E-mail, download programs and files, chat, buy merchandise, access the Source\* and other exciting data bases with the MICROCONNECTION, a quality direct connect modem for your Atari 400/800. The Autodial/Autoanswer MICROCONNECTION automatically dials other computers and answers too! The bussdecoding MICROCONNECTION eliminates the need for the 850 Expansion Interface\* and the "obsolete" acoustic coupler. Terminal software included.

Bussdecoding MICROCONNECTION Atari 400/800 with Autodial/Autoanswer	\$249.00 \$279.00
RS-232 MICROCONNECTION for Atari 400/800 with Autodial/Autoanswer	\$199.00 \$239.00
TSMART (Smart terminal program)	\$ 79.95
TYPERS-A (Users MICROCONNECTION to drive serial printers to provide printed output and listings)	\$ 19.95

## the microp~~eriph~~er~~al~~ corporation

2643 151st Pl. N.E., Redmond, WA 98052  
(206) 881-7544

\*Trademark of Reader's Digest, Inc. and Atari, Inc.

ATARI®

# UNLOCK YOUR ATARI

"ATARI HAS THE CAPABILITY—  
ACE GIVES YOU THE KEY"  
RIGHT IN YOUR POCKET!!



16 comprehensive pages

- error codes
- basic commands with abbreviations
- peek and poke locations
- internal codes
- machine language aides
- much, much more!!

Get Yours Now **only \$9.95**

(dealer ad space available)

ORDER NOW-CASH, CHARGE OR C.O.D.

ADVANCED COMPUTING ENTERPRISES  
5516 ROSEHILL  
SHAWNEE, KS. 66216  
(913)262-2875 • (913)631-4180



ATARI IS A REGISTERED TRADEMARK OF ATARI INC.

**Put any machine language file on a boot cassette, impossible you say?  
not any more!**

## introducing NUDMEHI SOFTWARE'S BOOT CASSETTE MAKER for the ATARI® 400/800 computers

- **BOOT CASSETTE MAKER** places ANY dos binary loadable machine language program on a boot cassette.
- **BOOT CASSETTE MAKER** converts even MULTIPLE machine language files to boot file format and then places them on a boot cassette.
- **BOOT CASSETTE MAKER** creates a boot cassette on which all run and initialization jumps are executed.
- **BOOT CASSETTE MAKER** is user oriented, fully documented and written in machine language.

**\$29.95\***

(POSTAGE INCLUDED)

To order, send check or money order along with your name and address to:

NUDMEHI SOFTWARE  
495 OLD YORK ROAD, SUITE 425  
JENKINTOWN, PENNSYLVANIA 19046  
(215) 635-2722



Our order lines are open 24 hours a day.  
MasterCard Gladly Accepted.

\* Pennsylvania Residents Please Add 6% Sales Tax  
ATARI® is a trademark of ATARI INC.

Dealer Inquiries Invited



*The past, present, and predicted future of the VIC. Jim Butterfield, an internationally recognized expert on Commodore Computers, discusses VIC software, add-ons, and VIC's place in the world of computing.*

# Whither VIC?

Jim Butterfield  
Associate Editor

VIC has been around for about a year now. It is catching on? Old hat? Will it survive in the turbulent marketplace?

## A Little History

The first VIC units had problems. Some were physical in nature. The unit ran too hot – you could hardly touch the ROM plug-in area. The picture was of poor quality. Radiation emission standards were not met. These were cleaned up in a redesign.

VIC had another problem, too. People didn't perceive it as a computer. There were few programs available, and the only peripheral was cassette tape. Memory was limited, and memory expansion was a distant promise.

And to top it all off, VIC was an unknown quantity. The VIC-20 User Guide – the "friendly computer guide" was brightly written and by far the best user documentation that Commodore had yet put out, but it was limited in scope. A Programmer's Reference Guide was hinted at, but seemed slow in making an appearance.

By late summer of 1981, the hardware problems had been resolved, but the VIC had still not established itself as a mature product. Disk, printer, and modem were still promises. Software was still limited.

VICs sold in quite respectable numbers during the Christmas season. A number of games had materialized, allowing the machine to be nicely demonstrated. The economical price and educational potential seemed to appeal to many buyers.

In early spring of 1982, VIC suddenly started to grow up, and a new class of users developed an interest in the machine, not as a game, but as a computer.

## New Hardware

The 1540 Single Drive Floppy Disk unit made a dramatic appearance. It looked good and behaved well. It proved to be compatible with the Commodore 4040 units, allowing easy transfer of programs and data files. Speed isn't up to the PET/CBM standards, but for most applications it's quite

usable.

Printers are now available in limited quantities. The style is familiar to the Commodore user, but the price is more economical.

Other devices are on the horizon. An IEEE-488 interface, which allows connection to the PET/CBM range of machines, has been demonstrated. An inexpensive modem is almost ready.

Several sizes of memory expansion are on the shelf, from the tiny 3K to the huge 16K. A motherboard system is promised soon which will allow the expansion of the VIC to a full 32K system. On the full system, BASIC will have about 27,500 bytes free; not quite as much as a full PET, but enough for most of us. The remaining memory isn't available to BASIC, but can be used for high-resolution screens and other special applications.

New hardware is appearing from non-Commodore sources. It looks like there will be two types: some will extend the capabilities of the VIC, making new things possible; and others will compete with existing products, hopefully keeping prices interesting.

## New Software

Commodore has now made available three major software support modules: a Monitor to allow machine language program writing and debugging; a Super Expander, to make graphics easy; and a Programmer's Aid to help in the writing and debugging of BASIC programs.

These three modules are not essential to the VIC's operation. You can write machine language without the Monitor; you can draw graphics without the Super Expander; and you can certainly write BASIC without the Programmer's Aid. But a job can be made much easier with their help.

The Super Expander, in particular, seems to be very popular among programmers with artistic inclinations. Computer art, geometric figures, and animated sketches have been enthusiastically produced by users.

The initial games library is being beefed up with new offerings. I have seen several prototype games which are nearing release and they look good – an order of magnitude better than the satisfactory, existing games on plug-in ROM cartridges.

I'm pleased to see good quality programs coming from non-Commodore sources. There's a lot of good stuff already out (see Table 1) and high-quality programs are a vote of confidence in the VIC by the software houses.

## New Information

Commodore has now released the *Programmer's Reference Guide*, which contains a great deal of reference information on the VIC. That's the kind



# 22-40-80 HIKE!


## Expand your VIC to 80 columns.



**Quantum Data's new Video Combo Cartridge brings you: 40 or 80 column display, plus 16K RAM and PROM socket. \$299<sup>00</sup>**

With the Video Combo Cartridge from Quantum Data you can now have 40 or 80 column display, 16K RAM and PROM all in one cartridge. It comes set for 40 column Display compatible with the VIC video modulator and your home T.V. Then, when you are ready to upgrade to 80 columns and a video monitor, just make a simple,


no-cost change inside the cartridge. Instructions are provided. Also provided is a socket for a PROM, 16K of memory and AC adaptor. If you don't need memory, then 80 columns can be yours for only \$199.50. A listing of the driver software is provided at no charge. A programmed PROM containing this software is also available for \$19.95.



**QDI expander:**

- Expands Basic user memory up to 24K in 8K steps
- PROMS may be mixed with RAM in 8K blocks
- 8K can be assigned to machine language area
- Plugs directly into VIC expansion port
- Low power, no additional power supply required
- Professional Quality, full buffering on all signals
- Small size: 6 x 4.5 inches.


**16K expander . . . . . \$149.95**  
**24K expander . . . . . \$199.95**



**QDI Printer RS-232 interface:**

- Provides RS-232 voltage conversion for VIC serial port
- Allows use of a wide variety of RS-232 peripherals including printers, modems and voice synthesizers
- Low power CMOS circuitry requires no external power supply
- Small size: 2½ x 3 inches

**Printer . . . . . \$49.95**



**QDI Minimother:**

- Adds 3 slots to the memory expansion port
- Removable card guides allow either boards or cartridges
- Requires no additional power supply
- Fused to protect VIC power supply from overload
- Simple plug-in installation

**Minimother . . . . . \$69.95**



**QUANTUM DATA, INC.**

(714) 966-6553  
**DEALER HOT LINE (714) 754-1945**  
 3001 Redhill Bldg. 4, Suite 105, Costa Mesa, CA 92626

VISA and MasterCard accepted.



## Non-Commodore Software

*This is software that I've seen that looks good. There's undoubtedly lots more. All games listed run in the 5K VIC.*

**Amok** – Nicely animated joystick chase game. Similar to the arcade game Berserk.

United Microware Industries, Inc.  
3431 H Pomona Blvd.  
Pomona, CA 91768

**VIC Pics** – Many high resolution pictures derived from TV camera. With explanatory booklet. Nice slide show for your friends.

**Un-Word Processor** – Simple, but does the job. Needs printer, of course.

Midwest Micro Associates  
P.O. Box 6148  
Kansas City, MO 64110

**Snakman** – Fast joystick graphics game. Similar to the arcade game Pacman.

Microdigital  
752 John Glenn Blvd.  
Webster, NY 14580

**The Qube** – Draws, scrambles, and solves the Rubic's Cube.

Qumax  
GRW Laboratories  
P.O. Box 17010  
Rochester, NY 14617

technology-driven era, it would be optimistic to expect any machine to have an economic life that's much longer.

The box isn't the only part of the question, however. If you move on in two years, how compatible will your software be? The Commodore line has been relatively stable for some time. There are occasional grumblings from long-time users (myself included) when Commodore introduces an improved line which calls for adjustments in some specialized programs, but most programs move fairly easily. Commodore's adoption of the "Kernal" standardized program system is likely to help.

Some things aren't likely to transport. Those plug-in games, for example, are in ROM memory, and can't be trimmed up for a new machine. That's OK ... keep the VIC for the games, or delight the kid who eventually buys your VIC by tossing in the games as part of the package.

At a computer club meeting in 1976, I asked a member what type of system he had. He replied, "I'm waiting for prices to drop to zero." I don't know if he's still waiting. But prices are down to the point where obsolescence in a couple of years shouldn't be an important factor in the decision.

Exciting things are happening with the VIC. There are user groups, there are lots of programs, and new hardware is appearing very quickly. It's going to be fun. ©

of resource we need to exploit the capabilities of the machine.

On the learning level, Commodore has released *An Introduction to BASIC*. This is a beginner-level text which comes as a book and two cassette tapes. At first glance, it looks quite attractive.

### What Next?

It looks good. Users are now seeing a computer system rather than a toy. There's a new level of interest in the VIC.

Are there clouds on the horizon? Commodore has announced new products – in particular, the Ultimax and the Commodore 64 – which have new capabilities (and some of the new features won't be VIC-compatible). Will VIC be obsolete before it really gest started?

I think not. In their first incarnations, Ultimax and Commodore 64 won't be direct competitors. Ultimax is too small, and the 64 is twice the price. More to the point: it will be some time before these products mature, just as it took the VIC some time to reach its present state.

I suspect that it will be a couple of years before VIC begins to fade away from the retail market. To a buyer interested now, that makes it a worthwhile investment. Less than \$300 for a couple of years' computing? A bargain price. Indeed, in this



# MALA

Educational Programs  
For Your Pet For Only

## \$48

For 8 Issue Subscriptions

• PET • COMMODORE • VIC •

Each "MALA" comes to you on cassette with 4 brand new programs to load and run on your Pet.

### COMM\*DATA SYSTEMS, INC.

P.O. BOX 325  
MILFORD, MICHIGAN 48042  
(313) 685-0113

• PET • COMMODORE • VIC •

**GAMES FOR YOUR VIC**

VIC TREK • HANGMAN  
TANK • YAHTZEE  
DAMSEL • NAB PLUS  
AND MANY MORE

only \$7.95 Each

▶ FREE Program Summaries available



PET

NEW SOFTWARE

**\*VORTEX\***™

CBM

The enemy is at the center of swirling rings of energy.  
Your mission - penetrate and destroy.

**\*PHANTOM FIGHTER\***™

Defend Superstition Mountain from UFO's.

... Each \$17.95 on cassette ...

**MAGIC CARPET**

P.O. Box 35115 Phoenix, AZ 85069

GAMES FOR VIC-20 ALSO AVAILABLE

**VIC-20****TWO GAMES-\$7.95**

**V** **I** **C** **-** **2** **0**

**SPACE LANDER\*** More than just a game. This program presents a "real time" simulation of a spacecraft landing on various heavenly bodies. The computer analyses and scores successful landings. Contains Color, Sound and Graphics.

**DOTS WHITE\*** Nim-like game pits you against the VIC. Flip dots all white and you win. Contains Color, Sound and Graphics.


Send check or money order (\$7.95 for both games):

**DTC SOFTWARE**

**P.O. BOX 916**

**JANESVILLE, WI. 53547**

608 752-3434

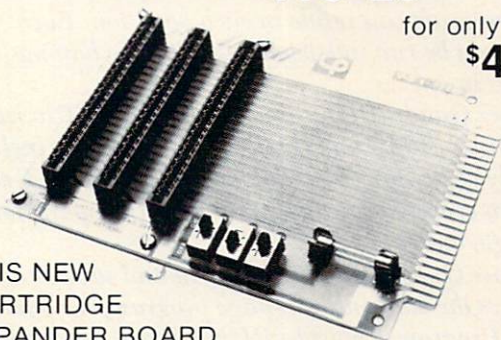**EXPAND**YOUR **VIC-20**for only  
**\$49<sup>95</sup>**

THIS NEW  
CARTRIDGE

EXPANDER BOARD

PLUGS INTO THE **SINGLE** EXPANSION PORT OF THE VIC-20, AND PROVIDES **THREE** SWITCHED EXPANSION PORTS FOR SELECTIVE OR SIMULTANEOUS USE OF ANY VIC-20 CARTRIDGES. ADD MEMORY, PROGRAMMERS AID, SUPER EXPANDER, GAMES, WORD PROCESSOR, OR WHATEVER YOU CHOOSE. SEE YOUR DEALER OR ORDER FROM:



**PRECISION TECHNOLOGY, INC.**

COMPUTER PRODUCTS DIV.

2970 RICHARDS ST.

SALT LAKE CITY, UTAH 84115

(801)487-6266

COD  
VISA  
M/C

**VIC-20 SOFTWARE**from  
**MIDWEST MICRO****UN-WORD PROCESSOR ... \$14.95**

What else do you call a program which does what a word processor does, yet it is just too simple and easy to use? Enter text. Edit ... List ... Save ... just like a program. Send to printer for finished copy. Save paragraphs separately, then merge in any order for printing. Requires only two lines of BASIC to access the M/L routines; over 3K available for text. Can be used with memory expansion. For VIC-1515 or RS-232 printers.\*

**TERMINAL-40 ... \$29.95**

NEW, improved TERMINAL-40 program displays 40 uppercase characters per line (3x6 dot matrix) for easier reading. Enables VIC to emulate a standard terminal. Add a BIZCOMP or VIC modem (or RS-232 modem with interface\*) and access SOURCE, TELENET, or any of the free Bulletin Boards around the country (list included). 300 baud; full or half duplex; supports control codes; screen dump to printer. Requires VIC-20 and 8K memory expansion.

**TERMINAL-22 (\$14.95)** Same as TERM-40 except 22 character lines and full duplex only. Runs on standard 5K VIC.

**VIC-PICS .... digitized pictures! \$18.95**

Nineteen fascinating high-resolution pictures to display on your VIC screen. Created by digitizing video camera images. Includes portraits, models, scenery, and much more. Over 16K points analyzed in each picture. Three styles: hi-contrast, dithered, and colored. Compatible with both color and B/W sets.

**GRAFIX MENAGERIE (\$11.95)**. Demonstrate what your \$300 miracle can do! Two-program set unleashes VIC's graphics. **SHOWOFF** contains Color Kaleidoscope, Arcade Critters, Custom Fonts, Electronics Schematic, and Music Notation. **PLOTTING** uses dot-plot and line-plot routines to make equations perform computer video-art on your screen. Change equation values and create your own interesting patterns. Plot routines may be easily included in your own programs.

**BANNER/HEADLINER (\$14.95)**. Two-program set makes GIANT headlines and banners on your printer. **HEADLINER** prints large characters across the page in three sizes. **BANNER** turns the characters sideways, printing continuously down the paper roll. Up to three lines of text, nearly unlimited in length. (How about a ten-foot long "WELCOME HOME"?) For VIC-1515 or RS-232 printers.\*

**TICKETAPE (\$14.95)**. Interrupt-driven! Watch your message glide smoothly across the screen in color. Adds motion and interest to any message display. Position on any line, even mix with normal printing. Two built-in character sets: standard and BOLD (or use custom sets from our **LIBRARY VOL. 1**). Message capacity: @ 2K bytes.

**LIBRARY VOL. 1 (\$12.95)**. Add style to displays with six full sets of custom character fonts; UPPERCASE, lowercase, numerals, punctuation, etc. Simple to fancy styles. Upper and lower case stored separately; load upper alone to save space ... load both for a full set. May be used with **TICKETAPE**.

All programs on high quality digital cassette tape

**GRAFIX DESIGNER (\$14.95)**. Two-program set helps you design custom graphics characters. **GEN/EDIT** displays an enlarged 8x8 square; move the cursor around in it and turn dots on or off to form a character (holds 100). Erase, edit or recall at random. Load **DATAMAKER** when finished designing. Characters automatically become numbered data statements. Save them on tape just like a program. Instructions included for appending to any new or old program.

Build libraries of graphics ... throw away the graph paper!

**RS-232 INTERFACE (\$49.95)**. Get more OUT of your VIC. Plug-in interface communicates with most standard serial printers and modems. Simply plug into User Port; needs no external power. Bi-directional operation. 90 day warranty. Full instructions for use. Includes M/L handshake "wedge."

VIC-20 is a trademark of Commodore Business Machines.

Dealer inquiries invited.

\*RS-232 printers require an interface. See ours above.

**MIDWEST MICRO Associates****PO Box 5148****K.C. Mo. 64110**

Include \$1.25 for postage and handling.  
Missouri residents add 4.6% sales tax.



*QuadraPET* (**COMPUTE!**, June 1981, #13) is a machine language program that lets you "partition" the memory of a 32K PET with Upgrade BASIC into four, 8K areas. A BASIC program can reside in each partition. Each program can be run independently. It's like having four computers in one.

*Super QuadraPET* converts *QuadraPET* to run on 4.0 machines (4032 and 8032) with 32K. Also included is a handy utility program that makes *QuadraPET* easy to use. It can even relocate itself into one of the partitions — ready to go, but out of the way.

To use *QuadraPET* 4.0, type in and save Program 1. It places the machine language program in upper memory. Program 1 must be RUN before you load and RUN Program 2.

# Super QuadraPET

David Sale  
Acton, Ontario

Several articles have appeared in **COMPUTE!** dealing with memory partition for the PET computer. I could see the value of this procedure for program development, especially since "Dungeon" could be neatly tucked away in one of the partitions to keep my son happy when I took a break.

Unfortunately, the very useful program by Charles Brannon (**COMPUTE!**, June 1981, #13, p. 102) was written for Upgrade ROMs and will not operate on 4.0 machines. In revising his program, I made several changes:

- 1) The program has been relocated to the top of memory to leave the cassette buffer available for machine language program development.
- 2) Calls to BASIC routines are revised for use with 4.0 ROMs.
- 3) Memory partitions have been changed to make areas more nearly equal in size rather than having the first partition (the most easily accessible) be the smallest.

To create the partitions, load Program 1 and type RUN. Four 8K partitions will be created. By choosing PET #1, you can then load the utility program (Program 2) that will simplify many tasks involved in program development and in "QuadraPETting." I use the utility program to relocate itself into partition four where it is available when

needed to perform the following tasks:

- 1) Converting decimal numbers to hex and vice versa.
- 2) Moving programs to and from the first partition.

This is necessary to avoid having to use machine language SAVES or awkward loading procedures.

- 3) Printing a directory to show which areas are available for use to avoid accidentally destroying a program.

## Moving Around In The Partitions

In relocating programs, the program to be moved is duplicated in the desired partition with all pointers reset to enable it to operate correctly. It is *not* erased from the original area. This makes it possible to revise a program in one area and then compare the results with the original in another.

If you are working in the partition that contains the utility program you can move to another area easily using its routine #6. If you are in another area, you can move using SYS 32513. Once you have moved to a new area, the program contained in it will operate normally. To erase the program or enter a new one, simply type NEW.

One word of caution: the relocation routines will move only BASIC programs. Programs containing machine language must be left in partition one or relocated using "Supermon" (**COMPUTE!**, Dec. 1981, #19, p. 134). If you want to pack "Supermon" into the top of partition four follow this procedure:

- 1) Load and run *QuadraPET*.
- 2) Choose PET #1.
- 3) POKE 53,127 to temporarily remove the partition.
- 4) Type NEW.
- 5) Load and run "Supermon."
- 6) POKE 53,35 to restore the partition.
- 7) POKE 32627,121 to protect "Supermon."

If you have saved "Supermon" at the top of memory rather than at 0600 you will need to follow a slightly different procedure:

- 1) Load "Supermon."
- 2) Relocate it to 7933 hex using its transfer function.
- 3) Load *QuadraPET* and run it choosing PET #1.
- 4) POKE 32627,121 to protect "Supermon."

"Supermon" is now safely tucked away at the top of memory under the *QuadraPET* program ready for use with SYS 31027.

No doubt you will discover more uses for these programs once you begin to explore their possibilities.




# THE BUSINESS MANAGER...

FULLY INTERACTIVE ACCOUNTING SYSTEM. NO DISKETTE CHANGING! FINALLY ALL THE FEATURES YOU'VE BEEN WAITING FOR — IN ONE COMPLETE INTERACTIVE SYSTEM.

**FULL SOFTWARE SYSTEM  
ONLY \$995.<sup>00</sup>**



MANUAL ONLY — \$40.00  
REFUNDABLE UPON  
SYSTEM PURCHASE.

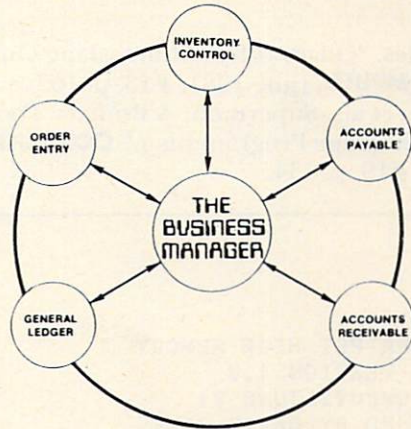

#### HARDWARE REQUIREMENTS:

- Commodore Model 8032 or SuperPET or 8096 Micro-computer
- Commodore Model 8050 One Megabyte Dual Disk Drive
- Commodore Model 4022 (or Larger) Printer
- Commodore PET — IEEE cable
- Commodore IEEE — IEEE cable

# DISHSHARE 9000

WORKS WITH ALL COMBINATIONS PET/CBM 100% HARDWARE. NO SOFTWARE REQUIRED! UP TO 8 USERS SHARE DISK AND/OR PRINTER. CONNECTS IN MINUTES — NO TOOLS REQUIRED. INCREASES PRODUCTIVITY — REDUCES COSTS. IDEAL FOR EDUCATION AND BUSINESS. CABLE LENGTHS UP TO 50 FEET.

**ONLY \$749<sup>00</sup>** (U.S.)  
8 USER SYSTEM ONLY \$1149



DEALER  
INQUIRIES  
WELCOME.



Multi  
User  
System



**References:**

- Brannon, Charles, "QuadraPET: Multitasking On Your PET?," **COMPUTE!**, June 1981, #13, p. 102.
- Butterfield, Jim, et al, "Supermon: A Primary Tool For Machine Language Programming," **COMPUTE!**, Dec. 1981, #19, p. 134.

**Program 1.**

```

10 REM
20 REM QUADRA PET HIGH MEMORY
30 REM VERSION 4.0
40 REM COMPUTE!JUNE 81
50 REM REVISED BY DAVID SALE
60 REM NOV.17 1981
70 REM
80 POKE 52,255: POKE 53,127
100 FOR I = 32513 TO 32645
110 READ A
120 POKE I,A
130 NEXT
140 SYS 32586
150 PRINT"{CLEAR}{05 RIGHT}QUADRA PET DIVID
ES THE AVAILABLE"
160 PRINT"{DOWN}MEMORY INTO FOUR 8K AREAS T
HAT CAN EACH"
170 PRINT"{DOWN}STORE A SEPARATE PROGRAM."
180 PRINT"{02 DOWN}{05 RIGHT}YOU ARE NOW IN
PET"PEEK(32611)+1". TO MOVE TO"
190 PRINT"{DOWN}ANOTHER AREA TYPE {REV}SYS ~
32513{OFF}."
200 PRINT"{02 DOWN}{05 RIGHT}PROGRAMS MAY B
E LOADED OR SAVED IN"
210 PRINT"{DOWN}THE FIRST AREA IN THE NORMA
L MANNER."
220 PRINT"{02 DOWN}{05 RIGHT}PROGRAMS IN OT
HER AREAS MUST EITHER"
230 PRINT"BE SAVED BY MACHINE LANGUAGE OR M
OVED"
240 PRINT"{DOWN}TO PET #1 USING THE UTILITY
PROGRAM."
250 END
995 REM CLEAR END OF STRING
1000 DATA 169,0,141,133,127
1005 REM STORE PRESENT POINTERS
1010 DATA 174,99,127,165,42,157,104,127,165,
43,157,108,127
1015 REM SELECT NEW AREA
1020 DATA 169,116,160,127,32,29,187,32,228,2
55,41,15,240,249,201,5,176,245
1030 DATA 170,202,142,99,127
1035 REM SET ALL POINTERS & CLR
1040 DATA 169,1,133,40,189,100,127,133,41,18
9,104,127,133,42,189,108,127,133
1050 DATA 43,169,0,133,52,189,112,127,133,53
,32,238,181,96
1055 REM INITIALIZE EACH AREA FIRST
1060 DATA 162,0,169,0,24,157,0,4,157,0,35,15
7,0,66,157,0,97
1070 DATA 232,224,3,144,238,76,1,127
1075 REM POINTER DATA
1080 DATA 0,4,35,66,97,3,3,3,3,4,35,66,97,35
,66,97,127
1085 REM WHICH PET QUESTION
1090 DATA 147,87,72,73,67,72,32,80,69,84,63,
32,40,49,45,52,41,0

```

**Program 2.**

```

100 PRINT"{CLEAR}PET UTILITY PROGRAMS"
110 PRINT"#####"
120 REM VERSION JANUARY 10, 1982
130 REM DAVID SALE
140 REM ACTON ONTARIO
150 REM FOR USE WITH QUADRA PET
160 REM VERSION 4.0 HIGH MEMORY
170 PRINT"{DOWN}{REV}1{OFF} DECIMAL TO HEX"
180 PRINT"{DOWN}{REV}2{OFF} HEX TO DECIMAL"
190 PRINT"{DOWN}{REV}3{OFF} RELOCATE TO PET
#1"
200 PRINT"{DOWN}{REV}4{OFF} RELOCATE FROM P
ET #1"
210 PRINT"{DOWN}{REV}5{OFF} PRINT DIRECTORY
"
220 PRINT"{DOWN}{REV}6{OFF} MOVE TO ANOTHER
PET"
230 PRINT"{02 DOWN}TYPE IN THE NUMBER OF YO
UR CHOICE"
240 GET A:IF A<1 OR A>6 THEN 240
250 ON A GOTO 260,440,590,1040,1490,1670
260 PRINT"{CLEAR}DECIMAL HEX CONVERSION TY
PE {REV}M{OFF} FOR MENU"
270 PRINT"#####"
280 PRINT"{DOWN}TYPE IN DECIMAL NUMBER (MAX
65535){DOWN}"
290 INPUT A$:IF A$="M"THEN 100
300 A=VAL(A$)
310 IFA>=16^4THENPRINT"ILLEGAL QUANTITY":GO
TO280
320 IFA>=16^3THENB(1)=INT(A/(16^3)):A=A-B(1
)* (16^3):GOTO340
330 B(1)=0
340 IFA>255THENB(2)=INT(A/256):A=A-B(2)*256
:GOTO360
350 B(2)=0
360 IFA>15THENB(3)=INT(A/16):A=A-B(3)*16:GO
TO380
370 B(3)=0
380 B(4)=A
390 C$="0123456789ABCDEF"
400 PRINTTAB(8)"{UP}= {REV}";
410 FORX=1TO4:B=B(X)+1:B$(X)=MID$(C$,B,1)
420 PRINTB$(X);:NEXT
430 PRINT"{OFF} HEX":GOTO290
440 PRINT"{CLEAR}HEX TO DECIMAL TYPE {REV}
M{OFF} FOR MENU"
450 PRINT"#####"
460 PRINT"{DOWN}TYPE IN HEX NUMBER (MAX FFF
F){DOWN}"
470 DC=0:INPUT HX$:IF HX$="M"THEN 100
480 IF LEN(HX$)>4 THEN 530
490 IF LEN(HX$)<4 THEN TM$="000"+HX$:HX$=RI
GHT$(TM$,4)
500 FOR I=1 TO 4:IN=ASC(MID$(HX$,I,1))
510 IF IN>47 AND IN<58 THEN IN=IN-48:GOTO 5
40
520 IF IN>64 AND IN<71 THEN IN=IN-55:GOTO 5
40
530 PRINT"ILLEGAL QUANTITY":GOTO 460
540 DC=DC+IN*(16^(4-I))
550 NEXT
560 TM$="" +STR$(DC):DC$=RIGHT$(TM$,5)
570 PRINT"{UP}"TAB(8)"={REV}"DC$TAB(16)"{O
FF}DECIMAL"

```



# HAPPY BIRTHDAY

---

# ASERT

---

## Aid for Search and Retrieval of Text

One year later... ASERT is now indispensable to many businesses across the U.S. and in Europe. From Employment Agencies and Travel Services to Schools and Libraries ASERT is helping to make the filing cabinet obsolete! Flexible in format and simple to use, ASERT can more than pay for itself in a short period of time.

The NEW COMPILED ASERT features:


- \* 11,000 CHARACTER "VIRTUAL" RECORD LENGTH
- \* 21 "FIELDS" AND 180 "SEARCHWORDS", ALL USER-DEFINABLE
- \* "FREE-TEXT" FIELD FOR EXTRA COMMENTS
- \* ABILITY TO RESTRUCTURE FILES AT ANY TIME
- \* SEARCH ON ANY COMBINATION OF FIELDS AND SEARCHWORDS
- \* "MUST HAVE", "MUST NOT HAVE", "OPTIONAL", "OR" OPERATORS
- \* WORKS WITH POPULAR WORD PROCESSING PROGRAMS & PRINTERS
- \* PRODUCE FORM LETTERS, REPORTS, AND MAILING LABELS
- \* USER FRIENDLY - MENU DRIVEN - OPERATOR ORIENTED

AND MANY OTHER NEW FEATURES

C. F. I. HOTLINE AVAILABLE TO USERS

**OTHER CFI SOFTWARE**  
Federal Income Tax Preparation System\*  
Personal Tax Calculator\*  
Emergency Control Program\*  
VIC Animation Tutorial



AVAILABLE FROM YOUR  
 **commodore**  
DEALER

**CFI . . . computer solutions**

201 West 92nd Street • New York, N.Y. 10025 • (212) 724-1711



```

580 GOTO 470
590 PRINT "{CLEAR}RELOCATION PROGRAM TO PET ~
#1"
600 PRINT "#####"
610 IF PEEK(1026)=0 THEN 670
620 PRINT "{DOWN}PET #1 CONTAINS A PROGRAM"
630 PRINT "DO YOU WANT TO DESTROY IT ?"
640 GET R$:IF R$="" THEN 640
650 IF R$<>"Y" THEN 100
660 PRINT TAB(30) "{UP}{REV}YES{OFF}"
670 PRINT "{DOWN}WHICH PET HAS PROGRAM TO BE
MOVED ?"
680 GET N$:IF N$="" THEN 680
690 NO=VAL(N$):IF NO<2 OR NO>4 THEN 680
700 PRINT TAB(37) "{UP}{REV}"NO
710 PRINT "{DOWN}ARE YOU SURE ?"
720 GET R$:IF R$="" THEN 720
730 IF R$<>"Y" THEN 100
740 PRINT TAB(17) "{UP}{REV}YES{OFF}"
750 PRINT "{DOWN}TRANSFERING CONTENTS OF PET
#"NO
760 PRINT "INTO PET #1"
770 REM SAVE POINTERS IF IN PET NO
780 IF PEEK(32611)<>NO-1 THEN 810
790 POKE 32616+NO,(PEEK(42))
800 POKE 32620+NO,(PEEK(43))
810 REM CORRECT POINTERS IN PET #1
820 NO=NO-1:V1=PEEK(32616+NO)
830 POKE 32616,V1: REM VAR. LOW
840 V2=PEEK(32620+NO)-31*(NO)
850 POKE 32620,V2: REM VAR. HIGH
860 MH=PEEK(32624+NO)-31*(NO)
870 POKE 32624,MH: REM MEMORY LIMIT
880 SU=NO*7936: REM SUBTR. FACTOR
890 SA=SU+1025: REM START ADDRESS
900 REM CORRECT POINTER TO NEXT ADDRESS
910 PA=PEEK(SA)+256*PEEK(SA+1)
920 BY=PEEK(SA):POKE(SA-SU),BY
930 SA=SA+1:BY=PEEK(SA):POKE(SA-SU),(BY-SU/
256)
940 REM TRANSFER REST OF LINE
950 SA=SA+1:FOR A=SA TO (PA-1)
960 BY=PEEK(A):POKE(A-SU),BY
970 NEXT
980 REM CHECK FOR END OF BASIC
990 IF PEEK(PA+1)<>0 THEN SA=PA:GOTO 910
1000 POKE PA-SU,0:POKE PA+1-SU,0
1010 PRINT "{DOWN}PROGRAM TRANSFERRED"
1020 FOR A=1 TO 3000: NEXT
1030 GOTO 100
1040 PRINT "{CLEAR}RELOCATE FROM PET #1"

1050 PRINT "#####"
1060 PRINT "{DOWN}TO WHICH PET ? (2-4)"
1070 GET N$:IF N$="" THEN 1070
1080 NO=VAL(N$):IF NO<2 OR NO>4 THEN 1070
1090 PRINT TAB(22) "{UP}{REV}"NO
1100 PRINT "{DOWN}ARE YOU SURE ?"
1110 GET R$:IF R$="" THEN 1110
1120 IF R$<>"Y" THEN 100
1130 PRINT TAB(16) "{UP}{REV}YES{OFF}"
1140 IF PEEK(1026+(NO-1)*7936)=0 THEN 1200
1150 PRINT "{DOWN}PET"NO"CONTAINS A PROGRAM"
1160 PRINT "DO YOU WANT TO DESTROY IT ?"
1170 GET R$:IF R$="" THEN 1170
1180 IF R$<>"Y" THEN 100
1190 PRINT TAB(30) "{UP}{REV}YES{OFF}"
1200 PRINT "{DOWN}TRANSFERING PROGRAM TO PET ~
#"NO
1210 PRINT "FROM PET #1"
1220 REM SAVE POINTERS IF IN PET 1

1230 IF PEEK(32611)<>0 THEN 1260
1240 POKE 32616,(PEEK(42))
1250 POKE 32620,(PEEK(43))
1260 REM CORRECT POINTERS IN PET NO
1270 NO=NO-1:V1=PEEK(32616)
1280 POKE 32616+NO,V1: REM VAR. LOW
1290 V2=PEEK(32620)+31*(NO)
1300 POKE 32620+NO,V2: REM VAR. HIGH
1310 MH=PEEK(32624)+31*(NO)
1320 POKE 32624+NO,MH: REM MEM. LIMIT
1330 AD=NO*7936: REM ADD. FACTOR
1340 SA=1025: REM START ADDRESS
1350 REM CORRECT POINTER TO NEXT ADDRESS
1360 PA=PEEK(SA)+256*PEEK(SA+1)
1370 BY=PEEK(SA):POKE(SA+AD),BY
1380 SA=SA+1:BY=PEEK(SA):POKE(SA+AD),(BY+AD/
256)
1390 REM TRANSFER REST OF LINE
1400 SA=SA+1:FOR A=SA TO (PA-1)
1410 BY=PEEK(A):POKE(A+AD),BY
1420 NEXT
1430 REM CHECK FOR END OF BASIC
1440 IF PEEK(PA+1)<>0 THEN SA=PA:GOTO 1360
1450 POKE PA+AD,0:POKE PA+1+AD,0
1460 PRINT "{DOWN}PROGRAM TRANSFERRED"
1470 FORA=1TO3000:NEXT
1480 GOTO 100
1490 PRINT "{CLEAR}DIRECTORY FOR PROGRAMS IN ~
PARTITIONS"
1500 PRINT "#####"
1510 FOR A=1 TO 4
1520 PRINT:PRINT "{DOWN}PET #"A
1530 PRINT "#####"
1540 READ B
1550 IF PEEK(B)=0 THEN PRINT "EMPTY";:GOTO 1
610
1560 PRINT "CONTAINS PROGRAM";
1610 NEXT
1620 DATA 1025,8961,16897,24833
1630 RESTORE
1640 PRINT:PRINT "{02 DOWN}PRESS {REV}M{OFF} ~
TO RETURN TO MENU"
1650 GET R$:IF R$="" THEN 1650
1660 GOTO 100
1670 SYS 32513
1680 PRINT "{CLEAR}"TAB(3) "{02 DOWN}YOU ARE N
OW IN PET #" PEEK(32611)+1 "{LEFT}
."
1690 PRINTTAB(3) "{02 DOWN}ANY PROGRAM IN THI
S PARTITION IS"
1700 PRINT "{DOWN}UNDISTURBED AND MAY BE RUN ~
OR MODIFIED."
1710 PRINTTAB(3) "{02 DOWN}TO ENTER A NEW PRO
GRAM FIRST TYPE {REV}NEW{OFF}"
1720 PRINT "THEN PROCEED IN THE NORMAL FASHIO
N."
1730 PRINTTAB(3) "{02 DOWN}TO MOVE TO ANOTHER
PARTITION TYPE"
1740 PRINT "{DOWN}{REV}SYS 32513{OFF}. THE PR
OGRAM IN THIS AREA"
1750 PRINT "{DOWN}WILL BE PROTECTED UNTIL NEE
DED LATER."

```

©

---

**COMPUTE!** The Resource.



*A disaster-prevention technique for Apple Disk systems. Teachers should find this especially valuable. For DOS 3.3 with 48K RAM.*

# Apple DOS Changer

Robert Swirsky  
Cedarhurst, NY

If there is an Apple in a classroom, there is usually a student who gets immense pleasure out of typing "INIT" and watching the drive whirl and click as it erases the disk!

There is a strange phenomenon which occurs when you mix microcomputers and young people. Most of them will treat the computer with reasonable care, but there is always someone who feels compelled to try to "mess up" the computer's files.

I know from experience; I used to be such a student. What can be done to stop people from tampering with dangerous DOS commands? The answer is simple — just *change* the names of commands that you don't want available to users. Since the DOS is stored in RAM, it is relatively easy to find the table of commands, and modify it accordingly.

This program will change the DOS commands. When run, it displays each command followed by a prompt. If you want to change the command, just type in your revision. To leave it unmodified, hit the RETURN key. The next DOS command will be displayed, and the same procedure is followed.

A few words of caution are needed. First of all, don't make the new commands so that they match the beginnings of other commands. For example, if you change "CATALOG" to "C", conflicts will arise if you try to use the CLR, CLOSE, or other commands that begin with C. Second, don't put spaces in your command. This tends to make strange things happen. Also, avoid making your commands excessively long. There is only so much room in memory for the command table. Note, however, that the commands can be of different lengths from the original ones.

## How To HAHA A Disk

The program will work on DOS 3.3 with 48K of

RAM. It will not work with less than 48K, without changing the addresses that the changes are POKEd to. Since the vast majority of Apple owners have the 48K, this is hardly a limitation.

After the program is RUN, the changes can be saved as a permanent part of DOS. Insert a *blank* disk, and type the INIT command, followed by the correct parameters. Of course, if you have changed the INIT *itself* to something else, you would type that in instead. When the initialization is completed, the disk will have your DOS modifications stored on it. Whenever DOS is booted from that disk, your custom commands will be the ones that the Apple knows.

A great deal of protection is offered with this program. If you decide to change INIT to HAHA, nobody can init the disk. Anyone who tries will be greeted with a ?SYNTAX ERROR (beep). However, when you go to HAHA your disk, you will be successful.

```

0 ONERR GOTO 1000
1 DIM CO$(28)
2 P = 1
10 FOR X = 43140 TO 43271
20 CO$(P) = CO$(P) + CHR$( PEEK (X))
31 IF PEEK (X) > 128 THEN P = P + 1
32 IF P = 28 THEN 70
40 NEXT
70 HOME
80 PRINT "DOS CHANGER BY ROBERT A. SWIRSKY
"
160 VTAB 24: PRINT "HIT 'C' TO CONTINUE";: ~
GET R$: IF R$ < > "C" THEN 160
170 HOME
180 PRINT : PRINT "YOU WILL SEE ALL 28 DOS ~
COMMANDS"
190 PRINT "IF YOU WISH TO LEAVE IT UNCHANGE
D,
PRESS RETURN"
200 PRINT "TO CHANGE THE COMMAND, SIMPLY RE
TYPE IT WITH YOUR CHOICE."
210 PRINT : PRINT
220 LL = 43139
221 HL = 43271
230 FOR Q = 1 TO 28
235 PRINT CO$(Q);
240 PRINT TAB( 20);" --> ";
250 INPUT R$
260 IF R$ = "" THEN R$ = CO$(Q)
261 IF LEN (R$) = 1 THEN PRINT "PLEASE --
TWO OR MORE LETTERS": GOTO 240
270 FOR W = 1 TO LEN (R$) -1
280 POKE LL + W, ASC ( MID$( R$,W,1))
290 NEXT
295 IFASC(RIGHT$(R$,1))>127THENPOKELL+W,ASC
(RIGHT$(R$,1)):GOTO 501
300 POKE LL + W,ASC(RIGHT$(R$,1))+128
501 REM
510 LL=LL+W
520 IF LL > HL THEN 600
530 W=0
599 NEXT
600 PRINT "CHARACTER LIMIT EXCEEDED"
1000 PRINT "RUN TERMINATED"

```



## A Monthly Column

---

*This month, columnist Michael Day tackles some of the practical aspects of adding a modem to your computer. A modem will let your computer talk to other computers over the telephone lines. If you're shopping for a modem, you'll need to answer some questions first. Will you want the computer to be able to "pick up the phone" by itself and answer incoming calls automatically? To place its own calls automatically? How can you use a modem with a "Princess" phone? Will you need an extra interface to connect the modem to your computer or will it just plug in?*

---

## Telecommunications:

# Choosing A Modem

Michael E. Day  
Chief Engineer, Edge Technology

There are a number of different types of modems on the market. In order to understand each modem's capability in each application, we need to break them down into different groups.

One aspect to consider is the way the modem attaches to the phone line. There are three basic methods:

1. Acoustic coupler: a modem that communicates through a telephone by sound.
2. Inductive coupler: a modem that communicates through a telephone by electromagnetic induction.
3. Direct connect: a device which allows a modem to connect directly to the phone line instead of using the telephone to communicate through.

The acoustic coupler and direct connect are the most commonly used methods. The inductive coupler is actually a modification of the acoustic coupler, and generally still requires that the transmitter portion of the modem be acoustically coupled. The usually stated advantage of the inductive coupler is its avoidance of the distortion and interference caused by the extra translation to sound and back occurring in the acoustic coupler.

This is of little help, however, since the majority of problems with acoustic coupling involve the transmitter portion, which needs to be acoustically

coupled anyway. The inductive coupler also has its own set of problems which can often make it more difficult to work with if care has not been exercised in its design.

Each telephone has its own quirks with regard to inductive coupling, and this can sometimes make it difficult to get a modem to work properly. Also, because of the sensitivity involved in properly picking up the weak electromagnetic signals, the inductive coupler is more sensitive to stray magnetic fields, fields generated by a computer or terminal can interfere with the operation of the modem.

### Portability Of The Acoustic Coupler

The acoustic coupler modem has been around for some time. The advantage of the acoustic coupler is its portability. It can be used with any telephone that has a standard handset (referred to as a *500 style phone*). This means that you are not limited as to the electrical connections to the phone line, only to the physical construction of the phone handset, which must fit into the rubber or plastic "cups" of the acoustic coupler.

This can be a problem if you have a princess or flip phone or some other style which does not use the standard 500 series handset. Other problems with the acoustic coupler are a result of the acoustic coupling itself. Because of the signal's conversion from electrical to acoustic and back to



electrical again, some amount of distortion is generated. This can be held to a minimum with proper modem design, but cannot be eliminated entirely. The telephone itself is a major contributor to this problem. A great portion of the distortion can be cured simply by replacing the carbon microphone in the telephone handset with a condenser (capacitor) microphone.

The standard acoustic coupler used to communicate over the telephone is referred to as a 103 compatible modem. This is a full duplex type modem – that is, it can send and receive data at the same time. Because of the method used to encode and decode the data to be transmitted by this type of modem, the maximum communication speed that can be used reliably is 300bps (30 characters per second).

This limitation is the result of many things, including the bandwidth of the phone line, the encoding scheme, and the signal distortion caused by the acoustic coupling. Although it is possible to push the speed a bit higher, reliability will suffer. A very good modem might let you push it to 400 or 450 bps, but, because of acoustic distortion, this is about the maximum.

Another problem with the acoustic coupler is its limited sensitivity. Most are not able to operate at a receive level of less than -30db to -36db. This is equivalent to a whisper. About 90% of the phone calls placed will provide a communications link allowing a signal through stronger than this. Therefore, this is not a great problem. However, the strength of the transmitted signal is of major importance, since the weaker the transmitted signal is, the weaker the received signal at the other end is going to be. Generally, it is desirable to have a transmitted signal strength of between -6db and -10db. This is equivalent to loud talking.

### Direct Connect Method

The other method of attaching a modem to the phone line is the direct connect method. Here you attach the modem directly to the phone line, rather than acoustically through a telephone handset. This eliminates the problem of distortion by not going through the translation to sound and back.

There are many types of direct connect modems. The type that most computer users need is the 103 compatible type. It uses the same conversion scheme to communicate as the 103 compatible acoustic coupler, although the translation to sound and back is, of course, not necessary.

The main advantages of the direct connect modem are reduced signal distortion and improved sensitivity, (since the sound translation is eliminated). Some direct connect modems are able to communicate at up to 600bps (60 characters per

second). However, some reduction in reliability should be expected at these high speeds. Other modems are designed so that they cannot operate at speeds above 300bps – in order to achieve a higher degree of reliability at the normal speeds.

Another attractive aspect of the direct connect modem is that it allows the computer to access the phone line directly to answer, and even make, calls *by itself*. This cannot easily be done with the acoustic coupler because it goes through a phone which must be physically lifted off a receiver to start dialing. The disadvantage of a direct connect modem, however, is that it must be physically attached to the phone line. This can be a problem with a business phone setup, pay phone, etc. As a result, the direct connect method is usually used in a fixed location where the phone line is easily attached. Often a phone line is solely for the use of a computer.

### Three Types Of Direct Connect Modems

The three main types of direct connect modems are the “auto answer,” “auto answer/manual originate,” and “auto answer/auto originate.”

An auto answer modem can answer calls, but is unable to place any. An auto answer/manual originate modem can answer calls as well as allowing you to manually make a call (after which control is transferred to the modem). Finally, an auto answer/auto originate modem lets the computer answer calls automatically as well as place them by itself without operator intervention.

While most acoustic couplers are separate devices that attach to a computer or terminal through some sort of interface (usually an RS232 serial interface), a few are built into the equipment. If the acoustic coupler is to be purchased as a separate device, be sure to find out if the separate interface will be needed and include it in the cost of the modem. Often a computer already has an RS232 port available to which to attach the modem. If this is the case, the additional interface may not be needed.

Direct connect modems come as either a separate unit that attaches to the computer, or as a device that can be mounted inside the computer. If it is a separate external unit, the interface must be taken into account. Generally, modems which are designed to be installed inside the computer provide their own interface to the computer, and the extra cost need not be considered.

Although the final decision must be made according to your own needs, a general rule of thumb is that if you have no need for automatic operations, an acoustic coupler will probably serve best. If, however, you do desire automatic functions, then you will need the direct connect type modem. ©



*In this, the first of a two-part series on the inner workings of Atari Graphics, the author reviews the computer's system of screen management and defines several important terms including color clock, playfield, mode line, and display list. Next month, the article concludes with techniques for using color indirection, a powerful graphics tool, and explores the new GTIA chip in detail. This new chip costs nothing if your Atari is still under warranty. If you have an older machine, the nearest authorized service center should be stocking it by now and will install it for about \$60.*

## Part I:

# Atari Video Graphics And The New GTIA

Craig Chamberlain  
Birmingham, MI

The GTIA is an exciting new graphics chip now being shipped in Atari 400/800 computers. Among its special features are a sixteen color mode with a resolution eight times better than the Apple's, and the capability of generating 256 color variations. The GTIA chip provides three new graphics modes in addition to the normal fourteen, totally different, full-screen modes. This article defines a few terms relating to graphics, explains the normal graphics modes, then introduces the new modes provided by the GTIA.

### ANTIC Is A Busy Chip

We all know that the Atari 400 and 800 have superior graphics capabilities. This has been achieved by designing special chips to handle video display tasks, taking that burden off the main microprocessor. In Atari computers these special chips are known as ANTIC and CTIA.

The ANTIC chip is actually an advanced DMA (direct memory access) controller that qualifies as a true microprocessor. It has an instruction set (mode lines and "load memory scan" operation), a program (the good 'ole display list), and data (display memory and character sets).

This special chip is a rather busy fellow. Its responsibilities include doing DMA for the display list, the display data (playfields), the character set, and player/missile buffers. Besides that, it sets the playfield width, controls horizontal and vertical

fine scrolling, keeps track of the vertical position of the scan beam, and handles NMI interrupts. It also supports a light pen.

### The GTIA: Three New Modes

The other chip is the CTIA, or Computer Television Interface Adapted integrated circuit. This is the chip which handles all color and luminance (brightness) information to send to the television screen. This is a complicated process, but the chip designers at Atari got carried away and created whole new functions which we know as the player/missile graphics system. It is the CTIA which processes the horizontal position, size, priority, and color of the players. The CTIA also watches for player/playfield collisions, joystick triggers, and console keys. Like the ANTIC, it is a busy chip.

The new GTIA chip replaces the CTIA. Rumor has it that the "G" stands for George. Apparently some fellow named George was still not satisfied with all the special functions of the CTIA, and gave it the ability to generate three totally new graphics modes. When you find out what these new modes can do, I think you will appreciate "George" and his GTIA.

The three new modes are 9, 10 and 11. The operating system and, therefore, Atari BASIC, supports these new modes. But before describing all the features of these new modes, I want to define a few essential terms and review the normal graphics modes 0 through 8.

In order to fully understand Atari graphics, one must have a solid concept of how a television display is generated. And no discussion on "television theory" would be complete without a definition of the "color clock." The term *color clock* derives from the fact that there is a problem in measuring distances on a television screen. Different television sets have different screen sizes, with 9", 13" and 19" being common diagonal measurements. All television sets, however, have a scanning beam which translates a signal from the computer into a picture on the screen.

The signal coming from the computer contains two characteristics. It has a frequency, which defines a color, and it has an amplitude, which defines the *luminance* of that color, often referred to as the brightness or intensity. These qualities of the computer signal affect the way in which the scanning beam shoots electrons at the phosphors on a television screen. This electron shooting process is done horizontally, one line at a time, but it is done so quickly that it is not noticeable to the human eye.

When drawing a line, the scanning beam starts at the left edge of the screen and proceeds to the right edge, shooting electrons the whole time. Since the beam has a finite amount of time it can





# ATARI SAYS ITS FIRST WORD

## WITH A VOICE BOX BY THE ALIEN GROUP!

THE ALIEN GROUP has emerged from the underground, daring to offer a full-featured speech synthesis system that is flexible, low in cost, and needs no accessory devices. No Interface, Cables, Speaker, Amp, or External Power Required! VOICE BOX has been designed and programmed by Atari users to become the integral voice of a 400 or 800 computer. Simply plugged into the serial port, VOICE BOX automatically routes all speech into the speaker of your television monitor. With the menu-driven operating system supplied, you'll be creating original, intelligible speech within moments after loading disk or cassette. No lengthy or obscure instructions to wade through.

The system includes a dictionary which translates typed text into VOICE BOX's phonetic language. The dictionary can be expanded to include as many as 5,000 words of your own custom vocabulary. Unlimited speech can be produced by straightforward phonetic definition at any time, even if the dictionary should be full.

The speech routines can be called from other programs for any purpose you can conceive. Here are a few suggested uses:

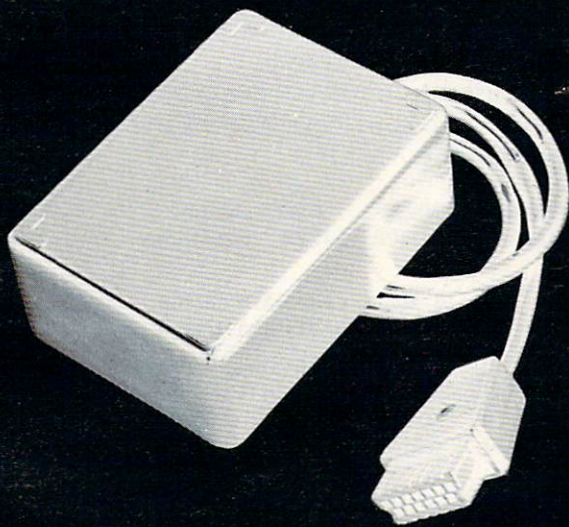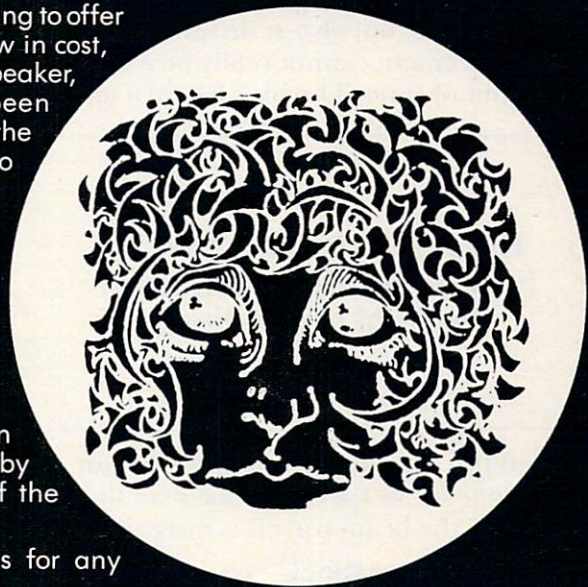

VOICE BOX  
Speech Synthesizer

#### SOUND EFFECTS

- Access 64 phonemes at any of 4 pitch levels to add filtered, contoured sound to the Atari audio repertoire.

#### GAMES

- Program aliens to hiss threats, moan when destroyed.
- Devise weird, non-human tongues for dungeon dwellers.
- Insert cryptic spoken clues in maze games.

#### COMPUTER OPERATION

- Code verbal prompts and error messages that command attention and leave the current display intact.

#### EDUCATION

- Gain an introduction to the principles of phonetics.
- Learn touch typing through spoken feedback from the keyboard.

In addition, the *Random Sentence Generator* included in the operating system, which prints and speaks endlessly startling, amusing, even poetic combinations of words supplied by the user, helps teach school children to identify parts of speech and recognize a variety of sentence structures.

A minimum of 16K RAM is required by the operating system. Either disk or cassette includes both 16K and 32K versions. Try VOICE BOX for up to 10 days, and if it isn't the finest value you've ever seen in a computer peripheral, the most challenging and provocative addition you've ever made to your system, return it in its original condition for a full refund.

When ordering specify disk- or cassette-based operating system, and enclose check or money-order for \$169, or state your VISA or MASTERCARD number. Send mail orders to: THE ALIEN GROUP

27 West 23rd Street  
Dept. PT-1  
New York, New York 10010

or telephone orders from  
10 AM to 6 PM New York time  
(212) 924-5546

**ALSO AVAILABLE AT LEADING COMPUTER STORES THROUGHOUT THE WORLD.**

Atari is a registered trademark of Warner Communications.



spend drawing one line, the beam will seemingly have to move faster to cover more area on a larger screen. Thus the problem of trying to measure horizontal distances is further complicated by the fact that different scanning beams not only travel different amounts, but also at different rates. Our unit of measurement cannot really be a distance; it must be a unit of time. The hint I gave a moment

---

## The ANTIC knows how to handle fourteen different kinds of mode lines.

---

ago was that the scanning beam has a certain amount of time it can spend on one scan line. How fast or how far the beam travels is insignificant.

### Understanding Color Clock

The fact that our unit of measurement is based on time explains the word *clock* in the term *color clock*. A color clock is the amount of time the computer needs in order to sufficiently change the frequency of the signal it generates so as to produce a different color. What a mouthful! This is my own personal definition; it has worked for me, but some people may not agree with it. Here's another definition. A scan line is the horizontal path of the scanning beam from the left edge of the screen to the right edge.

Scan lines extend horizontally across the screen, but it takes a lot of them stacked vertically to fill up the screen from top to bottom. Therefore, horizontal resolution is usually expressed in terms of color clocks while vertical resolution is expressed in scan lines. Of course, on different television sets the actual lengths will differ, but the resolution horizontally to vertically is always proportionate. It turns out that, on any screen, one color clock appears to be equal in length to two scan lines.

Now we have to get even more technical for a moment. The scanning beam starts at the upper left corner of the screen and travels horizontally to the right. By the time it hits the right edge it has drawn one scan line that is 228 color clocks wide. The beam then shuts off for a short period while it returns to the left edge, only one scan line lower. This period is called the "horizontal blank" for obvious reasons. The beam then turns on again and starts drawing the next scan line. This sequence of drawing scan lines continues 262 times. At that point, the scanning beam, at the lower right corner of the screen, shuts off and returns to the upper

left corner of the screen during a period known as the (guess what!) "vertical blank."

This whole process of drawing 262 scan lines, each of 228 color clocks, plus the blanking periods, constitutes one "frame." The television draws sixty of these frames every second, because your home power line is 60 Hz (cycles). The name given to this display method is "raster scan." The fact that your Atari follows a broadcast standard referred to as "NTSC" makes it one of the few home computers that can be video-taped without special equipment.

Just because the scanning beam generates all those scan lines and color clocks doesn't mean that the computer is generating that much display data. Even if the computer did, you wouldn't see the whole image since most television sets display a little less than 200 scan lines of about 170 color clocks. The part where the true picture exists is called the playfield, and now it's time for another definition.

### Playfields And Mode Lines

The playfield is the portion of each scan line for which data read from memory can produce colors and luminances. The background exists at the ends of each scan line; the playfield is in the middle. From the viewpoint of one frame, the playfield appears as a rectangular region which extends to the sides of the screen.

Two things control the size of this playfield area. The height in scan line is controlled by the display list as you will see in a moment. Recall that the width in color clocks is set by the DMA control register of the ANTIC.

SDMCTL	\$022F	559	shadow
DMACTL	\$D400	54272	hardware

D5	1	display list DMA enable
	0	display list DMA disable
D1,D0	00	playfield DMA disable (no playfield)
	01	narrow playfield (128 color clocks)
	10	standard playfield (160 color clocks)
	11	wide playfield (192 color clocks)

The OS screen handler always uses a standard width playfield. The advantage of the narrow playfield is that less DMA is required, so programs execute faster. Unfortunately, the screen handler routines do not work properly when the playfield width is other than the standard. The wide playfield generates more data than the television can display; its uses are rather limited. It's even possible to turn off playfield completely, in which case ANTIC fills the screen with scan lines of the background color. As will be shown in a moment, the playfield also requires a "display list" so bit five must be set for any playfield type to be generated.

Remember that a byte is made up of eight



**Another First!**

**Orderline:**  
**(303) 427-9036**

**Free Catalog**  
*available upon request*

## ACR

*A Point of Sale*

- 350 Inventory Items
- Purchase Orders
- Report Generator
- Receiving Records

**1 or 2 Drives**  
**32K (Disk)**

**\$169.95**

**Dealer Inquiries**  
**Invited**

exclusively distributed by:

## HCMS

3489 W. 72nd. Avenue  
Westminster, CO 80030

**1 STOP SOFTWARE STORES**  
for the ATARI 400/800\*

PRESENTS



for the ATARI 400/800\*

Use by itself or add to existing memory for up to 96K RAM

**A Simple Peek & Poke**  
**Puts Your ATARI in a League**  
**By Itself**

manufactured by:

**MaxRam Datawave Corporation**

\*ATARI is a registered trademark of ATARI, Inc.

## Copycat

*High-Performance*  
*Disk Copier*

- Handles non-standard formats
- All Machine Languages
- Super-Fast Execution
- Supports 1 or 2 drives

**\$29.95**

## Cassette

## Checkbook

## Program

*Balancer Program*

- Multiple Accounts
- Creative Use of Graphics

**\$14.95**

\$2.00 Shipping and Handling.  
Please add \$1.50 for COD.  
Colorado residents, add 6.5% tax.  
**VISA and MC accepted**

**Send for our FREE**  
**Software Catalog for the**  
**Atari 400/800 Computer**

**LARGE SELECTION**

**SAVE A MINIMUM OF 10%**

**ALL PROGRAMS PRETESTED**

**FREE SHIPPING**

**MOST MAJOR BRANDS**

# RANDOM

# ACCESS

# MICROWARE

**P.O. BOX 1704**  
**BREA, CA 92621**

**(714) 671-1093**





binary "bits." If playfield and display list DMA is enabled, bits may be read from the computer memory during the course of one scan line. The bit pattern determines the frequency and intensity changes of the scanning beam, with the result being different color/luminances. The same bit pattern may be repeated for several scan lines. And the bit pattern can be interpreted in different ways. This leads us to yet another definition.

A mode line is a contiguous group of scan lines for which display memory is read only once.

There are two main types of mode lines. In direct memory map modes, the bit pattern produces the same image on each scan line. Text modes are a more complicated mode type which use a character set.

The ANTIC knows how to handle fourteen different kinds of mode lines. Each mode line corresponds to a different method for interpreting a bit pattern. A full screen graphics mode is actually just a series of identical mode lines.

The display list is merely a sequence of bytes in memory that, among other things, tells ANTIC the proper sequence of mode lines for one screen.

Whenever the screen is opened (accomplished in Atari BASIC with the GRAPHICS statement), the screen handler establishes a display list of many mode lines to produce a screen of the desired mode. Modes can be mixed by manually changing the display list. Display lists produced by the screen handler always contain the proper number of mode lines for exactly 192 scan lines of playfield. Altering the display list can affect the total number of scan lines, which is how the vertical size of the playfield is controlled.

The display list also has other functions, such as control of fine scrolling, horizontal blank interrupts, and loading the memory scan counter of the ANTIC so it knows where to start reading memory.

A mode line divided into several parts forms pixels, which are single plotting points somewhere within the playfield area. A pixel's vertical resolution is the same as the mode line in which it is displayed, so there can be just as many pixels vertically as mode lines in the display list. The number of color clocks over which one pixel is spread is also determined by the mode line. Here is a little chart to show you the pixel size for the primary mapping modes:

MODE	COLOR CLOCKS	SCAN LINES	RESOLUTION (full/split screens)
3	4	8	40 by 24/20
4,5	2	4	80 by 48/40
6,7	1	2	160 by 96/80

Note that each time the width of a pixel is

reduced, its height also decreases, so a single pixel appears to be square in shape regardless of the graphics mode.

### Some Observations About Memory

Now to talk about memory. In the one-color modes, one pixel is represented in memory by one bit. If the bit is on, playfield zero shows. If the bit is off, the background shows. Modes 4 and 6 are the one-color modes. For more color, modes 3, 5 and 7 allow three colors. The tradeoff is that a single bit is no longer sufficient. Two bits, a pair, are required. The total value of the two bits selects either one of three playfields or the background:

BIT PATTERN	COLOR	PLAYFIELD TYPE
00	0	background
01	1	playfield zero
10	2	playfield one
11	3	playfield two

Playfield zero is the same thing as COLOR 1 in Atari BASIC. Playfield one is really COLOR 2, and so on, with COLOR 0 being the background.

Although modes 4 and 5 both have the same resolution, or pixel size on the screen, mode 5 will require twice as much memory. In the lower resolution modes which require little memory in the first place, the additional memory needed is rather insignificant. You might have noticed that mode 3 had no single color counterpart. Consider that in a 48K system it is possible to have about 150 different mode 3 screens in memory simultaneously. The chip designers probably decided it wasn't worth the effort or memory savings to provide a one color mode with such low resolution.

Therefore, the size of a pixel on the screen is determined by two things: how many scan lines high, and how many color clocks wide. The amount of memory required for a mode is also determined by two things: how many separate pixels to one mode line, and how many color possibilities per pixel. The only real connection between pixel size on the screen and size in memory is that bigger pixels fill up a screen faster, so there are fewer of them, and less memory is needed.

Now, three colors means two bits must be used. Does that mean we are always stuck with only three colors which can't be changed? No. The CTIA is capable of generating 128 color/luminance variations. It can produce sixteen different colors, each in eight different degrees of luminance. But 128 possibilities means seven bits would be required, and, in most cases, seven bits per pixel is simply not feasible. There is a limit to how much memory can be devoted to a screen. The solution to this problem is a sort of compromise, but it also presents some powerful and flexible advantages, too. The solution is to use *color indirection*. ©



# PLUG INTO the SOFTWARE connection

**FOR THE BEST ATARI® GAMES AT THE LOWEST PRICES**  
We have one of the largest selections of software available for your Atari® at extra low prices. You will find all the top games and office management software in our catalog at from 15% to 25% below retail. We also have special offers for user groups.

**WE CARRY COMPLETE LINES FROM THE FOLLOWING COMPANIES**  
AVALON HILL GAME COMPANY • COMPUTER MAGIC, LTD. • DATASOFT • EDU-WARE • GEBELLI SOFTWARE • INNOVATIVE DESIGN • K-BYTE • LJK • ON-LINE SYSTEMS • QUALITY SOFTWARE • SPECTRUM COMPUTERS • STRATEGIC SIMULATIONS • SYNERGISTIC • UNITED SOFTWARE OF AMERICA • VERSA COMPUTING • VOYAGER SOFTWARE • ATARI  
ARCADE PLUS • ARTSCI • AUTOMATED SIMULATIONS • ADVENTURE INTERNATIONAL •

**CALL US ON NEW RELEASES AND MONTHLY SPECIALS**  
**APPLE® USERS SEND FOR OUR APPLE® CATALOG**

**SEND FOR OUR FREE CATALOG TODAY**  
**OR CALL (916) 989-3174**  
**THE SOFTWARE CONNECTION**  
**5133 VISTA DEL ORO WAY**  
**FAIR OAKS, CA 95628**

## CASDUP

This program allows you to make backup copies of those expensive machine language programs you bought.

Single or multi-file copies on any ATARI 400/800

Cassette only \$20.00 (California residents add 6% tax)

Send check or money order to:

**VERVAN Software**  
**10072 Balsa Street**  
**Cucamonga, Calif. 91730**



**AIRSTRIKE**  
**NEW! AIRSTRIKE FOR THE ATARI 400/800 16K**

- INTRODUCING THE NEW ARCADE-STYLE GAME FOR ATARI COMPUTERS!
- SUPERB FINE SCROLLING GRAPHICS AND DAZZLING ARRAY OF COLOUR.
- FIGHT YOUR WAY THROUGH CAVERNS AND TUNNELS WITH ATTACKING MISSILES, FUEL AND AMMO DUMPS TO CONTEND WITH!
- 100% MACHINE CODE PROGRAM FOR ONE OR TWO PLAYERS.
- MULTIPLE SKILL LEVELS.

AVAILABLE NOW DIRECT ON 16K CASSETTE : \$39.95 PLUS \$5 AIRMAIL POSTAGE. SEND YOUR VISA/MASTERCARD NUMBER TODAY!  
ATARI IS A T.M. OF ATARI INC.

**ENGLISH SOFTWARE COMPANY**  
DEPT. C. 50 NEWTON STREET, PICCADILLY, MANCHESTER M1 2EA, ENGLAND, U.K. Tel: 061-236 7259

**DEALERS!**  
DON'T DELAY  
CONTACT US TODAY  
TO BECOME A  
STOCKIST OF  
AIRSTRIKE  
MORE INCREDIBLE  
PROGRAMS DUE  
SHORTLY



# All About PET/CBM Character Sets

Louis F. Sander  
Pittsburgh, PA

Commodore's unique assortment of graphics characters, combined with their numerous ROM sets and keyboard configurations, make the various PET and CBM character sets maddeningly hard to comprehend. Occasional inaccuracies in published documentation have confused the situation even more. But as of today, the mystery is over — this article describes all the PET/CBM character sets in specific detail, and shows how they relate to each other and to the standard ASCII character set used by many other manufacturers. Such information will be useful to any PET/CBM owner wanting to get past the beginning stages of programming, and will be invaluable to anyone using the IEEE bus or the user port to communicate with a non-Commodore device.

First, some definitions. Many computer devices can display a group of symbols, or *characters*, on paper or on a CRT. The symbols so displayed are called *printing characters*, and they consist of letters, numbers, punctuation marks, special characters, etc.

Within a given piece of hardware, each character is represented by a pattern of bits, which can be stored, manipulated, and transmitted electrically. The binary numbers corresponding to these bit patterns are called *character codes*. In the PET and CBM, all character codes are 8-bit binary numbers, and they are usually referred to by their decimal equivalents.

For example, the code for a PRINTed asterisk (\*) is 0010 1010 binary, or 42 decimal. Eight bits allow 256 different codes, which can be represented as decimal numbers in the range 0-255 inclusive. A given code can represent different characters in different machines, or even within one machine, depending on context. In the PET/CBM, for example, different codes are used to put a given character on the screen by PRINTing or by POKing.

Some character codes do not represent a *printed* character at all. Instead, they instruct the hardware to take a certain non-printing action. These codes

are called *control codes* or *control characters*.

RETURN, CURSOR DOWN, and RVS are some familiar PET/CBM control actions. If you have ever made your machine do a RETURN by executing the statement PRINT CHR\$(13), you have used a control code (the 13) to generate a control action (the RETURN).

A device's *character set* is its complete set of printing and control characters, along with their associated codes. Many computer devices use a standard character set called *ASCII*, pronounced *ask-ee*, which stands for American Standard Code for Information Interchange.

ASCII and the PET/CBM character sets have quite a bit in common, but there are large differences between them which have to be resolved whenever a PET/CBM is to communicate with an ASCII device. The information in this article will allow you to resolve these differences quickly and accurately in your own programs.

## The Printed Set

Now let's look in depth at the PET/CBM character sets. To keep things simple, we'll first investigate the *printed character set*, or the complete set of symbols that PET/CBM can display on its screen. The Character Set Demo program will allow us to do just that. Type it in and RUN it right now, being sure to include the semicolon at the end of line 210. If you have an 80-column machine, you need to substitute line 310 for line 200.

If everything has been entered properly, you'll see 256 evenly-spaced characters on the screen. You'll also see the notation "59468 = 12" (or 14), indicating the current contents of memory location 59468. Press any key several times, and observe that the notation alternates between 12 and 14, and, as it does, some of the displayed characters alternate as well. As you press a key, the demo program is changing the contents of 59468, and PET/CBM is changing certain printed characters as that happens. No character codes are being altered at all.

We are demonstrating that every PET/CBM has *two* sets of printing characters. A given character code will produce characters from one set or the other, depending on a number POKed into 59468. A 12 in that location produces what is often called the "standard" set of printing characters. It is the same in all PET/CBMs, and we will call it Character Set S, for "standard." POKing 59468 with a 14 produces what is often called the "alternate" character set. This nomenclature is ambiguous, because there are two *different* alternate character sets. Which one you have depends on the ROM set installed in your machine. In this article, we'll call the alternate character set installed in the Original



"Probably the best documented programs I've seen for PET/CBM."

Robert Baker  
Microcomputing  
September 1981

# PET/CBM & VIC OWNERS! Utilities & Games

"The strongest points of this system are its unsurpassed documentation and its human engineering."  
Ralph Bressler, The Paper  
Nov/Dec. 1981

## GAMES FOR VIC

**Skier** Thrill to downhill skiing, using your joystick to hit flags and avoid obstacles. Great graphics. 3 levels of difficulty. \$17.95

**Maze of Mikor** Adventure-like game with stunning graphics challenges you to steal the Warlock's gold as you evade the demon. \$17.95

**Tank Wars** Match your wits against the evasive enemy, maneuver around obstacles and avoid mines. \$17.95

**Victrek** Graphics and sound add to the excitement as you scan galactic maps, maneuver through star bases, and battle klingons. Enhanced version included for 8K VIC. \$17.95

**Pinball** Score points with flippers through bumpers and alleys. This game is the real thing. \$15.95

**Simon** Four squares light and sound at random. Then you imitate the sequence. It gets tougher as you get better. \$15.95

**Fuel Pirates** Protect your stock of atomic fuel from raiding pirates using your particle cannon. \$15.95

**Lazer Blitz** Terrific graphics as you destroy enemy aircraft from your flying saucer. \$17.95

**Pak Bomber** is dropping bombs that you must catch. Great challenge for eye-to-hand coordination. \$15.95

## NEW FOR 5K VIC 20!

**Tank Trap** You're challenged to protect your citizens. 4 exciting levels, each tougher than the one before. \$17.95.

**Concentration** Test your recall skills, when you try to remember what you saw beneath the block, and match it. \$15.95.

**Dam Bomber** You must break the dam while under cannon fire. \$15.95.

**VIC FORTH** Full FigFORTH implementation with compiler, interpreter and complete editor. Runs on standard VIC 20 with 5K. \$59.95 on cartridge.

**HESMON** Machine language monitor. Contains 50% more commands than Commodore's. \$39.95 on cartridge.

**Turtle Graphics** Based on LOGO. Perfect for learning computer programming. Great for kids. Very versatile. \$39.95 on cartridge.

**VIC-Riter** Word processing. \$39.95 on cartridge.

### SPECIAL ANNOUNCEMENT TO OUR CUSTOMERS AND DEALERS

HES has relocated to the San Francisco Bay Area and is now a division of USI International. We now have greater resources to provide you with excellent software on cartridge, cassette, or diskette in superior quality packaging.

Watch for more exciting products from HES.

## UTILITIES FOR PET & VIC

### 6502 ASSEMBLER PACKAGE

**HESBAL** is a 1- or 2-pass Assembler using standard MOS mnemonics and operand formats, has pseudo-opcodes and over 25 error messages. **HESEDIT** is a full screen text editor for use with HESBAL or alone. Assembler package runs on PET or VIC with 1 cassette and minimum 8K, (specify PET or VIC). \$23.95 on cassette, \$26.95 on diskette.

**HESCOM** transfers data and programs bidirectionally between PETs, VICs, or a PET and VIC at 3 times the speed of the disk. Set up VIC as a terminal to PET and create games for 2 players. Or use VIC as a peripheral to PET for hi-res graphics and sound. Only \$49.95 on cassette, \$52.95 on diskette.

**HESCOUNT** monitors BASIC program's execution and accumulates data. Essential for debugging and optimization. Discover how many times your program looped, and when IF statements were true or false. Fast execution. Runs on PET or VIC. On cassette \$23.95. On diskette \$26.95.

**HESCAT** Complete hi-speed diskette cataloging system. Five programs let you sort names, print reports 3 ways, and locate file names in memory or on disk, and much more. Works with any PET/CBM, 16K and dual drives. \$39.95.

**HESLISTER** takes complex BASIC programs and prints (to screen or printer) in an easily understood manner. Lets you analyze BASIC programs to alter or debug code. Works on any PET/CBM and 1 disk drive. \$23.95.

**HESPLOT** Very fast hi-res graphics subroutines for VIC. Includes line drawing routines. With 8K VIC plot within field of 176 x 160. On cassette \$17.95

All products available at your dealer or directly from HES. Add \$2 postage. Calif. res. add 6% sales tax. We accept VISA and MasterCard. Dealer inquiries invited.

PET, CBM, and VIC are trademarks of Commodore.

**HES** Human Engineered Software  
71 Park Lane • Brisbane, CA 94005



Div. USI International

(415) 468-4110

Send today for your **FREE CATALOG**  
of VIC and PET/CBM Software

Name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip \_\_\_\_\_

Mail to **Human Engineered Software**  
71 Park Lane • Brisbane, CA 94005







# BATTERIES INCLUDED

village by the grange, 71 mccaal st. (f6) toronto m5t 2x1 telephone 596-1405

## ARBITER 1.4 MULTI-USER DISK SYSTEM FOR COMMODORE 4.0 COMPUTERS

OVER THREE HUNDRED IN USE ACROSS ONTARIO

Since September 1981 **BATTERIES INCLUDED** has been installing the ARBITER system in classrooms of Commodore BASIC 4.0 computers. The computers are connected to CBM Disk Drives and printers. All users have access to all disk drives and printers plus a host of commands to make this system configuration really usable!

THE ARBITER 1.4 SYSTEM IS READY TO GO!

### FEATURES

- 1) Easy installation.
- 2) Uses no RAM or Utility Sockets.
- 3) Up to 32 computers in one system.
- 4) System self initializes on power up.
- 5) Operation is completely transparent to the user.
- 6) Extended commands allow a friendly multi-user environment.
- 7) System design virtually eliminates interleaved printer output.

### SPECIAL COMMANDS

@ S - Allows students to protect files with a five character password. A three character user ID is forced into the file name.

@ L - Allows the students to load protected files if the password code is known.

LISTC - Used to produce program listings with a Commodore printer. Clumsy OPEN, CMD, LIST, PRINT#, CLOSE sequence not needed. It overcomes the listing problems found on other multi-user hardware systems.

LISTP - Used to get program listings on systems which have an ASCII printer. The cursor control characters are expanded and displayed in brackets. e.g. 'home'

ALL FILE TYPES ARE SUPPORTED - During relative or sequential file access a delay has been built in so the computer will retain control of the system until the file is closed.

TEACHER UTILITY - A utility is supplied on disk to allow the teacher to produce a hardcopy listing and output from any of the protected or unprotected files selected. Once the files are chosen from the disk directory the teacher may do other tasks while the job is completed.

IF YOUR CLASSROOM WAS DESIGNED TO TEACH COMPUTER LITERACY OR STRUCTURED BASIC THEN THIS SYSTEM WAS DESIGNED FOR YOU.

Arbiter and Arbiter 1.4 are copyrights of Batteries Included.

**NEW PRODUCT**

## JUST PLUG IT IN

- No soldering • No messy wires

## SOFTWARE SELECTABLE

1. Software select one of two operating systems. (BASIC 2.0 / BASIC 4.0)
2. Software select utility ROMs at conflicting addresses.

**\$150<sup>00</sup>**



Master Charge and VISA accepted.



# SWARM-100



For 24 Pin ROM Machines Only.

# BATTERIES INCLUDED

Village by the Grange  
71 McCaul Street  
Toronto, Ontario  
Canada M5T 2X1  
(416) 596-1405



# There are over 500 reasons to own this reference encyclopedia. Here's one of them.

4: Effective BASIC

-31-

Programming the PET/CBM

```

x   Input and validate item to be searched for (say, K$ = key item).
    N1 and N2 set to current low and high record numbers
    R = INT((N1+N2)/2)
y   Read the appropriate field of record no. R: say R$
    IF R$=K$ GOTO z
    IF N1>=N2 THEN PRINT "RECORD NOT ON FILE": GOTO x: REM CALCULATE NEW MID-POINT
    IF R$>K$ THEN N2=R-1: GOTO y
    IF R$<K$ THEN N1=R+1: GOTO y
z   Continue processing the record
    REM FOUND IT!
    REM NON-EXISTENT
    REM REVISE UPPER LIMIT DOWN
    REM REVISE LOWER LIMIT UP

```

This schematic program of the binary chop search is, I hope, self-explanatory. N1 and N2 converge, sandwiching the correct value of R between them. Note that records needn't be disk-based; they could as easily be a sorted array in RAM, in which case the test line would read IF R\$(R)=K\$ GOTO z. Try out this technique before implementing a large system, generating test-data with a program, and timing the result. It may be too slow, depending on the disk system and size of file.

**4.1.14 Sorting** is an important operation in commercial data processing. (COBOL has a SORT verb). Chapter 5 has a collection of routines, mostly in BASIC, with notes. The first example, the 'tournament' sort, is unlike all the others in computing individual results singly, so that results can be printed continually, before all the values are ordered. Most sorts wait until the entire batch of data has been ordered, and this can be irritating to wait for and slightly worrying, as the machine may appear to do nothing for long periods. The 'bubble' sort has achieved fame through being very slow. It operates by checking neighbouring values in the array, interchanging those which are out of sequence, and repeating this process until the sort is guaranteed, or until any pass takes place without a transposition, depending on the algorithm. That in Chapter 5 (section 5.3) has a test in line 620 which uses a 'finished' flag. The sort is assumed to be in ascending order, and after every pass another value is positioned at its correct value at the 'top' of the heap, unless, with a partly-sorted set of data, many items are simultaneously sorted. To illustrate the idea, seven figures in the left-hand column are shown sorted (in five passes) in the right-hand column.

4	7	7	7	7
7	4	6	6	6
1	6	4	5	5
3	1	5	4	4
5	3	1	3	3
2	5	3	1	2
6	2	2	2	1

required, making about  $\frac{1}{2}n^2$  in all. On this basis it is often said that the bubble sort takes time proportional to the square of the number of items to be sorted. The correct time is very sensitive to partial ordering of the set of data, and the end of SORT shows that new items, added to an already sorted array, then bubble sorted together, is very fast; in fact, under these circumstances, the bubble sort is one of the fastest possible, since it does little more than check that each item is correctly related to its neighbour, which is necessary in any sorting system. The machine code sort operates on string arrays, changing the pointers where appropriate, and using the identical comparison to that of BASIC, for consistency. It does not sort the zeroth element, which can therefore be used as a title or reminder. If new items are to be sorted in, keep a number of null or blank elements at the start of the array. As the diagram illustrates, high values (e.g. 6) can rise quickly from the bottom, but low values (e.g. 1) are slow in descending. Note finally that the machine-code can be made to sort from the second, third, ... characters of the string, rather than the first, by changing \$FF in \$032E (BASIC 1), or \$7FB6 (BASIC>1) to 0 (second), 1 (third), ... A demonstration BASIC routine is provided with the machine-code. Of the other sorts, the Shell-Metzner and Quicksort are well-known; the former performs many small bubble sorts on longitudinal subsets of the data; the latter compares data with a 'pivot value', putting the result into one or other 'stack' depending on the result. It may run out of space; if so, dimension the array in line 40 with a larger value. The 'scatter' sort is an attempt to mimic human sorting; a subsidiary array is used, into which data is first roughly sorted, on some a priori basis, for example with the As at the beginning, Zs at the end, and others in between. Then this array is sorted thoroughly. Its use of RAM is too great to permit the method to be very useful on micros.

Dealer inquiries are invited.

"Your book is EXCELLENT!"

JIM STRASMA,  
From a letter to the author.



# Programming The PET/CBM

by Raeto Collin West

The book described by Jim Butterfield as

**"...unquestionably the most comprehensive and accurate reference I have seen to date..."**

The Reference Encyclopedia for Commodore 2000, 3000, 4000, and 8000 series computers and peripherals.

Here's just a sample of reviewer and reader reaction:

From reviewers:

**Educational Computing Review** by Stephen Potts

"Of all the books I have read on the PET this book *Programming the PET/CBM* by Raeto West must rank as one of the most comprehensive and readable accounts on the PET that I have ever had the pleasure to see..."

"If you wish to get more from your PET than arcade games and simple teaching programs then this book is a must for your bookshelf. It does not matter whether you run on BASIC 1, BASIC 2, or BASIC 4 since all routines are supplied with addresses and changes to make them run on any machines wherever possible..."

"...this book, with its lucid explanations of the PET, its useful routines and programming hints, is an essential purchase."

**IPUG Magazine Review** (British PET User Group) by Ron Geere

"This publication represents over a year's intensive research ... and the resulting product is a valuable work of reference. A tremendous amount of useful information has been packed in this 500+ page work at which I was so over-awed that I did not know how to

start this review at first...

"This book is a must for every CBM/PET user."

From readers:

"...a book the average to advanced user cannot afford *not* to possess..."

"My copy of your *Programming the PET/CBM* has been in daily use for nearly a month and I am finding it totally addictive, suffering severe withdrawal symptoms whenever I try half-heartedly to move on to other reading matter. It is without doubt the best book on its subject available today..."

"I have recently acquired a copy of your book *Programming the PET/CBM* and must congratulate you on its concept and on packing in so much detail. It's so very much better than anything I have had up to now that it'll be my constant reference manual."

"I have received my copy of *Programming the PET/CBM* by Raeto West and I have recommended it to several of my students. This book is so valuable that I cannot now afford to be without it."

Published exclusively in North America by **COMPUTE! Books**. The book is an astonishing reference manual of useful information. Contents include this and much more:

**1 Introduction and overview:** Plan of the book, sources of information, features and chronology of CBM hardware.

**2 BASIC and how it works:** Storage of BASIC and its variables; tokens, pointers, syntax; optimising BASIC.

**3 Program and system design:** Capabilities of the equipment; charts, algorithms, space, timing.

**4 Effective programming in BASIC:** Seventeen examples, including subroutines, dates, DATA, INPUT, rounding.

**5 Alphabetic reference to BASIC keywords:** Full descriptions, with examples, of all keywords, with methods for adding additional commands not present in CBM BASIC, e.g. AUTO, DEL, OLD, POP, PRINT USING, SORT, VARPTR.

**6 Disk drives:** Descriptions of operation and workings of disk drives, with BASIC and machine-code examples; bugs.

**7 Alphabetic reference to disk BASIC commands:** BASIC 4 disk commands with examples and notes.

**8 Other peripherals and hardware:** Tape storage and handling; printers; modem; keyboard; EPROMs; reset switches.

**9 Graphics and sound:** Tables of CBM characters; CRT chip;

animation, bar plots, 80 by 50 etc.; user-port sound.

**10 The transition to machine-code:** Introductory concepts; a BASIC monitor; use of MLM, Supermon, Extramon; easy examples.

**11 More 6502 machine-code:** 6502 hardware features; eighteen common problems in programming; debugging.

**12 Alphabetic reference to 6502 opcodes:** Examples, notes, and explanations on each opcode from ADC to TYA.

**13 Using ROM routines:** I/O, NMI, RESET; the Kernel; examples - modifying LIST; ordinary and relocating loaders.

**14 Effective 6502 programming:** Assemblers; CHRGET and wedges; PIAs, VIA, IEEE; common mistakes.

**15 Index to BASIC ROMs and RAM:** Memory map of RAM and ROM, detailing and comparing BASICs 1, 2, and 4.

**16 Mathematical programming:** Precision; equations; statistics; simulation; finance; calculus; machine-code.

**17 Programming in business and education:** Examples, applications and pitfalls in business and education.

**Appendices:** 6502 reference charts; Supermon listings; ASCII; glossary

Plus many programs, diagrams and charts. Paperback, 504 pages. ISBN 0 942386 04 3. **\$24.95.**

To Order

**Programming The PET/CBM**

Call

**TOLL FREE 800-334-0868**

**In NC Call 919-275-9809**

Or send coupon to

**COMPUTE! Books, P.O. Box 5406, Greensboro, NC 27403**

In England, order from Level Limited, P.O. Box 438, Hampstead, London, NW3 1BH. Price in England is £14.90, including P & P.

Please send \_\_\_\_\_ copy (copies) of **Programming The PET/CBM** at \$24.95 each. (In the US and Canada, add \$3.00 shipping and handling. Outside North America, add \$9.00 for air mail delivery, \$3.00 for surface delivery).

All orders must be prepaid in US funds (money order, check, or charge).

Payment Enclosed

Please charge my  VISA  MasterCard  Am. Express

Account No. \_\_\_\_\_ Expires \_\_\_\_\_ / \_\_\_\_\_

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Country \_\_\_\_\_

Allow 4-6 weeks for delivery. Foreign surface delivery allow 2-4 months.



TABLE 2 - CHR\$ CHARACTER SETS FOR PET/CBM

The CHR\$ function prints all characters shown. Business keyboards do not print codes 161-191. No keyboard prints codes 96-127 or 224-255. Control Codes in *ITALICS* apply only to 80-column machines and the newest 40-column machines. Character set selection is as follows: S - POKE 59468,12 in all machines. AO - POKE 59468,14 in PETs with Original ROMs. A - POKE 59468,14 in all other machines.

CHR\$ ACTION	CHR\$ S A AO	CHR\$ S A AO	CHR\$ ACTION	CHR\$ S A AO	CHR\$ S A AO	CHR\$ S A AO
0	32 Space	64 @	128	160 Sh Space	192 -	224 Sh Space
1	33 ! ! !	65 A a	129	161 ! ! !	193 A a	225 ! ! !
2	34 " " "	66 B b	130	162 " " "	194 B b	226 " " "
3 Stop	35 # # #	67 C c	131 Run	163 - - -	195 - C c	227 - - -
4	36 \$ \$ \$	68 D d	132	164 - - -	196 - D d	228 - - -
5	37 % % %	69 E e	133	165	197 - E e	229
6	38 & & &	70 F f	134	166 # # #	198 - F f	230 # # #
7 Bell	39 ' ' '	71 G g	135	167	199   G g	231
8	40 ( ( (	72 H h	136	168 * * *	200   H h	232 * * *
9 Tab	41 ) ) )	73 I i	137 Toggle Tab	169 # # #	201 ~ I i	233 # # #
10	42 * * *	74 J j	138	170	202 \ J j	234
11	43 + + +	75 K k	139	171	203 \ K k	235
12	44 , , ,	76 L l	140	172 . . .	204 \ L l	236 . . .
13 Return	45 - - -	77 M m	141 Sh Return	173 L L L	205 \ M m	237 L L L
14 Text	46 . . .	78 N n	142 Graphic	174 ~ ~ ~	206 / N n	238 ~ ~ ~
15 Set Top	47 / / /	79 O o	143 Set Bottom	175 - - -	207 \ O o	239 - - -
16	48 0 0 0	80 P p	144	176 ~ ~ ~	208 \ P p	240 ~ ~ ~
17 Crsr Down	49 1 1 1	81 Q q	145 Crsr Up	177 ~ ~ ~	209 \ Q q	241 ~ ~ ~
18 Reverse	50 2 2 2	82 R r	146 Rvs Off	178 ~ ~ ~	210 - R r	242 ~ ~ ~
19 Home	51 3 3 3	83 S s	147 Clear Scrn	179 ~ ~ ~	211 ~ S s	243 ~ ~ ~
20 Delete	52 4 4 4	84 T t	148 Insert	180	212   T t	244
21 Delete Line	53 5 5 5	85 U u	149 Insert Line	181	213 \ U u	245
22 Erase End	54 6 6 6	86 V v	150 Erase Begin	182	214 \ V v	246
23	55 7 7 7	87 W w	151	183 - - -	215 O W w	247 - - -
24	56 8 8 8	88 X x	152	184 - - -	216 ~ X x	248 - - -
25 Scroll Up	57 9 9 9	89 Y y	153 Scroll Down	185 - - -	217   Y y	249 - - -
26	58 : : :	90 Z z	154	186 ~ ~ ~	218 ~ Z z	250 ~ ~ ~
27 Escape	59 ; ; ;	91 [ [ [	155	187 . . .	219 + + +	251 . . .
28	60 < < <	92 \ \ \	156	188 . . .	220 # # #	252 . . .
29 Crsr Right	61 = = =	93 ] ] ]	157 Crsr Left	189 ~ ~ ~	221   ] ]	253 ~ ~ ~
30	62 > > >	94 ^ ^ ^	158	190 . . .	222 ~ ~ ~	254 . . .
31	63 ? ? ?	95 + + +	159	191 ~ ~ ~	223 ~ ~ ~	255 ~ ~ ~



YES! We said  
"SORT VISICALC"!

## versacalc<sup>TM</sup>

A UNIQUE VISICALC(tm) ENHANCEMENT

NOW AVAILABLE FOR PET

If you use Visicalc(tm) but are bumping into its limitations, you need Versacalc(tm)! Versacalc runs within Visicalc but uses no extra memory; in fact, it effectively increases memory by letting you call in modules from disk as needed.

A Tutorial section makes clear such features as @LOOKUP, DIF, @NA, @ERROR, which are not well explained in the Visicalc manual.

A Utilities section makes it easy to create your own menu-driven modules which condense hundreds of commands into four keystrokes. You can build in sophisticated error checking (e.g. Is the input value between certain limits?). Now it is possible for people untrained in Visicalc to perform the weekly updating without constant instruction.

for Commodore Pet & CBM 2040 - DOS 1.0  
available for 8050 on request

**SORT Visicalc, and Other Useful Wonders!**

**NOW YOU CAN:**

SORT a Visicalc screen on any column, ascending or descending, and all related formulas and labels are sorted too.

put the entire disk CATALOG on the screen at once!

easily do Year-To-Date accumulations! "pound" formulas to expose the full formulas in place on the screen!

append two Visicalc files!

print the contents of a /SS file!

print the contents of a /PF file!

AND our EASEL BINDER is so nice that you will put your other manual in it!

Distributed by:

Anthro-Digital Software  
P.O. Box 1385  
Pittsfield, MA 01202  
413-448-8278

Retail \$125

Versacalc is a trademark of Versacalc Enterprises, Inc.  
Visicalc is a trademark of Personal Software, Inc.

The SM-KIT is a collection of machine language firmware programming and test aids for BASIC programmers. SM-KIT is a 4K ROM (twice the normal capacity) which you simply insert in a single ROM socket on any BASIC 4 CBM/PET—either 80 column or 40 column. Includes both programming aids and disk handling commands.

**ERROR DETECTION:** the SM-KIT automatically indicates the erroneous line and statement for any BASIC program error.

**LINE NUMBERING:** the SM-KIT automatically numbers BASIC statements until you turn the function off.

**SCREEN OUTPUT:** the commands FIND, DUMP, TRACE and DIRECTORY display on the CRT while you hold the RETURN key (display pauses when the key is released). Continuous output is selected with shift-lock.

**OUTPUT CONTROL to DISK or PRINTER:** in addition to displaying on the CRT, you can direct output to either disk or printer.

**HARDCOPY:** allows screen displays to be either printed or stored on disk.

**FIND:** searches all or any part of a program for text or command strings or variable names. Either exact search or wild card search supported.

**RENUMBER:** the SM-KIT can renumber all or any part of a program. The selective renumbering allows you to move blocks of code within your program.

**VARIABLE DUMP:** displays the contents of floating point, integer, and string variables (both simple and array). Can display all variables or any selected variables.

**TRACE:** SM-KIT can trace program execution either continuously or step by step starting with any line number. Selected program variables can be displayed while tracing.

**DISK COMMANDS:** as in DOS Support (Universal Wedge), the "shorthand" versions of disk commands may be used for displaying disk directory, initializing, copying, scratching files, load and run, etc.

**LOAD:** SM-KIT can load all or part of BASIC or machine language programs. It can append to a program in memory, overwrite any part of a program, load starting with any absolute memory location, and load without changing variable pointers.

**MERGE:** allows merging all or any part of a program on disk with a program in memory. **SAVE and VERIFY:** SM-KIT provides one step program save and verification. It also allows you to save any part of a program, or any address range.

**DELETE:** allows any program segment to be deleted.

**REPEAT KEYS:** allows repeating functions if not already available on specific PET/CBM model.

## SM-KIT

for Commodore Computers

A Programming Productivity Tool



ONLY  
\$40

A 4K ROM with both  
programming and disk  
handling aids.



Developed by (and available in Europe from) SM Softwareverbund-Microcomputer GmbH, Scherbaumstrasse 29, 8000 Munchen 83, Germany

252 Bethlehem Pike  
Colmar, PA 18915

215-822-7727 **A B Computers**

WRITE FOR CATALOG.

Add \$1.25 per order for shipping. We pay balance of UPS surface charges on all prepaid orders. Prices listed are on cash discount basis. Regular prices slightly higher.



PET ROMs Character Set A0, for "alternate, original," and the alternate character set in all other ROMs Character Set A. These two alternate sets contain the same characters, but in a different order, as we will see later on.

About 75% of the characters in all three sets are identical. Sets S, A, and AO differ only in the characters produced by the alphabetic keys A through Z, and in four other characters, all graphics. At "power on," graphics keyboard PET/CBM's have Character Set S enabled, while machines with business keyboards have Character Set A.

Character sets can be switched by POKEing 59468 with 12 or 14, or with other numbers as well. Numbers having a binary representation of the form XXXX 110X will produce character set S, while any other number will produce your machine's alternate character set. In machines having the GRAPHIC and TEXT commands, these can also be used to switch character sets.

Now back to the demo program. Without touching the keyboard, study the characters displayed on your screen. Notice that there are 256 characters, all different, and that the first 128 of them are repeated in reverse field to make up the second 128. (There may seem to be two identical SPACE characters, but there aren't – the second one is SHIFTED SPACE, and your computer treats it as a separate character altogether.) This is the complete set of printing characters from the currently activated set. In other words, you are looking at every character your machine can display at this moment.

Now press any key and study the characters in the other set. Again, there are 256 unique symbols, 128 regular and 128 in reverse field. Press a key several times, and notice which characters change as the character sets are toggled. If you count them, you'll find 60 characters that change – 30 regular and 30 reverse field. Note which ones they are, and notice that certain combinations of characters can never be on the screen at the same time, the HEART and the lowercase "s," for example.

You have now seen every character that your machine is able to display. All other PET/CBM's have the same printing characters, but in some machines they are gotten at in a slightly different way. Altogether, there are 316 different characters, 256 of them available at any one time.

Since we've now looked at the complete repertoire of printing characters, let's look further into character codes, the other part of the character set. A character can be displayed on PET/CBM's screen in one of three ways: by POKEing a code into a screen memory location, by pressing a key, or by executing a PRINT statement. Additionally, your

machine can send characters to, or receive them from, devices connected to the IEEE, user, recorder, and memory expansion ports. In every case, character codes are used to specify which character is to be displayed, recorded, or transmitted.

### The Screen And CHR\$ Sets

Our demonstration program POKEd characters to the screen, using the 256 character codes from 0 to 255 inclusive, which produced 256 different printed symbols. POKEing a 1 gave an A, a 2 gave a B, and so on through all the printed characters. This particular combination of codes and characters is valid *only* for screen POKEing, and is summarized in Table 1. We'll call it the *Screen POKE Character Set*.

All other character manipulation in the PET/CBM uses a completely different group of codes to print these same characters, and it is summarized in Table 2. Many of the printing characters and control functions in this set can be activated directly from the keyboard, and all of them can be activated by using the CHR\$ function. We will call this the *CHR\$ Character Set*.

Some people call it PET ASCII, but that terminology is misleading – PET/CBM's CHR\$ character set has twice as many codes as ASCII, and only about half of the 128 ASCII codes have the same meaning in the ASCII and CHR\$ character sets!

All PET/CBM keyboard and PRINT operations use the CHR\$ character set; it is also used whenever characters are sent to or received from external devices such as printers, files, or modems. If you tell PET to send an asterisk to your printer, it will, in fact, send 0010 1010, or 42 in decimal notation. And whenever PET receives a 42, whatever the 42 may have represented in the sending device's character set, PET interprets it as an asterisk.

There are 256 CHR\$ codes, numbered from 0 to 255 inclusive, and the CHR\$ character set differs substantially from the POKE set, although both can be used to display the same symbols. Here are the essential differences:

- Very few characters have identical POKE and CHR\$ codes.
- There are no CHR\$ codes for reverse field characters. Instead, the RVS ON/OFF key or its corresponding CHR\$ codes are used to produce them.
- The CHR\$ set includes 14 control characters (28 in 80-column machines and newer 40-column machines) in addition to its 128 printing characters.
- Since there are 256 CHR\$ codes, and only



# nüFEKOP FOR THE VIC-20

HARD SOFTWARE TO BEAT

ANY 5 \$42.00 : ANY 3 \$27.00 : ANY 1 \$9.95 : OUR CATALOG FREE!

**SEARCH** - Drive through a giant maze of rooms encountering money bags, fuel tanks, and moving oil slicks that slide you back to start. Nobody here has ever gotten all eighteen bags—but we're still at it and soon . . .

**ALIEN PANIC** - Climb ladders, dig holes and drop aliens . . . Quickly!

**KRAZY KONG** - You have to climb to the top but this crazy monkey keeps rolling barrels!

**VIKMAN** - Sweep up dots before monsters mop you up.

**QUIRK** - Arcade type game where if you're not awake the floor literally moves out from under your feet. Fortunately for the careful (and the Quick) the rewards roll into your pocket.

**RESCUE from NUFON** - A Graphic Adventure game played with the keyboard. Some commands are, N.S.E.W. for direction, T for transport, U and D for the 5 floor elevator. Under your watchful eye (there are certain undesireables in these rooms) your guy finds and transports humans to safety. One player average 20 min.

**DODGE CARS** - Fast fun on crowded freeway. This colorful game keeps top 5 & compares against last 50.

**INVASION** - Protect energy pods from being stolen by enemy ships. Simple and challenging.

\*\*\*\*\* SPECIFY KEYBOARD OR JOYSTICK \*\*\*\*\*

**nüFROM DEPT.**  
EXTENDED MEMORY & DISK GAMES

AVAILABLE BY TIME OF PRINTING  
WRITE FOR NEW CATALOG

Also 32K Krazy Kong for the ATARI

WRITE **nüFEKOP**

P.O. BOX 156  
SHADY COVE, OREGON 97539

OR CALL 503-878-2113  
MASTERCARD - VISA - C.O.D.

## VIC 20 VIDEO

HERE ARE THE SAME PROGRAMS  
OUR TELEVISION PRODUCTION  
TEAM USE FOR MAKING COM-  
MERCIALS AND SPECIAL EFFECTS.  
COLOR BARS, COUNTDOWNS, AUTO  
SLATES, GRIDS, PULSATING SINE  
WAVES, STAR BEDS + MUCH MORE.  
EASY TO CUSTOMIZE & SAVE.

**ALL CRAMMED IN ONE TAPE!**

20.00

SEND 2.00 FOR CATALOG OF  
UNIQUE VIC ACCESSORIES.

**HYPERTech**  
1820 NE 142 St  
PENTHOUSE 7  
MIAMI, FL. 33181

VIC 20 IS A T.M. OF COMMODORE

### PET/CBM OWNERS

**WALLBANGER** - Blast your way through the dodge'm, blast'm, and attack modes. If you destroy the bouncing balls before they destroy you, the walls close in for the next round. Wallbanger is written in machine language, has great sound, and encourages complex strategies.

CASS/8K/40 COL SCREEN/OLD-NEW ROMS . . . . . **\$15.00**  
(CALIF. RES. ADD 8% SALES TAX)

**MILLIPEDE** - Exterminate the oncoming millipedes and fleas as they descend through the mushroom patch. Blast giant bouncing spiders before they pounce on you. Shoot a millipede in the body and suddenly two millipedes descend toward your ship. Millipede is written in machine language, has excellent graphics, and great sound.

CASS/8K/40 COL SCREEN/OLD-NEW ROMS . . . . . **\$15.00**  
(CALIF. RES. ADD 8% SALES TAX)

Write for FREE game details:

**ON LINE SOFTWARE**  
**P.O. BOX 2044**  
**ORCUTT, CA 93455**

**WARNING!** These games cause high panic levels!

PET/CBM OWNERS



TABLE 3 - AMERICAN STANDARD CODE FOR INFORMATION INTERCHANGE (ASCII)

The ASCII Codes in Decimal Form:	English Names of the Special Characters:	Key to Control Code Abbreviations:
0 NUL		ACK - Acknowledgement
1 SOH	33 - Exclamation point	BEL - Bell
2 STX	34 - Quotation mark	BS - Backspace
3 ETX	35 - Number sign	CAN - Cancel
4 EOT	36 - Dollar sign	CR - Carriage return
5 ENQ	37 - Percent	DC1 - Device control #1
6 ACK	38 - Ampersand	DC2 - Device control #2
7 BEL	39 - Apostrophe	DC3 - Device control #3
8 BS	40 - Opening parenthesis	DC4 - Device control #4
9 HT	41 - Closing parenthesis	DEL - Delete
10 LF	42 - Asterisk	DLE - Data link escape
11 VT	43 - Plus	EM - End of medium
12 FF	44 - Comma	ENQ - Enquiry
13 CR	45 - Hyphen (Minus)	EOT - End of transmission
14 SO	46 - Period (Decimal point)	ESC - Escape
15 SI	47 - Slant	ETB - End of transmission block
16 DLE	48 - Colon	ETX - End of text
17 DC1	49 - Semicolon	FF - Form feed
18 DC2	50 - Less than	FS - File separator
19 DC3	51 - Equals	GS - Group separator
20 DC4	52 - Greater than	HT - Horizontal tab
21 NAK	53 - Question mark	LF - Line feed
22 SYN	54 - Commercial at	NAK - Negative acknowledgement
23 ETB	55 - Opening bracket	NUL - Null
24 CAN	56 - Reverse slant	RS - Record separator
25 EM	57 - Closing bracket	SI - Shift in
26 SUB	58 - Circumflex	SO - Shift out
27 ESC	59 - Underline	SOH - Start of heading
28 FS	60 - Grave accent	SPC - Space
29 GS	61 - Opening brace	STX - Start of text
30 RS	62 - Vertical line	SUB - Substitute
31 US	63 - Closing brace	SYN - Synchronous idle
	64 @	US - Unit separator
	65 A	VT - Vertical tab
	66 B	
	67 C	
	68 D	
	69 E	
	70 F	
	71 G	
	72 H	
	73 I	
	74 J	
	75 K	
	76 L	
	77 M	
	78 N	
	79 O	
	80 P	
	81 Q	
	82 R	
	83 S	
	84 T	
	85 U	
	86 V	
	87 W	
	88 X	
	89 Y	
	90 Z	
	91 [	
	92 \	
	93 ]	
	94 ^	
	95 _	
	96 `	
	97 a	
	98 b	
	99 c	
	100 d	
	101 e	
	102 f	
	103 g	
	104 h	
	105 i	
	106 j	
	107 k	
	108 l	
	109 m	
	110 n	
	111 o	
	112 p	
	113 q	
	114 r	
	115 s	
	116 t	
	117 u	
	118 v	
	119 w	
	120 x	
	121 y	
	122 z	
	123 {	
	124	
	125 }	
	126 ~	
	127 DEL	



128 + 14 = 142 CHR\$ characters (156 in some machines), many of the CHR\$ codes have no meaning at all in the PET/CBM, and in many cases one printed character has two different CHR\$ codes!

Table 3 shows the standard ASCII character set. It is presented in a similar format to Table 2, to facilitate comparison of the ASCII and PET/CBM character sets. Study the two tables carefully, and you'll see that PET/CBM has all but seven of the ASCII printed characters, (94-96 and 128-126), but often with different character codes.

You'll also notice that ASCII, being a seven-bit code, has no character codes above 127, and lacks many of PET/CBM's printing characters.

Because there are so many ASCII control codes, most ASCII keyboards use a special CONTROL key, similar to the SHIFT key, to generate them. CTRL A often sends a 1 code (SOH), CTRL B a 2 code (STX), CTRL C a 3 code (ETX), etc. Also, the meanings of the ASCII control codes, established with commercial message traffic in mind, are almost completely foreign to PET/CBM.

No wonder it's sometimes hard to use non-Commodore devices with your machine! But now that you have Tables 2 and 3, you can write programs for perfect conversions between ASCII and PET/CBM codes. Table 2 shows you exactly what code PET/CBM sends when a given character is transmitted, and Table 3 shows you exactly how an ASCII device will interpret that code. Conversely, Table 3 shows you the intended character representation of every ASCII code your machine receives from outside, while Table 2 shows which code it has to be converted to to have the same representation inside your PET/CBM.

### Some Example Conversions

A few examples will illustrate the conversions. Suppose that your PET, with Character Set A enabled, is connected through a modem to an ASCII terminal, and that you are sending messages back and forth. The ASCII terminal sends the lowercase letter "a." Table 3 shows that the code actually transmitted will be 97 decimal, or 0110 0001. If your PET receives that code and displays it on the screen as a PRINTed character, Table 2 shows that it will be displayed as an exclamation point!

So you'll need some software in your PET that converts received ASCII input to CHR\$ format before displaying it. In this case, whenever PET receives a 97, the program should convert it to a 65 before PRINTing it. Of course, the program should also be smart enough to convert (or not convert) any of the other ASCII codes between 0 and 127 so that they give the proper display on your PET.

Going the other way, suppose that you press the unshifted "b" key on your PET, and want the distant ASCII terminal to see it as a lowercase "b." Table 2 tells us that your PET will send a 66, which Table 3 tells us the ASCII terminal will interpret as an *uppercase* "B," which is not at all what you want. So your program has to convert the 66 to a 98 before transmitting it, and to make conversions on any other transmitted characters where it's appropriate.

If you study Tables 2 and 3, you'll be able to determine every sending and receiving conversion, and to write your programs accordingly. If the remote device has a character set different from standard ASCII (many of them do), all you need to do is compare it to Table 2, and you'll be able to program the conversions.

```

100 REM   *** CHARACTER SET DEMO ***
120 REM
130 REM SHOWS EVERY PET/CBM CHARACTER
140 REM (KEY PRESS CHANGES CHAR. SET)
150 REM
160 PRINT "{CLEAR}"
170 FORCH=0TO255
180 POKE(32768+2*CH+40*INT(CH/20)),CH
190 NEXTCH
200 FORI=1TO23:PRINT:NEXT
210 PRINTTAB(32)"59468=1";
220 IFPEEK(59468)=14THEN250
230 POKE59468,12:POKE33767,50
240 GETA$:IFA$=""THEN240
250 POKE59468,14:POKE33767,52
260 GETA$:IFA$=""THEN260
270 GOTO230
280 REM
290 REM ** LINE 200 FOR 80 COL. CMB'S:
300 REM
310 FORI=1TO11:PRINT:NEXT

```

©

## Simulative Strategy Games

for the

# VIC-20

from P.R. Software

*These simulative strategy games combine graphics and strategy situations to offer maximum enjoyment and challenge. No joysticks required. Non-arcade games.*

- STAR DEFENDER
- CONVOY ESCORT
- CONVOY RAIDER
- COMPUTER BASEBALL
- BOXER'S CORNER
- DUNGEONS OF KAL

**\$11.95 each**

Send check or money order plus \$1.50 postage and handling to:  
**P.R. Software, P.O. Box 169, South San Francisco, CA 94080**

Calif. Res. add 6% sales tax

Dealer Inquiries Invited Programmers sought

VIC-20 is a registered trademark of Commodore Business Machines



In the May issue of **COMPUTE!**, Steve Steinberg's article "Language Lab" was inadvertently published with the wrong program accompanying it. It is reprinted here in its entirety.

## An ATARI Learning Program

# Language Lab

Steve Steinberg  
Washington, DC

Language Lab is a program to use your ATARI to help you build vocabulary in a foreign language. It is basically a computerized version of that old standby of language education, the flash card set, and I have found it extremely simple and effective to use. It is structured so that you can drill and score yourself on as many words as you like, but I find it most useful if you display a fifteen or twenty word vocabulary drill on the screen, spot the errors and review them, then try again. If you have enough memory, you can also use it to create a fair sized foreign language dictionary.

I have used a handful of French words in the program example but you can easily change this to any language you want. Simply change line 55 LANG\$="FRENCH" to LANG\$="GERMAN", "SPANISH", "NAVAJO" or whatever you like and enter the appropriate word pairs in DATA.

The DATA, beginning on line 1000 is easy to expand as your language skill increases and can be used in conjunction with either a self teaching or school language course. Just enter the DATA in word pairs, the first in English, the second in whatever language you are working with.

The key to the vocabulary drills is the random word subroutine, lines 500 through 550. In line 510  $X = (1 + \text{INT}(\text{RND}(1) * 25))$  the 25 is equal to the number of word pairs entered as DATA. As you increase the number of word pairs by adding new DATA this number should also be appropriately increased. You can also alter this line to drill yourself on only part of your total foreign language vocabulary.

Let's assume, for example, that you have 600 word pairs in DATA but only want to drill yourself on the last 100 words you have entered. In that case,

change line 510 to  $X = (500 + \text{INT}(\text{RND}(1) * 100))$ .

Lines 160,180,260,280,330 and 430 use the ATARI cursor advance and line "up" arrow keys to provide a format that will display as much of your language drill or translations on the screen at one time as possible, but you can replace these with just "PRINT" statements if you prefer. This would be useful if you want to use the program for drill and translation of whole phrases and sentences instead of just single words. Don't forget, however, to increase the size of the appropriate string dimensions (ENGLISH\$,WORD\$,TRANSLATE\$) in line 50.

One final note; if you happen to own IRIDIS 2 (and if you have an ATARI computer I don't think you can find a better bargain in software) you can easily add the appropriate subroutine to use Language Lab for Russian, Greek, Hebrew or whatever you wish by adding the foreign alphabet in lower case. I am currently using the program to teach myself Classical Greek. I hope this program will be useful for budding language students and in any case good luck with it, bon chance, and auf wedersehen.

```

40 REM LANGUAGE LAB
41 REM
45 REM BY STEVE STEINBERG
50 DIM LANG$(15),ENGLISH$(20),WORD$(20),
TRANSLATE$(20),Q$(2)
55 LANG$="FRENCH"
60 PRINT "(CLEAR)":PRINT " ";LANG
$;" LANGUAGE LAB"
65 PRINT :PRINT
70 PRINT "1) ";LANG$;" TO ENGLISH VOCABU
LARY DRILL"
75 PRINT :PRINT "2) ENGLISH TO ";LANG$;"
VOCABULARY DRILL"
80 PRINT :PRINT "3) ";LANG$;" TO ENGLISH
TRANSLATOR"
85 PRINT :PRINT "4) ENGLISH TO ";LANG$;"
TRANSLATOR"
90 PRINT :PRINT "ENTER NUMBER OF DESIRED
PROGRAM":INPUT CHOICE:IF CHOICE>4 THEN
GOTO 90
95 GOTO CHOICE*100
100 REM LANGUAGE TO ENGLISH DRILL
110 PRINT :PRINT :PRINT "HOW MANY WORDS"
:INPUT N:COUNT=0:SCORE=0
120 ? "(CLEAR)":? "TRANSLATE THE FOLLOWI
NG WORDS INTO ENGLISH":PRINT
125 GOSUB 500
130 IF COUNT=N THEN GOSUB 600
135 IF COUNT=N THEN GOTO 100
140 PRINT WORD$,

```



```

150 INPUT TRANSLATE$,
160 IF TRANSLATE$=ENGLISH$ THEN SCORE=SC
ORE+1:COUNT=COUNT+1:PRINT "(UP) (30 RIGHT
)CORRECT"
170 IF TRANSLATE$=ENGLISH$ THEN GOTO 125

180 IF TRANSLATE$(<>ENGLISH$ THEN COUNT=C
OUNT+1:PRINT "(UP) (11 RIGHT)WRONG! IT'S
";ENGLISH$:GOTO 125
200 REM ENGLISH TO LANGUAGE DRILL
210 PRINT :PRINT :PRINT "HOW MANY WORDS"
;:INPUT N:COUNT=0:SCORE=0
220 ? "(CLEAR)":? "TRANSLATE THE FOLLOWI
NG WORDS INTO ";LANG$:PRINT
225 GOSUB 500
230 IF COUNT=N THEN GOSUB 600
235 IF COUNT=N THEN GOTO 200
240 PRINT ENGLISH$,
250 INPUT TRANSLATE$,
260 IF TRANSLATE$=WORD$ THEN SCORE=SCORE
+1:COUNT=COUNT+1:PRINT "(UP) (30 RIGHT)CO
RRECT"
270 IF TRANSLATE$=WORD$ THEN GOTO 225
280 IF TRANSLATE$(<>WORD$ THEN COUNT=COUN
T+1:PRINT "(UP) (11 RIGHT)WRONG! IT'S ";W
ORD$:GOTO 225
300 ? "(CLEAR)":PRINT LANG$;" TO ENGLISH
TRANSLATOR":PRINT :PRINT "ENTER ";LANG$
;" WORD"
310 ? :INPUT TRANSLATE$
320 READ ENGLISH$,WORD$
330 IF WORD$=TRANSLATE$ THEN PRINT "(UP)
(15 RIGHT)":PRINT ENGLISH$:RESTORE :GOT
0 410
340 IF ENGLISH$(<>TRANSLATE$ THEN GOTO 32
0
400 ? "(CLEAR)":PRINT "ENGLISH TO ";LANG
$;" TRANSLATOR":PRINT :PRINT "ENTER ENGL
ISH WORD"
410 ? :INPUT TRANSLATE$
420 READ ENGLISH$,WORD$
430 IF ENGLISH$=TRANSLATE$ THEN PRINT "(
UP) (15 RIGHT)":PRINT WORD$:RESTORE :GOT
0 410

440 IF WORD$(<>TRANSLATE$ THEN GOTO 420
500 REM RANDOM WORD SUBROUTINE
510 X=(1+INT(RND(1)*25))
520 RESTORE
530 FOR M=1 TO X:READ ENGLISH$,WORD$
540 NEXT M
550 RETURN
600 REM SCORE SUBROUTINE
610 PRINT :PRINT "OUT OF ";N;" VOCABULAR
Y WORDS YOU HAVE   CORRECTLY TRANSLATED
";SCORE;". "
620 PRINT :PRINT "YOUR SCORE IS ";INT(SC

```

```

ORE*(100/N));" PER CENT"
630 PRINT :PRINT "GO AGAIN (Y OR N)":IN
PUT Q$:IF Q$="Y" THEN RETURN
640 IF Q$="N" THEN END
1000 DATA ONE,UN,TWO,DEUX,THREE,TROIS,FO
UR,QUATRE,RED,ROUGE,BLUE,BLEU,GREEN,VERT
,MAN,HOMME,CHILD,ENFANT
1010 DATA HAT,CHAPEAU,PENCIL,CRAYON,HAM,
JAMBON,EGG,OEUF,CITY,VILLE,COUNTRY,PAYS,
OF,DE,UNDER,SOUS,MONDAY,LUNDI
1020 DATA TUESDAY,MARDI,WEDNESDAY,MERCRE
DI,SATURDAY,SAMEDI,SUNDAY,DIMANCHE,YES,O
UI,NO,NON,OLD,ANCIEN

```

©

FORTH programmers:

**COMPUTE!** is  
looking for screens  
and applications  
articles.

**PRETZELLAND  
SOFTWARE**



**PROUDLY PRESENTS: AFFORDABLE  
ATARI®  
SOFTWARE**

**ANDROID ATTACK**

FIGHT YOUR WAY THROUGH LEVELS OF  
DEADLY ANDROID GUARDS TO SAVE THE  
RUNAWAY NUCLEAR REACTOR, THEN TRY  
TO SAVE YOURSELF!



**AAARRRGGG!**

A FAST, FRANTIC CHASE AROUND THE  
SCREEN TRYING TO CATCH SOME CRAZY  
CREATURES. IF YOU CATCH THE  
\*SUPER-AAARRRGGG!\*, YOU'LL GET A  
SUPER BONUS, BUT DON'T GET POISONED!



**STARBASE ASSAULT**

HOW LONG CAN YOU PROTECT YOUR  
STARBASE FROM THE ATTACKING ALIEN  
ARMADA? EACH HIT WEAKENS YOUR FORCE  
FIELD RINGS AND NOW THEY'RE ATTACKING  
FIVE AT A TIME!



FOR 16K CASSETTE OR 24K DISK  
\*FAST\* ACTION, SUPER GRAPHICS, ONLY \$18.95 EACH  
PLEASE ADD \$2.00 PER ORDER FOR SHIPPING.

INTRODUCTORY OFFER:  
MENTION THIS AD AND TAKE  
\$1.00 OFF EACH GAME!

**Pretzelland Software**

**2005 A WHITTAKER RD.**

**YPSILANTI, MI. 48197**





A map of the significant machine language routines in the VIC Super Expander. You can translate these hexadecimal numbers into decimal, then SYS to them and watch the effects.

# VIC Super Expander Memory Map

Chuan Chee  
St. Catharines, Canada

## General Input/Output Routines

- A000-A001** Vector: RESET (\$A044)  
**A022-A003** Vector: NMI (\$A077)  
**A004-A008** ROM identification ('a0CBM')  
**A009-A010** Table: function key numbers  
**A011-A043** Table: initial function key definitions  
**A044-A076** RESET routine  
**A077-A08A** NMI routine  
**A08B-A0BE** Parse KEY (get parameters and check syntax)  
**A0BF-A131** Display all function key definitions  
     **A110-A11C** Print ° + chr\$(34) and an optional '+'  
     **A11D-A131** Print ° + chr\$(13) and an optional '+'  
**A132-A135** Table: ASCII string for output ('key' backwards)  
**A136-A13F** Table: ASCII string for output (° + chr\$(13) backwards)  
**A140-A149** Table: ASCII string for output (° + chr\$(34) backwards)  
**A14A-A17A** Delete current function key string (key number in .X)  
**A17B-A1B0** Insert string into function key definition area  
**A1B1-A1BE** Locate function key definition (key number in .X, return index in .Y)  
**A1BF-A213** Table: new BASIC keywords in ASCII form  
**A214-A237** Table: vectors corresponding to new BASIC tokens (\$CC to \$DD)  
**A238-A2A1** Initialize kernal vectors, I/O, RAM  
**A2A2-A2C1** Table: kernal vectors (L,H)  
**A2C2-A2C7** Warm start routine  
**A2C8-A317** Output a character to device 3 (char in .A)  
**A318-A336** End music mode  
**A337-A365** Interpret keyboard matrix input  
**A366-A369** Table: keyboard matrix code for function keys  
**A36A-A371** Table: conversion pattern for function keys  
**A372-A394** IRQ routine  
**A395-A3A5** Input a char from any device (device number in \$99)  
**A3A6-A3B3** Output a char to any device (char in .A, device num in \$9A)  
**A3B4-A3F1** Input each char from keyboard buffer  
     **A3B4-A3E7** Handle 'RUN' key

- A3E8-A3F1** Handle 'RETURN' key  
**A3F2-A3FC** Input from device 0  
**A3FD-A406** Print an error message in GRAPHIC 0 mode (error token in .A)  
**A407-A4B9** Lexically analyse BASIC source line (translate to tokens)  
**A4BA-A503** Print BASIC tokens in ASCII form  
**A504-A529** Start new BASIC statement  
     **A515-A523** Handle new tokens (\$CC to \$D6)  
**A52A-A58A** Get and evaluate an expression  
     **A558-A58A** Handle new function tokens (\$D7 to \$DD)  
**A58B-A596** Table: BASIC vectors for RAM  
**A597-A5A4** Change BASIC vectors during RESET

## Music Routines

- A5A5-A5D0** Save current sound table (address of table in .X,.Y)  
**A5D1-A601** IRQ music driver  
**A602-A625** Table: conversion for note index to frequency  
**A626-A6E5** Interpret music mode characters (char in .A)  
     **A629-A643** Execute 'O' command, default 3  
     **A644-A65D** Execute 'T' command, default 0  
     **A65E-A674** Execute 'S' command, default 4  
     **A675-A686** Execute 'V' command, default 7  
     **A687-A693** Execute 'R' command  
     **A694-A69B** Execute 'P' command  
     **A69C-A6A7** Execute 'Q' command  
     **A6A8-** Play new note (note index in .Y)  
**A6AB-A6B3** Save new sound table when previous note finishes  
     **A6B4-A6B9** Common return routine  
     **A6BA-A6CD** Play notes 'A' to 'G'  
     **A6CE-A6DA** Execute '#' command  
     **A6DB-A6E5** Execute '\$' command  
**A6E6-A6EC** Table: conversion for notes to note index  
**A6ED-A6EF** Table: conversion for octave to base note index  
**A6F0-A6F9** Table: conversion for tempo to duration (jiffies)

## Parsing New Command Routines

- A6FA-** Look for and evaluate first 1-byte and two 2-byte parameters  
**A6FD-** Look for and evaluate two 2-byte parameters  
**A700-** Look for and evaluate one 2-byte parameter  
**A714-A71B** Save one 1-byte parameter (parameter in .A, index in .Y)  
**A71C-** Look for and evaluate two 1-byte parameters  
**A71F-A72B** Look for and evaluate one 1-byte parameter  
**A72C-A73F** Parse GRAPHIC (get parameters and check syntax)  
**A740-A762** Parse CIRCLE  
**A763-A7A4** Parse DRAW  
**A7A5-A7BC** Parse POINT  
**A7BD-** Parse COLOR  
**A7C8-A7CE** Go to execute commands after parsing  
**A7CF-A7D8** Parse REGION  
**A7D9-A7DC** Parse SCNCLR  
**A7DD-A7E9** Parse SOUND  
**A7EA-A809** Parse CHAR  
**A80A-A810** Parse PAINT




VIC-20®

VIC-20®



## WE SELL FUN!™



### TREASURES OF THE BAT CAVE \$19.95

Battle the vampire bats as you search their cave for gold bullion. Fast, real time action will keep you playing for hours. Of course, you are in a different cave every time you play.

### COSMIC DEBRIS \$14.95

This highly addictive arcade type game will keep you battling the aliens for days.

### GRAVE ROBBERS \$13.95

Introducing the first GRAPHIC ADVENTURE ever available on the VIC-20! With realistic audio-visual effects, you explore an old deserted graveyard and actually see the perils that lie beyond.

### NIGHT RIDER \$12.95

High speed night time driving simulator.

### STREET SWEEPERS \$14.95

Gobble up all of the dots in the maze before the ensuing nemesis gets you. The maze is different every time, and if you succeed in getting all the dots, you get progressively harder mazes to complete as your skills increase. Does this sound like Pac Man? It isn't! Highly recommended and extremely addicting.

Send for free catalog.

All programs fit in the standard VIC memory, and can be controlled from the keyboard. All programs on cassette tape.

Ordering—Please add \$1.50 postage and handling per order. PA residents please add 6% sales tax.

### VICTORY SOFTWARE INC.

2027-A S. J. Russell Circle, Elkins Park, PA 19117  
(215) 576-5625

VIC-20®

VIC-20®

## NEW VIC-20 AND PET PRODUCTS

### \*\*\*COMMUNICATION CARTRIDGE\*\*\*

Makes VIC into dumb terminal with selectable parameters.

Model MW-300 49.95


### \*\*\*V-DATA BASE CASSETTE\*\*\*

Allows user to input mail lists, and mini inventories.

Model MW-301 29.95

### \*\*\*8 BIT DIGITAL TO ANALOG CONVERTER AND 8 CHANNEL ANALOG TO DIGITAL CONVERTER\*\*\*

Allows your VIC or PET to output analog signals. Plugs into your parallel users port. Has capability for 8 channel analog to digital conversion.

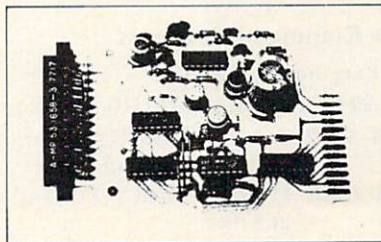

Model MW-304p PET 139.95

Model MW-304v VIC 129.95

### MICRO WORLD ELECTRONIX INC.

6340 W. Mississippi Ave.  
Lakewood, Colorado 80226 (303) 934-1973

# WUNDERWARE® PRESENTS GAMES FOR YOUR VIC-20

These games and many more! Send 50¢ (refundable with order) for catalog and free program listing.

#### THE MAD PAINTER

This game is a little unique and a lot of fun. You control a paint brush, moving it around a colorful maze. Your job is to paint the entire maze. This is not as easy as it sounds, because in the maze with you are two voracious Bristle Biters (they love paint brushes). Occasionally you will receive a visit from an Invisible Stomper who leaves footprints in your fresh paint. Requires joystick.

\$9.95

#### SPACE RESCUE!

Evil forces have trapped three of your men deep in the perilous depths of the dreaded Dromedary Caverns on the planet of Kam-El. You can rescue them, but the tunnel to the lower chamber is narrow and full of hazards. A single player game against time. Space Rescue keeps the top score of the day on the screen. Requires joystick.

\$9.95

#### SNAKE!

A fast and fun action game for one player. You're a big snake roaming around the screen. Mice, rabbits, eggs, and feet appear at random. Your mission in life is to bite these targets. You have to be quick—the targets don't stay for long. The main problem is: you always seem to be running into the wall or into yourself (the longer you play, the longer, and harder to avoid your tail)! Snake! Keeps high score and requires a joystick.

\$9.95

- ✓ Price includes Postage & Handling.
- ✓ Foreign orders and COD's; Please add \$3.00.
- ✓ Catalog is included with order.
- ✓ Prices are subject to change without notice.
- ✓ Send check or money order to:



wunderware

P.O. BOX 1287, JACKSONVILLE, OR 97530

VIC-20 is a registered trademark of Commodore Business Machines.

# VIC-20 Assembler

**EDITOR** Used to create and update the assembly language source-program library, it syntax-checks each statement as it is entered, allowing only valid mnemonics and addressing modes. Menu options are Create, Print, Load, Delete, Insert, Change, and Save.

**ASSEMBLER** Inputs source-program segments created with The Editor. It lists the original source as well as the generated machine language in hexadecimal or decimal, and optionally produces machine language load segments for The Loader. Printer output is supported.

**LOADER** The Loader inputs the load segments from the library created by The Assembler. The machine language program is POKEd into memory and BASIC's top-of-memory pointer may be automatically reset to a value specified in the source program. The loader may be easily incorporated into another BASIC program or it may be run stand-alone and will SYS to the entry address specified in the source program.

#### SIGNIFICANT FEATURES

The Assembler can assemble program segments of up to 99 statements on the 5K VIC-20 and several hundred statements on larger systems. It can assemble an unlimited number of such segments in sequence, creating a load segment for each. It is necessary only to include an EQU for every referenced label which occurs outside the segment. There is no limit to the number of labels used or referenced, and labels may be of any length.

The BYT pseudo-op may define literal and hex strings of any length as well as decimal data and address constants in high-low format.

Operand fields may include complex algebraic expressions utilizing the +, -, \*, / (integer and fractional powers supported), & (logical AND), & (logical OR) operators, and any number of terms in combinations of decimal, hexadecimal, symbolic address and literal formats. Negative numbers generate two's complement values.

Everything runs fast, is easy to use, pleasant to look at, and does just what you expect it to.

\$24.95 + \$1.00 postage & handling. VISA/MC accepted with \$1.00 service charge and inclusion of acct. # and expiration date. Send payment to French Silk, P.O. Box 207, Cannon Falls MN, 55009.

VIC-20 is a registered trademark of Commodore Business Machines.

French  
Silk smooth  
ware



**A811-A817** Parse RPOT  
**A818-A81B** Parse RPEN  
**A81C-A81F** Parse RSND  
**A820-A823** Parse RCOL  
**A824-A827** Parse RGR  
**A828-A842** Parse RDOT  
**A843-A846** Parse RJOY  
**A847-A84E** Look for first 1-byte parameter  
**A84F-A866** Indirect jump to execute new commands (pointer to parameter save area in .X.,Y. command index in .A)  
**A867-A878** **Table:** vector to execute new commands (H)  
**A879-A88A** **Table:** vector to execute new commands (L)

### Execute New Command Routines

**A88B-AA22** Execute GRAPHIC  
**A8AB-A94E** Handle GRAPHIC 1,2,3 if previous was 0.  
**A8D4-A942** Transfer BASIC program to above \$2000 and execute CLR  
**A943-A94E** Make screen at \$1E00 and character set at \$1000  
**A94F-A9AB** Handle GRAPHIC 4  
**A967-A9AB** Transfer BASIC program down to old location and execute CLR  
**A9AC-A9B7** Handle GRAPHIC 0 if previous was 1,2,3  
**A9B8-AA22** Set up proper GRAPHIC screen  
**AA23-AA28** Execute RGR  
**AA29-AA6A** Execute COLOR  
**AA6B-AA84** Execute REGION  
**AA85-AA8B** Execute RCOL  
**AA8C-AAE6** Execute RDOT  
**AAE7-AAF1** Execute POINT  
**AAF2-AB12** Execute SCNCLR  
**AB13-AB22** Execute DRAW (c TO x,y ...)  
**AB23-AB34** Execute DRAW (c,x,y TO x,y ...)  
**AB35-AB54** Execute SOUND  
**AB55-AB69** Execute RSND  
**AB6A-AB76** Execute RPOT  
**AB77-AB7D** Execute RPEN  
**AB7E-** Plot a single point from parameter save area  
**AB86-ABE4** Plot a single point from beginning scaled X,Y coordinates  
**ABE5-** Set up pointers to character and colour memory  
**ABFA-AC0A** Set up pointer to colour memory  
**AC0B-** Draw a line with a new starting coordinate  
**AC11-AC92** Draw a line starting from previous coordinate (using a version of Bresenham's DDA algorithm)  
**AC93-AD12** Execute CIRCLE (using principal of digital differential analyser (DDA))  
**AD13-** Convert starting angle to radians  
**AD19-AD22** Divide FAC#1 by 16  
**AD23-** Calculate new scaled X and Y coordinate on locus  
**AD39-AD6B** Calculate unit offset \* scaled radius  
**AD6C-ADDE** Execute PAINT  
**ADDF-** Check for possible new lower bound pivot coordinate  
**ADE8-AE01** Save pivot coordinate  
**AE02-AE0B** Check for possible new upper bound pivot coordinate

**AE0C-** Check if able to PAINT a coordinate  
**AE0F-AE1E** Check if able to PAINT a coordinate (X,Y in .A.,Y)  
**AE1F-AE23** Move beginning scaled X,Y coordinate to .A.,Y  
**AE24-AE3B** Check if coordinate has been already plotted on  
**AE3C-AE44** Move beginning scaled X coordinate to the right  
**AE45-AE51** Move beginning scaled X coordinate 2 to the left  
**AE52-AE56** Flag 'FORMULA TOO COMPLEX' error message  
**AE57-AED9** Execute CHAR  
**AEDA-AF13** Execute RJOY  
**AF14-AF33** Set up correct VIC chip screen registers  
**AF34-** Save number of coordinates and colour register  
**AF39-AF3E** Save colour register  
**AF3F-AF47** Copy beginning from ending scaled X,Y coordinate  
**AF48-AF75** Scale X and Y coordinates  
**AF76-AFB0** Scale X or Y coordinate to the range 0 to 159 (.X = .A\*coordinate\*2/256) (number of columns or rows in .A)  
**AFB1-AFBA** **Table:** vector to map Y coordinate to colour memory (L)  
**AFBB-AFCE** **Table:** vector to map X coordinate to character memory (L)  
**AFCF-AFE2** **Table:** vector to map X coordinate to character memory (H)  
**AFE3-AFE5** **Table:** bit set for colour memory (not used - contains \$00)  
**AFE6-AFE6** (not used - contains \$00)  
**AFE7-AFEE** **Table:** bit mask for highres mode  
**AFEF-AFF6** **Table:** bit mask for multicolour mode  
**AFF7-AFFA** **Table:** bytes to plot in multicolour mode  
**AFFB-AFFE** **Table:** conversion factor for VIC chip screen registers  
**AFFF-AFFF** (not used - contains \$AA)

### Note:

**(H):** high byte of a two-byte address  
**(L):** low byte of a two-byte address  
**Vector:** two-byte address used for indirection of execution  
**Pointer:** two-byte address for data  
**Index:** one-byte offset for a table

### General RAM Area

**0024** Number of coordinates  
**0024** **Flag:** colour register mode (\$FF = multicolour, \$00 = highres)  
**0024-0025** **Pointer:** New start of variables / start of BASIC memory  
**0026** Temp area for building VIC chip registers / for building character byte / for saving start of BASIC (L)

### Current Coordinates

**0062** Ending scaled X coordinate (0 to 159)  
**0063** Beginning scaled X coordinate (0 to 159)  
**0064** Scaled X difference (absolute value)  
**0065** Ending scaled Y coordinate (0 to 159)  
**0066** Beginning scaled Y coordinate (0 to 159)  
**0067** Scaled Y difference (absolute value - 1)







**For Scaling Coordinates**

0069	Multiplicand - 1
006A	16-bit product
006B-006C	10-bit multiplier

**For DRAW**

0069	Scaled X unit direction - 1
006A	Scaled Y unit direction
006B-006C	Number of scaled Y units left to plot before next scaled X unit (count up)
006D-006E	Number of points left to plot (count up)

**For PAINT**

0069	<b>Index:</b> pivot coordinates save area
------	---

**For CHAR**

0069	Current row (0 to 19)
006A	Current column (0 to 19)
006B	Length of string
006C-006D	<b>Pointer:</b> string location

**General RAM Area**

009B	<b>Index:</b> beginning of current function key definition
009B-009C	<b>Pointer:</b> current char set address / byte in char set / position in screen memory / destination of byte of BASIC program to transfer
009D	<b>Index:</b> end of function key definition area
009E	Current function key number / length of current function key string
009F	Length of current function key string (count down)
009E-009F	<b>Pointer:</b> byte in colour memory
00AC-00AD	<b>Pointer:</b> current byte (function key definition, tape, scrolling)
00C3	<b>Flag:</b> 0 = have transferred BASIC program to a new location
00C3-00C4	<b>Pointer:</b> kernal set up / current music table / parameter save area (\$033C)
00FB-00FC	<b>Pointer:</b> top of BASIC memory (usually same as \$0284-\$0285)

**For Key**

028F-0290	<b>Vector:</b> interpret keyboard input (\$A337)
02A1	Number of bytes taken by Super Expander in high memory (\$88)
02A2	Number of characters in function key definition
02A3	<b>Index:</b> current byte of function key string
02A4	Length of function key string (amount left to output)

**For Music**

02A5	Previous character in music mode
02A6	Music mode (\$80 = on)
02A7	Screen echo (\$50 = on, \$00 = off)
02A8	Current voice (sound register - 1)
02A9	Current note index
02AA	Current duration (jiffies)
02AB	Current sound amplitude (volume * 2)
02AC	Current octave (base note index)

02AD	Voice 1 note index (+ \$80)
02AE	Voice 1 duration count down (jiffies)
02AF	Voice 2 note index (+ \$80)
02B0	Voice 2 duration count down (jiffies)
02B1	Voice 3 note index (+ \$80)
02B2	Voice 3 duration count down (jiffies)
02B3	Voice 4 note index (+ \$80)
02B4	Voice 4 duration count down (jiffies)
02B5-02BF	(for expansion)

**For Execution Of New Commands**

02C0-02C2	<b>Jump table:</b> execute new commands (JMP \$A84F)
02C3	Current VIC chip left margin register
02C4	Current VIC chip top margin register
02C5	Current VIC chip number of columns register
02C6	Current VIC chip number of rows register
02C7	Current row of cursor
02C8	Current GRAPHIC mode
02C9	(for expansion)
02CA	Current colour register parameter (while plotting)
02CB	Current screen colour
02CC	Current border colour
02CD	Current character colour
02CE	Current auxiliary colour
02CF	<b>Index:</b> parameter save area (while plotting)
02D0	Current character set address page
02D1	Usual character set address page (\$80)
02D2-02D3	<b>Pointer:</b> old limit of BASIC memory
02D4	Old screen memory page
02D5	Last scaled X coordinate (0 to 159)
02D6	Last scaled Y coordinate (0 to 159)
02D7	<b>Flag:</b> \$00 = DRAW c,x,y TO, \$01 = DRAW c TO / current number of out of range coordinates (\$00 = within range)
02D8	Old number of out of range coordinates (\$00 = within range)
02D9	<b>Index:</b> parameter save area (while getting parameters)
02DA-02FF	(for expansion)

**Operating System Vectors**

0300-0301	<b>Vector:</b> error message (\$A3FD)
0302-0303	<b>Vector:</b> BASIC warm start (\$C483)
0304-0305	<b>Vector:</b> lexically analyse BASIC source line (\$A407)
0306-0307	<b>Vector:</b> print BASIC tokens in ASCII form (\$A4BA)
0308-0309	<b>Vector:</b> start new BASIC statement (\$A504)
030A-030B	<b>Vector:</b> get and evaluate an expression (\$A52A)
0314-0315	<b>Vector:</b> IRQ (\$A372)
0316-0317	<b>Vector:</b> BRK instruction (\$A2C2)
0318-0319	<b>Vector:</b> NMI (\$FEAD)
031A-031B	<b>Vector:</b> BASIC OPEN statement (\$F40A)
031C-031D	<b>Vector:</b> BASIC CLOSE statement (\$F34A)
031E-031F	<b>Vector:</b> set input (\$F2C7)
0320-0321	<b>Vector:</b> set output (\$F309)
0322-0323	<b>Vector:</b> restore I/O (\$F3F3)



0324-0325	Vector: input a character	(\$A395)
0326-0327	Vector: output a character	(\$A3A6)
0328-0329	Vector: test STOP key	(\$F770)
032A-032B	Vector: BASIC GET statement	(\$F1F5)
032C-032D	Vector: abort I/O	(\$F3EF)
032E-032F	Vector: user BRK instruction	(\$A2C2)
0330-0331	Vector: BASIC LOAD statement	(\$F549)
0332-0333	Vector: BASIC SAVE statement	(\$F685)
0334-033B	(for expansion)	

#### Save Area

033C-03F8	Save area: parameter passing / pivot coordinates (PAINT)
-----------	--

#### For Circle

033C	Index: X or Y
0347-0348	Old scaled X coordinate on locus
0349-034A	Old scaled Y coordinate on locus
034B-034C	New scaled X coordinate on locus
034D-034E	New scaled Y coordinate on locus
034F-0353	Floating point unit offset X coordinate
0355-0359	Floating point unit offset Y coordinate



## Your VIC-20 Will Smile...

### SUPERFONT

Design programmable characters on your VIC-20 with this easy-to-use program. Especially useful when creating animations, since you can edit four characters at once as a 2x2 block.

### SAFARI

You are a photographer on an African Safari in this great game. The jungle animals run past as you try to snap their pictures. An excellent example of how to use large blocks of programmable characters on the VIC to create animation effects.

### QUIX

How good is your memory? QUIX presents patterns of color and sound that gradually get longer and harder to remember.


These three excellent programs are available on the VIXEL #2 cassette for the standard 5K VIC-20 for only \$12.95 in the US and Canada. Foreign orders add \$3.50 for shipping. CA residents add 6% tax. VISA and MasterCard welcome.

VIXEL is a trademark of The Code Works.  
VIC-20 is a trademark of Commodore Business Machines.

### The Code Works

Box 550, Goleta, CA 93116 805/683-1585

### TRANSFORM GRANDPA "PET™" INTO A YOUNG VIBRANT "PET™" BY UPGRADING TO 4.0 BASIC

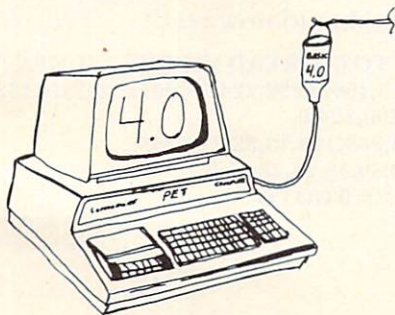


Socketed P.C. Board that will plug into your ROM Sockets and accepts Commodore's 24 Pin ROMS 4.0 BASIC Interpreters (ROMS not included): When used with I.C. Clip, soldering is minimal. Please check number of pins on your ROMS before ordering.

RB-4 (for 28 Pin ROM "PET™")	\$49.95
RB-4 with I.C. Clip	69.95
RB-4A (for 24 Pin ROM "PET™")	49.95
RB-4A with I.C. Clip	69.95

Please include \$1.50 each for shipping and handling.  
California residents, please include 6% Sales Tax.

10% User Group Discount for Purchase of 5 or More Units.  
Send S.A.S.E. For Free Catalog.



**BETTER SOLUTIONS**

505-589-1100

4605 RIPLEY STREET • EL PASO, TEXAS 79922

"PET" is a trademark of  
Commodore Business Machines, Inc.

© 1982 BETTER SOLUTIONS  
ALL RIGHTS RESERVED

### FINALLY, 1200 BAUD At A Reasonable Price

\$175 PET Terminal Emulator  
\$495 U.D.S. 212 Modem  
\$600 Our introductory Price

#### PET Terminal Emulator

- Choose from 3 terminals
- Up to 4800 baud

#### Universal Data Systems 212 LP

- 1200 baud modem
- call for modem only price

### AMPLIFY, INC.

2325 Macbride  
Iowa City, Iowa 52240  
319-351-4775



This concludes a three-part series on getting started in machine language.

## Part III

# Machine Language: First Steps

Jim Butterfield  
Associate Editor

In the two previous episodes, our intrepid hero, F. R. Vescent, has coded the following bar graph program in machine language:

```
027A A2 30          LDX  #30
027C A0 00          LDY  #300
027E E8            YLOOP INX
027F E0 3A          CPX  #3A
0281 D0 02          BNE  SKIP
0283 A2 30          LDX  #30
0285 8A            SKIP  TXA
0286 20 D2 FF      JSR  $FFD2
0289 C8            INY
028A CC 00 03      CPY  $0300
028D 90 EF          BCC  YLOOP
028F A9 0D          LDA  #30D
0291 20 D2 FF      JSR  $FFD2
0294 60            RTS
```

After finishing the coding job, he enters it into memory using the machine language monitor like this:

```
:: 027A A2 30 A0 00 E8 E0 3A D0
:: 0282 02 A2 30 8A 20 D2 FF C8
:: 028A CC 00 03 90 EF A9 0D 20
:: 0292 D2 FF 60 .. .. .. ..
```

With the machine language program in place, F. R. returns to BASIC and writes:

```
200 DATA 15,10,30,35,28,28,15,0
210 READ V:IF V=0 GOTO 300
220 POKE 768,V
230 SYS 634
270 GOTO 210
300 END
```

The program runs properly, but the machine language is in the first cassette buffer, and this makes it hard to SAVE. F. R. uses the following piece of trickery to make the ML coding more tractable: He types:

```
FOR J=634 TO 660:PRINT PEEK(J)::NEXT J
```

634 is the address of the start of the ML program (\$027A) and 660 is the address of the last byte (\$0294). So what F. R. is doing is writing a line to cause the program to be dumped, byte by byte,

to the screen. He will get something like:

```
162 48 160 0 232 224 58...
```

There will be two spaces between each pair of numbers. Now F. R. does some clever screen editing. He places the cursor just before the 4 of 48, and presses the DEL key and the comma. Now the two numbers read 162,48 ... and F. R. moves the cursor ahead to just before the 160 and repeats the sequence. Eventually, he gets a long line of numbers with commas between. He does *not* press RETURN, but backs up to the beginning of the line and types several Insert keys; now he has room to enter the extra information "110 DATA". Now he presses RETURN and the bytes of his machine language program are entered as part of a DATA statement.

There's another line left over and he must repeat the editing sequence to create a 120 DATA ... line and complete the DATA recording of his program. Now he types in line 100:

```
100 FOR J=634 TO 660:READ M:POKE J,M:NEXT J
```

The whole program should now read:

```
100 FOR J=634 TO 660:READ M:POKE J,M:NEXT J
110 DATA 162,48,160,0,232,224,58,208,2,162,48,138,
32,210,255,200,204,0
120 DATA 3,144,239,169,13,32,210,255
200 DATA 15,10,30,35,28,28,15,0
210 READ V:IF V=0 GOTO 300
220 POKE 768,V
230 SYS 634
270 GOTO 210
300 END
```

Now: whenever we say RUN, the machine language program is POKEd into place (line 100) before the main program uses it. We may now safely SAVE the BASIC program to tape or disk without worrying about how to save the machine language part. The BASIC program makes its own machine language where it needs it.

Serious programmers will think of more efficient ways to convert the program into easily SAVEable code. More advanced machine language programmers will find better ways than DATA statements. But this is a start.

We've traced a machine language program through its conception, assembly, and implementation. It's not too hard a job, and there are aids to



help you along the way.

This example was picked because it presented a fairly easy challenge. Even so, it took us three installments to see it through. The bigger jobs are not much harder; most of the work was in the housekeeping.

For beginners who have never followed the whole process through, it's a worthwhile exercise. Once you've seen the trick done, you can see how to do your own. ©

Use the card  
in the back  
of this magazine  
to order your  
**COMPUTE! Books**

*This is the safety net you need to avoid losing hours of programming time when a power failure or a keyboard lockout strikes your Atari.*

# Atari Variable Table Refresh And Program Backup

Jon Harding  
Rochester, NY

Writing new programs, especially long ones, usually requires many hours of editing and typing which can lead to two problems: (1) the variable name table grows too long and (2) the editing session may be catastrophically terminated by a keyboard lockup or power failure. Even commercial software may have variable name tables which are larger than necessary. And power failures occur only at the worst possible time: after typing in the 252nd line of that new game you're so anxious to try! The following routine eliminates the first problem and minimizes the losses of the second.

Type in these two programs (but delete REMs to conserve memory), SAVEing the first as "WRKLOAD.SAV" and LISTing the second as "BACKUP.LST." The meaning of the extensions should be clear. These routines will become part of your program, but can be deleted when you've finished typing. Initiate a new program or add to an existing program, already LOADED, by ENTERing "D:BAKUP.LST". After typing and/or editing five to ten lines, type G.32000 <RETURN>. The program in RAM is LISTed to the disk as "WRK," the RAM area cleared, and "WRK" re-ENTERed. Edit or add more code and type G.32000 again.

This time the old "WRK" is RENAMED "WRK.BAK," the program in RAM becomes "WRK," and is re-ENTERed. The next time, and thereafter, "WRK.BAK" is deleted, "WRK" becomes "WRK.BAK," and the program in RAM becomes "WRK" (and is re-ENTERed).

This procedure provides *father-son* (*mother-*

## VIC PET APPLE SOFTWARE

**NEW GRAPHICS** - full screen super graphics package for the VIC. Adds 18 commands to BASIC. Draw detailed pictures using 152 X 160 points. Hires & Multicolor graphic modes on same screen! Switch between text and graphics screens with function keys. Save/load pictures to/from tape or disk. Requires 3K or 8K expander. With sample programs and user's manual. Price \$25; manual only \$5.

**VIC/PET VIGIL** - Interactive Games Language - Program your own or play the 9 games included. With 60+ powerful commands. Easy to learn. VIC version has color (requires 3K or 8K expander). Complete with user's manual. Price \$35; manual only \$10.

**VIC/PET PIPER** - the MUSIC MACHINE - Simplest way yet to compose, conduct and play music. Complete music control of notes, rests, volume, repeats, tempo, etc. Written in fast machine language. With sample compositions and user's manual. Price \$25; manual only \$5.

**VIC HIRES/MULTICOLOR GRAPHICS UTILITIES** - Add graphics to VIC BASIC. Requires no extra memory. Plot points, lines and boxes in fine detail - 104 X 152 points. With sample programs and user's manual. Price \$15; manual only \$3.


**PET TINY Pascal PLUS+** - structured language alternative to BASIC. With Editor, Compiler and Interpreter. All programming constructs supported. With user's manual. Graphics or non-graphics versions. For NEW/4.0/8032. W/graphics (32K) - disk \$50; cassette \$55. W/O graphics (16K+) - disk \$35; cassette \$40; manual only \$10.

**NEW APPLE II DYNASOFT Pascal** - complete Pascal development system with Editor, Compiler, Interpreter and Supervisor. All programming constructs and data types: scalars, char, array, pointer, integer, Hires, Lores and machine language interface. With sample programs and user's manual. Disk \$50; Disk with complete machine readable source code \$85; manual only \$10.


**PET TINY BASIC COMPILER** - Produces true 6502 code. Supports all floating point operations. Subset of the full PET BASIC. Compiler listing optional with 16K version (included). With user's manual. For OLD/NEW/4.0/8032 and 8K+. Price \$25; manual only \$5.


**PET MACHINE LANGUAGE GUIDE** - Now in its ninth printing. Learn the hidden talents of your Old, New or 4.0 Rom PET/CBM. 30+ routines fully detailed. Price \$9 (\$11 foreign).

**NEW ABACUS** - Beautifully crafted Chinese abacus. Teach children basics of math or use as lovely decoration. With free 50+ page manual explaining use. Price \$14.95 + \$2.00 postage (\$4.00 foreign).



**ABACUS SOFTWARE**  
P. O. Box 7211  
Grand Rapids, Michigan 49510  
**616 / 241-5510**





Unless noted, prices are for cassette. Add \$3.00 per disk package. Foreign orders add \$5.00 per package or \$2.00 for manual only. AT1 orders must be prepaid in US Dollars, VISA, MC, ACCESS, Eurocard.



daughter) backup and keeps the variable name table as small as possible. When you finish a session, type G.32000 once more to save the latest changes in "WRK." When you start a new session just type ENTER "D:WRK" and you pick up where you left off. If you use this routine to back up other programs on your disk, be sure to save the latest version by its proper name, e.g. "D:GASBILL.UTL." You could also delete the "WRK" files before using the routine on another program, but it's not necessary since they will be replaced anyway.

The beauty of this routine is that it only takes a short command to invoke and can't be started by the program in RAM because of the STOP at 31998. The XIO... code is the special I/O command, explained on page 29 of the *Atari BASIC Reference Manual* which allows you to access DOS utilities without calling DOS, among other things.

### Other Possibilities

More generally, this scheme suggests the possibility of a disk with many short utility routines which can be SAVED for use by themselves or LISTED for use during program writing/editing. Examples might include: listing the disk directory to the screen (without calling DOS), printing the disk directory, a screen viewing of a dumped machine language program, and hex to decimal conversion.

A note of caution: if you write a program which will reside in RAM with the program you're working on, it *must* be complete within itself. In other words, when execution is completed, everything defined must be undefined (variables, dimensions, arrays), all devices OPENed must be CLOSED, and there must be an END. (The CLR command takes care of undefining anything DIMensioned and clears all variables.) The closing statement of such a routine should look like this: `lineno CLOSE #1:CLR:END.`

### Program 1.

```
32039 REM *****
32040 ENTER " :WRK"
32041 REM *****
```


### Program 2.

```
31997 REM *****
31998 ? "SHOULDN'T BE HERE!":STOP
31999 REM *IF 'WRK,BAK' EXISTS, DELETE IT*
32000 TRAP 32010:XIO 33,#1,0,0,"WRK,BAK"
:TRAP 40000
32005 REM *IF 'WRK' EXISTS, RENAME IT @WRK,BAK'*
32010 TRAP 32020:XIO 32,#1,0,0,"D:WRK,WR
```

```
K.BAK":TRAP 40000
32015 REM *LIST PROGRAM TO DISK AS 'WRK'
*
32016 REM *'RUN WRKLOAD.SAV' ERASES RAM
AND RE-ENTERS 'WRK'*
32020 LIST "D:WRK":RUN "D:WRKLOAD.SAV"
32050 REM *****
```

©

Use the card  
in the back  
of this magazine  
to order your  
**COMPUTE! Books**



Superb new  
programs  
for your Atari\*  
computer

Atari is a registered trademark of Atari, Inc.

DOLLARS AND SENSE is a set of three programs designed to inform and educate. One touch menu driven and totally user friendly.

I R A outputs every year from your present age to age 65 year by year. Simply input your present age, yearly contribution and projected interest rate. A fast and effective way to compare different combinations.

FUTURECOST will determine the cost of any item at any point in the future. A graphic demonstration that will enlighten everyone as to the value of saving for the future.

WHAT IS IT WORTH will show you exactly how much all that money you have saved is really worth in today's dollars. You had better sit down for this one. ATARI (24K) tape or (32K) disc \$29.95 VIC-20 WITH 8K EXPANDER \$29.95

AUTORUN allows you to automatically boot your disc based programs when you power up. Menu driven and very fast. Autorun will probably be one of the most useful programs you will ever own. ATARI (24K) disc only \$19.95

SKYPILOT is a real time flight landing simulator with full instrumentation and superb graphics and sound. We think it's the finest flight simulator available for the Atari. ATARI (24K) tape or (32K) disc \$21.95

SUPER SEVEN are excellent games and simulators on a single one touch menu driven disc. This is beyond a doubt the best software value on the market today.

SKYPILOT is included and described above.

EASYRIDER is a totally unique approach to motocross racing. You must negotiate a twisting maze with realistic sound and super graphics.

ALIEN is a one on one cannon saucer duel. The Alien takes evasive action so he's hard to aim. Kids love it!

SEA BATTLE puts you in command of a nuclear sub surrounded by mines and surface vessels. Strategy counts.

VOYAGER must be guided to a safe landing on a rugged and hostile alien landscape. Full instrumentation and visual display to help you succeed.

GERONIMO is what your hero yells as he jumps from a small plane trying to land on a tropical island. You must consider both speed and altitude when you push him out.

CANNONS is for one or two players. Each has 20 shots and a time limit to hit a moving target. Kids really enjoy the game. ATARI (32K) disc only \$39.95

Send \$1.00 (refundable) for catalog. Visa and Master Charge accepted. All order shipped within 48 hours. Satisfaction guaranteed. Include \$1.50 per order for postage & handling.

Dealer inquiries welcome.

ARMA DESIGN GROUP

1201 Bridge Street, Asbury Park, N.J. 07712

(201) 774-9099



QUALITY PRODUCTS FOR ATARI COMPUTERS

# SWIFTWARE

FROM SWIFTY SOFTWARE

## ORDERED BY NASA

Yes, the National Aeronautics and Space Administration selected these three quality products.

### HARDWARE DISK SENTRY™

An intelligent digital accessory for your ATARI 810 Disk Drive, lets you selectively write data to both sides of single sided and write protected disks. DISK SENTRY cannot harm your drive or disks. Installs and removes easily; no soldering required. DISK SENTRY's LED signals system status, preventing accidental erasure of data. DISK SENTRY is a convenient push button write-protect override which can pay for itself with your first box of disks. \$39.95

### NEW GAMES HAUNTED HILL™

In this super game you fight bats and ghosts in the dark of a cemetery. This exciting, all machine language game has arcade quality graphics and speed. Requires Joystick. DISK ONLY. \$29.95

### TRIVIA TREK™

A multiple choice game of trivia for one or two players or teams. Comes complete with fifty categories of trivia questions and over two thousand multiple choice answers. A program for creating your own trivia questions and answers is also included. Play it for fun, test your knowledge or entertain friends. Parents and teachers can also make up questions. Great at parties. 32K Disk Only. \$29.95

### UTILITIES DISKETTE INVENTORY SYSTEM™

Use this system to gain control of your expanding disk/program inventory. Quickly get locations of single or multiple copies of your programs and all your valuable files. An invaluable tool, this system is easy and convenient to use and to update. 24K disk system required. \$24.95 Printer suggested.

### SWIFTY UTILITIES

A valuable collection of programming utilities for the ATARI programmer. This DISK ONLY package includes all of Programming Aids I and additional programs designed to make programming time more efficient. Special MENU program runs both saved and listed programs. REM REMOVER eliminates REM statements so programs take less core and run faster. PRINT 825 and PRINTEPS custom print programs prepare condensed, indented and paginated program listings on your ATARI 825 or EPSON MX-80 printer. Listings identify machine code, graphics and inverse video characters. VARIABLE LIST and VARIABLE PRINT programs help you prepare alphabetized annotated list of your program variables. A delete lines utility provides convenience of line deletion while a DOS CALLER gives you convenient access to many DOS utilities while your program is in core. Disklist prepares disk jacket labels. Many of these programs work coreident with each other and with your program. Disk Drive and minimum of 24K required. \$29.95

### PROGRAMMING AIDS PACKAGE I™

Four utility programs to help increase programming efficiency and learn more about your computer. RENUMBER handles references and even variables. Generates Diagnostic Tables for programming error detection. PROGRAM DECODER, DECIMAL to BCD and BCD to DECIMAL programs give you a practical way of studying internal program representation and ATARI number-conversion procedures. Comes with comprehensive user's manual. 16K cassette \$14.95; 24K disk \$19.95

### SWIFTY TACH MASTERTM

An accurate disk speed diagnostic utility program designed specifically for ATARI 810 Disk Drives. Provides easy-to-read visual indication of the speed of any drive connected to your system. Using the accuracy of machine language, TACH MASTER displays five RPM readings per second with a working tachometer accurate to 1/4 RPM. Allows you to adjust your drive(s) to factory specs easily and at any time in the convenience of your own home. Comes complete with easy to follow user's manual. \$29.95

### SWIFTY DATALINK™

High Quality Smart Terminal Communications program. Easy to use Multi-Option, Menu Driven. Full performance uploading/downloading. Works in Duplex or Simplex modes supporting ASCII and ATASCII transmission. Printer Dump, Screen Dump and Disk Search options. Use as remote terminal. Send/receive and store programs and data files. Saves connect time charges with commercial services. Requires 24K RAM, 810 Disk Drive, 850 Interface or equivalent, 830 or other 300 Baud modem. (Printer optional) \$39.95

### PERSONAL DATA MANAGEMENT FILE-IT 2™

This is Jerry White's popular database system for filing and managing personal and financial information. Create, store, manipulate and retrieve all types of data. Special financial entry and report programs create a powerful personal accounting system. Monthly Bar Graph program shows financial data on the screen and/or printer. Supports up to four disk drives as well as the Axlon Ramdisk (if you have one). Mailing list program generates mailing labels in one or two across format. Extensively documented in a ring binder. 24K Disk and Printer. \$49.95 + \$3.50 for shipping and handling.

### FUN 'n' GAMES #1™

WORDGAMES, POSSIBLE and LEAPFROG giving you hours of fun, challenge and entertainment. WORDGAMES, two games in one, contains GUESSIT - a deductive alphabetic reasoning game for one or two players and WORDJUMBLE - a multiple word descrambling puzzle with play-on-word hints and mystery answers. Instructions show how you can substitute your own words. Use POSSIBLE to help descramble word jumble puzzles or to create your own. All letter/number combinations or permutations of input are printed to screen or optional printer. LEAPFROG is a Chinese-Checker type jumping game in which you try to position two sets of animated jumping frogs in a minimum number of moves. 16K Cassette \$19.95; 24K Disk \$24.95. Disk version of GUESSIT works with VOTRAX Type "n" TALK. A real crowd pleaser.

### COMING SOON! Space Shuttle Adventure Series™

Real-time Space Flight Simulations

### COMING SOON! The Family Financier™

AN easy to use financial package.

### ACCESSORIES

#### VINYL DUST COVERS

Custom sewn upholstery grade vinyl dust covers for ATARI 800 and 400 computers and the 810 and 825 peripherals. Protecting your equipment when not in use, these crisp black covers go well with any decor. Specify model(s) when ordering. \$14.95 each.

send check or money order including \$2.50  
Shipping and Handling to:

## SWIFTY SOFTWARE, INC.

64 BROAD HOLLOW ROAD  
MELVILLE, N.Y. 11747  
(516) 549-9141

N.Y. Residents add 7 1/4% sales tax

send for free catalogue dealer orders and c.e.d.'s accepted

©1981, 1982 Swifty Software, Inc.

NOTE: ATARI® is a registered trademark of Atari Inc., a Warner Communications Company and all references to ATARI® should be so noted.



GREAT  
NEW PROGRAMS  
FOR ATARI  
COMING FROM  
SWIFTY!



SPACE SHUTTLE ADVENTURE  
HAUNTED HILL  
MAILIFT  
FILE-IT C  
MORE!

FOR DETAILS  
SEE OUR AUGUST  
COMPUTE! AD



# How To Use The 6560 Video Interface Chip

Dale Gilbert  
Henegar, AL

The 6560 Video Interface Chip, the VIC chip, provides low cost, high resolution, color video to a color monitor or a color television, and it also incorporates a sound generator, A/D converters [*analog/digital*], and even a light pen feature.

The 6560, some RAM, a crystal, a few bus drivers, and a little decode logic is all the hardware that is required to add color and sound to a micro-processor that has an expansion bus.

The VIC capabilities include on-chip sync generation, screen grid size of up to 192 horizontal dots by 200 vertical dots, two character sizes, three independent programmable tone generators, a white noise generator, an amplitude modulator, screen centering, on-chip DMA address generation, and two modes of color operation.

The 6560 VIC is manufactured by MOS Technology, Inc.. Commodore Business Machines incorporates the 6560 in their VIC-20 Computer. I purchased my chip from Falk-Baker Associates, 382 Franklin Avenue, Nutley, New Jersey 07110, for \$14.95.

## 6560 Software

To produce colored characters, VIC addresses two blocks of memory at the same time. This address method produces twelve bits of data. The eight bit block of memory is called the Character Pointer Block (called the *screen memory* on the VIC-20).

The second block of memory is called the Character Color Block (called the *color nibble area* on the VIC-20). This block contains four-bit character color data.

VIC takes the character pointer data, left shifts it three times, and adds the result to the character cell base address contained in bits zero through three of register five.

VIC then puts the result on the address bus which addresses another block of memory called the Character Cell Block (called character bit maps on the VIC-20). This block of memory is eight bits wide. The data obtained from this address is video information on an 8 x 8 character matrix. The matrix is eight bytes high and eight bits wide.

VIC takes the four-bit character color data and, if the MSB is 0, the character matrix will be displayed in high resolution mode. If the MSB is one, the character matrix will be displayed in the multicolor mode.

When the high resolution mode is selected and when bit-3 of register-F is a zero, all one bits of the character cell data will be displayed in the background color and all zero bits will be in the foreground color. The three remaining bits of the character color data specify the color of the foreground. The color of the background is specified by bits four through seven of register-F. If bit-3 of register-F is 1, the one bits of the character cell data will be displayed in foreground color and the zero bits will be displayed in background color.

If bit-3 of register-F is one, all the character cell matrix will have the same color background. If bit-3 is a zero, all the character cell matrix will have common character colors.

When the multicolor mode is selected (MSB of the character color data is one), there is a pairing of bits of the character cell data. The character matrix now is a 4 x 8 dot matrix with each dot's color determined by the code of each pair. The code has four possibilities: 00,01,10,11. If a dot code is 00, its color is the background color specified by bits four through seven of register-F. If the code is 01, the dot color is the same as the external border color specified by bits zero through two of register-F. If the code is ten, the dot color is the foreground color specified by the three bits of the character color data. If the code is 11, the color of the dot is specified by bits four through seven of register-E.

VIC produces a TV raster of up to twenty-two columns by up to twenty-three rows of character matrix surrounded by a border. The base address of the character pointer block contains the first upper left pointer for that character matrix. The base address plus one of the character pointer blocks contains the pointer for the next right character matrix. It is the responsibility of the MPU to manipulate the pointers in the character pointer block of memory. A whole raster of repeated characters (character matrix) can be obtained by just repeating the pointers in the character pointer block.

## 6560 Hardware

The 6560 VIC has fourteen address pins (A0-A13) and twelve data pins (D0 - D11). When the 02 clock is high, the MPU can place an address on the address pins and read or write data into any of the sixteen eight-bit registers via data pins D0 - D7. VIC decodes the address pins and selects registers zero through F when address 1000 through 100F



# Teach your Commodore to use the telephone.

## Telecommunicate with McTerm

Don't miss out on the computer/telephone revolution. With our McTerm package and a modem, your Commodore becomes an *intelligent* terminal. You can interact with large and small computers anywhere in the world.

Access databases like the Source™, or MicroNet™, or Dow Jones for up-to-the minute news, sports, stock market reports, etc. Write programs on your micro and run them on distant mainframes.

McTerm actually saves you money and time while you use it. There's no need to read data line-by-line as you receive it. Instead, you can quickly save it all to disk or printer and sign-off. You save on expensive computer time *and* long distance phone rates.

McTerm sends and receives faster than anything else on the market – up to 1200 baud. Adjustable duplex, echo, and parity. Runs on any Commodore 4000 or 8000 series computer with BASIC after version 1.0. Works with most RS-232 modems and supports auto dial. Write/Or Phone for Data Sheet.



**McTerm connects you with the rest of the world.**

Madison Computer, 1825 Monroe, Madison, WI 53711 USA. 608-255-5552

INTRODUCING

### FOR THE VIC Multiple Interface Connector

*This All-In-One Powerful Connector Includes:*

- MIC MON... Machine Language Monitor  
A must for machine language programmers and can be used with any memory size.
- MIC ED... Editing Utility Aid  
Gives programmers 26 new commands and can be used with the MIC MON.
- MIC SET... Reset Button  
First time on VIC. Reset instantly without switching off computer.
- MIC SLOT... Peripheral Slot  
Permits connection to any IEEE device, 3 K Super Expander for graphics or external memory.
- MIC SWITCH... Memory/Peripheral Switch  
Gives the choice of selecting added peripheral memory or IEEE peripherals.

**BASIC MIC PRICED AT \$249.95**

#### MEMORY OPTIONS

Select from Built-In 3K, 8K, 16K, 24K, or 32K

#### RAM MEMORY BOARDS

#### THE COMPUTER WORKS

2028 West Camelback  
Phoenix, Arizona 85015  
Telephone (602)/249-0611

Dealer Inquiries Invited

VISA

MASTERCARD

## VICware

By: MicroSpec Ltd.

**DATA BASE MANAGER:** Create, Add, Delete, Change, Sort, Search, Print, Write, Read and Browse are the commands available to you. You can manage your own data base. 8-k expansion required..... \$17.95

**HOME INVENTORY MANAGER:** Keep track of all your household belongings for insurance purposes. Allows you to add, delete, search, sort, etc. Will print totals and subtotals while listing your complete inventory. \$14.95

**STOCK PORTFOLIO MANAGER:** Will categorize the stocks you own and allow you to post both earnings and current quotes. Tracks the last six quotes and will graph the stocks performance. Prints a comprehensive report with subtotals by category along with percentage and yield figures..... \$17.95

Many more programs available. Write for free catalog.

VISA and MASTERCARD Accepted

2905 Ports O'Call Ct.  
Plano

(214) 867-1333  
Texas 75075



(the VIC-20's VIC chip ignores the A 15 line) is placed on the address pins.

The address pins are input pins when 02 is one; if 02 is zero, then these pins are output address pins.

When the 02 clock is one, the MPU can also write or read data to the character pointer RAM, the character color RAM, and the character cell RAM. The character cell memory may be RAM, ROM, or both. The base address of the character cell block and/or the character pointer can be changed by modifying a register in the VIC.

When the 02 clock is low, the VIC addresses memory in such a way that the character pointer RAM and the character color RAM is selected at the same time. VIC must receive character pointer data on D0 through D7 and character color data on D8 through D11 at the same time.

The R/W pin four is an input only pin and must be driven by the MPU when 02 is one and held high when 01 is one.

Pins 38 and 39 are the master clock inputs. The 6560 VIC requires a 14.31818 MHz, two phase, five volt, non-overlapping signals. The master clock uses a standard 14.31818 MHz crystal (4x color) and the delay of 74LS gates to give a non-overlapping signal. Resistors R1 and R2 are used to give extra pull up to CMOS levels. CMOS gates don't seem fast enough for this clock.

Pins 35 and 36 are the system output clock used for system timing and driving the clock of the 6512 MPU (if used). A 6502 MPU can be used by feeding pin 36 to the 00 IN pin on the 6502. Removing the original 00 signal and wiring this new 00 is the only alteration needed on the mother MPU.

Because the 6502 address lines are active when 01 is 1, the expansion address lines to the VIC and its associated memory must be isolated from the MPU bus during this time.

The data bus should also be buffered and gated for this same reason.

The system clocks are five volt, non-overlapping, 1.02 MHz signals.

Pin 19 provides the sound output which must be fed to an amplifier to a drive speaker. The output impedance is approximately 1000 ohms.

Pin 3 is the output pin for the composite sync and the luminance signal. This pin is an open drain which makes it easy to shift to the needed voltage level for a RF modulator, TV first video amplifier, or a black and white CRT monitor.

In the following wiring diagram, diodes K3, K4, K5, and K6; resistors R5, R6, and R7; and C1 make up the level shifter for a TV output or video monitor output.

The VIC is a superior CRT controller for a

B/W monitor due to the varying levels of luminance required for a color picture. VIC can produce varying shades of gray.

Pin 2 provides the composite color signal. This signal contains the color phase and amplitude information plus the 3.58MHz burst signal. Pin 2 is a high impedance output buffer which can be applied to the first chroma amplifier of a TV, color monitor, or RF modulator.

Pins 17 and 18 are the input pins for the Pot-X and Pot-Y analog to digital converters. A pot is used to charge an external capacitor tied to the pot wiper and fed to pin 17 or 18. These pins are systematically pulled to ground after each charge voltage reading. The voltage is digitized and deposited in register 8 or 9.

Pin 37 is the light gun/pen pin. The voltage of triggering is approximately 2.5 volts on the falling edge. Holding this pin low clears registers 6 and 7. The values of registers 6 and 7 represent the horizontal and vertical positions of the current dot being scanned. The light gun/pen option is only available on a 6560-101 which is sometimes identified by a white dot on the case of the IC.

Address decoding must be provided so that the character color nibble RAM will be selected, when the character pointer RAM is addressed by the VIC, but not selected when the MPU addresses the character pointer RAM. A data bus transceiver must be provided to isolate the nibble bus from the byte bus along with the logic for this transceiver. The logic must enable the MPU to read or write to the nibble bus when the 02 clock is one.

The expansion 02 may be used as the E(02) if the expansion 02 has no more than one LS gate delay and it is the true MPU 02. If these provisions can't be met, connect E(02) to the V02 (pin 36).

This author used addresses 1000 through 100F for the VIC; 2000 through 23FF for the character pointer block; 2400 through 27FF for the character color block; and 2800 through 2BFF for the character cell block.

The addition of a 6560, a few RAM chips, and a few gates will free up and complement many a MPU.

#### Color Code

##### Auxiliary/Background/Border/Foreground


0 BLACK	8 ORANGE
1 WHITE	9 LIGHT ORANGE
2 RED	A PINK
3 CYAN	B LIGHT CYAN
4 MAGENTA	C LIGHT MAGENTA
5 GREEN	D LIGHT GREEN
6 BLUE	E LIGHT BLUE
7 YELLOW	F LIGHT YELLOW



Register	Data										Address
R0	I=I O=N	Horiz. Center Vx4 Dots 6 5 4 3 2 1 0									1000
R1	Vertical Center Vx2 Dots 7 6 5 4 3 2 1 0										1001
R2	Cp A9	No. of Character Matrix Columns 6 5 4 3 2 1 0									1002
R3	RV 0	No. of Character Matrix Rows 5 4 3 2 1 0							I=D O=S	1003	
R4	Raster Value 8 7 6 5 4 3 2 1										1004
R5	Base Cp A13 A12 A11 A10					Base Char. Cell A13 A12 A11 A10					1005
R6	LP Horizontal Position 7 6 5 4 3 2 1 0										1006
R7	LP Vertical Position 7 6 5 4 3 2 1 0										1007
R8	Pot-X 7 6 5 4 3 2 1 0										1008
R9	Pot-Y 7 6 5 4 3 2 1 0										1009
RA	Sw I=On	Frequency Osc. -1 6 5 4 3 2 1 0									100A
RB	Sw I=On	Frequency Osc. -2 6 5 4 3 2 1 0									100B
RC	Sw I=On	Frequency Osc. -3 6 5 4 3 2 1 0									100C
RD	SW I=On	Frequency Noise Gen. 6 5 4 3 2 1 0									100D
RE	Auxiliary Code 3 2 1 0				Audio Amplitude 3 2 1 0						100E
RF	Background Code 3 2 1 0				I=B O=F	Border Code 2 1 0				100F	

Abbreviations:

I = Interlace	S = 8x8 Matrix
N = None Interlace	D = 16x8 Matrix
CP = Character Pointer	B = Common Background
Base Address	F = Common Foreground
R = Raster	LP = Light Pen
V = Value	Sw = Switch

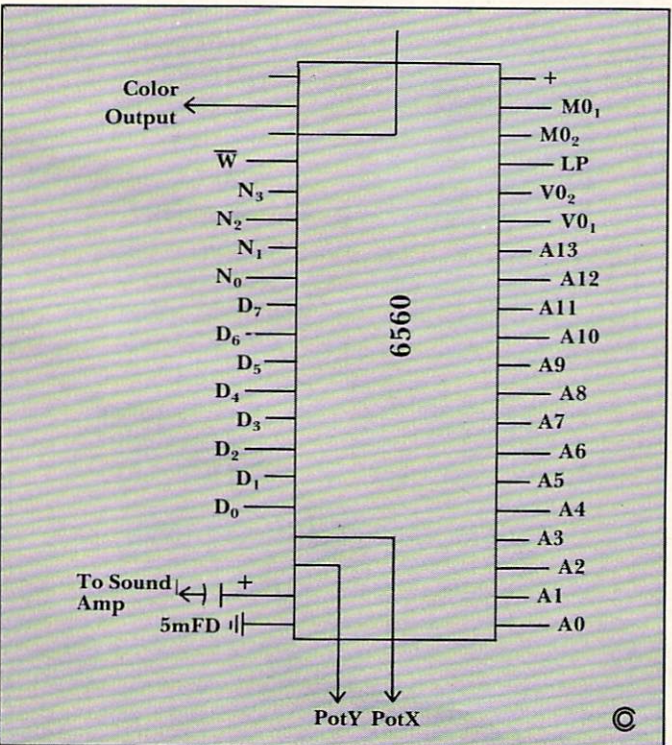

# COMPUTE! Books

P.O. Box 5406 Greensboro, NC 27403

Ask your retailer for these **COMPUTE! Books**. If he or she has sold out, order directly from **COMPUTE!**

For Fastest Service  
Call Our **TOLL FREE US Order Line**  
**800-334-0868**  
In NC call 919-275-9809

Quan.	Title	Price	Total
	<b>The Beginner's Guide To Buying A Personal Computer</b>	<b>\$ 3.95</b>	
	<small>(Add \$1.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		
	<b>COMPUTE!'s First Book of Atari</b>	<b>\$12.95</b>	
	<small>(Add \$2.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		
	<b>Inside Atari DOS</b>	<b>\$19.95</b>	
	<small>(Add \$2.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		
	<b>COMPUTE!'s First Book of PET/CBM</b>	<b>\$12.95</b>	
	<small>(Add \$2.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		
	<b>Programming the PET/CBM</b>	<b>\$24.95</b>	
	<small>(Add \$3.00 shipping and handling. Outside US add \$9.00 air mail; \$3.00 surface mail.)</small>		
	<b>Every Kid's First Book of Robots and Computers</b>	<b>\$ 4.95</b>	
	<small>Available in July. (Add \$1.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		
	<b>COMPUTE!'s Second Book of Atari</b>	<b>\$12.95</b>	
	<small>Available in July. (Add \$2.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		
	<b>COMPUTE!'s First Book of VIC</b>	<b>\$12.95</b>	
	<small>Available in August. (Add \$2.00 shipping and handling. Outside US add \$4.00 air mail; \$2.00 surface mail.)</small>		

All orders must be prepaid (money order, check, or charge). All payments must be in US funds. NC residents add 4% sales tax.

Payment enclosed  
Please charge my:  VISA  MC  Am. Exp.  
Acc't. No. \_\_\_\_\_ Expires \_\_\_\_\_ / \_\_\_\_\_  
Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Country \_\_\_\_\_  
Allow 4-5 weeks for delivery.



**This Publication  
is available in Microform.**



**University Microfilms International**

Please send additional information

for \_\_\_\_\_ (name of publication)  
 Name \_\_\_\_\_  
 Institution \_\_\_\_\_  
 Street \_\_\_\_\_  
 City \_\_\_\_\_  
 State \_\_\_\_\_ Zip \_\_\_\_\_

300 North Zeeb Road, Dept. P.R., Ann Arbor, Mi. 48106

**NEW COMMODORE ADD-ONS  
RAM-ROM:  
GETS RID OF SAFING ROM**

**MX-910 CBM/PET RAM/ROM;**

Allows multi ROM protected programs using the same socket to be put onto diskette/cassette, no need to insert protect ROM in socket after initial load, eliminates need for ROM switch box, write protect in software, decoded for dual ROM socket usage, 4K expandable to 8K, easy internal CBM installation: \$119.95

**MX-232 CBM/PET TO RS-232C  
INTERFACE:**

Low cost, bidirectional, 50 to 19,200 baud rate, full modem controls, parity allows for two RS-232C CBM ports, installs easily inside CBM: \$199.95

**SX-100 IEEE-488/PET MODEM SOFTWARE:**

Best 810 modem software, by 8010 developer, works with Source/Micronet/CBM to disk/CBM to CBM; Intelligent Terminal Software: \$79.95

**MX-200 IEEE-488/PET PARITY  
MODEM/SOFTWARE**

Talk to a host computer requiring parity, all features of SX232: \$399.95

**MX-113 THEFT PROTECTION ROM:**

Plug in ROM, displays owner's name, etc. when computer turned on: \$49.95

**ECX COMPUTER COMPANY**

2678 NORTH MAIN ST.  
 WALNUT CREEK, CA 94596  
 (415)944-9277

For additional new product information and catalog send self addressed, stamped envelope.

**...PET/CBM/VIC? SEE SKYLES...**

**PET owners everywhere sing**  
*♪ Thanks for the Memories ♪*  
**to good old Bob Skyles**

... they should... because Bob Skyles is the only complete source for memory boards for *any* PET ever sold. Old Bob won't forget you.

And the Skyles memory systems have the highest quality control of any computer product ever. Over 100 million bits of Skyles memory boards are already in the field. First quality static and dynamic RAMS, solid soldered on first quality glass epoxy. That is why they are **guaranteed—in spite of the new lower prices—for a full two years.**

The boards, inside the PET/CBM, install in minutes without special tools or equipment... just a screwdriver.

Because of our new dynamic memory design, and to celebrate old Bob's 30<sup>th</sup> birthday, here are the smashing new prices:

<b>8K Memory System</b>	orig. \$250.00	now \$200.00	Save \$ 50.00
<b>16K Memory System</b>	orig. \$450.00	now \$300.00	Save \$150.00
<b>24K Memory System</b>	orig. \$650.00	now \$400.00	Save \$250.00

... For any PET ever made. When ordering, just describe your PET by model number and indicate the amount and type (or brand) of memory currently in the unit.

Shipping and Handling... (USA/Canada) \$3.50 (Europe/Asia) \$15.00  
 California residents must add 6%/6½% sales tax, as required.

Visa/Mastercard orders: call tollfree (800) 227-9998 (except California).  
 California orders: please call (415) 965-1735.




**Skyles Electric Works**  
 231E South Whisman Road  
 Mountain View, California 94041  
 (415) 965-1735

**...PET/CBM/VIC? SEE SKYLES...**

**NEW FOR '82**

● **PAYROLL SYSTEM** ●

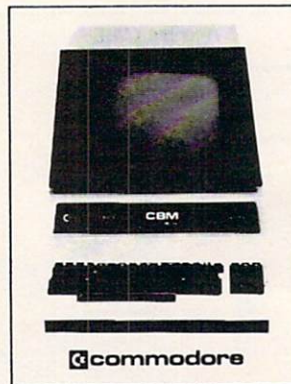

**\$295<sup>00</sup>**

(INTRODUCTORY PRICE)

**FOR MOD 8032 (4040 OR 8050)**

OTHER BUSINESS PROGRAMS AND PRICE LIST AVAILABLE

**DELTA**  
**SOFTWARE CO.**

3436 MENDOCINO AVE.  
 SANTA ROSA, CA 95401  
 (707) 544-3425

- OVER 100 EMPLOYEES
- 25 DATA FIELDS PER EMPLOYEE
- MULTIPLE RATES
- OVERTIME
- VACATION
- SUBSISTENCE
- 16 GEN. LEDGER CATEGORIES
- PRINTS CHECKS OR CHECK STUBS
- W2 FORMS
- CALIF. DE3 AND DE3B, 941 AND OTHER REPORTS



*This compactor analyzes and compresses BASIC at lightning speed. For PET/CBM, Upgrade and 4.0 BASIC, with disk drive.*

# Machine Language Compactor

David L. Evans  
Caldwell, ID

When the programs "Compactor" and "Un-Compactor" by Robert Baker appeared in the Sept./Oct., 1980 and May, 1981, issues, respectively, of **COMPUTE!** I immediately typed them in and tried them out on several of my programs.

To my dismay, compacting a 16K program required approximately 48-52 minutes. I am a college student and spend a limited amount of time on my computer (a 16K 4.0 PET) due to study time and my job. That compacting time ate heavily into the time I spend on my PET and I decided to do something about it. This program is the result.

I tried several different BASIC versions of the program, but could come up with no noticeable increase in speed. I then decided to give machine language a try. The result? A 947% increase in speed! Even this phenomenal increase in speed can be improved a bit further by eliminating the error checking in my input subroutine.

The program consists of five different sections. The input section prints the directions and inputs the input and output file names. The scanning section scans the BASIC program for target line numbers and prints them for you to see, while also storing them for use by the compacting section. The compacting section compacts the program (where possible) and prints "DONE" when finished.

A following subroutine section contains an input subroutine, a line number checking routine, and a disk error routine. Following these four sections is the data and work storage area. This program was designed to run on both Upgrade and 4.0 ROMs. It will automatically adjust itself to work on either ROM set, so all the user has to do is to LOAD the PROGRAM and type RUN.

Running the program is fairly simple. Load the program into memory with the LOAD or DLOAD command, depending upon which computer you have. If you do not have DOS 2.0 or higher, make sure that both drives are initialized. Type RUN, and the computer will print a short greeting along with some brief directions.

## Typing In Compactor

Below are the step-by-step instructions for entering and SAVEing Compactor. **COMPUTE!** generally provides BASIC loaders so that readers who don't know machine language can easily type in and use machine language subroutines and programs. Though it could be done, we felt that creating a BASIC loader for Compactor would be too complicated to be worthwhile: Compactor sits in memory starting at address 1024 (like a BASIC program). A loader would involve an awkward process of writing over itself and checksums would be equally difficult to use.

Instead, Compactor is presented as *hex dump*. To enter it into the computer:

1. Type: SYS 1024 (to enter the machine language monitor).
2. When prompted by the period (.), type M 0400 0460 and the screen will reveal (in hexadecimal numbers) the contents of the memory cells between address 0400 and 0460. You can type over these numbers and hit RETURN on each line, thereby entering the new numbers into memory. So, for the first line, you type: 00 0B 04 FF FF 9E 31 30 (RETURN). Continue on until you've typed and entered line 0460 as it appears in the magazine listing.
3. Then do the next block of memory. Type: M 0468 0500 and continue on, replacing the values on screen with Compactor's numbers as printed. When you've typed in the last line, (0B70), you are done.
4. Now Compactor is in your computer's memory and it must be SAVEd onto a disk. Type: S "0:COMPACTOR", 08,0400,0B78 (RETURN) and it will now be available for use as a program called "COMPACTOR" on the disk in Drive zero.
5. If the power went off just before you finished (and you lost everything, including your temper), you might prefer to take up the author's offer (at the end of the article) to make a copy for you.



After reading the directions, type in your input file name preceded by the drive number the file is on. Example : 0:COMPACTOR. You will then be asked for the output file name; do the same with it as you did with the input file name. The computer will then scan and compact your program. If any disk error is detected, the program will report it and will return to BASIC. After your program has been compacted, LOAD it into memory and type the CLR command; this will fix all the line links. Be sure to reSAVE the corrected copy.

Clearly, machine language lends itself to input/output programs more readily than BASIC does. Once the basics of how to open files from machine language are learned (see **COMPUTE!**, April, 1981, #11), it is easy to generate input/output programs in machine language which will run at a phenomenal speed.

For those of you who do not want to type this in, I will make you a copy of it if you will send me \$3.00 and a self-addressed, stamped mailer and a blank tape or disk. For those who send a disk, I have DOS 2.0, so all disks will be written in DOS 2.0.

David Evans  
2202 Ellis Ave.  
Caldwell, ID 83605

```

0400 00 0B 04 FF FF 9E 31 30
0408 33 37 00 00 00 AD 50 C3
0410 C9 2E F0 38 A9 24 8D F0
0418 04 8D 30 05 8D EC 06 8D
0420 09 07 A9 AE 8D 69 06 8D
0428 6E 06 8D A7 06 8D 89 09
0430 8D 91 09 8D 99 09 A9 D9
0438 8D 88 06 8D 5E 07 8D DA
0440 08 A9 DC 8D 89 06 8D 5F
0448 07 8D DB 08 A9 78 85 01
0450 A9 0B 85 02 A0 00 A9 00
0458 91 01 C8 D0 F9 E6 02 A5
0460 02 C9 16 D0 EF A9 0D 8D
0468 88 0B A9 00 8D 87 0B A2
0470 00 BD 48 0A C9 00 F0 07
0478 20 D2 FF E8 4C 71 04 A2
0480 00 20 CF FF 9D 50 0C C9
0488 0D F0 08 E8 E0 12 F0 03
0490 4C 81 04 E8 A9 0D 9D 50
0498 0C AD 50 0C C9 30 F0 04
04A0 C9 31 D0 CB AD 51 0C C9
04A8 3A D0 C4 A2 00 BD 09 0B
04B0 C9 00 F0 07 20 D2 FF E8
04B8 4C AD 04 A2 00 20 CF FF
04C0 9D 70 0C C9 0D F0 08 E8
04C8 E0 12 F0 03 4C BD 04 AD
04D0 70 0C C9 30 F0 04 C9 31
04D8 D0 95 AD 71 0C C9 3A D0

```

```

04E0 8E A9 0F 85 D2 85 D3 A9
04E8 08 85 D4 A9 00 85 D1 20
04F0 63 F5 20 F7 09 A2 00 BD
04F8 50 0C C9 0D F0 04 E8 4C
0500 F7 04 A9 2C 9D 50 0C 9D

```

```

0510 52 9D 53 0C E8 E8 E8 E8
0518 8E 86 0B 86 D1 A9 05 85
0520 D2 85 D3 A9 08 85 D4 A9
0528 50 85 DA A9 0C 85 DB 20
0530 63 F5 20 F7 09 20 CE 09
0538 20 CE 09 18 AD 78 0B 6D
0540 79 0B B0 07 C9 00 D0 03
0548 4C A1 06 20 CE 09 AD 78
0550 0B 8D 7A 0B AD 79 0B 8D
0558 7B 0B 20 D7 09 AD 79 0B
0560 C9 00 F0 D4 C9 89 F0 08
0568 C9 8D F0 04 C9 A7 D0 EA
0570 A9 00 8D 7C 0B 8D 7D 0B
0578 20 D7 09 AD 79 0B C9 3A
0580 B0 DB 90 03 20 D7 09 AD
0588 79 0B C9 20 F0 EA C9 3A
0590 B0 58 C9 30 90 54 A9 0A
0598 85 01 A9 00 8D 7E 0B A2
05A0 08 0A 2E 7E 0B 06 01 90
05A8 09 18 6D 7C 0B 90 03 EE
05B0 7E 0B CA D0 EC 8D 7C 0B
05B8 AD 7D 0B 0A 85 01 0A 0A
05C0 18 65 01 6D 7E 0B 8D 7D
05C8 0B 38 AD 79 0B E9 30 8D
05D0 79 0B 18 AD 79 0B 6D 7C
05D8 0B 8D 7C 0B 90 03 EE 7D
05E0 0B 20 D7 09 AD 79 0B 4C
05E8 8E 05 AD 7C 0B 8D 83 0B
05F0 AD 7D 0B 8D 84 0B 20 9C
05F8 09 AD 85 0B C9 FF F0 71
0600 AD 87 0B C9 00 D0 07 AD

```

```

0610 0B 8D 1E 06 AD 88 0B 8D
0618 1F 06 AD 7C 0B 8D FF FF
0620 EE 87 0B AD 87 0B C9 00
0628 D0 0A EE 88 0B AD 88 0B
0630 C9 16 B0 22 AD 87 0B 8D
0638 44 06 AD 88 0B 8D 45 06
0640 AD 7D 0B 8D FF FF EE 87
0648 0B AD 87 0B C9 00 D0 03
0650 EE 88 0B 4C 71 06 A2 00
0658 BD 39 0B C9 00 F0 07 20
0660 D2 FF E8 4C 58 06 A9 05
0668 20 E2 F2 A9 0F 20 E2 F2
0670 60 A2 00 BD 1F 0B C9 00
0678 F0 07 20 D2 FF E8 4C 73
0680 06 AE 7C 0B AD 7D 0B 20

```







# commodore

## SHOW SPECTACULAR

- 8032-32K 80 COL CRT  
REG \$1495 **\$1065**
- 64K ADD-ON MEMORY  
REG \$500 **\$395**
- 9000 134K SUPER PET  
REG \$1995 **\$1795**
- 4032 32K 40 COL CRT  
REG \$1295 **\$965**
- 4016 16K 40 COL CRT  
REG \$995 **\$765**
- 8050-DUAL DISK 950K  
REG \$1795 **\$1295**
- 4040-DUAL DISK 343K  
REG \$1295 **\$995**
- 2031-SINGLE DISK 170K  
REG \$695 **\$525**
- C2N-CASSETTE DRIVE  
REG \$75 **\$65**
- 4022-80 COL PRINTER  
REG \$795 **\$595**
- 8023P-136 COL PRINTER  
REG \$995 **\$849**
- 8300P-40CPS LTR QLTY  
REG \$2250 **\$1995**
- 8024-MANNESMAN TALLEY  
REG \$1995 **\$1595**
- 8024L-LETTER TALLEY  
REG \$2495 **\$1995**
- 25CPS-STARWRITER  
REG \$1895 **\$1445**
- CBM-IEEE MODEM  
REG \$279 **\$229**
- VOICE SYNTHESIZER  
REG \$395 **\$329**

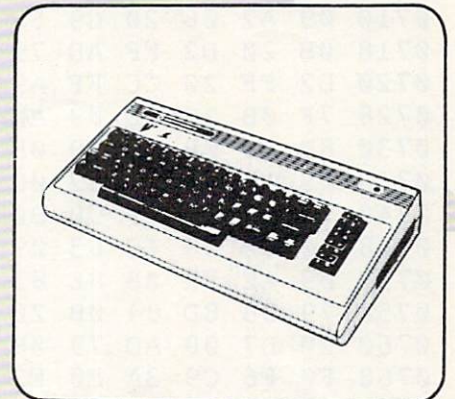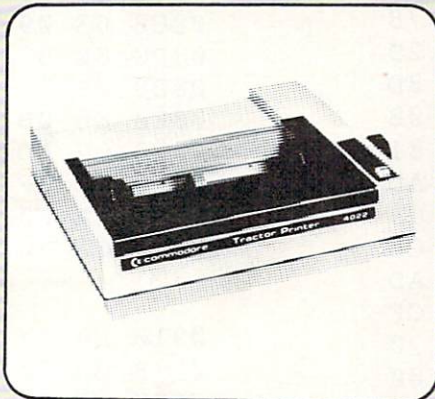

- PET TO IEEE CABLE  
REG \$39.95 **\$34**
- IEEE TO IEEE CABLE  
REG \$49.95 **\$39**
- VIC 20  
REG \$299 **\$265**
- VIC 1540 DISK 170K  
REG \$599 **\$499**
- VIC 1515 30CPS PRINTER  
REG \$395 **\$349**
- VIC 1011 RS 232 INTER  
REG \$49.95 **\$39**
- VIC 1112 IEEE INTER  
REG \$99.95 **\$79**

### MATOR SHARK HARD DISK DRIVE

- \*Winchester Disk
- \*Commodore DOS 2.5
- \*24 Megabyte
- \$6475**
- Strobe 100 Plotter
- \*PET Interface
- \*Software Pack
- \$975**

SCHOOL SPECIALS

3 for 2 Pricing

CALL US!

20% Off on Software

*Special pricing on Atari, Apple, Digilog, Epson, Hayes Modem, Printwheels*

## PHILADELPHIA COMPUTER DISCOUNT ©

P.O. Box 170 St. Davids, PA 19087 (215)687-8540

### MAIL ORDER PHONE 1-800-345-1289

PREPAID ORDERS SHIPPED FREE  
VISA & MASTERCARD ADD 3%  
COD - UPS  
PA RESIDENTS ADD 6% SALES TAX



0688 83 CF AD 79 0B C9 2C D0  
 0690 03 4C 70 05 C9 20 F0 03  
 0698 4C 5D 05 20 D7 09 4C 8A  
 06A0 06 20 CC FF A9 05 20 E2  
 06A8 F2 A2 00 BD 49 0B C9 00  
 06B0 F0 07 20 D2 FF E8 4C AB  
 06B8 06 A2 00 BD 70 0C C9 0D  
 06C0 F0 04 E8 4C BB 06 A0 00  
 06C8 B9 70 0B C9 00 F0 08 9D  
 06D0 70 0C C8 E8 4C C8 06 86  
 06D8 D1 A9 06 85 D2 85 D3 A9  
 06E0 08 85 D4 A9 70 85 DA A9  
 06E8 0C 85 DB 20 63 F5 20 F7  
 06F0 09 AE 86 0B 86 D1 A9 05  
 06F8 85 D2 85 D3 A9 08 85 D4  
 0700 A9 50 85 DA A9 0C 85 DB

0710 09 A2 06 20 C9 FF AD 78  
 0718 0B 20 D2 FF AD 79 0B 20  
 0720 D2 FF 20 CC FF A9 00 8D  
 0728 7F 0B 20 CE 09 AD 78 0B  
 0730 8D 80 0B AD 79 0B 8D 81  
 0738 0B A9 00 8D 82 0B 18 AD  
 0740 78 0B 6D 79 0B B0 07 C9  
 0748 00 D0 03 4C 63 09 20 CE  
 0750 09 AE 78 0B 8E 83 0B AD  
 0758 79 0B 8D 84 0B 20 83 CF  
 0760 20 D7 09 AD 79 0B C9 20  
 0768 F0 F6 C9 3A F0 F2 C9 00  
 0770 F0 0E C9 8F D0 19 20 D7  
 0778 09 AD 79 0B C9 00 D0 F6  
 0780 A9 01 8D 82 0B 20 9C 09  
 0788 AD 85 0B C9 FF D0 9B A2  
 0790 06 20 C9 FF AD 80 0B 20  
 0798 D2 FF AD 81 0B 20 D2 FF  
 07A0 AD 83 0B 20 D2 FF AD 84  
 07A8 0B 20 D2 FF 20 CC FF A9  
 07B0 04 8D 7F 0B AD 82 0B C9  
 07B8 00 F0 12 A2 06 20 C9 FF  
 07C0 A9 3A 20 D2 FF 20 CC FF  
 07C8 A9 05 8D 7F 0B A9 00 8D  
 07D0 82 0B 4C E9 07 A2 06 20  
 07D8 C9 FF AD 79 0B 20 D2 FF  
 07E0 20 CC FF EE 7F 0B 20 D7  
 07E8 09 AD 79 0B C9 89 F0 08  
 07F0 C9 8B F0 04 C9 A7 D0 05  
 07F8 A9 01 8D 82 0B AD 79 0B  
 0800 C9 00 D0 03 4C 9C 08 C9

0810 D7 09 AD 79 0B C9 00 D0  
 0818 F6 4C 9C 08 AD 79 0B C9  
 0820 22 D0 46 A2 06 20 C9 FF  
 0828 AD 79 0B 20 D2 FF 20 CC

0830 FF EE 7F 0B 20 D7 09 AD  
 0838 79 0B C9 22 F0 97 C9 00  
 0840 D0 E1 AD 82 0B C9 00 F0  
 0848 0D A9 00 8D 79 0B A2 06  
 0850 20 C9 FF 4C 1C 07 A2 06  
 0858 20 C9 FF A9 22 20 D2 FF  
 0860 20 CC FF EE 7F 0B 4C 9C  
 0868 08 AD 79 0B C9 3A F0 03  
 0870 4C D5 07 20 D7 09 AD 79  
 0878 0B C9 20 F0 F6 C9 3A F0  
 0880 F2 C9 8F F0 8A C9 00 F0  
 0888 13 A2 06 20 C9 FF A9 3A  
 0890 20 D2 FF 20 CC FF EE 7F  
 0898 0B 4C E9 07 AD 82 0B C9  
 08A0 00 D0 07 AD 7F 0B C9 AB  
 08A8 90 0D A9 00 8D 79 0B A2  
 08B0 06 20 C9 FF 4C 1C 07 20  
 08B8 CE 09 18 AD 78 0B 6D 79  
 08C0 0B B0 07 C9 00 D0 03 4C  
 08C8 63 09 20 CE 09 AE 78 0B  
 08D0 8E 83 0B AD 79 0B 8D 84  
 08D8 0B 20 83 CF 20 9C 09 AD  
 08E0 85 0B C9 FF F0 2C 20 D7  
 08E8 09 AD 79 0B C9 8F D0 03  
 08F0 4C 0F 08 C9 20 F0 EF C9  
 08F8 3A F0 EB C9 00 F0 B8 A2  
 0900 06 20 C9 FF A9 3A 20 D2

0910 E9 07 A2 06 20 C9 FF A9  
 0918 00 20 D2 FF A9 01 20 D2  
 0920 FF 20 D2 FF AD 83 0B 20  
 0928 D2 FF AD 84 0B 20 D2 FF  
 0930 20 CC FF A9 04 8D 7F 0B  
 0938 20 D7 09 AD 79 0B C9 20  
 0940 F0 F6 C9 3A F0 F2 C9 00  
 0948 F0 04 C9 8F D0 0D A2 06  
 0950 20 C9 FF A9 3A 20 D2 FF  
 0958 20 CC FF A9 00 8D 82 0B  
 0960 4C E9 07 A2 06 20 C9 FF  
 0968 A9 00 20 D2 FF 20 D2 FF  
 0970 20 D2 FF 20 CC FF A2 00  
 0978 BD 65 0B C9 00 F0 07 20  
 0980 D2 FF E8 4C 78 09 A9 06  
 0988 20 E2 F2 20 F7 09 A9 05  
 0990 20 E2 F2 20 F7 09 A9 0F  
 0998 20 E2 F2 60 A9 0C 85 02  
 09A0 A9 00 85 01 A8 AA AD 83  
 09A8 0B D1 01 D0 09 C8 AD 84  
 09B0 0B D1 01 F0 13 88 C8 C8  
 09B8 D0 EC E6 02 A5 02 C9 16  
 09C0 D0 DE A9 00 8D 85 0B 60  
 09C8 A9 FF 8D 85 0B 60 20 D7  
 09D0 09 AD 79 0B 8D 78 0B A2  
 09D8 05 20 C6 FF 20 E4 FF 85  
 09E0 01 A9 01 8D 89 0B 20 F7  
 09E8 09 A5 01 8D 79 0B A9 00



# COMMODORE VIC

## PERSONAL COMPUTER

60% more powerful than VIC-20

# \$299<sup>00</sup>

Special Sale Price



● We Stock More VIC-20 Programs and Accessories than anyone in the USA!

● We Stock "United Micro's" VIC-20 Super Programs! Arcade Quality up to 256 Levels-Super Graphics Sound-Fast Action Unrelenting Challenge.

● VIC-20 Owners Write for Free Catalog.

FOR THE SPECIAL SALE PRICE OF \$299.00 you get the COMMODORE VIC-20 computer *plus* WE ADD 3000, BYTES OF MEMORY to give you 60% MORE PROGRAMMING POWER! This powerful full-sized extra featured computer includes the 6502 microprocessor (LIKE APPLE) 20,000 bytes ROM with a 16K extended LEVEL II Microsoft BASIC, 8000 bytes RAM plug in expandable to 32,000 bytes RAM, 66 key typewriter professional expanded keyboard with graphic symbols on keys, color command keys, high resolution graphics, 512 displayable characters, text display is 22 lines 23 characters, sound and music, real time, upper lower case, full screen editing cursor, floating point decimal and trig functions, string arrays, scrolling, multi statement lines, file management, PEEK AND POKE. Assembly machine language is available. We have easy to use self teaching books and programs. Accept TAPE-DISK-PLUG IN CARTRIDGES, connects to any TV, includes AC adaptor, R.F. modulator, switch box, self teaching instruction book, comes in a beautiful console case for only \$299.00.

### LOW COST PLUG IN EXPANSION

Expansion accessories plug directly into this computer, extra RAM memory, Controllers, a Cassette, A Telephone Modem for only \$109.00, an 80 Column Printer for \$375.00, even the 170K Disk Drive plugs in direct. You do not have to buy an expensive expansion interface.

### WHY SUCH A LOW PRICE

WE GIVE YOU 60% to 400% MORE PROGRAMMING POWER THAN VIC-20! You can't beat our prices for the VIC-20 with increased programming power added! We sell direct to customers. We save you the profit margin normally made by computer stores, department stores, and distributors. We are willing to take a smaller margin to develop volume!

### INVEST IN YOUR CHILDREN

Educate your children while they play. Every kid wants to play electronic games. (We have some of the best). The next natural step for their curiosity is to try simple programming. They can do this in 20 minutes with our simple self teaching instruction book. High schools are teaching computer math, science and programming - some start in grammar school.

If you provide this computer as a Teacher and Tutor at home, before you know it your child will be writing computer programs. You can use your T.V. to EDUCATE not frustrate your family and eliminate T.V. boredom with programs that challenge, stimulate and entertain the whole family. We have a wide variety of games, recreational, home finance and educational programs to choose from. Why pay \$140.00 to \$295.00 for an electronic game when you can buy this powerful computer for only \$299.00.

### COMMUNICATE WITH THE WORLD

Plug in your VIC telephone modem. Now you can get a world of information through your telephone, plus electronic mail. Just dial up the information you want. UPI wire service, stock market, historical information by topic from over 60 magazines, including New York times. Airline information, order tickets, get weather information anywhere in the world, restaurant and hotel information, thousands of categories are on line for you, business, finance, education, entertainment, games etc. YOU'LL BE THE TALK OF YOUR NEIGHBORHOOD. Our telephone modem price is by far the lowest available.

### IMMEDIATE REPLACEMENT WARRANTY

If your computer fails because of warranty defect within 90 days from date of purchase, you simply send your computer to us via United Parcel Service prepaid. We will "immediately" send you a replacement computer at no charge via United Parcel Service prepaid. No one we know gives you this kind of warranty service. Most computer warranty service takes 30 to 90 days to handle - this fantastic "immediate replacement warranty" is backed by COMMODORE COMPUTER, a MAJOR national brand electronics manufacturer.

### SPECIAL SALE PRICE \$299

FOR ONLY \$299 you get the POWERFUL 28K COMMODORE VIC with 60% MORE PROGRAMMING POWER THAN VIC-20! 28,000 bytes total memory (20,000 bytes ROM, 8000 bytes RAM and extended LEVEL II BASIC), the professional 66 keyboard, color, sound, music self teaching instruction book, A.C. adaptor, R.F. modulator, T.V. switch box, owners manual plus all the other features listed, in a beautiful console.

### SPECIAL SALE PRICE \$379

FOR ONLY \$379 you get the 41K COMMODORE VIC with 400% MORE PROGRAMMING POWER THAN VIC-20! We add 16,000 bytes memory to the VIC-20. You get a total of 41,000 bytes memory (20,000 bytes ROM, 21,000 bytes RAM and extended LEVEL II BASIC) plus all the extra features shown for the 28K COMMODORE VIC.

### SPECIAL DATA CASSETTE SALE

THIS SPECIAL DATA CASSETTE has special electronics that eliminates loading problems and loss of programs recorded on tape! Includes tape counter and your selection of any \$14.95 "GAME PACK" program FREE!!! Reg. Price \$90.00 Sale Price \$69.00 (A standard tape recorder will not work).

### 15 DAY FREE TRIAL

#### DON'T MISS THIS SALE - ORDER NOW

- Please send me the 28K Commodore VIC Computer for \$299.00
- Please send me the 41K Commodore VIC Computer for \$379.00
- Special Data Cassette \$69.00

We ship C.O.D. and honor Visa and Master Card.

Name \_\_\_\_\_

Address \_\_\_\_\_

City \_\_\_\_\_

State \_\_\_\_\_ Zip Code \_\_\_\_\_

VISA  MASTER CARD  C.O.D.

Credit Card No. \_\_\_\_\_

Expiration Date \_\_\_\_\_

Add \$10.00 for shipping, handling and Insurance. Illinois residents please add 6% tax. Add \$20.00 for CANADA, PUERTO RICO, HAWAII orders. WE DO NOT EXPORT TO OTHER COUNTRIES.

Enclose Cashiers Check, Money Order or Personal Check. Allow 14 days for delivery (21 days for Personal Check orders.) 2 to 7 days for phone orders. Canada orders must be in U.S. dollars.



we are  
**commodore VIC**  
experts!!

# PROTECTO ENTERPRIZES

BOX 550, BARRINGTON, ILLINOIS 60010  
Phone 312/382-5244 to order



09F0 8D 89 0B 20 CC FF 60 A2  
 09F8 0F 20 C6 FF A2 00 20 E4  
 0A00 FF C9 0D F0 07 9D A0 0C

0A10 20 CC FF AD A0 0C C9 30  
 0A18 D0 08 AD A1 0C C9 30 D0  
 0A20 01 60 A9 0D 20 D2 FF A2  
 0A28 00 BD A0 0C 20 D2 FF E0  
 0A30 00 F0 04 E8 4C 29 0A 68  
 0A38 68 AD 89 0B C9 00 F0 07  
 0A40 A9 00 8D 89 0B 68 68 60  
 0A48 93 20 20 20 20 20 20 20  
 0A50 4D 41 43 48 49 4E 45 20  
 0A58 4C 41 4E 47 55 41 47 45  
 0A60 20 43 4F 4D 50 41 43 54  
 0A68 4F 52 0D 0D 0D 42 59 3A  
 0A70 20 44 41 56 49 44 20 45  
 0A78 56 41 4E 53 0D 0D 0D 45  
 0A80 4E 54 45 52 20 46 49 4C  
 0A88 45 20 4E 41 4D 45 20 57  
 0A90 49 54 48 20 54 48 45 20  
 0A98 44 52 49 56 45 20 4E 55  
 0AA0 4D 42 45 52 0D 0D 50 52  
 0AA8 45 43 45 44 49 4E 47 20  
 0AB0 49 54 2E 0D 0D 45 58 41

0AB8 4D 50 4C 45 3A 20 20 20  
 0AC0 30 3A 46 49 4C 45 4E 41  
 0AC8 4D 45 0D 0D 44 4F 20 54  
 0AD0 48 45 20 53 41 4D 45 20  
 0AD8 57 49 54 48 20 54 48 45  
 0AE0 20 4F 55 54 50 55 54 20  
 0AE8 46 49 4C 45 20 4E 41 4D  
 0AF0 45 2E 0D 0D 0D 0D 49 4E  
 0AF8 50 55 54 20 46 49 4C 45  
 0B00 20 4E 41 4D 45 20 3F 20

0B10 54 20 46 49 4C 45 20 4E  
 0B18 41 4D 45 20 3F 20 00 93  
 0B20 46 4F 55 4E 44 20 54 41  
 0B28 52 47 45 54 20 4C 49 4E  
 0B30 45 20 4E 55 4D 42 45 52  
 0B38 00 93 54 4F 4F 20 4D 41  
 0B40 4E 59 20 4C 49 4E 45 53  
 0B48 00 93 43 4F 4D 50 41 43  
 0B50 54 49 4E 47 20 4C 49 4E  
 0B58 45 20 4E 55 4D 42 45 52  
 0B60 2E 2E 2E 2E 00 93 12 44  
 0B68 4F 4E 45 0D 0D 0D 0D 00  
 0B70 2C 50 2C 57 00 00 00 00

©

**SMITH CORONA®**  
 Daisy Wheel Printer/Typewriter  
 with Letter Quality Printing.

RS232 or IEEE-488  
 Interface Included.  
 Use with CBM, Apple, Atari,  
 and Others.

TP-1  
 Available  
 at \$789.00



**Albany Typewriter & Computer**  
 923 San Pablo Avenue  
 Albany, CA 94706  
 (415) 526-1959



**NEW FOR ATARI**

FROM  
**MMG MICRO SOFTWARE**

\*\*\*\*\*GAMES\*\*\*\*\*

**CHOMPER** - All machine language arcade game. One of the only computer games with intelligent monsters. Destined to become a classic.  
 Requires 16K, 1 Joystick ..... \$24.95

**ASTEROID MINERS** - Race against time! Your mission is to mine all the asteroids before time runs out. BASIC and machine language.  
 Requires 32K, 1 Joystick ..... \$29.95

\*\*\*\*\*NECESSITIES\*\*\*\*\*

**DISK COMMANDER** - Just save this program on your BASIC disks and it will autoboot and automatically list all programs from the disk onto your screen. Simply run any program by typing in a number.  
 Requires 16K, Disk only ..... \$19.95

**RAM TEST** - The most thorough and fastest memory test available for the atari. This all machine language program takes 4 min. to test 48K. It's the only program that tests the cartridge area of RAM. Good for new 400/800 computer owners and for testing new RAM boards.  
 Requires 8K ..... \$19.95

\*\*\*\*\*BUSINESS/HOME\*\*\*\*\*

**MAILING LIST** - Extremely fast BASIC and machine language program. Each data disk holds over 500 files. Sort on any of 6 fields at machine language speed. Use any size labels or envelopes.  
 Requires 16K, Disk only ..... \$39.95

Unless otherwise specified, available on cassette and disk. Please specify when ordering.

MMG is seeking new Atari Authors. Please call or write for details.

Please send check or money order to:  
**MMG MICRO SOFTWARE**

P.O. Box 131

Marlboro, New Jersey 07746

or call (201) 583-4362 For C.O.D. deliveries

New Jersey residents add 5% state tax.

ATARI is a registered trademark of ATARI, Inc.



# Insight: Atari

Bill Wilkinson  
Optimized Systems Software  
Cupertino, CA

This month I will first respond to some of that unanswered mail; then part six of Inside Atari BASIC [a continuing series within this column] will delve further into string and array magic; and finally we will do a preliminary exploration of the depths of Atari's FMS.

## Graphics Revisited

Actually, the title of this section might better be "machine language revisited." Probably none of my columns has generated as much response as part four of my Atari I/O series, subtitled "Graphics," in the February, 1982, issue of **COMPUTE!** Unfortunately, most of the response has been of the "I can't make it work" variety. Of course, my first response is "but I *know* it works!" Yet still the letters ask, "How?"

I do not intend to turn this column into a tutorial on machine language. There are several good books available on 6502 machine language (including the Inmans' book specifically for *The Atari Assembler*), and any struggling beginner who is trying to make do without at least one of them is simply a masochist. However, my ego says that it will be better fed if more readers understand my articles.

For the most part, it seemed that those who had trouble with my February article assumed that what was published was some neat program to be used as is. *Not so!* I had simply given you a set of *subroutines* to use with your own programs. For an example, let us take a simple BASIC routine and its machine language equivalent. First, the BASIC:

```
30000 POKE 20,0 : POKE 19,0
30010 IF PEEK(19) = 0 THEN 30010
30020 RETURN
```

Now, you would not mistake that for a complete BASIC program. But, if I told you that entering this routine and then executing a GOSUB 30000 from your program would produce a 4.2667-second pause, you would know when and how to use it. So let's do the same thing in machine language:

```
PAUSE
LDA #0
STA 20 ; "poke 20,0"
STA 19 ; "poke 19,0"
```

## LOOP

```
LDA 19
BEQ LOOP ; "if peek(19) = 0 then loop"
RTS      ; "return"
```

Again, this is *not* a complete program! *But* if you enter it (say at the end of your own machine language program) and then execute a JSR PAUSE, it will produce a 4.2667 second pause. Note, then, that JSR in machine language is the equivalent of GOSUB in BASIC.

The graphics routines (Program 5) in my February article are just subroutines, to be placed in your own machine language program and then JSRed to perform their actions. Perhaps the biggest mistake I made was in presenting these as an assembled listing (complete with "\* = \$660"). I certainly never used them as such. In point of fact, I tested them by .INCLUDEing them in my test programs, which were written with the OSS EASMD Assembler/Editor. And one of the test programs I used was, indeed, the example given on page 77 of that same article.

So how do *you* get these subroutines in and working for you? First and foremost, you obviously must type in all that code. Perhaps the best thing to do would be to type it in exactly as shown, including even the "\* = \$660" and the ".END". Then assemble it and carefully compare the object code generated with that in the magazine. When all appears correct, remove the "\* =" line and the ".END" line, renumber the whole thing (I would suggest REN 29000,5 or something similar), and LIST it to diskette or cassette. Now use NEW and write your mainline code. When you are reasonably satisfied with it, LIST it to disk or cassette also.

Now what? Obviously, if you have OS/A+, I suggest you use .INCLUDE (an assembler pseudo-op which allows you to include one file while assembling another). In fact, I tend to write assembly code structured as follows:

```
.INCLUDE #D:SYSEQU.ASM
<my mainline code>
.INCLUDE #D:library-routine-number-1
.INCLUDE #D:library-routine-number-2
...
.END
```

If my "mainline" code is big enough, I may even break it into two or three pieces and .INCLUDE each of them separately.

But what if you don't have .INCLUDE capability? Well, several assemblers have "FILE" or "CHAIN," which are not quite as flexible (since you don't return to where you left off after you have assembled a chained-to file...thus making the procedure next to useless for zero page equate files, etc.); but the principle is generally the same: put your mainline code first and then CHAIN to



the subroutine files.

And what if you have the Assembler/Editor cartridge? (For all of its faults, it is still a remarkably flexible tool, especially considering that it is usable with cassette-based systems.) Again, the principle holds. The only real difference is that you must do the INCLUDEs yourself. How? Via the ENTER command. If you haven't noticed it up until now, get your manual and read up on the ",M" option of ENTER. You can merge two or more machine language program files (including cassette files) via the ",M" option! Just as you can with BASIC, except that BASIC always presumes you want to merge.

Are there things to watch out for? Of course. Would I ever give you a method without a handful of caveats? (1) If you ENTER/merge a file with line numbers which match some (or all) of those in memory, you will overwrite the in-memory lines. (2) If you EVER forget the ",M" option, you will wipe out everything in memory so far. (3) You won't find out about duplicate labels until you assemble the whole thing.

But even with all these cautions, I *strongly* recommend that you store each of your hard-earned routines on its own file/cassette. It then becomes almost easy to write the next program that needs some of those same routines.

By the way, caution number 1 in the previous paragraph is the reason I suggested RENumbering the graphics routines to 29000, or some such out of the way place. If you make notes of what each file (or cassette) does, as well as what line numbers it occupies, you can build a powerful library. And a P.S.: generally, .INCLUDE, FILE, and CHAIN commands do not require unique line numbers, so you need not worry about RENumbering sub-routines for use in such environments.

### Gozinta and Gozouta

As long as we are on the subject of machine language techniques, I would like to point out the absolute necessity of establishing entry and exit conventions for each and every subroutine. Again, if you will refer to Program 5 from the February issue, you will note that each routine (GRAPHICS, COLOR, POSITION, PLOT, LOCATE, DRAWTO, and SETCOLOR) specified ENTER and EXIT conditions. For example, GRAPHICS requires that the desired graphics mode number be placed in the A-register before the JSR GRAPHICS. Upon return (RTS), the Y-register is guaranteed to contain a completion status.

On machines with more registers, it is good practice to write subroutines in a way that any registers not specifically designated in the ENTER and EXIT conditions are returned to the caller unchanged. On the 6502 microprocessor, though,

it is generally hard to write any significant routine that does not affect all three registers. Therefore, I have adopted the opposite convention for this CPU: If the ENTER/EXIT comments don't say otherwise, I presume that all registers are garbage when the routine returns. What convention you adopt doesn't really matter; just be sure to stick to one, and only one, method and you won't go wrong.

### FILL From Machine Language

For those of you who are experienced machine language programmers and have not been kept entertained up to this point, take heart. The other question most asked about my February article was something like "so how do you call FILL from assembler?" I guess my comment that FILL from assembly language was exactly the same as from BASIC didn't make a very good impression. So, okay, I know when I'm licked. Herewith is a FILL subroutine, which I would hope you would include with the rest of the graphics routines and keep in your library for future use.

This time, I won't make the mistake of putting in line numbers and using "\*" = " and ".END" This is a straight subroutine; type it in and JSR to it *only* after you have satisfied its ENTER conditions.

---

### FILL H,V

```

; ENTER: Must have previously drawn the right hand edge
;         of the area to be FILLED via JSR's to PLOT and
;         DRAWTO. Just prior to JSR FILL, it must have
;         performed a JSR PLOT to establish the top (or
;         bottom of the line which will define the left edge of
;         the area to be FILLED. FILL presumes that the
;         color to fill with is that which was most recently
;         chosen via JSR COLOR. Finally, on entry, FILL
;         expects the registers to specify the ending position
;         of the line which will define the left edge of the
;         filled area, as follows:
;         h (horizontal) position in X,A registers
;           (X has LSB of position, A has MSB)
;         v (vertical) position in Y register
;
; EXIT:   Y-register has completion status from OS fill
;         routine

```

---

```

FILDAT = 765 ;where XIO wants the fill color
CFILL  = 18  ;fill is XIO 18
; rest of equates are from February article and program;
;
FILL

```

```

JSR POSITION ; subroutine from Feb. 1982
           ; article
LDA SAVECOLOR ; value established via JSR
           ; COLOR
STA FILDAT ; see BASIC manual: color used
           ; for FILL
LDX #6*$10 ; file 6...where S: normally is

```



# STATISTICS FOR RESEARCHERS

## R-STAT

Friendly, easy to use,  
well documented.

### INCLUDES:

- Database with transformations
- ANOVA N - way
- Analysis of COvariance One - way
- Stepwise Multiple Regression  
(with Ridge-regression)
- Univariate Statistics
- Multiple range tests
- Crosstabs
- t - tests
- Graphics
- Menu-driven

DISKETTE & MANUALS **\$350<sup>00</sup>**


### ATARI® DOS II

For a FREE Brochure or further  
information please call or write.

**DSC** P.O. BOX 1035  
CO: CENTRALIA, WA 98531  
(206) 736-7714

VISA & MASTERCHARGE ACCEPTED

# WANTED



## SOFTWARE AUTHORS!

for Apple, Atari, TRS-80, NEC, Hitachi. . .

Brøderbund Software is looking for new authors to join its international team of programmers. If you have a product for the micro market, let us show you the advantages of working with our team of design, production and distribution specialists.

Call or write for our free Authors Kit today or send us a machine readable copy of your work for prompt review under strictest confidence.



Brøderbund Software

1938 Fourth Street, San Rafael, CA 94901 • (415) 456-6424

# RAM

For ATARI

## 48K RAM BOARD FOR THE 400

- Increases memory capacity
- Reduces power consumption
- Reduces heat

48K Board **\$240**

32K Board **\$100**

**INTEC**  
**PERIPHERALS**  
**CORP**

906 E. Highland Ave.  
San Bernardino, CA 92404  
**(714) 881-1533**

ATARI, 400, 800 are Trademarks of ATARI, Inc.

A Revolutionary Concept In Software  
For The ATARI\* 400 and 800 Computers

## The Interactive Storybook

### Sammy The Sea Serpent

A Storybook Program For Children Ages 4 to 7.

### Sammy The Sea Serpent

is the story of an imaginary sea creature who is lost and trying to find his way home. The story is read aloud to your child by a professional actress. While the tale is being told, the child uses the joystick to help Sammy out of some tight spots.

The A side of the cassette contains the interactive story; the B side contains games that the child plays with Sammy.

The program uses voice, sound effects, music, color and mixed graphics.

### Sammy The Sea Serpent

can be used with either the ATARI 400 or 800 and requires 16K. It is available in cassette format only. Price is \$16.95 plus \$2.00 shipping and handling.

Also available at fine computer stores.



Program Design, Inc./11 Idar Court Greenwich, CT 06830  
203-661-8799

ATARI is the registered trademark of ATARI, Inc.



```

LDA #CFILL      ; the fill command (XIO 18)
STA ICCOM,X    ; ... is specified
LDA #0
STA ICAUX1,X   ; remember, XIO 18, #6, 0
JSR CIO        ; and let the OS do the work
RTS            ; ...and give us status in the Y-reg

```

By the way, did you notice that we didn't actually specify "S:" for the XIO, as specified in the BASIC manual? That's because the BASIC manual doesn't tell the whole truth. If you perform XIO on an already open file, the operating system ignores any filename you give it! Want to save a little space in your BASIC programs? Use 'XIO 18,#6,0,0,junk\$' where 'junk' is *any* string variable you happen to be using for any other purpose in your program.

### Inside Atari BASIC: Part 6

Last month, we delved into the hopefully-no-longer-mysterious details on how string and array space is allocated from Atari BASIC and BASIC A+. We showed how to fool BASIC into believing that a perfectly ordinary string was located smack in the middle of screen space. The advantage of such deceptions is that BASIC can move strings of bytes at extremely high speeds, faster than you could ever hope to accomplish with any BASIC subroutine.

We did not discuss one other significant use of such string moves: Player/Missile Graphics. Obviously, if you can move the screen bytes around, you can move the players around just as well, and just as fast. Again, several games and utilities now available on the market use just this technique.

I also promised in the last column to tell of possible uses for multiple variables in the same address space (that is, having a string and an array occupying the same hunk of memory). If the idea interests you, read on.

One thing which BASICs in general lack is a good means of handling record input/output. How many times have you seen programs doing disk I/O using PRINT# and INPUT#? Yuch. (I have several reasons for that "yuch," but the best one is simply that PRINT#ing an item means that the number of disk bytes occupied depends upon the contents of the item.) But what is the alternative? With many BASICs, there is none. With Atari BASIC there is at least GET# and PUT#, but they are slow. So let us examine a way to make PRINT# and INPUT# work for us, instead of against us.

First, we will examine a small program:

```

100 DIM RECORD$(1),NAME$(20),QUANTITY
    ORDERED(0)
110 OPEN #1,8,0,"D:JUNK"

```

```

120 VVTP = PEEK(134) + 256*PEEK(135)
130 POKE VVTP+4,27 : POKE VVTP+6,27
140 GOSUB 900
150 PRINT "GIVE NAME AND QUANTITY:"
160 INPUT NAME$
170 INPUT TEMP : QUANTITYORDERED(0) =
    TEMP
180 PRINT #1;RECORD$
190 CLOSE #1
200 REM --- READ FILE WE JUST CREATED
    ---
210 OPEN #1,4,0,"D:JUNK"
220 GOSUB 900
230 INPUT #1,RECORD$
240 PRINT "WE READ BACK IN:"
250 PRINT ,,NAME$
260 PRINT ,,QUANTITYORDERED(0)
270 CLOSE #1
290 END
900 REM --- CLEAR THE VARIABLES ---
910 NAME$=" " : REM
    20 BLANKS
920 QUANTITYORDERED(0)=0
930 RETURN

```

Surprised? Even though we cleared the variables in line 220, the input of line 230 re-read them from the file. How? Because line 130 set the dimension and length of RECORD\$ to 27, which includes the original single byte of RECORD\$, the 20 bytes of NAME\$, and the six bytes of the single element of the array QUANTITYORDERED. So PRINT# thought it had to print 27 bytes for RECORD\$, and INPUT# allowed RECORD\$ to accept up to 27 bytes.

Wow! With one fell swoop we have managed to allow fast disk I/O of any sized record, right? Wrong. Unfortunately, there are several limitations



# Royal Software



WE DEAL EXCLUSIVELY IN PRODUCTS FOR THE ATARI (THE BEST) COMPUTER

YOUR MARKETPLACE FOR:

# ATARI

## ACTION QUEST



A real time Adventure game played with joystick. You, as the ghost, move from room to room in an attempt to capture valuable prizes while eluding capture by strange creatures.

**\$26.90**  
16K DISK OR TAPE

## MEGALEGS

ARCADE QUALITY MACHINE LANGUAGE GAME



16K DISK  
OR  
TAPE **\$31.40**

**FAST ACTION...**  
Kill the attacking creatures. It's a spectacular arcade game with lots of excitement! Sure to be one of the TOP games in the months to come.

## PRO-FOOTBALL



Play against the computer or another player. Over 25 offense and defence plays. The BEST football game yet.

16K  
**\$26.90 TAPE**  
**\$31.40 DISK**

## HARDWARE

800 Computer 16K	\$648
800 Computer 48K	\$757
400 Computer 16K	\$338
810 Disk Drive	\$448
850 Interface	\$178
410 Recorder	\$ 78
825 Printer	\$599
16K Ram module	\$ 69
32K Ram module	\$109
Graphics Tablet	\$278

Trade your 400 or older 800 for the new model 800 - Call

## SOFTWARE


PAC MAN (cart.)	\$39.50
Centipede (cart.)	\$39.50
Microsoft Basic (D)	\$79.90
Ghost Hunter (T)	\$25.50
Ali Baba (D) 32K	\$28.90
Protector (T) 32K	\$22.45
Apple Panic (D)	\$26.90
Threshold (D) 40K	\$33.90
GOLF (D)	\$35.10
Wizard of Wor (D)	\$35.10
Text Wizard (D)	\$87.90
Dodge Racer (T)	\$20.20
Chicken (T)	\$20.20
De Re Atari	\$17.90
Atari Games Book	\$13.90
Personal Finance	\$67.50
Zork 1 or II (D)	\$35.90
Deluxe Invaders (D)	\$31.40
Eastern Front	\$25.40
Mousekattack (D)	\$31.40
Galactic Chase (T)	\$22.40
Bug Attack (T,D)	\$26.90
Star Raiders (Cart)	\$44.90
Missile Command	\$39.50
Midnight Magic (D)	\$31.45
Tanktics (T,D)	\$24.65
Controller (D)	\$27.00

Call or Write for

# FREE

ATARI PRODUCTS CATALOG  
with nearly 1000 items

## Canyon Climber

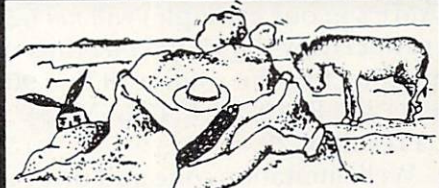

Smart **DONKEYS,** boulders and birds dropping rocks try to stop you from reaching the top. A real challenge. Arcade quality.

16K  
DISK **\$26.90** TAPE **\$26.90**

## CROSSFIRE

The aliens have landed and it's your job to save the city.

(If you can!) **TOP RATE GAME, ARCADE QUALITY, HI-RES Graphics & Sound.**

32K **\$26.90**  
DISK or TAPE



## FROGGER

This is the genuine **FROGGER**

game that you see in the arcades. Made by the same people that made Jawbreaker (One of the top ten sellers.)

16K DISK OR TAPE  
**\$31.40**



**TO ORDER CALL TOLL FREE 800-235-5759**

FOR INFORMATION  
CALL 805-967-3889

**HOW TO ORDER:** Send check or money order or call our toll free number and use your Visa Card. Shipping on software is \$2.00 per order anywhere in USA. Hardware shipping call for cost. CA residents add 6% sales tax. Add 3% for VISA or MC. Equipment subject to price change and availability without notice.

Store Hours  
8 am — 6 pm  
Mon. — Sat.

Royal Software, 5138 Hollister Avenue  
Santa Barbara, CA 93111

\* Atari is Trademark of Atari Inc.



to this technique. (1) The record cannot be over 255 bytes long or INPUT# won't be able to retrieve it all. And any size over 127 bytes will wipe out routines/data in the lower half of page \$600 memory. (2) The record cannot contain a RETURN (155 decimal, 9B hex) character. It will print fine, but the INPUT# will terminate on the first RETURN it sees. (3) The other strings in the record (NAME\$ in our example) will *not* have their lengths set properly by the INPUT#, thus necessitating something like the routine at line 900. But if you insert "280 PRINT LEN(NAME\$)", you will always get a result of 20.

Well, limitations one and three are easy enough to predict and understand, but how do you insure that your data does not contain a RETURN code? For strings which have been INPUT by a user, that's easy: the RETURN code will never appear in such a string. But what about numbers? Remember that we will be printing the internal form of Atari decimal floating point numbers. Can such numbers contain a byte with a value of 155 (\$9B)? Yes, but such a number would be in the range of -1E-74 to -9.E-73, which is unlikely enough to ignore for most purposes.

So, in summary, is this make-a-record technique useful? I'm not sure. Certainly BGET/BPUT or RGET/RPUT from BASIC A+ or their USR equivalents under Atari BASIC are much easier to code and use. And, yet, there is a certain elegance to record-oriented techniques which is not entirely lost to me. I probably will stick with the constructs we invented for BASIC A+, but I would respect a program using the above techniques.

A few last comments: the pokes of line 130 depend on RECORD\$ being the first variable defined. Recall my comments from last month about LISTing and reENTERing a program to insure a particular order of definition. Also, if you need to alter a variable other than variable number zero, remember that the formulas are:

VVTP + 8 \* VNUM + 4 for the LSB of the length  
VVTP + 8 \* VNUM + 6 for the LSB of the DIMension

(and, again, see last month's article for fuller explanations).

And, finally, I really would be interested in hearing from anyone who uses the techniques I have devised here to produce a unique, real-world program that does things that can't be done otherwise.

### Fun With FMS, Canto The First

Remember that fix for burst I/O I gave you in the May, 1982, issue? Did you try it? Did it prevent burst I/O errors? Yep. Did it slow down every kind of disk read? Yep. Oooooopsy daisy. Well, you can't be completely right all the time. This month,

we will try again.

First, I would like to explain, in terms of the FMS listing and the commentary (Chapter 12 – BURST I/O, *Inside Atari DOS*, **COMPUTE! Books**) why the fix I gave you in the May, 1982, issue worked insofar as it fixed the burst I/O problems.

To begin with, examine the code at locations \$09F8-\$09FD and \$0AD2-\$0AD7. These are the locations in PUT-BYTE and GET-BYTE, respectively, where the burst I/O routine is called. But lo! In PUT-BYTE, the JSR to burst I/O is directly preceded by a BCS, meaning that burst I/O won't occur unless carry is clear. But, in GET-BYTE, the JSR to burst I/O is directly preceded by a BCC – burst I/O occurs in read mode only if carry is set!

Now, if you examine the label "WTBUR" at \$0A1F, you will note that the first thing that occurs is a test of FCBFLG to find out if we are in update mode or not. If we are updating, we don't burst. But note that GET-BYTE called the label "RTBUR", AFTER the test, and so would always burst, whether in update mode or not. What I tried to do was change the "JSR RTBUR" (at \$0AD4) to a "JSR WTBUR" and then use the carry flag to distinguish between the type of request (I changed the BMI at \$0A24 to a BCC). *Great!* It worked! Except...it worked *too* well. Unfortunately, FCBFLG is zero (and therefore plus) when we have a file open for read only; so, therefore, the burst I/O was suppressed for *all* reads. Nuts.

We try again, using a slightly different approach. We will still count on the carry being set when called from PUT-BYTE and reset when called from GET-BYTE. This time, though, we will examine the actual I/O mode in use. FMS receives the I/O mode from CIO when the file is opened and places it in FCBOTC. Recall that the only legal values are 4, 6, 8, 9, and 12. Well, burst I/O is only illegal in modes 6 (read directory) and 12 (update). But mode 6 is handled separately (see \$0AC5-\$0ACB), so 12 is all we are really concerned with. Anyway, without further ado, here's the listing of the FMS patch:

```

*=$0A1F
;
; first, patch the code where WTBUR used to be
;
WTBUR
BURSTIO
    LDA    FCBOTC,X ; Open Type Code byte
    EOR    #$0C     ; check for mode 12...
                    ; update
    BEQ    NOBURST ; it IS update...don't burst
    ROR    A        ; move carry to MSB of A
                    ; register
    NOP          ; filler only
TBURST
; ... and the STA BURTYP remains ... but now BURTYP is

```



This Publication  
is available in  
Microform.




**University Microfilms  
International**

Please send additional information  
for \_\_\_\_\_  
Name \_\_\_\_\_  
Institution \_\_\_\_\_  
Street \_\_\_\_\_  
City \_\_\_\_\_  
State \_\_\_\_\_ Zip \_\_\_\_\_

300 North Zeeb Road  
Dept. P.R.  
Ann Arbor, Mi. 48106

**INTRUDER:**




Four nuclear reactors have gone out of control, ready to melt down in only minutes. They are also protected by pre-programmed robots that can destroy anything in seconds. Your mission is to shut down the reactors and capture the robots before a melt down occurs. But before you enter ... remember you are the...

**INTRUDER!**

16K Cassette ..... 29.95 US funds  
24K Disk ..... 34.95 US funds

**ALIEN SWARM**

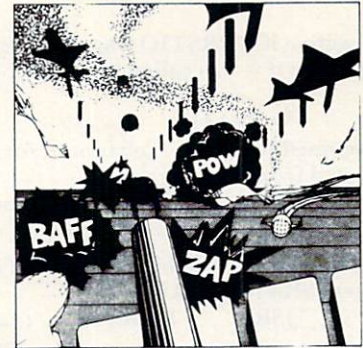

Space Invaders! Asteroids! Meteor Showers and more! You have defended them all. But can you survive the fetish attack of the...

**ALIEN SWARM**

100% Machine - Joysticks  
16K Cassette ..... 29.95 US funds  
16K Disk ..... 34.95 US funds

**Now available...ALIEN NUMBER**

An educational arcade game.  
Cassette ..... \$29.95  
Disk ..... \$34.95

**INHOME**



**SOFTWARE**

**CRYPTS OF TERROR**



You are in search of the true meaning to life, but first you must battle each level in search of the magic ring. Will you survive this horror? What lurks in these deep and dark...

**CRYPTS OF TERROR**

Joystick - BASIC required.  
16K Cassette ..... 29.95 US funds  
16K Disk ..... 34.95 US funds

**MATH PACK + - ÷ ×**

Atari brought the computer age home. Now we bring home the educational software.

MATH PACK was written for the educational side of the Atari by professional educators in the field of mathematics. All four independant math programs use Atari's sound and graphics to make learning more fun and enjoyable for your whole family. A final summary at the end of the programs lets you see how well you've done or what area needs to be practiced. Age and skill levels.

- 1) Math Pack Drill\*
- 2) Equations\* \*\*
- 3) Jumble\* \*\*
- 4) Digit Span\*

\*BASIC and \*\* Joysticks required.

16K - 2 tapes - 39.95 U.S. funds.  
16K - Disk - 42.95 U.S. funds.

Check your local computer dealer or order direct from us.  
Ordering: VISA, MasterCard, American Express and Cheques accepted.

Please include all numbers on cards.  
Include phone number with all orders.

Add \$2.00 for shipping and handling per item ordered.

Please specify which program ordering.

\*DEALER INQUIRIES WELCOME

**INHOME  
SOFTWARE**

PH. 1-416-961-2760

1728 Avenue Rd.  
Toronto, Ontario  
Canada M5M3Y6



```

; negative if BURSTIO was called from GET-BYTE and
; positive if it was called from PUT-BYTE.
;
;   *= $0A41
; so we must patch here to account for the sense of being
; inverted from the original.
;   BPL   WRBUR   ; called from PUT-BYTE
;   *= $0AD4
; finally, we must patch the GET-BYTE call so that it no
; longer JSR's to RTBUR.
;   JSR   BURSTIO ; call the common burst
;                   routine
;
; .END

```

And for those of you who don't want to type all that in, you might simply use BUG to do the following changes:

```

C A20 < 82,13,49,0C,F0,24,6A,EA
C A41 < 10
C AD5 < 1F

```

And, last but not least, from BASIC you may use the following:

```

POKE 2592,130
POKE 2593,19
POKE 2594,73
POKE 2595,12
POKE 2596,240
POKE 2597,36
POKE 2598,106
POKE 2599,234
POKE 2625,16
POKE 2773,13

```

### Fun With FMS, Canto The Second

Not long ago, an OSS customer told me that he couldn't use Atari DOS to SAVE (option K on the menu) the contents of ROM. "How sneaky," cried I, "Best to use the SAVE command under OS/A +. We wouldn't do anything that nasty to you!"

But we did. And we do. And it isn't because we or Atari are sneaky or nasty; it is yet another phenomenon of burst I/O. Recall that when the burst I/O test is passed, FMS calls SIO to transfer the sectors of data directly from the user's buffer space. In order to do so, though, it must write the sector link information (last three physical bytes in a sector) into the correct spot in the user's buffer before calling SIO. Then, when SIO returns, it restores those three bytes and tries to write the next sector the same way. Again, if you have *Inside Atari DOS*, you can follow this happening at addresses \$0A52-\$0A7A, in the "WRBUR" code.

Ah...but what happens when you try to do burst I/O writes from ROM? FMS blindly tries to put its goodies into those three bytes and call SIO. SIO does what it is told, and FMS thinks that all is OK. Except that all is *not* OK! Those three bytes did *not* get changed, so what was written to the disk is garbage. And even ERasing the file won't work,

because the sector links are badly messed up. Crunchy, crunchy goes the disk, under worst-case circumstances.

Now this restriction is fairly easy to get around: one simply writes a program (in BASIC or machine language) which writes the desired bytes to the disk one at a time, thus preventing burst I/O. So I don't feel that I am giving away deep, dark Atari secrets when I give you an easier method to prevent burst I/O. Simply do either of the following:

```

from BUG:   C A2E < 0
from BASIC: POKE 2606,0

```

Again, for those of you with the FMS listing, note that what we are doing is changing the AND #\$02 which checks for text mode (the read and write text line commands are \$05 and \$09, neither of which have bit \$02 turned on) into an AND #\$00 instruction, thus fooling the BEQ that follows into thinking that FMS can't do burst I/O because it's doing text mode I/O. Not too terribly tricky, and it works well.

I cannot recommend that you make this patch a permanent part of most system disks, since it completely disables burst I/O and makes the system load and save files considerably slower. Change it, use it, and then forget it. ©

## ATARI OWNERS!

20% OFF ALL SOFTWARE

Adventure International \* Avalon Hill \*  
 Crystalware \* Automated Simulations \*  
 Arcade Plus \* Gebelli Software \* On Line  
 Systems \* Horizon Simulations \* IDSI \*  
 Artworx \* C.E. Software

### Order from us and get:

Free Newsletter - Evaluations, Reviews!  
 No Club To Join - No Membership Fees!  
 Free Catalog!  
 Free Charge Card Use!  
 Free Phone Orders (we deduct the cost of the call)

### COMPARE:

	Retail	Your Cost
Crush, Crumble, and Stomp	29.95	23.95
Jawbreaker	29.95	23.95
Mouseattack	34.95	27.95

To Order Call:  
**(412) 235-2970**

Or Write:

**MIDEASTERN SOFTWARE**  
**Box 247 New Florence, PA 15944**

Send money order, certified check, personal check (allow two weeks to clear), C.O.D.

Add \$2.00 shipping per order  
 PA residents add 6% sales tax

Prices subject to change without notice.



# SPACE ACE



## SO... YOU THINK YOU'RE A SPACE ACE!

- Can you blast through the deadly asteroid fields?
- Can you survive robot space bombs?
- Can you handle invisible Silurian space mines?
- Can you dodge a rotating death vortex?
- Can you defeat the alien battle cruisers?

### GOOD LUCK CHARLEY!

You'll need luck and skill to complete your first mission at drive level I. If, by beginner's luck, you progress to Patrolmen at drive level II, the hyper-asteroids and Silurian mines will send you back to the Academy for a refresher course in "Beginning Pilot". Should the incredible happen, and you get your ship to drive level III, and are able to blast your way through the asteroids and mines, the space death bombs will get you—just like all the others. If you get past the bombs, there's more, and more, and more!

## SO... YOU THINK YOU CAN HANDLE IT?

Try it, if you're right, you're a... SPACE ACE!

*A great new and challenging space game by Greg Young*

- Hi-res Graphics
- Requires 16K and all of the potential of the Atari™ 400/800
- Disk/Cassette
- Joy stick
- 100% machine language
- Multiple levels of play
- Great Audio
- Time limit options
- Bonus scoring

**\$ 29.95**

SEND CHECK OR MONEY ORDER TO:

LONDON SOFTWARE  
374 Wildwood Avenue  
Piedmont, CA 94611

Ph. orders (415) 893-1090  
Visa/Mastercharge  
Dealer Inquiries Invited.

Please add \$1.50 postage & handling. Calif. residents add additional \$1.95 tax.  
Atari 400/800 is a registered trademark of Atari, Inc.

## COMPUTE!

is looking for  
applications  
articles

on

Sinclair ZX-81,

Texas Instruments

TI-99/4A,

and

Radio Shack

Color Computer.



## BYTE-A-BIT COMPUTING CO.

"The Software Specialists" offer...

# ★ THE STATE OF THE ART ★ IN COMPUTER SOFTWARE

● NUMBER STUMPER:  
24K CAS. \$19.95 32K DISK 24.95

AN ARCADE GAME FOR ONE OR TWO PLAYERS.  
USES JOYSTICKS.

● UTILITY PAK #1:  
32K DISK \$29.95

DOS UTILITIES, AUTORUN, SYS, RENUMBER, VARIABLE LISTER  
AND CHANGER, AUTOMENU.

● UTILITY PAK #2:  
32K DISK \$24.95  
(PRESENTLY UNDER DEVELOPMENT)

DISK-SPEED ADJUST, CONVERT DECIMAL-HEX-BINARY #'S,  
COLOR & SOUND PROGRAMMER'S AID,  
SAVE-A-SCREEN UTILITY.

● GAME PAK #1:  
24K CAS. \$14.95 32K DISK \$19.95

SCOREFOUR, DOTS, FIFTEEN, PLUS SURPRISE GAME!  
(A TOTAL OF FOUR GAMES). USES JOYSTICKS.

BYTE-A-BIT  
OFFERS YOU

**FREE:** PROGRAMMING  
CONSULTATION

CALL OR WRITE FOR A CATALOG OF OUR  
PROGRAMS AND DETAILED INFORMATION ON  
OUR FREE OFFERINGS. SPECIALISTS IN SOFTWARE  
FOR THE ATARI™ COMPUTER. GAMES, UTILITIES  
AND CUSTOM PROGRAMMING AVAILABLE.

DEALERS INQUIRIES INVITED

BYTE-A-BIT COMPUTING CO.

28 ORCHID ROAD  
LEVITTOWN, N.Y. 11756



(516) 796-1212

ADD \$2.50 SHIPPING AND INSURANCE. N.Y. RESIDENTS  
ADD SALES TAX. C.O.D. OR BLUE LABEL SHIPMENT ADD'L.

"Our Software Is  
Guaranteed For As Long  
As You Own It" If Any  
Program EVER Fails To  
Run, We Will Replace  
It FREE!!

ALL OUR SOFTWARE  
MAXIMIZES THE USE  
OF ATARI GRAPHICS  
AND SOUND



After you've written a FORTH program, you can metacompile, leaving out words which are not a working part of the application.

## The FORTH Page

# Headless Metacompilation

Richard Mansfield  
Assistant Editor

Somehow, the prefix *meta* always sounds both glamorous and forbidding. Attached to a word, *meta* usually adds a special meaning involving "over" or "beyond" or "transformed" — it can seem paradoxical. A *metatruck* would be a truck that carries other trucks. MetaFORTH, likewise, means using FORTH to compile itself.

"FORTH for PET," an adaptation of FORTH by L. C. Cargile and Michael Riley, supports a FORTH Metacompiler (for Upgrade or 4.0 BASIC with 32K RAM) which can be purchased separately for \$30. "FORTH for PET" itself does not require the extra memory.

The goal of metacompilation is to reduce memory size or modify FORTH itself by recompiling the entire FORTH dictionary. Obviously, you cannot eliminate words like DUP and SWAP. They are in the definitions of many other words and will always be central in any working FORTH application.

However, there are applications which will not need keyboard entry, disk access, or other such normal FORTH capabilities. If you write a game which does not involve the disk, you could metacompile a special FORTH which does not have such words as FLUSH, LOAD, etc.

### Clear, Step-by-step Instructions

The Metacompiler's instruction booklet is written so clearly that a relative novice in FORTH will have little difficulty with it. The process of metacompilation is essentially straightforward and the manual leads you through it, step-by-step, explaining what's happening along the way. You load your ordinary FORTH into the computer, load screen ten from the Metacompiler disk, and it requests a target address for a new, temporary FORTH. Since regular FORTH starts at hex \$0400, you can respond with \$4000 as the start of the new version. Both will be resident in memory simultaneously, but after metacompilation, control of the computer is passed to the upper one.

After you've indicated your target address,

you can sit back and watch the dictionary being recreated at the new location. The words are put on screen as they are recompiled. Or you can leave and come back about six minutes later to find two FORTHS in the computer. You'll be able to communicate with the upper version and it will respond normally.

The final step is to compile back down, giving \$0400 as the target this time, and making any changes you want to the Metacompiler's disk screens. These changes will be reflected in the new FORTH you are creating.

The manual takes you carefully through an entire editing process where you create a stand-alone "Calendar" program. This calendar application is truly a FORTH transfigured: when run, it uses DUP and other key words, of course, but it will not recognize them from the keyboard. It can do nothing with the disk. In fact, it understands only the few words that relate to the calendar functions to which it is dedicated. What's more, it's *headless*.

### Removing Heads

In FORTH, there are four "fields" to an ordinary word: the name, link, code, and parameter fields. The "head" of a word is the name and link fields, taken together. If a word in your new FORTH application will only be used in further definitions and will never be independently executed, you can type DROP-HEADS before it on the Metacompiler disk. That word and any words after it will be compiled without name or link fields when the new FORTH is created. To resume head compilation, type COMPILE-HEADS.

### An Excellent FORTH Adaptation

It is gratifying to find this metacompilation capability, a valuable and sophisticated technique, available on PET/CBM computers. Equally pleasing is the excellent FORTH implementation by the same authors, "FORTH for PET" (\$50, 16 or 32K, Upgrade or 4.0 BASIC, with disk) to which this Metacompiler is an optional addition.

"FORTH for PET" is a full FIG FORTH system (allowing all FORTH 79 extensions as an option), a complete assembler, several sample programs, many utilities, and introductory and reference manuals. Perhaps most attractive is the fact that the full, powerful Commodore screen editing system works the same way that it works in BASIC. You move anywhere fast and modify screens with great ease. Other versions of FORTH are sometimes encumbered by awkward editing procedures.

"FORTH for PET," and "Metacompiler for FORTH" are both available from A B Computers, 525 Bethlehem Pike, Colmar, PA, 18915. ©



*If you've ever wanted to thoroughly document, explore, and understand your computer's BASIC or Operating Systems – the techniques and programs here are your tools. Written for OSI, these ideas can be modified for other computers. Next month this article concludes with additional programs and examples.*

## Resource Part I:

# Mapping Machine Language Code

T. R. Berger  
Coon Rapids, MN

Have you ever tried to document your machine software by annotating disassemblies? Have you ever tried to move these programs by reconstructing assembler source listings from disassemblies? If so, you know what a huge investment of time is needed. This article covers a group of BASIC programs which will facilitate regenerating fully documented assembler source listings starting from machine language programs in much less time than the painful direct route.

When I undertook to write these programs, I did not even dream how powerful they would be. I never really anticipated regenerating a source listing of 8K OSI Microsoft Disk BASIC. When I realized that this task could be done, what was one simple program expanded into the four presented here. A much modified and improved version of the single program which started this all off is also included here. If OS65D would allow six buffers to be open at once, these programs could be vastly speeded up and simplified.

These programs are written in BASIC for disk based OSI computers. However, the programs are carefully documented so that those using other 6502 machines with different disassemblers should have no difficulty in copying the idea. The programs accept as input an ASCII file produced by the OSI version of the Apple disassembler (see *Dr. Dobbs Journal*, September, 1976, p. 22). The output is a collection of ASCII files which include the

following:

1. An assembly source listing of code which will reassemble at the same location without further editing.
2. Equate files necessary to run the assembly source through an assembler.
3. Separate cross reference files for each of the following:
  - a. Zpage addresses,
  - b. Jumps and jumps to subroutines,
  - c. Memory calls, and
  - d. Branches.

A single pass program RESOURCE S is included for resourcing small programs. On a 48K C8PDF it has no trouble handling OS65D. Since only symbols and cross references are kept in memory, a 32K machine should also have no trouble. Cross reference strings in RESOURCE S are of limited size so that the program will crash in attempting to cover 8K BASIC. The Zpage cross references to \$AC overrun about halfway through. Since RESOURCE S is a compressed version of the program package presented, I will comment very little on it. When there are a very large number of cross reference strings, the program slows way down due to garbage collection. In Microsoft BASIC, garbage collection times go up approximately as the square of the number of strings in memory (and not their size).

### Run Times Approached 24 Hours

I have written this package so that hobbyists can understand their most commonly used language: BASIC. A source file for 8K BASIC is colossal. Therefore, many shortcuts are necessary to complete the resourcing task. I originally tried to enlarge RESOURCE S to cope with the job. OS65D has only two disk buffers requiring that a large amount of information be kept in memory for a single program. So many strings were generated and garbage collection time became so great that run times approached 24 hours. Clearly this is not the way to go. I broke the task into small pieces, each being completed in a reasonable amount of time.

On 8" floppies the BASIC disassembler source (\$03A1 - \$2300) takes 28 tracks (84K). Those using minifloppies must tackle BASIC in three or more passes, using the cross reference tables to properly join the final product.

The final product, scattered through several files, takes up about 36 tracks. There is no hope of assembling these files without a linking assembler. (Leroy Erickson has written such an extension for the OSI Assembler.) However, printout of the source and the cross reference tables greatly sim-



plifies the annotation and documentation process. After one pass of RESOURCE S over OS65D, it was possible to reassemble OS65D at the same location. After about two hours of editing, a file was obtained which assembles anywhere.

Using my maps of OS65D and Jim Butterfield's maps of BASIC, you should be able to obtain fully documented source listings of both BASIC and OS65D. I would hope to see more articles using specific parts of OS65D and BASIC. Namely, what are some subroutines, how do they work, how does one use them, and how does one resource them?

The entire program package presented here is written in BASIC. This sped implementation and modification time. It also makes the programs easier to understand. The price paid is runtime, which is considerable over 8K BASIC. Efforts have been made to optimize runtimes, especially on inner loops. This adds steps to the process, but significantly reduces program running times.

Of course, one must edit the files generated by these programs. I use a group of utilities which constitute a useful BASIC text file editor and processor. I will describe these utilities in a future article.

The three most useful utilities are a transfer program to move large text files around, a print program to output large files to a printer, and a fast sorter to sort symbol tables. A further useful addition is a large text file single pass character-oriented line editor.

### How It Works

The first program (PASS 1) takes the disassembly listing (which I will call SOURCE) and compresses it into a scratch file (which I call SCRATCH). The main working file is SCRATCH. It is about 25% smaller than SOURCE and serves as input to the other programs. A typical line of SOURCE looks as follows:

```
1A3D BD11B0 LDA $B011,X.
```

In SCRATCH this same line would be:

```
1A3D LDA HHB011,X.
```

The code field has been eliminated and \$B011 has been changed to a six letter symbol. All four digit operands \$XXXX are changed to six letter symbols HHXXXX, which is the maximum size for symbols in OSI's Assembler. Except for immediate operands, two digit operands \$YY are replaced by six letter symbols HHZZYY. Further, the first H in every operand is always aligned as the eleventh letter in a line. BASIC is much too slow to search a line for a symbol. Aligning symbols makes them easy to find when editing. For example,

```
MID$(IN$,11,6)
```

removes a symbol from a line IN\$. The 'H' in

position eleven distinguishes a symbol. The 'Z' in position thirteen distinguishes a Zpage reference.

```
A line in SOURCE
```

```
1A40 FF ???
```

would appear in SCRATCH as

```
1A40 .BYTE $FF.
```

This step makes the resource file assembler ready. Bad disassembly of opcodes must be fixed by editing the final file if a true source file is needed. In particular, tables and text are not resourced correctly, only made assembler-ready.

The first program also builds a table of two byte operands (which I will call SYMBOL). SYMBOL is used in PASS 2 to generate labels and an equate file of two byte operands. Since SYMBOL is searched repeatedly in PASS 2, it must be sorted. Sorting SYMBOL means a fast binary search can be used which is many times faster than a sequential search. (For BASIC, this addition reduced line process times in PASS 2 from about 5 seconds per line to less than 1 second per line.) Since BASIC requires 800 symbols, this search method cuts hours off PASS 2. Accordingly, PASS 1 keeps a sorted symbol table.

PASS 2 generates the resource file (which I call OBJECT). It reads one line of SCRATCH:

```
1A3D LDA HHB011,X.
```

It searches SYMBOL for 1A3D. If 1A3D is found, a numbered line

```
10000 HH1A3D LDA HHB011,X
```

is output to OBJECT. Since 1A3D is now defined by a label, it is marked as 'used' in SYMBOL. If 1A3D is not found, a numbered line

```
10000 LDA HHB011,X
```

is output to OBJECT. After OBJECT is complete, the unmarked symbols in SYMBOL are operands which are not defined by labels in OBJECT. Thus, an equate file (which I call EQUATE) is written using these unmarked terms from SYMBOL. For example, if 1A3D is unmarked, it would be written to EQUATE as a numbered line

```
5000 HH1A3D = $1A3D.
```

Except for Zpage labels, OBJECT and EQUATE are ready for the assembler.

PASS 3 generates the various symbol tables. The symbols are picked out of SCRATCH along with their addresses. A symbol HHXXXX is stored in a string SS\$(I) as XXXX. A check is run to see if the symbol already appears in the table. If it does not, the counter SN is incremented and the symbol is added. This list is stored as a sorted table.

Suppose that HHXXXX appears in Line YYYY and that SS\$(I) = XXXX. Then UYYYY is ap-



pendent to the right hand end of SA\$(I) where U is chosen to give information about the opcode on line YYYY. Some thought went into the choice of U. In the branch table, the middle letter of a branch instruction comes closest to distinguishing all branches. Thus U is the middle letter of the opcode. Again in the JMP and JSR table, the middle letter distinguishes JMP from JSR. Thus U is M or S in this case. The first letter of the opcode is chosen for the memory table.

In decoding programs, I have found that the

#### Example 1.

```

10000          .BYTE $17
10010          LDA #$16
10020          STA HHZC7
10030 HH18DD   JSR HH18ED
10040          JSR HH19D1
10050          STA HHZC5
10060          STY HHZC6
10070          DEC HHZC7
10080          BMI HH1922
10090          BNE HH18DD
10100 HH18ED   JSR HH19BC
10110          LDA (HHZC5,X)
10120          TAY
10130          LSR A
10140          BCC HH1901
10150          LSR A
10160          BCS HH1910
10170          CMP #$22
10180          BEQ HH1910
10190          AND #$07
10200          ORA #$80
10210 HH1901   LSR A
10220          TAX
10230          LDA HH17A5,X
10240          BCS HH190C
10250          LSR A
10260          LSR A
10270          LSR A
10280          LSR A
10290 HH190C   AND #$0F
10300          BNE HH1914
10310 HH1910   LDY #$80
10320          LDA #$00
10330 HH1914   TAX
10340          LDA HH17E9,X
10350          STA HHZC1
10360          AND #$03
10370          STA HHZC2
10380          LDA HHZC8
10390          BNE HH1923
10400 HH1922   RTS
10410 HH1923   TYA
10420          AND #$8F
10430          TAX
10440          TYA
10450          LDY #$03
10460          CPX #$8A
10470          BEQ HH1939
10480          LSR A
10490          BCC HH1939
10500          LSR A
10510          LSR A

```

most important fact to know about Zpage opcodes is their addressing mode. That is, is an opcode indexed or not? Thus, U is the extreme right hand symbol of the disassembly line. This includes ), X, and Y. It is not possible from this to tell whether the Y means indexed or indirect indexed. However, given the simplicity of this approach, it is adequate.

If SA\$(I) becomes too long, it is written to a cross reference file and SA\$(I) is emptied. (In RESOURCE S this step is not performed, the program bombs when SA\$(I) becomes too long.) These "long strings" will appear out of order in the file. (The first few cross references may be out of order.) The symbol table can be resorted by most any sorting program. As it stands, the table is "almost in order."

PASS 4 generates the Zpage equate file which I call ZEQUATE. This is done using the Zpage cross reference file generated in PASS 3. The file resembles the EQUATE file.

In resourcing a large program, there will not be enough room on one disk for all the files generated. SCRATCH, and various other files may be moved using a transfer utility. Symbol and cross reference files may be sorted using a sort utility. Final files may be printed using an output utility.

Example 1 shows the OBJECT file (resourced assembly language) for the beginning of the disassembler in the Extended Monitor. Example 2 gives the two equate files. Example 3 gives the output from the Assembler using these three files. Example 4 gives the four cross reference tables. The first address in each row is the symbol. The other addresses following are the cross references, with some indication as to opcode.

#### How To Use It

STEP 1) Creating a SOURCE file.

If you plan to resource BASIC, you must move the Extended Monitor since it overlays part of BASIC. In another article, I will give explicit instructions on how to do this. I find it handy to have the Extended Monitor available while BASIC is resident.

After trying several methods, I've decided that the following is the easiest way to generate a SOURCE file. It uses the disk output capability of OS65D. The code you are resourcing should not overlay the disk buffer used. (Video with polled keyboard is assumed; otherwise, recheck the I/O flags.)

- a) Initialize a fresh disk.
- b) Copy the directory Track D onto this disk using OS65D's copy utility (D is Track 8 on 8" floppies).
- c) Create files for all empty tracks except Tracks 0 and D. Delete all directory entries on



the new disk.

- d) Load the machine language program to be resourced.
- e) Load and run the Extended Monitor.

We must now set all the various pointers for a disk buffer. To resource BASIC you need a very large file. Let the first available track be N where the directory is on Track N-6 (N=9 on 8" floppies).

- f) Choose a first track number N for your SOURCE file. Let M be the last track number on the disk (M=76 on 8" floppies). Do not choose N so that either N=0 or the directory track is included in the range of N to M.
- g) Using the "at" (@) sign command, set the following buffer values. (These are valid for OS65D V3.2, i.e. 8" floppies. The correct values for minifloppies are given in the *OS65D User's Guide*.)

ADDRESS (\$)	ADDRESS (D)	VALUE	
2326	8998	7E	BUFFER START ADDRESS
2327	8999	31	
2328	9000	7E	BUFFER END ADDRESS
2329	9001	3D	
232A	9002	N	FIRST TRACK OF FILE
232B	9003	M	LAST TRACK OF FILE
232C	9004	N	CURRENT BUFFER TRACK
232D	9005	0	DIRTY BUFFER FLAG
23C3	9155	7E	ADDRESS DISK OUTPUT
23C4	9156	31	(CURRENT BUFFER ADDR.)

- h) Mount the fresh disk.
- I) From EM type (i.e. turn on disk output)  
**!IO ,22 <return>**.

The next few steps write directly to the disk without error correction. If you make an error, perform step l) and restart at step g. Presumably you know the start (\$XXXX) and the finish (\$YYYY) addresses of the code to be resourced. For BASIC these are \$XXXX=\$03A1 and \$YYYY=\$2300. For OS65D these are \$XXXX=\$2336 and \$YYYY=\$2E1E. For the ROMs these are \$XXXX=\$FD00 and \$YYYY=\$FFFA.

- j) Commence disassembly with  
**QXXXX <return>**.
- k) Put your finger on LINEFEED. Hold it there until \$YYYY has been disassembled. Then hit RETURN.

All but the last track of the SOURCE file is on the disk. The last track is still in the buffer. This last part is also missing an "end of file" marking. The next few steps turn off the disk output long enough to make corrections, then turn it back on to write the final track to the disk.

The next step turns off disk output by creating a syntax error, and puts a mark to help find the end

of the SOURCE file.

- l) Type  
**!XIT <return>**.
- m) Search for the end of the file  
**W!XIT>317E,3D7F.**

If all has gone well, you will receive a message

(\*) **VVVV/21**

where VVVV is the address of ! in the expression !XIT. If you do not receive such a message, it is possible (but unlikely) that a "disk write" occurred in the middle of the word !XIT. Go back to step g) and start again. When you reach step k), hit RETURN five times instead of just once, then proceed. If you do not receive the message (\*), something is definitely wrong somewhere. Start a careful search (*Beware*: some values given only work for 8" floppies).

- n) Using quotes and "at" check the following  
**VVVV/21 "!**  
**VVVV+1/58 "X**  
**VVVV+2/49 "I**  
**VVVV+3/54 "T**
- o) Make the following change.  
**VVVV/21 0D**

Now the "end of file" marker is properly installed. Next we write the buffer to the disk.

- p) Make the following pointer change.

**23C3/YY 7E**  
**23C4/WW 3D**

- q) Write down the value TK

**232C/TK**

- r) Type  
**!IO ,22 <Return>**

The entire SOURCE file is on the disk. It starts on Track N and ends on Track TK. We must now create a directory entry for this file.

- s) Load BASIC and CREATE, but do not run CREATE. (You may need a different disk to do this.)
- t) Delete line 20290 (which would erase all the work you have done). It reads:

**20290 DISK!"IN "+T\$:DISK!"SA "+T\$+" ,1=**  
**317/" +P\$**

- u) Run CREATE and name the SOURCE file on your new disk.

STEP 2) Create a SCRATCH and SYMBOL file entry.

These files must be on the same disk as SOURCE. Be sure to reload CREATE so that line 20290 is not missing. SCRATCH can be about 25% smaller than SOURCE. SYMBOL can be 1-2 tracks. On 8" floppies, 8K BASIC needs two tracks for



SYMBOL (4K file size). You may put these files anywhere as long as they do not overlap the directory track, Track 0, or the tracks used by SOURCE.

#### STEP 3) PASS 1.

Run the first resource program. Prompting will tell you what to do. The new disk must be in the drive throughout the run. The screen will display the current status. On large programs, be prepared for several-minute waits for garbage collection. A five minute wait between screen data lines probably means there has been a system crash. This program will not work with ROM BASIC since the garbage collector is defunct. (See *PEEK(65)*, March 1980, p. 3 for a fix.)

The SOURCE, SYMBOL, and SCRATCH file may fill a disk, so you may have to move some files to other disks. SOURCE is no longer needed, but should be saved in case of trouble. Symbol is needed for PASS two and SCRATCH is needed for PASSES two and three. Using a transfer utility you may move SCRATCH and SYMBOL to a new disk.

#### STEP 4) PASS 2.

The second resource program generates an EQUATE file and the resourced assembly listing OBJECT. Create such files on a disk containing SCRATCH and SYMBOL. EQUATE need not be large, usually much less than a track. OBJECT should be slightly larger than SOURCE.

The next step creates all the cross reference tables. Each table needs its own file. SCRATCH is the input file. The branch table will probably be the largest file.

#### STEP 5) PASS 3.

Repeat this step until all cross reference tables are complete. Only Zpage cross references are essential. However, I find the Zpage and JSR tables the most useful. You may wish to sort these tables, even though they are "almost sorted."

#### STEP 6) PASS 4.

Create the Zpage equate file: ZEQUATE. Input to this program is the Zpage cross reference file. This step is the final one which creates the list of Assembler Zpage equates.

Any of the files generated may be dumped to a printer using a printer utility. The process is much simpler than it sounds. The single pass resource program eliminates most steps if only small programs are being resourced.

### Moving ASCII Text Files To The Assembler

For small programs, the resource can actually be assembled by the OSI Assembler. The three files (OBJECT, EQUATE, and ZEQUATE) must be merged and the program counter location given ( $10 * = \$XXXX$ ).

The resourced files are ASCII text files with an end of file (EOF) marker:

**XIT <return>.**

Since OSI's Assembler does not keep an ASCII file, more is needed. We must transfer the disk text files into the Assembler/Editor. In OS65D it is easy to reset output flags with:

**IO ,02.**

However, only one input is recognized and, if this is not the keyboard, then keyboard input is dead. During disk input, the keyboard is disabled. In particular, OS65D has no way of recognizing the end of a file except by an operating system error. This is a definite deficiency in OS65D. When an operating system error does occur, the IO flags are properly reset to default values.

If a file is on Tracks 2 and 3, inputting these tracks will result in a system error as soon as Track 3 is finished. The trouble is that the actual file may end halfway through Track 3. The rest of Track 3 may contain absolutely destructive information, such as Assembler commands or operating system commands. My favorite is the following. The ASCII character "left bracket" occurs as input opening the Indirect File. This file fills up memory, wiping out everything in the way. It eventually reaches the disk addresses. You hear a thunk and the disk goes dead. If input continues, it next reaches the screen memory filling the screen with jazzy characters. It goes on to the color memory, tone generator, etc. You've probably had this occur and wondered what happened. It's just the Indirect File, filing all the garbage away.

One solution is to remove the destructive information on the track. Another simpler one is to create an operating system error at the end of the file, in this case, midway through Track 3. Input errors to the OSI Assembler do not cause the IO flags to be reset. We must be more subtle than just having an input error. If E<return> is sent to the Assembler, it exits to the operating system. In the operating system command mode, any line which is not a legal command creates a syntax error. For example, another E<return>, will do the job. The following changes to PASS two and PASS four will prepare files for entry into the Assembler. Add the following lines:

**PASS Two**

**642 PRINT #7,"E"**

**644 PRINT #7,"E"**

**842 PRINT #7,"E"**

**844 PRINT #7,"E"**

**PASS 4**

**472 PRINT #7,"E"**

**474 PRINT #7,"E"**

There is yet another problem. In their normal



positions, the disk buffers occupy the same space as program memory. This problem can be solved by moving the buffers. Use the following steps to load first the file ZEQUATE, second EQUATE, and third OBJECT into the Assembler.

- a) Load and run the Extended Monitor.
- b) Suppose the file we wish to load starts on Track N and ends on Track M. Perform STEP l) g) from "HOW TO USE IT." Be sure to use the values given below (or larger values where you have RAM).

ADDRESS(S)	ADDRESS(D)	VALUE	
2326	8998	00	
2327	8999	50	
2328	9000	00	
2329	9001	5C	
232A	9002	N	
232B	9003	M	
232C	9004	N-1	
232D	9005	FF	
23AC	9132	00	ADDRESS MEMORY
23AD	9133	5C	BUFFERED INPUT

Note that 232C, 232D, 23AC, and 23AD have strange values. These values track the disk into loading the first track of your file into memory. Otherwise you would have to do that job separately.

- c) If you have already loaded the first file, skip this step. Initialize the Assembler.
- d) Re-enter the Assembler.
- e) Get input by  
!IO 20 <return>.
- f) Repeat a) - e) until all files are loaded.

Your files are now merged in the Assembler. Be sure to inspect them carefully before assembling.

### Remarks, Refinements, Additions

Resource will execute on 8K BASIC in a reasonable amount of time. The longest pass (PASS One) will run slightly less than an hour on a 1 MHz machine.

This package of programs is, in a sense, incomplete. Using the cross reference tables, one could give mnemonic names to all of the various labels and equates. These could be entered into a file. Then one extra pass over OBJECT could exchange address labels with mnemonic labels.

A big file line editor utility could be added to edit any one of the files created. If tables are known at disassembly time, they can be edited into SCRATCH. Incorrectly disassembled code could be corrected. These steps could be performed also on SCRATCH or OBJECT.

If table locations are known in advance, disassembly can be cleaned up considerably by replacing all table bytes with \$FF (or any other value not equal to a 6502 opcode). Then, all tables will appear in the resource as a sequence of lines: 10000 .BYTE \$FF.

Using an editor, it then would be a simple task to replace each \$FF by its correct value. I used this procedure on BASIC.

OS65D cannot be changed in this way since it will crash. But there is a simple solution. Move OS65D from addresses 2XXX to addresses, say 5XXX. When SCRATCH and SYMBOL are complete, go through them, changing the leading 5's back to 2's. A program to do this is simple to write. SYMBOL must be resorted and repetitions deleted. This way, I was able to use the trick with \$FF in tables to obtain an accurate resource of the code in OS65D.

A simple, but useful, utility would be a commenter. Such a utility would allow the user to add comments to the end of each line of the resourced file or to insert lines into the file. I have used this technique to produce the various listings in this article. I hope to present a future article on this editor.

Even though I am careful to fully document the machine software I write, I still find it useful to run the resource program over my machine programs. The cross reference files often reveal infelicities and logical inaccuracies.

I am still improving these programs. If you think of a nice enhancement, I'd be glad to hear about it.

#### Example 2.

```

1000 ;EQUATE FILE
1010 ;
1020 ;Z PAGE
1030 ;
1040 HHZC1 = $C1
1050 HHZC2 = $C2
1060 HHZC5 = $C5
1070 HHZC6 = $C6
1080 HHZC7 = $C7
1090 HHZC8 = $C8
1100 ;
1110 ;
1120 ;TWO BYTE
1130 ;
1140 HH17A5 = $17A5
1150 HH17E9 = $17E9
1160 HH1939 = $1939
1170 HH19BC = $19BC
1180 HH19D1 = $19D1

```

#### Example 3.

```

10 18D8 * = $18D8
1000 ;EQUATE FILE
1010 ;
1020 ;Z PAGE
1030 ;
1040 00C1= HHZC1 = $C1
1050 00C2= HHZC2 = $C2
1060 00C5= HHZC5 = $C5
1070 00C6= HHZC6 = $C6
1080 00C7= HHZC7 = $C7
1090 00C8= HHZC8 = $C8

```



```

1100      ;
1110      ;
1120      ;TWO BYTE
1130      ;
1140 17A5= HH17A5 = $17A5
1150 17E9= HH17E9 = $17E9
1160 1939= HH1939 = $1939
1170 19BC= HH19BC = $19BC
1180 19D1= HH19D1 = $19D1
10000 18D8 17      .BYTE $17
10010 18D9 A916     LDA #$16
10020 18DB 85C7     STA HHZZC7
10030 18DD 20ED18  HH18DD JSR HH18ED
10040 18E0 20D119   JSR HH19D1
10050 18E3 85C5     STA HHZZC5
10060 18E5 84C6     STY HHZZC6
10070 18E7 C6C7     DEC HHZZC7
10080 18E9 3037     BMI HH1922
10090 18EB D0F0     BNE HH18DD
10100 18ED 20BC19  HH18ED JSR HH19BC
10110 18F0 A1C5     LDA (HHZZC5,X)
10120 18F2 A8      TAY
10130 18F3 4A      LSR A
10140 18F4 900B    BCC HH1901
10150 18F6 4A      LSR A
10160 18F7 B017    BCS HH1910
10170 18F9 C922    CMP #$22
10180 18FB F013    BEQ HH1910
10190 18FD 2907    AND #$07
10200 18FF 0980    ORA #$80
10210 1901 4A      HH1901 LSR A
10220 1902 AA      TAX
10230 1903 BDA517  LDA HH17A5,X
10240 1906 B004    BCS HH190C
10250 1908 4A      LSR A
10260 1909 4A      LSR A
10270 190A 4A      LSR A
10280 190B 4A      LSR A
10290 190C 290F    HH190C AND #$0F
10300 190E D004    BNE HH1914
10310 1910 A080    HH1910 LDY #$80
10320 1912 A900    LDA #$00
10330 1914 AA      HH1914 TAX
10340 1915 BDE917  LDA HH17E9,X
10350 1918 85C1    STA HHZZC1
10360 191A 2903    AND #$03
10370 191C 85C2    STA HHZZC2
10380 191E A5C8    LDA HHZZC8
10390 1920 D001    BNE HH1923
10400 1922 60      HH1922 RTS
10410 1923 98      HH1923 TYA
10420 1924 298F    AND #$8F
10430 1926 AA      TAX
10440 1927 98      TYA
10450 1928 A003    LDY #$03
10460 192A E08A    CPX #$8A
10470 192C F00B    BEQ HH1939
10480 192E 4A      LSR A
10490 192F 9008    ECC HH1939
10500 1931 4A      LSR A
10510 1932 4A      LSR A

```

**Example 4.**

```

. CROSS REFERENCES
.
. ZPAGE
.

```

```

C1 1918
C2 191C
C5 18E3 )18F0
C6 18E5
C7 18DB 18E7
C8 191E
.
. JMP & JSR
.
18ED S18DD
19BC S18ED
19D1 S18E0
.
. MEMORY
.
17A5 L1903
17E9 L1915
.
. BRANCH
.
18DD N18EB
1901 C18F4
190C C1906
1910 C18F7 E18FB
1914 N190E
1922 M18E9
1923 N1920
1939 E192C C192F

```

**.PASS 1**

```

.
. RESOURCE 1 ** BUILD SCRATCH AND
SYMBOL FILES **
.
. TWO BUFFERS ARE REQUIRED
.
.
.
.
.
.
100 REM *** RESOURCE 1 ***
110 REM T.R. BERGER 11/80
120 PRINT
.
130 PRINT"RESOURCE ** STEP 1 - BUILD
SCRATCH AND SYMBOL FILES"
.
140 PRINT
.
. ** REMOVE COMMA AND SEMICOLON **
150 POKE 2972,13:POKE2976,13
.
160 INPUT"SOURCE FILENAME";SF$
170 INPUT"SCRATCH FILE NAME";JF$
180 INPUT"SYMBOL FILE NAME";SM$
190 PRINT:INPUT"NUMBER OF SYMBOLS";NS

```

```

.
. ** DIMENSION SYMBOL AND POINTER ARRAYS
**
200 DIM SS$(NS), V(NS)
.
. ** MAIN PROGRAM **

```



```

.
210 DISK OPEN,6,SF$
220 DISK OPEN,7,JF$
.
.  ** LOOP BACK HERE **
230 INPUT #6,IN$
.
240 IF IN$="XIT" THEN590
250 IF LEN(IN$)<15 THEN230
.
.  ** ADJUST SOURCE, PICK UP SYMBOLS **
.
. A1$=XXXX ADDRESS
. A2$=OPCODE +
. A3$=OPERAND (SYMBOL)
. A4$=ADDR MODE
. OU$=A1$+A2$+A3$+A4$
. IN$=INPUT FROM OSI DISASSEMBLER
.
260 A3$="": A4$=""
.
.  ** GET ADDRESS **
270 A1$=LEFT$(IN$,4)
.
.  ** DO ERRORS **
280 IFMID$(IN$,13,1)="?"THENA2$=" .BYTE $"
+MID$(IN$,6,2):GOTO550
.
.  ** DO REFORMATTTING **
.
.  ** ELIMINATE END SPACES **
290 IN$=MID$(IN$,12): L=LEN(IN$)
300 IF MID$(IN$,L,1)=" " THEN L=L-1: GOTO
300
310 IN$=LEFT$(IN$,L)
.
.  ** DO IMPLIED AND ACCUMULATOR ADDRESSI
NG **
320 IF L<7 THEN A2$=IN$: GOTO550
.
.  ** DO IMMEDIATE ADDRESSING **
330 IF MID$(IN$,6,1)="#" THEN A2$=IN$:
GOTO550
.
.  ** ADJUST OPERAND POSITION **
340 IFMID$(IN$,6,1)="$"THENK=7:A2$=LEFT$(
IN$,5)+" HH":GOTO360
350 K=8: A2$=LEFT$(IN$,6)+"HH"
.
.  ** Z PAGE CHECK **
360 M=K+2
.
.  ** DO Z PAGE OPERANDS **
370 IF M>L THEN A3$=RIGHT$(IN$,2): A2$=A2$
+"ZZ": GOTO550
.
.  ** Z PAGE, STRIP ADDRESS MODE **
380 IF MID$(IN$,M,1)>"/" THEN400
390 A3$=MID$(IN$,K,2): A2$=A2$+"ZZ": A4$=
MID$(IN$,M): GOTO550
.
.  ** TWO BYTE OPERAND CHECK **
400 M=K+4
.
.  ** DO TWO BYTE OPERANDS **
410 IF M>L THEN A3$=RIGHT$(IN$,4): GOTO430
.
.  ** TWO BYTE, STRIP ADDRESS MODE **
420 A3$=MID$(IN$,K,4): A4$=MID$(IN$,M)
.
.  ** PUT SYMBOLS IN TABLE **
.
.  ** SEARCH TABLE FOR SYMBOL **
.
.  ** THIS IS A BINARY SEARCH **
430 L=0:R=SN
.
.  ** SYMBOL NOT FOUND, INSERT IT **
440 IF L>R THEN490
450 M=INT((L+R)/2)
.
.  ** SYMBOL IN TABLE SO QUIT **
460 IF A3$=SS$(V(M)) THEN550
470 IF A3$>SS$(V(M)) THEN L=M+1: GOTO440
480 R=M-1: GOTO440
.
.  ** ADD SYMBOL **
490 SN=SN+1: SS$(SN)=A3$
.
.  ** POINT TO ITS PROPER POSITION IN ORDE
RING **
500 IF L=SN THEN540
510 FOR I=SN-1 TO L STEP -1
520 V(I+1)=V(I)
530 NEXT I
540 V(L)=SN
.
.  ** GENERATE LINE FOR SCRATCH FILE **
550 OU$=A1$+A2$+A3$+A4$
560 PRINT #7,OU$
570 PRINT OU$
580 GOTO230
.  ** LOOP BACK NOW **
.
.  ** CLOSE SCRATCH AND SOURCE FILES **
590 PRINT #7,IN$
600 DISK CLOSE,6
610 DISK CLOSE,7
.
.  ** END OF MAIN PROGRAM **
.
.  ** WRITE SYMBOL FILE **
620 DISK OPEN,7,SM$
.
.  ** WRITE SYMBOLS IN ORDER **
630 FOR I=0 TO SN
640 PRINT #7,SS$(V(I))
650 PRINT SS$(V(I))
660 NEXT I
670 PRINT #7,"XIT"
680 DISK CLOSE,7
.
.  ** OUTPUT DATA **
690 PRINT:PRINT
700 PRINT TAB(9) SN" SYMBOLS USED"
710 PRINT TAB(10) "SCRATCH FILE: "JF$
720 PRINT TAB(10) "SYMBOL FILE: "SM$
730 PRINT:PRINT TAB(10) "PASS 1 COMPLETE"
740 PRINT:PRINT:END

```



**Review:**

# Caverns Of Mars

Charles Brannon  
Editorial Assistant

*Caverns of Mars* is a new action-packed game from Atari, Inc. Originally sold through the Atari Program Exchange (APX), *Caverns of Mars* is now available through dealers.

The object of the game is to maneuver your spacecraft into the depths of the planet Mars. As you penetrate the five layers of defenses you can blow up fuel silos (to provide additional fuel for your ship), Martian missiles, and "spy stations" that supposedly warn the Martian headquarters of your approach.

Your first challenge is to weave your way through the twisting subterranean (submartian?) tunnels. The screen continuously scrolls upward, so you move left and right mostly, although your craft can also move vertically. When you press the fire button on the joystick, your craft shoots twin photon torpedoes that detonate any target they contact.

After surviving these levels, you face an armada of Martian spacecraft. They don't fire at you; they just try to overwhelm you with sheer numbers, forcing you to dodge them and fire furiously to avoid a fatal collision. If you can make it past this defense, you slowly descend into the very center of the Martian stronghold, where you'll find a giant, glowing, egg-shaped bomb. By landing on it, you "arm" it, and the timer starts ticking at 30 seconds, 29, 28, 27... The destruction of the base is inevitable, but *your* survival is at stake too. If you don't escape from the Martian base before the time is up, you are ruined in a brilliant orange explosion. Assuming that you make it out (not very likely in your first games), you watch the explosion lighting up the mouth of the cavern, and you can then valiantly enter... cavern two.

Each new cavern is progressively harder — most noticeably when making your escape — you ascend twice as fast, making a collision with the "ceiling" rather likely. I've played the game for a week, and I still can't escape Cavern two.

You get five ships, each with 99 units of fuel. Here's the catch — if you run out of fuel, your ship explodes. It is not uncommon to meet this fate just

moments before arming the bomb, or before rising triumphantly to the surface. If your ship blows up in a certain level, you have to start over at the beginning of the level.

The graphics are impressive. Apparently, the game is constructed using a custom character set in the special four-color IRG graphics mode (a rather unexploited feature of the Atari until now). Most of the animation is performed with vertical fine scrolling, and the ship is a player. It also uses a modified display list to show your status, and I think it even uses display list interrupts. All in all, an excellent use of the Atari's graphics capabilities.

*Caverns of Mars* is currently only available on diskette. You'll also need a joystick.

A curious feature of the program is that it names its skill levels as *Star Raiders* does: Novice, Pilot, Warrior, and Commander. Will *Caverns of Mars* replace *Star Raiders* in the hearts of Atari space-game fans? If so, we may soon hear a new phrase: "Old *Star Raiders* never die, they just move to Mars..."

*Caverns Of Mars*  
Available through dealers.  
\$39.95

©

## MICROMAIL

### CRT'S • PRINTERS • TELEPRINTERS

★NEW★  
**DEC LA100**  
Dual Mode  
Matrix Printer  
CALL FOR PRICE!

★LOW★  
Letter Quality  
**DIABLO 630**  
**\$1949.00**

★NEW★  
**3M WHISPER WRITER**  
• TWX  
• TIME SHARE  
• Computer Terminal

### CALL FOR OUR LOW PRICES ON

**NEC, QUME, ANADIX,  
TELEVIDEO, DEC, T.I.,  
TELETYPE, DIABLO, C.I.TOH**

**TOLL FREE (800) 854-6028**

**SAVE ON  
PREPAID  
ORDERS**

**MASTER CARD  
VISA  
ACCEPTED**

**C.O.D  
REQUIRES  
15% DEPOSIT**

**FOR ORDERING  
INFORMATION  
PLEASE CALL**

**MICROMAIL**  
P.O. Box 3297  
Santa Ana, CA 92703  
Phone 714/731-4338  
TWX 910 595 1146



## Review:

# Two Programs From The VIC 6 Pack

Harvey B. Herman  
Associate Editor

### Car Chase

This is a clever game which my kids rated 8 (out of 10). There are two cars (the blue one is yours) traveling in opposite directions in a square, four-lane track. The object of the game is to score the most points before you crash into the other car. You can change lanes or speed up or slow down to avoid a collision. Points are scored by riding over dots (and later diamonds) on the tracks. This game is very similar to the PET program *NAB* sold by *Cursor* magazine.

We (my kids and I) particularly liked several features of the BASIC game. Color and sound are integrated into the program. Effective use of a custom character set makes the track layout much nicer than if only the standard characters had been used. The other car is smart and you must be on your toes to avoid a crash. To score well you must change speeds at appropriate times or you're stuck in the wrong lane, headed for disaster.

The one feature I did not like (and this did not seem to bother my kids) is that the keyboard is used as the car controller. I prefer a joystick or the number pad on the old PETs. The "J" and "K" keys used to change lanes are close together and I was forever confusing which was "move in" and "move out." You don't have to think as much with a joystick.

A helpful hint: the instructions say not to use Car Chase with any memory expansion in place. Bullfeathers! If you have added the 3K memory expansion a special load sequence is necessary. Type:

```
POKE 44,16
POKE 4096,0
NEW
LOAD
```

Before loading other programs, POKE location 44 back to normal or turn the VIC off and on.

### Blue Meanies From Outer Space

This is an Invaders-like game which my kids rated 6 (out of 10). The blue meanies (frowning faces) are dropping from the skies trying to knock out your protected power cells inside your starbase. You are able to blast them with fixed laser guns as they fall erratically. Points are added when you kill a meanie or deducted if you hit your own supply ship which is coming to recharge your energy. You must have energy to fire your weapons. Energy is lost when shooting and for various other operations. If the supply ship makes it, you get an energy bonus. It is possible to repair damage (holes in your starbase) using a robot, but at the cost of energy. When the meanies reach the power cells, the game is over.

This BASIC game, like Car Chase, is considerably enhanced by good use of color, sound, and a custom character set. It was fun to shoot the meanies, but it would have been even more fun if they were a little smarter. (However, the instructions do promise "meaner meanies" after 20 are shot.) Again, I prefer a joystick to the use of the keyboard for game control. I get confused if the required actions are not reflexive. My kids commented that the instructions for the repair robot were not clear and they did not care for negative energy or a suspended robot. I believe they have been spoiled by playing Invaders on the PET. Blue Meanies is a good program, but it doesn't quite match up to that very good simulation of the video arcade game.

Note: if you have added a 3K memory expansion, use the same trick as above for Car Chase to LOAD Blue Meanies.

*Commodore Business Machines*  
681 Moore Rd.  
King of Prussia, PA 19406  
\$43.95 (for all 6)

©

**\*VIC-20\***

**FROG**

Take control of an animated fly zapper.

Requires NO extra equipment.

... Each \$17.95 cassette ...

**MAGIC CARPET**

P.O. Box 35115 Phoenix, AZ 85069

GAMES FOR THE PET ALSO AVAILABLE



## Review:

# SoftBox — CP/M For PET/CBM

Richard Mansfield  
Assistant Editor

A considerable amount of software requires the disk operating system known as CP/M. Originally developed in 1973, it has since become an essential part of many word processor, accounting, data base manager and other commercial software products. CP/M means "Control Program/Monitor" and was intended for use with the 8080 and Z80 microprocessors. "SoftBox," manufactured by Small Systems Engineering, however, allows you to use CP/M-based software packages on the PET/CBM computers.

Attached between your PET and disk drive, this "interface-computer" contains 64K RAM, a Z80 chip, IEEE and RS-232 interfaces with software-definable baud rates, and a Corvus hard disk interface. The unit will work with any PET/CBM using Upgrade or 4.0 BASIC and 8K RAM. An optional cassette program can be used with Original PETs. Any combination of from one to eight Commodore floppy disk drives (2040, 3040, 4040, or 8050) may be attached, resulting in up to a potential eight megabytes mass memory available at one time. Memory can be further increased by attaching Corvus hard disk drives. A total of 80 megabytes is possible.

### Simple To Set Up

Adding CP/M to your PET takes only a few minutes. You plug a standard PET-to-IEEE cable between the SoftBox and your disk drive. (Another of these cables goes from the drive to the PET.) When you power-up the three units, everything is normal and, in fact, you can work with the computer and the disk drive as if SoftBox were not connected.

For CP/M, you place the supplied disk (CP/M Version 2.2) into Drive zero, LOAD, and RUN it. That's it. PET is now under the control of CP/M. The disk contains a variety of CP/M utilities, special Corvus files, and a SoftBox memory test diagnostic program.

If you've not worked with CP/M, the SoftBox User's manual is an excellent introduction. It takes you through the major CP/M

commands, step-by-step, and clearly demonstrates their uses and terminology. Special commands allow you to control the PET screen (upper/lowercase, graphics/text), the TI\$ function, and, when you want to return to normal PET BASIC, simply type "cold" and you're back in the Commodore.

And for the more advanced user, several appendices provide technical information, a map of SoftBox's memory, suggestions on modifying CP/M itself, and I/O details.

SoftBox, \$895  
Small Systems Engineering  
222 B View Street  
Mountain View, CA 94041 ©

## THE DATA HANDLER for VIC

A word processor and catalog program for the VIC-20 plus 8K

- \*over 15 edit functions
- \*sorting
- \*data formatting
- \*expandable
- \*screen scrolling—78 character lines
- \*full documentation
- \*works with cassette and standard VIC printer
- \*disk version available
- \*easy to adapt for RS-232 printers

Price \$29.95

C.O.D., check, or money order  
(Specify disk or cassette)

**MW Software**

P.O. Box 126  
Urbana, IL 61801  
(217) 356-7511

Dealer inquiries welcome.  
VIC is a trademark of Commodore.

## VIC-20 SOFTWARE

Over 100 programs on tape and cartridge for the VIC computer—both educational and fun!!

Write or call for your free catalog.

Sunrise Electronics  
7057 Lompoc Court  
Citrus Heights, California  
95610  
(916) 969-8319

## VIC-BACKGAMMON-VIC

Plays a great game by the rules and won't let you cheat. Our best seller.

5K version \$12.95  
Advanced 8K version \$19.95

### BLACKJACK TUTOR

Learn when to HIT, STAY, SPLIT PAIRS and DOUBLE. You can beat Vegas for just \$12.95

### GRAPHICS GENERATOR

Create, edit, reverse, save special characters. Unique DEMO feature included. \$9.95

### MAZE-MAN

Arcade game with fast munching action. Key or joystick. \$9.95

All programs fit into 5K VIC-20. Send for free catalog.

Send check or money order to:  
(Add 50¢ for postage)

### RAR-TECH

Box 761, Rochester, MI 48063  
VIC-Trademark of Commodore





## Review:

# SYSRES For PET/CBM

Charles Brannon  
Editorial Assistant

SYSRES claims to be the "ultimate program manipulation system." Like its predecessors, the Toolkit and BASIC Aid, SYSRES is a programmer's aid package. SYSRES "wedges" into BASIC and adds 33 commands (including six improved BASIC commands) plus 11 extended DOS Support (the original "Wedge") commands. All of the commands are used for the development and maintenance of BASIC programs.

The primary tools needed by a programmer are: auto line numbering, renumbering, find, and trace. SYSRES supplies "deluxe" versions of all these. Automatic line numbering provides the line numbers when typing in a program. If you start at line 100, it will automatically print 110 when you press RETURN on line 100 (assuming a step size of ten). SYSRES permits a unique variation: automatic statement generation. If you are typing in a long set of DATA statements, SYSRES can provide the line numbers and the word "DATA." SYSRES offers a "fill in the blank" line where you only need to enter a single number. It can even press RETURN for you, giving it the capability for automatic line entry.

### Advanced Renumber

Most Renumber commands change the line numbers of a BASIC program by an even increment and update all line references made by GOTO, THEN, GOSUB, etc. The entire program is renumbered. SYSRES permits partial renumber. You can renumber just a subroutine, for example, preserving all other line numbers, and updating any line references if necessary.

Perhaps the most useful command in a package like this is a Find command. Many programmers find it indispensable. Using Find, you can locate any variable, phrase, or keyword used anywhere in your program. Another related command is Change, which permits you to replace any variable, phrase, or keyword with anything else.

For the Change command especially, it is vital that you exactly specify the search string. You may want to change A\$ to B\$, but you don't want ZA\$ to become ZB\$. To zero in on whatever you are searching for, SYSRES permits you to use several wild card and limitation symbols (such as V for Variable, B for Beginning of line, or a quote to

signal quote mode), which together permit over 700 possibilities.

Debugging a program is much easier with a Trace command. Trace (as implemented by SYSRES) permits you to display program variables as they change or are defined. So, you could display the index of a FOR/NEXT loop, or watch how certain variables interact. (You can also type DUMP in direct mode to display all variables.)

The advanced editor commands let you use the BASIC editor as a general purpose ASCII line editor. The commands GET and PUT let you save this ASCII file to disk. SYSRES even partially tokenizes this file to save disk space. These ASCII files can be used to develop EXEC files, which are a sequence of direct commands that are executed as if they were a program. This gives the PET/CBM the power found formerly only in CP/M's .EXC files, Apple's EXEC files, or Atari's ENTER files. An important feature of EXEC files is that they use no program memory as they execute.

When using SYSRES, you get a feeling that careful design went into the system. All keys repeat, and the cursor keys "take off" quickly. Full up/down scrolling of your BASIC program is supported, and it works perfectly. If you display the directory with the improved ">\$0" command, these line numbers cannot be accidentally entered as program lines or activate the scrolling feature.

Full printer support is also included with full ASCII translation. Any command can be sent to the printer if preceded with an asterisk. For example, \*LIST would list a program to the printer. You can also dump the screen by holding down both SHIFT keys and pressing RVS. Speaking of keys, with SYSRES you can define any shifted key to equal any sequence of keys or keywords. When you define any key, all the alphabetic keys "come alive" with convenient single-key abbreviations.

### Improvements To BASIC Itself

The improved BASIC commands are another example of the care taken to produce a complete "operating system." The LOAD, SAVE, and VERIFY commands default to the disk drive, and the save with replace ("@" ) works on any disk drive. (It first SCRATCHes, then resaves the program.) Nevertheless, none of the commands are programmable. Therefore, programs developed with SYSRES are fully transportable. As the manual says, "SYSRES is designed to be 'addictive to programmers not to programs.'"

SYSRES  
Solidus International Corporation  
Suite 6 - 144 West 15th Street  
North Vancouver, B.C.  
Canada, V7M 1R5.  
\$75.



**Review:**

# Fun With Microcomputers And BASIC

Fred D'Ignazio  
Associate Editor

Do you like puzzles and games?

Are you looking for a quick, painless way to learn how to program a personal computer?

Are you a kid, an adult, or something in between?

If you answered *yes* to all these questions, then this book is for you.

I am a person who has a low pain threshold, when it comes to plowing through "introductory" guides to personal computers. "Ouch!" I cry when I see guides set in a midget-sized typeface that resembles footprints made by a tapdancing flea.

The same goes when I see guides with no pictures, or guides that are too technical, too serious, too somber, or too trivial. These books give me indigestion – the same lumpy discomfort I experience when I swallow a plateful of spaghetti and meatballs I forgot to chew.

Don Spencer's book is different. It's fun, it really teaches, and it's an almost painless introduction to microcomputers and BASIC programming.

The book starts at a lofty level. In the first ten pages, Spencer skims over computers' social impact, computer devices, trends, and careers.

Then you get down to business. You plan a program, learn a little about flowcharting, get a few tips on how to write your first program.

Then you dive into BASIC. For twenty pages, you swim through constants and variables, arithmetic operations and DATA statements. You finish by looping through arrays.

Then come seventy pages of programs including Manhattan Island, Sam's Monkey, The Jolly Green Giant, and Roger Goes to the Circus. If you are math-oriented or a compulsive gambler, you'll really like these programs.

I recommend this book to teachers of introductory programming courses, and to parents,

kids, and anxious professionals just getting started on their new computer. The problems start easy and get harder. Almost all come with actual "solution" programs you can study. There are even occasional exercises for you to tackle.

This is what the book offers.

What does it lack?

It is only an *introduction* to microcomputer BASIC, so don't expect to be a programming whiz when you are done – especially with regard to a particular machine. Also, there is almost nothing on sound or graphics – two popular features of the new, low-cost personal computers.

Still, it's a good start. Whether you're old or young. Whether you're cocky about computers or afraid to touch one for fear it might bite off your hand. Or explode.

*Fun with Microcomputers and BASIC*

by Donald D. Spencer

Reston Publishing Co.

11480 Sunset Hills Rd.

Reston, VA 22090

128 pages

\$9.95 paperback

©



## SERVICE... a nonexistent word in computer language?

Now you can get **FACTORY AUTHORIZED** service for your Commodore or Atari computer and peripherals at reasonable cost. Minimize your down time frustration and expense. Extended warranty available for most products, too!

CALL

**717-327-1450**

**Micro Computer  
Service Center**

477 E. Third St., Williamsport, PA 17701



# COMPUTE!'s Listing Conventions

Many of the programs which are listed in **COMPUTE!** use special keys (cursor control keys, color keys, etc.) To make it easy to tell *exactly* what should be typed in when copying a program into the computer, we have established the following listing conventions.

## For The Atari

All the editing and cursor control characters are spelled out and surrounded by brackets in the program listings: {CLEAR} for "clear screen." Other characters, such as CTRL-T (the "ball" character) will be listed as the "normal" character, but it will be within brackets: { T }. A series of identical control characters will be indicated by a number within the brackets: {3DOWN} means type ESC CURSOR-DOWN three times; {12 R} would mean type CTRL-R twelve times. Remember to press the ESC (escape) key before each cursor control key. If you should see {ESC} itself in a program listing, you would press ESC *twice*.

Two of the control characters, {=} and {-}, should be shifted. Any reverse field text will be enclosed within vertical lines. (In other words, any time you see a vertical line within a program listing in **COMPUTE!**, press the Atari logo key {A}.)

## Atari Conventions

```
{CLEAR}= SHIFT-< (Clear Screen)
{UP}= CTRL-minus (Cursor Up)
{DOWN}= CTRL-equals (Cursor Down)
{LEFT}= CTRL-plus (Cursor left)
{RIGHT}= CTRL-asterisk (Cursor right)
{BACK S}= BACK S (Back space)
{DELETE}= CTRL-DELETE (Delete character)

{DEL LINE}= SHIFT-DELETE (Delete Line)
{INSERT}= CTRL-INSERT (Insert character)

{INS LINE}= SHIFT-INSERT (Insert line)
{ESC}= ESC (ESCAPE key pressed twice)
{TAB}= TAB (Tab key)
{CLR TAB}= CTRL-TAB (Clear tab settings)
{SET TAB}= SHIFT-TAB (Set tab stop)
{BELL}= CTRL-2 (Ring buzzer)
```

## For PET/CBM/VIC

Generally, any PET/CBM/VIC program listings will contain bracketed words which spell out any special characters: {DOWN} would mean to press the cursor-down key; {3DOWN} would mean to press the cursor-down key three times.

To indicate that a key should be *shifted* (hold down the SHIFT key while pressing the other key), the key would be underlined in our listing. For example, S would mean to type the S key while holding the shift key. This would result in the "heart" graphics symbol appearing on your screen.

Sometimes in a program listing, especially within quoted text when a line runs over into the next line, it is difficult to tell where the first line ends. How many times should you type the SPACE bar? In our convention, when a line breaks in this way, the ~ symbol shows exactly where it broke. For example:

```
100 PRINT "TO START THE GAME ~
      YOU MAY HIT ANY OF THE KEYS
      ON YOUR KEYBOARD."
```

shows that the program's author intended for you to type two spaces after the word *GAME*.

## For The Apple

Programs listed as "Microsoft" are written for the PET/CBM,

Apple, OSI, etc. Although the programs are general in nature, you may need to make a few changes for them to run correctly on your Apple. Microsoft BASIC programs written for the PET/CBM sometimes contain special cursor control characters. The following table shows equivalent Apple words. Notice that these Apple commands are *outside* quotations (and even separate from a PRINT statement). PRINT "[RVS]YOU WON" becomes INVERSE: PRINT "YOU WON":NORMAL

```
[CLEAR] (Clear Screen) HOME
[DOWN] (Cursor down)
  Apple II +: Call -922
  POKE 37,PEEK(37)+(PEEK(37)<23)
[UP] (Cursor up)
  POKE 37,PEEK(37)-(PEEK(37)>0))
[LEFT] (Cursor left) PRINT CHR$(8);
[RIGHT] (Cursor right)
  PRINT CHR$(21)
```

[RVS] (Inverse video on. Turns off automatically after a carriage return. To be safe, turn off inverse video after the print statement with NORMAL unless the PRINT statement ends with a semicolon.)

INVERSE

[OFF] (Inverse video off) NORMAL

Shifted characters can represent either graphics characters or uppercase letters. If within text, just use the non-shifted character, otherwise substitute a space. Some "generalized" programs contain a POKE such as POKE 59468,14. Omit these from the program when typing it in. One final note: you will probably want to insert a question mark or colon within an INPUT prompt. PET/CBM and many other BASICs automatically print a question mark:

```
INPUT "WHAT IS YOUR NAME?";N$
  becomes
INPUT "WHAT IS YOUR NAME?";N$
```

## All Commodore Machines

Clear Screen {CLEAR}	Cursor Left {LEFT}
Home Cursor {HOME}	Insert Character {INST}
Cursor Up {UP}	Delete Character {DEL}
Cursor Down {DOWN}	Reverse Field On {RVS}
Cursor Right {RIGHT}	Reverse Field Off {OFF}

## VIC Conventions

Set Color To Black {BLK}	Function Two {F2}
Set Color To White {WHT}	Function Three {F3}
Set Color To Red {RED}	Function Four {F4}
Set Color To Cyan {CYN}	Function Five {F5}
Set Color To Purple {PUR}	Function Six {F6}
Set Color To Green {GRN}	Function Seven {F7}
Set Color To Blue {BLU}	Function Eight {F8}
Set Color To Yellow {YEL}	Any Non-implemented
Function One {F1}	Function {NIM}

## 8032/Fat 40 Conventions

Set Window Top {SET TOP}	Erase To Beginning {ERASE BEG}
Set Window Bottom {SET BOT}	Erase To End {ERASE END}
Scroll Up {SCR UP}	Toggle Tab {TGL TAB}
Scroll Down {SCR DOWN}	Tab {TAB}
Insert Line {INST LINE}	Escape Key {ESC}
Delete Line {DEL LINE}	



# COMPUTE! Back Issues

Here are some of the applications, tutorials, and games from available back issues of **COMPUTE!**. Each issue contains much, much more than there's space here to list, but here are some highlights:

**January, 1981:** Load PET Programs Into The Apple II, Player-Missile Graphics for Atari, The Atari DOS, The Kernel of the OSI Operating System, Fixing LOADING Problems on the PET, Spooling with the PET Disk, Expanding KIM.

**February, 1981:** Simulating PRINT USING, Using the Atari as a Terminal for Telecommunications, Attach a Printer to the Atari, Double Density Graphing on C1P, Commodore Disk Systems, PET Crash Prevention, A 25¢ Apple II Clock.

**March, 1981:** Machine Language Programming for Beginners, Getting the Most from your PET Cassette Deck, Apple and PASCAL, Flipping your Apple Disk, Designing your own Atari Character Sets, Renumber for Atari, An Atari Disassembler, Six-gun Shootout Game for OSI C1P, PET Machine Language Graphics.

**April, 1981:** How to be a VIC Expert, Resolving the Applesoft and Hires Graphics Memory Conflicts, Atari SuperCube, String Arrays in Atari, Memory Partition in PET, Pet Relative Files, Working with BASIC 4.0, Commodore File I/O, ROM Expansion for Commodore PET.

**May, 1981:** Named GOSUB/GOTO in Applesoft, Generating Lower Case Text on Apple II, Copy Atari Screens to the Printer, Disk Directory Printer for Atari, Realtime Clock on Atari, PET BASIC Delete Utility, PET Calculated Bar Graphs, Running 40 Column Programs on a CBM 8032.

**June, 1981:** Computer Using Educators (CUE) on Software Pricing, Apple II Hires Character Generator, Ever-expanding Apple Power, Color Burst for Atari, Mixing Atari Graphics Modes 0 and 8, Relocating PET BASIC Programs, An Assembler In BASIC for PET, QuadraPET: Multitasking?

**July, 1981:** Home Heating and Cooling, Animating Integer BASIC Lores Graphics, The Apple Hires Shape Writer, Adding a Voice Track to Atari Programs, Machine Language Atari Joystick Driver, Four Screen Utilities for the PET, Saving Machine

Language Programs on PET Tape Headers, Commodore ROM Systems, The Voracious Butterfly on OSI.

**August, 1981:** Minimize Code and Maximize Speed, Apple Disk Motor Control, A Cassette Tape Monitor for the Apple, Easy Reading of the Atari Joystick, Blockade Game for the Atari, Atari Sound Utility, The CBM "Fat 40," Keyword for PET, CBM/PET Loading, Chaining, and Overlaying.

**September, 1981:** The Column Calculator, What is a Modem and Why Do I Need One?, PET, Apple, Atari: On Speaking Terms, A Tape "EXEC" for Applesoft, A Self-altering Program for Apple II, Positioning P/M Graphics and Regular Graphics in Memory, An Atari BASIC Sort, Shoot, an Arcade Game for Atari, Exploring OSI's Video Routine, PET Tape Append and Renumber, All About LOADING PET Cassettes.

**October, 1981:** Automatic DATA Statements for CBM and Atari, VIC News, Undeletable Lines on Apple, PET, VIC, Budgeting on the Apple, Switching Cleanly from Text to Graphics on Apple, Atari Cassette Boot-tapes, Atari Variable Name Utility, Atari Program Library, Train your PET to Run VIC Programs, Interface a BSR Remote Control System to PET, A General Purpose BCD to Binary Routine, Converting to Fat-40 PET.

**November, 1981:** SuperPet: A Preview, Japanese Micros: A First Look, Introduction to Binary Numbers, An Apple Primer, Page Flipper for Apple, An Atari Database System, A Program for Writing Programs on the Atari, Atari Textplot, OSI Relocation, The PET Speaks, Inversion Partitioning, A Personal News Service on PET, Bits, Bytes, and Basic Boole.

**December, 1981:** Saving Fuel \$\$ (Multiple Computers: versions for Apple, PET, and Atari), Unscramble Game (multiple computers), Maze Generator (multiple computers), Animating Applesoft Graphics, A Simple Printer Interface for the Apple II, A Simple Atari Wordprocessor, Adding High Speed Vertical Positioning to Atari P/M Graphics, OSI Supercursor, A Look At SuperPET, Supermon for PET/CBM, PET Mine Maze Game.

**January, 1982:** Invest (multiple computers), Developing a Business Algorithm (multiple

computers), Apple Addresses, Lowercase with Unmodified Apple, Cryptogram Game for Atari, Superfont: Design Special Character Sets on Atari, PET Repairs for the Amateur, Micromon for PET, Self-modifying Programs in PET BASIC, Tiny-mon: a VIC Monitor, Vic Color Tips, VIC Memory Map, ZAP: A VIC Game.

**February, 1982:** Insurance Inventory (multiple computers), Musical Transposition (multiple computers), Multitasking Emulator (multiple computers), Disassemble Apple Programs from BASIC, Plotting Polar Graphs on Apple, Atari P/M Graphics Made Easy, Atari PILOT, Put A Rainbow in your Atari, Marquee for PET, PET Disk Disassembler, VIC Paddles and Keyboard, VIC Timekeeping.

**March, 1982:** Word Hunt Game (multiple computers), Infinite Precision Multiply (multiple computers), Atari Concentration Game, VIC Starfight Game, CBM BASIC 4.0 To Upgrade Conversion Kit, Apple Addresses, VIC Maps, EPROM Reliability, Atari Ghost Programming, Atari Machine Language Sort, Random Music Composition on PET, Comment Your Apple II Catalog.

**April, 1982:** Track Down Those Memory Bugs (multiple computers), Shooting Stars Game (multiple computers), Intelligent Input Subroutines (multiple computers), Ultracube for Atari, Customizing Apple's Copy Program, Using PET/CBM In The High School Physics Lab, Grading Exams on a Microcomputer (multiple computers), Atari Mailing List, Renumber VIC Programs The Easy Way, Browsing the VIC Chip, Disk Checkout for PET/CBM.

Back issues are \$3.00 each or six for \$15.00. Price includes freight in the US. Outside the US add \$1.00 per magazine ordered for surface postage. \$3.00 per magazine for air mail postage. All back issues subject to availability.

**In the Continental US call  
TOLL FREE 800-334-0868  
(In NC Call 919-275-9809)**

Or write to **COMPUTE!** Back Issues, P.O. Box 5406, Greensboro, NC 27403 USA. Prepayment required in US funds. MasterCard, Visa and American Express accepted. North Carolina Residents add 4% sales tax.



# 64K RAM for AIM-65<sup>®</sup> and SYM-1<sup>®</sup> from BYTE MICROSYSTEMS

AT LAST, ENOUGH MEMORY TO GET THE JOB  
DONE RIGHT! AND AT THE RIGHT PRICE!!


- EASY, PLUG-IN INSTALLATION
- NO SOLDERING REQUIRED
- APPEARS AS 2 MEMORY BANKS,  
EACH 32K BYTES LONG
- OCCUPIES ADDRESS RANGE 0000-7FFF
- DESIGNED FOR COMPATIBILITY WITH  
ALL AIM AND SYM PROGRAMMING  
LANGUAGES, AND WITH BYTE-DOS  
AIM-65 DISK SYSTEM\*
- ALL ADDRESS AND DATA LINES  
FULLY BUFFERED
- USER UPGRADABLE TO ADD  
PIGGYBACK COLOR VIDEO GRAPHICS  
BOARD (SOON TO BE RELEASED)

SPECIAL INTRODUCTORY PRICE

**\$399.<sup>00</sup>**

(Effective 9/1/82 will be \$475.00)

Includes assembled, tested board,  
connectors and complete instructions.  
Dealer inquiries invited.

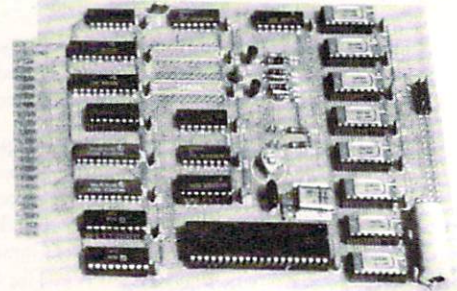

SEND ME THE FULL STORY!

Name \_\_\_\_\_  
Company \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Telephone \_\_\_\_\_  home  
 work



**BYTE MICROSYSTEMS**  
CORPORATION

1477 ELKA AVENUE, SAN JOSE, CA 95129

408/446/0559

\* BYTE-DOS \$499 SYSTEM INCLUDES DISC CON-  
TROLLER CARD, TEAC FD-50A DISC DRIVE

® AIM-65 is a trademark of Rockwell International  
SYM-1 is a trademark of Synertek Systems Corp.

## CAPUTE! Modifications Or Corrections To Previous Articles

### Further Notes on "Fast Sort For PET/CBM"

The following information from Jim Russo will aid in adapting the PET/CBM machine language sort utility to work within a BASIC program. "Fast Sort" appeared in **COMPUTE!**, May, 1982, #24, pg. 160:

This routine operates on strings of equal length which occupy contiguous memory locations. It does not know about variable names or arrays. The example given in the article uses Program 2 to collect some data, and then Program 3 to read it, in order, into a fresh string data space, without any extra string variables. Both functions could be done in the same program if the data was written into an array as it was collected, and then the following line was used to move the data into a contiguous area at the beginning of string memory:

```
FORI=0TOTN-1: A$(I)=A$(I):NEXT
```

In a larger program with more than one array,

this same technique could be used to move each array to the appropriate place when it was time for it to be sorted.

Line 150 in Program 3 will fail for certain values of length and number of records. A better way to write it is:

```
150 AA=256*HA+LA+LN+2:POKE179,AA AND 255:PO  
KE180,AA/256
```

The two extra bytes used in each string by BASIC 4.0 are a pointer back to the variable data area, where the string length and starting address are stored. After a sort, these pointers are not valid. No harm will be done as long as none of the sorted strings is redefined by the program. If some of the sorted strings are redefined by the program, then a subsequent garbage collection will cause chaos. To illustrate this, try adding the following line to Program 3:

```
175 A$(1)="NEW STRING #1":X=FRE(0)
```

If there is enough room for two copies of the array data in string memory, then the following two lines will fix the problem:

```
125 IF FRE(0) < 270+TN*(LN+2)THENPRINT"NO R  
OOM":STOP
```

```
175 FORI=0 TO TN-1: A$(I)=A$(I): NEXT
```

Line 125 forces a garbage collection, and makes sure there will be enough room for line 175 to execute without causing another garbage collection. Line 175 fixes the pointers by rewriting all of the sorted strings.



# New Products



## Hayden Announces Tetrad: A New Way To Play Tic-Tac-Toe

Tetrad is a game of strategy and mental daring that enables a player to match wits against a computer. Based on the popular game of Tic-Tac-Toe, Tetrad allows the tension to build between opponents as each tries to get four X's or O's in a row in any direction on any or all four playing boards.

Tetrad has a board that offers 16 squares on four different levels. The additional squares and boards allow 76 possible winning combinations – nine times more than conventional, two-dimensional Tic-Tac-Toe.

Players can choose from three levels: novice, intermediate or professional. Colorful graphics accompanied by unique sound effects make Tetrad a new way to play an old favorite.

Tetrad is written by Philip Hess and can be used on an Apple II disk with 32K, 09809, \$19.95.

*Hayden Book Co., Inc.  
50 Essex St.  
Rochelle Park, NJ 07662  
Toll free (800)631-0856  
or NJ: (201)843-0550*

## Corvus Announces Mass Storage And Network Systems For Atari 800

Corvus Systems, Inc. announced the availability of Winchester disk systems and the Corvus Multiplexer local area network for the Atari 800 microcomputer.



This announcement means that Atari 800 owners can join microcomputer users who enjoy the speed, reliability, and storage capacity of Corvus 6, 11, and 20 megabyte disk systems. It also means that, with the Corvus Multiplexer local network, Atari users can share mass storage as well as printers and other expensive peripherals. Corvus will also offer its Mirror backup system which uses video tape technology for Winchester disk backup. Prices of Corvus disk systems for the Atari 800 start at \$3,195 complete with interface and all required software.

*Corvus Systems, Inc.  
2029 O'Toole Avenue  
San Jose, CA 95131  
(408)946-7700*

## Software Publisher Releases P/SAT Preparatory

Edu-Ware has announced two software tutorials for college-bound students on mastering vocabulary and deciphering new words. PSAT Word Attack Skills and SAT Word Attack Skills prepare students specifically for the "antonyms" portion of the Scholastic Achievement Test.

PSAT and SAT Word Attack Skills each contain two diskettes: Prefixes and Roots. Vocabulary

words, selected for their frequent appearance on the PSAT/SAT, are grouped into lessons (six per diskette). In each lesson, students first pinpoint a word's meaning by selecting its synonym. The word is then reviewed through definition, sample sentences, analysis of its components (root and/or prefixes), and a test question. A timed test then prepares students to function under pressure.

PSAT Word Attack Skills and SAT Word Attack Skills are independent tutorials, yet can be purchased and used together as a comprehensive sequence. Both systems are available for the Apple II and II Plus computers,

## VIC\* OWNERS

### TELEGAMES

**BRINGS YOU MORE SOFTWARE:**

**BREAKAWAY** – A breakout game using paddles – \$8.95

**TARGET ZAP** – Move man around screen to hit randomly appearing objects – \$8.95

**HANGMAN** – A fun and educational game for all – \$7.95

**SUPER TREK** – Track down Klingons; then destroy them (3K exps. req.) – \$9.99

**LEARNING SERIES #1** – First of a series of tapes and reference material put together to help the new computerist learn computing the fun and easy way!! #1 – \$14.95

**CANADIAN OR US FUNDS!!**

Send check or M.O. to:

**TELEGAMES**

P.O. Box 152

Hampton, Ontario, Canada L0B 1J0

Write For  
Free Catalog

\*Trademark of  
Commodore




48K, DOS 3.3. Each two-disk package retails for \$49.00.

Edu-Ware Services, Inc.  
P.O. Box 22222  
Agoura, CA 91301

## Discover FORTH Announced By Osborne/McGraw-Hill

Osborne/McGraw-Hill has released a new book by Thom Hogan entitled *Discover FORTH: Learning and Programming the FORTH Language*.

This introduction to FORTH, the computer language of building blocks, is written in a friendly, informal style. Beginners will find information on this multi-faceted language and instructions to guide their programming skills up to an intermediate level. More experienced programmers can use Hogan's

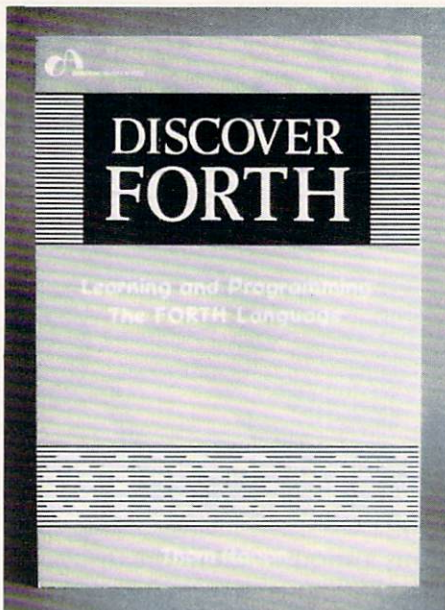

book as a reference tool.

In the text, Hogan describes FORTH syntax, specifically applicable to both FORTH-79 and FIG-FORTH. Notes are included on logical extensions and alternatives to the current standard FORTH syntax.

*Discover FORTH* provides a history of the language and a synthesis of material from programming manuals, independent programmers, and publications of the FORTH Interest Group.

*Discover FORTH: Learning and Programming the FORTH Language*


by Thom Hogan  
\$15.00 Paperback  
250 pages

Osborne/McGraw-Hill  
630 Bancroft Way  
Berkeley, CA 94710

To place an order call:  
(415)548-2805.

## Apple Announces Price Drop For Monitor III And Apple II Stand

Apple Computer, Inc. announces a price reduction for its Monitor III video display, and introduces



800 16K ..... \$665  
800 48K ..... \$799  
400 16K ..... \$320

### New Software for Atari

Temple of Apshai ..... \$ 30  
Apple Panic ..... \$ 23  
Raster Blaster ..... \$ 23  
Bug Attack ..... \$ 23  
Bishops Square ..... \$ 23  
Graphics Master ..... \$ 30  
Dung Beetle ..... \$ 23  
Action Quest ..... \$ 23  
Crossfire ..... \$ 23  
Threshold ..... \$ 30  
Frogger ..... \$ 26  
Computer Stocks & Bonds ..... \$ 17  
Guns of Fort Defiance ..... \$ 17  
Mousekattack ..... \$ 26  
K-Razy Shootout ..... \$ 36  
Jawbreaker ..... \$ 23  
Black Forest ..... \$ 20  
Ghostly Manor ..... \$ 20

Tremendous Discounts on All ATARI software from Adventure International, Arcade Plus, ARTSCI, Automated Simulations, Avalon Hill, Broderbund, Budgeco, Cavalier, Computer Magic, Crystal Computer, Datasoft, Edu-Ware, Gebelli, Innovative, J.V. K-Byte, LJK, On-Line, Quality Software, Spectrum Strategic Simulation, Sublogic, United Software, Versa Computing, Visicorp.



The Computer Outlet is an associate of The Computer Learning Center For Children. We are experts in educational technology and can customize educational software curriculums for school districts, individual schools, or for the child at home. Please contact us about your software and equipment requirements and feel free to stop by our school in Las Vegas.

We have one of the world's largest educational software inventories featuring our own Computer Learning Center software.

Ten Little Robots (ATARI) ..... \$12.95  
Pre-School Math (ATARI) ..... \$19.95  
Funbunch (TRS-80) ..... \$15.95  
Jack & Jill (TRS-80) ..... \$12.95

The absolute lowest prices on all Apple Software from Adventure International, Astar, Artsci, Automated Simulations, Avalon Hill, Avant-Garde, Beagle Bros., Bez, Broderbund, Budgeco, California Pacific, Cavalier Computer, Continental software, Dakin, Datamost, Datasoft, Delta Software, Denver Software, EDJ-Ware, Gebelli, Hayden, Highlands Com-

**SPECIALS OF THE MONTH**  
BMC 13" Color Monitor \$309  
TI 99/4A Computer ..... \$325  
Axlon Ramcram ..... \$142  
Hayes Smartmodem .. \$229  
Elephant Disks ..(box) \$ 22

**SAVE UP TO 35% on Personal and Business Computers, Peripherals and software from these leading manufacturers:**

Computers — Altos, Commodore, Dynabyte, Televideo, Texas Instruments, Xerox.  
Modems — Hayes, Lexicon, Livermore, Noxation.  
Monitors — Amdek, BMC, NEC, Sanyo.  
Printers — Anadex, Diablo, Epson, MEC, Okidata, CITO, QUME, Texas Instruments.  
Miscellaneous — Axlon, Sorge Sentry.

puter, Howard Software, Infocom, Innovative Design, ISM, IUS, LJK, Micro Lab, Micro Pro, Microsoft, Muse, On-Line, Piccadilly, Phoenix, Software, Quality Software, Riverbank, Sensible, Sentient, Sierra, Sirius, Sir-Tech, Softape, Stone-ware, Strategic Simulations, Sublogic, Synergistic, Turnley, United Software, Versa Computing, Videx, Visicorp, etc.


**YOUR ONE STOP MARKETPLACE FOR ALL YOUR COMPUTER NEEDS.**  
If not listed, please ask.

## Computer Outlet



Park Place — Upper Level  
1095 E. Twain — (702) 796-0296  
Las Vegas, Nevada 89109

Call Toll Free **800-634-6766**  
We accept Major Credit Cards



VIC20 ..... \$249

### VIC Software

Avenger ..... \$ 23  
Superslot ..... \$ 23  
Super Alien ..... \$ 23  
Jupiter Lander ..... \$ 23  
Draw Poker ..... \$ 23  
Midnight Drive ..... \$ 23  
Starfleet Orion ..... \$ 19  
Morloc's Tower ..... \$ 16  
Dragon's Eye ..... \$ 19  
Spiders of Mars ..... \$ 42  
Robot Blasters ..... \$ 30  
Meteo Run ..... \$ 42  
Blastoids ..... \$ 15  
Amok ..... \$ 15  
Alien Blitz ..... \$ 19  
Skymath ..... \$ 12  
Space Division ..... \$ 12  
Long Division ..... \$ 12  
Gobbler ..... \$ 19  
The Alien ..... \$ 19  
Invader Fall ..... \$ 17  
Stars Wars ..... \$ 14  
Laser War ..... \$ 15  
Dragon Maze ..... \$ 14  
Space Intruders ..... \$ 16  
Computer Stocks & Bonds ..... \$ 13  
Guns of Fort Defiance ..... \$ 16

**AMI Apple Disk Drives**  
40 Track ..... \$345  
80 Track ..... \$399

For Fast Delivery, send certified or cashier checks, money orders, or direct bank wire transfers. Personal checks allow 2 to 3 weeks to clear. 25% deposit on all C.O.D.'s. Prices are mail order only and are subject to change. Shipping-Software (\$2.00 Minimum), hardware-call. Nevada Residents all sales tax. Foreign inquiries invited — add 15% for shipping.





a stand which permits easy use of the Monitor III with the Apple II personal computer.

The suggested retail price of the Monitor III is now \$249.00, a 22% reduction, and applies to both white and green phosphor versions. The new pricing reduces the total system cost for both the Apple II and the Apple III.

The Apple II Stand is designed to the exact width of the Monitor III to allow aesthetic integration into the Apple II system. The stand permits easy accessibility to the back of the Apple II. The suggested retail price is \$29.95.

Apple Computer  
20525 Mariani Ave.  
Cupertino, CA 95014

# Micro Wholesale

## BEST PRICES



**VIC-20 \$248**

**5 VIC Programs \$19.95**  
States & Capitols, Jackpot, Countries & Capitols, Black Jack, and Hangman.

### COMMODORE EQUIPMENT

VIC Printer	\$ 320
VIC Disk	\$ 467
PET 4016	\$ 789
PET 4032	\$ 952
CBM 8032	\$1087
Super PET	\$1636
Datasette	\$ 63
Single Disk	\$ 541
4040 Disk	\$ 983
8050 Disk	\$1333
4022 Printer	\$ 613
8023P Printer	\$ 768
8300P Daisy Printer	\$1732

Xerox 820	\$2447
Atari 400	\$ 347
Atari 800	\$ 697
Atari Disk	\$ 447
Box of 10 Elephant Diskettes No. 1 S.S. S.D. Soft Sector	\$ 21
Anadex 9501 Printer 200CPS Matrix-Graphics	\$1197
Smith Corona Daisy Printer Letter Quality, Parallel or Serial	\$ 787
Comet I, 124 CPS Matrix Printer Bidir. Parallel or Serf-Lmtd Qty	\$ 302
Epson MX70	\$ 344
Epson MX80	\$ 444
Epson MX80FT	\$ 547

**Other Brands Carried:** NEC, ALTOS, NORTH STAR, DIABLO, QUME OKIDATA, TELE-VIDEO, AMDEK, MAXELL, SCOTCH, DY-SAN, CITO, ZENITH and More.

Ask For Catalog: Specify Commodore, Atari, Apple, North Star, or Peripherals.

**Micro Wholesale**  
276 N. University, P.O. Box 1243  
Provo, Utah 84603 (801) 373-2901

Prices are for prepayment by certified check, add 3% for Bank Cards. Personal checks accepted, but will delay shipment. When possible, all items shipped UPS, freight collect. All sales subject to availability and stock.

# CALL FOR THE BEST PRICE.

Call P.R.I.C.E. for big savings on home computers, video cassette recorders, car stereo, home stereo, portable radios and tape recorders, telephone answering machines, video games, tape, and movies.

**800-343-1078**  
[in Mass., (617) 961-2400]

Remember, P.R.I.C.E. will beat any legitimate offer on in-stock items.

Just pick up the phone, dial our toll-free number, and ask for P.R.I.C.E. quotes. (Or ask us to mail you our P.R.I.C.E. list.)

P.R.I.C.E. is what you want.

Commodore VIC-20 illustrated.

Atari 400 home computer	\$319
Atari 410 recorder	\$75
Atari 810 disk drive	\$439
Atari CX481 entertainer package	\$82
Atari C2600 video game computer system	\$139.95
Commodore VIC-20 home computer	\$249
Commodore 1530 datacassette	\$68
Commodore 1211 super expander	\$52
Commodore 1901 avengers cartridge for VIC	\$22.50

Computer Software Associates music composer program cassette for VIC ..... \$9.95

Mattel 2609 Intellivision video game computer system ..... \$229.95

Magnavox 7600 Odyssey video game computer system ..... \$139.95

**CALL FOR PERIPHERALS AND PROGRAMS**  
Prices subject to change after 7/31/82.

# P.R.I.C.E.

Hours: 9 to 9 Mon.-Fri.  
10 to 5 Sat.

MasterCharge VISA

67 Teed Drive, COM 782, Randolph, MA 02368




## Sybx Releases Book For Business Managers

*Executive Planning with BASIC* by X. T. Bui has just been released by Sybex. With this book, the business manager will learn to use a personal computer to accelerate decision-making and planning methods.

Up-to-date BASIC decision model computer programs for business management are presented including: Cost/Volume/Profit, Linear Programming, Inventory Management, Critical Path Analysis and PERT, Exponential Smoothing, Linear and Multi-Linear Regression, Financial Ratio Analysis, Discounted Cash Flow, Portfolio Management and more.

The development, rationale and proper use of each decision model is carefully outlined. True-to-life application examples are provided and problems are followed up and solved in sample runs of the programs. Three appendices complete the text: a summary of BASIC instructions; a collection of subroutines for matrix Algebra; and a summary of the most important business statistics tools along with BASIC programs that perform these algorithms.

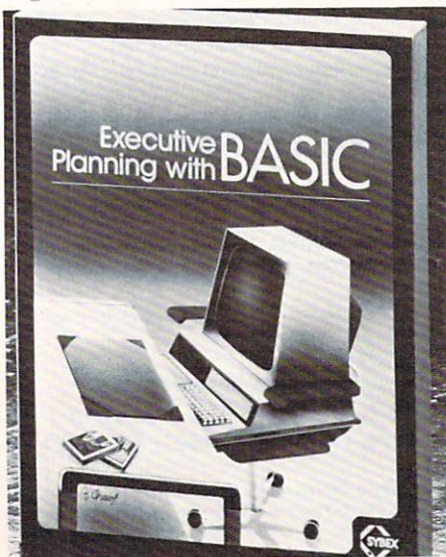

Executive Planning With BASIC  
by X. T. Bui  
\$12.95  
Ref. B380 ISBN: 0-89588-083-0  
Sybex  
2344 Sixth Street  
Berkeley, CA 94710  
(415)848-8233



## Intelligent Modem From BIZCOMP

BIZCOMP Corporation announces the immediate availability of Model 1012, a microprocessor-based 1200/300 baud Intelligent Modem. The 1012 features full Bell 212A compatibility and BIZCOMP's keyboard dialing.

An integral serial auto-dialer allows keyboard dialing while the low-power, LSI circuit design gives reliable, cool running operation. A Thompson pre-filter assures excellent data integrity. The built-in microprocessor provides a full complement of powerful commands for controlling dialing, auto-answer, self testing and programming modem parameters.

Front panel controls have been ergonomically designed for efficient and simple use by nontechnical office personnel. The 1012 is fully FCC registered for direct connection and is packaged in a stylish, low-profile injection enclosure which may be used as a base for a desk telephone.

Applications include remote datastations, store-and-forward electronic mail, computer-computer file transfers and automatic polling of unattended locations.

*Inquiries Manager*  
BIZCOMP Corporation

P.O. Box 7498  
Menlo Park, CA 94025  
(415)966-1545

## EPYX Releases Exciting New Quest Game For The Atari

EPYX has released King Arthur's Heir, a new fantasy quest game for the Atari 400/800 home computer.

In this legendary realm, the player serves at the King's right hand. Arthur, King of the Britons, has named him heir to the throne.

But the player must prove himself worthy to hold the crown of Camelot. Arthur commands that he shall go in quest of the treasured Scroll of Truth, hidden by the great wizard, Merlin.

By moving his joystick, the player's computer displays, in full color graphics, the magical world of Camelot and its mystical surroundings.

Being faithful to the Crown, the player accepts the royal command to retrieve the scroll. Merlin forewarns him of mysterious places, gruesome creatures, evil forces and magical objects that enter his quest at every turn.

Defying all perils, the player journeys through an ominous forest, a supernatural castle, treacherous caves and magical cities — a few of the seven types of realms that entice him. Some hold necessary supplies and even treasures, but in others he is surrounded by evil.

The player must do all in his power to ward off dragons, bargain with wizards, and subdue the devil himself, as more than these will try to waylay him in his quest.

But, amazing treasures will spur him on. A staff that emanates the most powerful of magic and a ring with supernatural powers are among the wonders the player may find.



## THE MONKEY WRENCH™ FOR ATARI

\$49.95



A BASIC and machine language programmers aid for 800 users. Plugs into right slot and works with ATARI BASIC. Adds 9 new direct mode commands including auto line numbering, delete lines, change margins, memory test, renumber BASIC, hex/dec conversion, cursor exchange, and machine language monitor.

The monitor contains 15 commands used to interact with the 6502. Some are display memory/registers, disassemble, hunt, compare, hex/dec convert, transfer memory, and printer set/clear. Uses screen editing.

### CASSETTE BASED MACRO ASSEMBLER/EDITOR

"The Compatible Assembler/Editor"

- Macros, Conditional Assembly, String search and/or replace, standard mnemonics, (Ex: LDA (LABEL), Y)
- Long labels, MOVE, COPY, AUTO, DELETE, PUT, GET, etc.

### EPROMS - HIGH QUALITY, NOT JUNK

Use with PET, APPLE, ATARI, SYM, AIM, etc. 450 ns. \$6.50 for 2716, \$12.50 for 2532.

## EPROM PROGRAMMER FOR PET AND ATARI COMPUTERS

The BRANDING IRON is an EPROM programmer especially designed for PET and ATARI computers. Programs 2716 and 2532 type EPROMs. The PET version plugs into the cassette and I/O port and comes with software which adds the programmer commands to the PET monitor. The ATARI version plugs into controller jacks and comes with a full fledged machine language monitor which provides 30 commands for interacting with the computer and the BRANDING IRON.

PET - \$75.00 ATARI - \$119.95

### 5 1/4 INCH SOFT SECTORED DISKETTES

Highest quality. We use them on our PETs, APPLES, ATARIs, and other computers. \$22.50/10 or \$44.50/20



### PET TERMINAL SOFTWARE


A buy you RS-232 users can't pass-up. Includes RS-232 hardware with a sophisticated software package. May be controlled via keyboard or from BASIC. A super buy. \$129.95

### STARWRITER F-10 DAISY WHEEL PRINTER

PARALLEL - \$1495, RS-232 - \$1680, TRACTORS - \$210

## SIGNALMAN MARK I DIRECT CONNECT MODEM - \$89.50

Standard 300-baud, full duplex, answer/originate. Powered by long lasting 9-volt battery (not included). Cable and RS-232 connector included.



## MAE SOFTWARE DEVELOPMENT SYSTEM FOR PET, APPLE, ATARI \$169.95

"The Compatible Assembler"

- Professional system for development of Machine Language Programs. 31 Characters per label.
- Macro Assembler/Text Editor for Disk-based systems.
- Includes Word Processor for preparation of Manuals, etc.
- Standard Mnemonics - Ex.: LDA (LABEL), Y
- Conditional Assembly, Interactive Assembly.
- Editor has string search/search and replace, auto line numbering, move, copy, delete, u/c capability.
- Relocating Loader to relocate object modules.
- Designed with Human Factors Considerations.

BEFORE YOU BUY THAT OFF-BRAND ASSEMBLER, WRITE FOR OUR FREE DETAILED SPEC SHEET.

FLASH! EHS Management has decided to allow \$50.00 credit to ASM/TED owners who want to upgrade to MAE. To get this credit, return ASM/TED manual with order for MAE.

# Eastern House

2329 Linda Dr.  
Winston-Salem, N.C. 27106  
(919) 924-2889 (919) 748-8446  
Send for free catalog!

VISA

MasterCard

# Olympic Sales Company

CABLE: "OLYRAV" LSA  
Main Showroom & Offices:  
216 So. Oxford Avenue  
(P. O. Box 74545)  
Los Angeles, CA 90004  
Telex: 67 34 77

WE HONOR VISA and MASTERCHARGE



ORDER DESKS  
open 6 days a week!  
7:00 am to 7:00 pm Mon - Sat  
Order Desks: (213) 739-1130

TOLL-FREE (outside Calif.) (within Calif.)  
800-421-8045 800-252-2153

Prices shown are for mail or phone orders; Walk-in slightly higher.

Goods subject to availability; OSC will meet or beat almost any advertised price as long as the competition has the goods on hand; not responsible for typographical errors; prices & specifications subject to change without notice; this ad supercedes all previous ads; min shpg & hndlg \$5.95; Send \$2 for 112-pg catalog

## hp HEWLETT PACKARD

HP-87 32K Bytes standard	\$1885.00
82907A 32K Mem. mod.	239.00
82908A 64K Mem. mod.	337.00
82909A 128K Mem. mod.	537.00
HP-85A Computer	\$1985.00
HP-125 Computer	1985.00
HP-41C Prog. scientific	188.00
HP-41CV Prog. scientific	248.00
HP-41 Card reader	169.00
HP-41 Printer	297.00
HP-41 Optical wand	99.00
82106A 41C Memory module	26.00
82170A 41C Quad mem. mod.	84.00
82160A HP-IL interface	109.00
82161A Cassette drive	437.00
82162A HP-IL printer	397.00
HP-97 Prog. sci./printer	584.00
HP-67 Hand-held fully prog	309.95
HP-32E Scientific	58.95
HP-33C Prog. scientific	93.95
HP-34C Adv. prog. scientific	114.00
HP-37E Business	77.95
HP-38C Prog. financial	119.00
HP-11C Prog. scientific	114.00
HP-12C Prog. financial	127.00
82905A Impact printer	619.00
82901M 5 1/4" dual drive	1699.00
9895A 8" dual drive	4499.00
2631 B Impact printer	2999.00
2601 A Letter qual. ptr.	2999.00
85-15001 Mass storage ROM	124.00
85-15002 Plot/print ROM	124.00
85-15003 I/O ROM	239.00
85-15004 Matrix ROM	124.00
85-15005 Adv. prog. ROM	124.00
85-15007 Assembler ROM	239.00
82903A 16K mem. module	169.00
82937A HP-1B interface	328.00
82939A Serial interface	338.00
82940A GPIO interface	408.00
82941A BCD interface	408.00
82949A Parallel ptr. int.	239.00
HP-7470A Hi-speed color grphc ptr w/intfc	1269.00



New TI-99/4A - 48K RAM  
100% TI parts w/Extended Basic  
or TI-LOGO Re: \$1300 Y/C: \$5689.95

## Texas Instruments Home Computer



16K

10" color monitor high res  
32K memory module  
Extended Basic  
Speech synthesizer  
Disk memory drive  
Telephone coupler (modem)  
Printer (solid state)  
TI-LOGO

TI-99/4A  
Only  
\$299.95

RETAIL	Your Cost
374.95	339.95
399.95	314.95
100.00	75.00
149.95	129.95
499.95	394.95
224.95	189.95
399.95	319.95
250.00	99.95

## SANYO MONITORS

High resolution, number one seller!	Retail	Your Cost
VM4509 9" B & W	190.00	159.95
VM4215 15" B & W (below our cost)	349.00	189.95
DMS109 9" Green	200.00	169.95
DM8112 12" B & W	250.00	199.95
DM8112 12" Green	260.00	209.95
DMC6013 13" Color, hi quality	470.00	399.95
DMC6113 13" Color, RGB hi res	995.00	799.95
DM2012 (NEW) 12" B & W	179.00	139.95
DM2112 (NEW) 12" Green	199.00	159.95

Free w/purchase of each Sanyo monitor one \$49.00 LCD pen watch  
(Subject to avail. on new models & others)

## Commodore VIC-20

5K Personal Computer  
(Expands to 32K) Works with any TV!  
Retail: \$300.00 Your SPECIAL Cost: \$259.95  
FREE with purch of VIC-20 one \$49.50 LCD Pen Watch!  
Commodore Datasette Recorder  
for VIC-20 Your Cost: \$68.95 We carry all peripherals,  
software & access. for the VIC-20 (we will beat any price!)

## ATARI® IN STOCK COMPUTERS

FOR ATARI 400 & 800-  
GHOST HUNTER (similar to Pac-Man)  
Disk \$34.95 Cassette \$29.95

Model	Retail	Your Cost
800 16K	1080.00	689.95
800 48K	1280.00	789.95
800 160K		
(800-32K + 128 RAM disk)	1299.95	
810 Disk drive	600.00	469.95
Atari VisiCalc	200.00	169.95
825 Impact Ptr	1000.00	779.95

## ATARI 400

Personal Computer System



SUPER SPECIAL - ATARI 400 (16K)  
Retail \$595.00 Your Cost \$299.95  
400 Lang. card opt. \$49.95

## ATARI

Programmable Color TV Game  
Your Cost: \$139.95  
Atari's game cartridge  
Pac-man \$27.95

IDS Prism Printers -  
& Software for Apple Computers\*  
\*call for our LOW, LOW prices!  
Immediate delivery -  
132 column (color) Retail 1995.00 Your Cost 1795.00  
80 column (B & W) Retail 1196.00 Your Cost 999.00

While supply lasts  
CLOSE-OUT ON PRINTERS  
PAPER TIGER by IDS

Model	Retail	Our Cost	We Sell
480 G	1094.00	733.00	699.95
445 G	894.00	599.00	579.95
445	795.00	555.00	536.00

CENTRONICS  
730 - 895.00 550.00 550.00  
737 - 895.00 610.00 489.00

Epson PRINTERS

Model	Your Cost
MX70	\$299.95
MX80 with grafix	489.95
MX80 FT	599.00
MX100	749.00
Graphtrax chip	95.00

MATTEL ELECTRONICS INTELLIVISION

**\$229.95**  
Retail: \$325.00  
animated TV game!

AMDEK Ledex High Quality Monitors

Model	Description	Retail	Your Cost
100	12" B/W, 12 MHz	180.00	149.00
300 G	12" Green, 18 MHz	269.00	199.00
Color I	13" Color, NTSC comp. input, audio amp & spkr	499.00	359.00
Color II	13" Color, RGB input, hi res graphics, spkr	1295.00	799.00
Color III	13" Color, RGB 240 line resolution	699.00	459.00



He may discover a magnificent ark, which acts in his favor if, and only if, he has certain magic in his possession.

If he uses his powers wisely, they will hasten his quest and safely return him to Camelot and the Crown.

King Arthur's Heir is available now on disk for the Atari 400/800 (32K) with joystick controller. The suggested retail price is \$29.95.

EPYX  
P.O. Box 4247  
Mountain View, CA 94040

## Microcomputer Index To Go Online With Dialog

Microcomputer Information Services, publishers of Microcomputer Index, has announced the availability of Microcomputer Index on the Dialog Information Retrieval Service. The index will

articles from 32 periodical sources including: BYTE, InfoWorld, Interface Age, Creative Computing and **COMPUTE!**. The information covered includes microcomputer articles, software reviews, hardware reviews, book reviews, new product descriptions and more.

Each citation contains an abstract describing the article, complete bibliographic information and assigned descriptors. The printed version of Microcomputer Index, which is published quarterly, is \$30 per year.

For additional information, contact:

*Microcomputer Index*  
2464 El Camino Real, Suite 247  
Santa Clara, CA 95051  
(408)984-1097

or

*Dialog Information Services*  
3460 Hillview Avenue  
Palo Alto, CA 94304  
(415)858-3735

user now has write protect switches/indicators for each drive, a power ON indicator and audible error beeper. The ease of write protecting drives by switch versus diskette labels encourages good operating procedure to prevent accidentally erased files. The power indicator and error beeper provide valuable disk unit status to the operator.

All switches and indicators are mounted in a small (2"x3"x1") control box that may be placed on the disk unit or near the computer. The control box connects by cable to a circuit board which "piggybacks" onto a 2040/4040 internal connector. Installation involves simple reconnection of internal disk unit cables, which can be accomplished without special tools or skills or any soldering. Full instructions are provided.


Disk-O-Mate is shipped fully assembled and tested. Price is in the \$70-\$80 range.

*Optimized Data Systems*  
P.O. Box 595  
Placentia, CA 92670  
(714)966-3201

## Educational Game Drill From School CourseWare Journal

Students of any age may now begin to find the typewriter and computer keys by touch and without looking, in a new educationally designed game drill by School CourseWare Journal (previously CorseWare Magazine).

"TYPING" presents on the screen the names of the keys for a single typewriter row. This presentation encourages learners to keep their eyes away from their fingers. As the user responds to letter or character cues correctly, the key names begin to disappear from the screen. If a

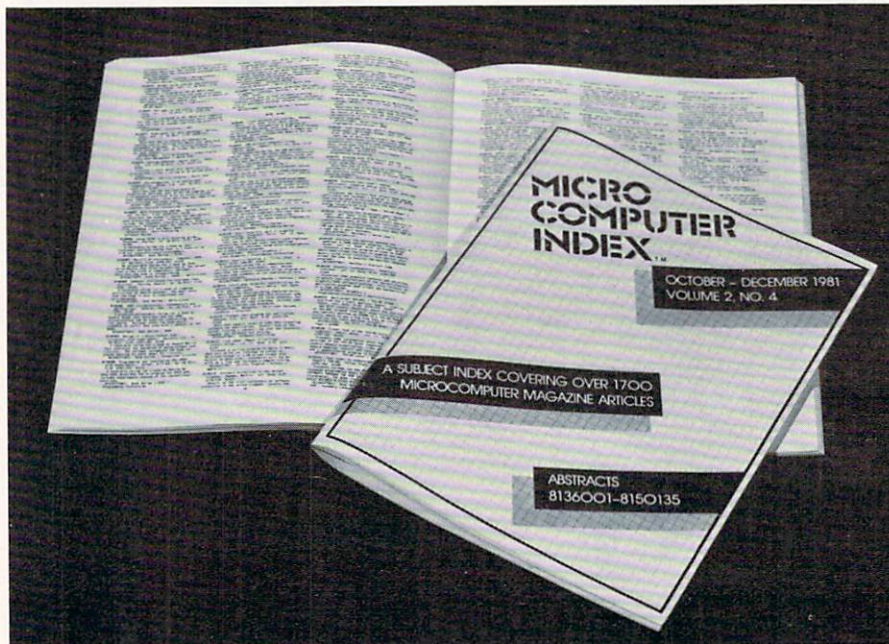

begin online service with over 10,000 citations during the summer of 1982.

Microcomputer Index, which is also available in a printed version, began publication in 1980. The index is a subject and abstract guide to microcomputer


## Disk-O-Mate For CBM Disk Drives

Optimized Data Systems announces the PH-003 Disk-O-Mate for Commodore 2040/4040 disk drives. With Disk-O-Mate the



# SMITH-CORONA TP-I \$699

Letter Quality  
Daisy Wheel  
12 CPS  
Low Cost Text  
Printer

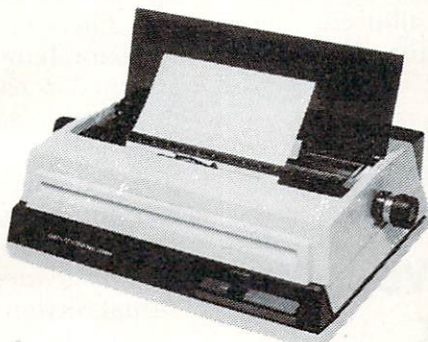

## OTHER GREAT PRINTER VALUES

NEC 8023 .....	\$479	Diablo 630 .....	\$1975
NEC 7710 .....	\$2299	Citoh Prowriter .....	\$479
Okidata 82 .....	\$479	CBM/Diablo Special .....	\$1649
Okidata 83 .....	\$719	Trendcom 100 .....	\$269
Epson MX80 .....	\$429	Centronics 739-I .....	\$479
Epson MX80FT .....	\$519	Centronics 739-III .....	\$579
Epson 100 .....	659		

## computer mail order

east  
800-233-8950

In Pa. Call (717) 327-9575  
477 E. Third St.  
Williamsport, PA 17701

west

800-648-3311

In Nev. Call (702) 588-5654  
P.O. Box 6689  
Steline, NV 89449

# ATARI®

VIC-20 \$249

800 (16K) **649**

400 (16 K)	319
410 Recorder	74
810 Disk Drive	439
822 Printer (THERMAL)	269
825 Printer (80 COLUMN)	589
830 Modem	149
850 Interface	164
853 Memory (16K)	79

### ATARI SOFTWARE

4002 BASIC CARTRIDGE	45	483 THE PROGRAMMER	52
4003 ASSEMBLER EDIT	45	484 THE COMMUNICATOR	299
4006 SUPER BREAKOUT	33	404 WORD PROCESSOR	110
4007 MUSIC COMPOSER	45	405 PILOT (EDUC)	99
4008 SPACE INVADERS	33	4106 PROGRAMMING 2	21
4009 COMPUTER CHESS	33	4117 PROGRAMMING 3	21
4011 STAR RAIDERS	37	8126 MICROSOFT BASIC	66
4012 MISSILE COMMAND	33	8121 MACRO ASSEM&EDIT	66
4013 ASTEROIDS	33	813 CAVERNS OF MARS	29

CALL OR WRITE FOR FREE CATALOG

## COSMIC COMPUTERS

UNLIMITED

228 N. PROSPECTORS RD.  
DIAMOND BAR, CA.  
91765


SHIPPING EXTRA \$2 MINIMUM  
PRICES SUBJECT TO CHANGE  
CALIF. RESIDENTS ADD TAX

OPEN 7 DAYS (714) 861-1265  
8am - 9pm



# Tara

## Computer Products

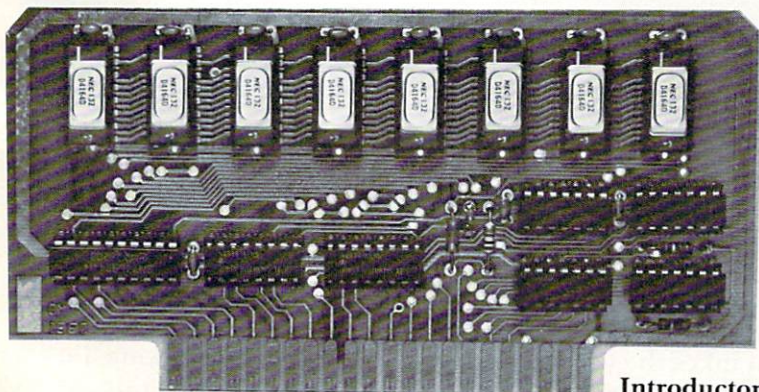

Tara Computer Products  
3648 Southwestern Blvd.  
Orchard Park, NY 14127  
(716)662-7219

Tara Computer Products  
1655 Sismet Rd., Unit 30  
Mississauga, Ontario  
Canada L4W 1Z4  
(416)624-5655

Introductory  
Offer **\$199<sup>00</sup>**

US  
PLUS  
SHIPPING

### PUT AN END TO YOUR MEMORY EXPANSION PROBLEMS!

With the only logical choice for 48K memory expansion of the Atari 400. Upgrade with the new Tara Computer 48K RAM card for the 400.

#### Features:

- Easy installation.
- Cooler, less power hungry operation compared to standard 16K or 32K products.
- Uses state-of-the-art 64K Dynamic RAMs.
- Extends 400 useable memory to 48K.
- Allows higher performance 800 software to be run on your 400.
- Quality construction with gold edge connector.
- Allows for disk operation.

Increase the performance of your personal system efficiently and economically with the new Tara Computer 48K RAM card. Available direct from Tara Computer or from select dealers.

(Dealers' Inquiries Welcome).



cue is missed, the key name will reappear to help the user. The object of the drill is to make all the key names disappear from the screen. A summary of speed, accuracy and score is presented at the end of each game with the previous best speed, accuracy and score also displayed.

Students are encouraged to double the amount of their drill by the question DO YOU WISH TO TRY TO BEAT YOUR SCORE?

Volume 2, Number 3 of School CourseWare Journal, which includes the two programs "TYPING" and "SIGN DRILL," costs \$15.95 for the cassette version of the two programs (and \$6.50 for each program when included in a school year subscription). The programs are available on cassette or diskette for the Apple II 16K, TRS-80 16K, and PET 8K microcomputers.

For a free catalog:

*School CourseWare Journal*  
4919 N. Millbrook, Suite 222R  
Fresno, CA 93726

## Data Perfect Atari From LJK

LJK Enterprises, Inc. announced the release of its newest program Data Perfect Atari, for the Atari 400 and 800 computer. Written in machine language, Data Perfect requires no disk swapping, and is fully interactive with LJK Word Processor, Letter Perfect. This user friendly program allows the operator to design his own screen mask. The single-load program, which is menu driven, has incorporated into it a utilities section, as well as a report generator and a mailing label generator. Multiple searches and sorts are allowed. Complete formula operations, as well as mathematical operations, may be performed on and between fields. The program supports one or two disk drives, and requires a minimum

of 32K memory. Use with any parallel printer is allowed. The introductory cost for the program is \$99.95.

*LJK Enterprises, Inc.*  
P.O. Box 10827  
St. Louis, MO 63129  
(314)846-6124

## Improved Version Of DOS For Atari 800

This command-driven K-DOS is completely compatible with the Atari 2.0S and other related software. In addition, K-DOS supports the Atari 850 handler which allows the use of printers and modems.


K-DOS features: a machine language monitor which allows

commands.

The 40-page, K-DOS instruction handbook, with disk attached, is easy-to-read and designed to acquaint programmers with all of the K-DOS features, and will give personal computer buffs greater reliability, flexibility and control. The handbook is divided into five individual sections for quick reference and also contains a pocket Command Summary Card.

For additional details and price information on K-DOS and the K-DOS Handbook, please contact:

*John Mathies*  
K-BYTE  
1705 Austin, P.O. Box 456  
Troy, Michigan 48099  
(313)524-9878

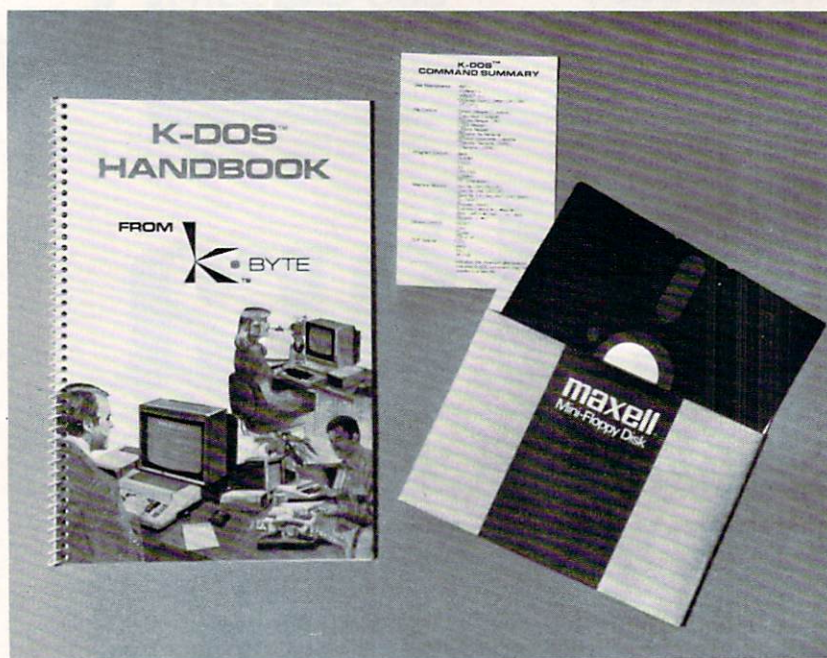

examination and alteration of memory in hexadecimal and displays ATASCII representation; interception of the break instruction does not crash the system, but takes the user back into K-DOS; new, powerful commands reserve and erase memory and may be executed when the BASIC or Assembler cartridge is in control; K-DOS allows the user to create his own

## New VIC-20 Program By RAK Electronics

Budget II – a new home budget program that maintains a full calendar year's budget data on tape for review and update. The data requires input of each month's NET INCOME and 16 budget categories. After all of



# DISCOUNT

# SOFTWARE ACCESSORIES

APPLE®	YOUR LIST PRICE	
David's Midnight Magic	\$ 34.95	\$ 25.00
The Arcade Machine	44.95	33.00
Track Attack	29.95	21.00
DOS Boss	24.00	17.00
Raster Blaster	29.95	21.00
The Home Accountant	74.95	54.00
Horizon V	34.95	25.00
Castle Wolfenstein	29.95	21.00
SuperText II	150.00	100.00
Frogger	34.95	25.00
Mouskattack	34.95	25.00
Bandits	34.95	25.00
Gorgon	39.95	29.95
Jellyfish	29.95	21.00
Joyport	74.95	54.00
Wizardry	29.95	21.00
PFS (New Improved)	125.00	95.00
Visicalc 3.3	250.00	199.00
Visitrend/Visiplot	300.00	240.00
Ceiling Zero	29.95	21.00

ATARI®	YOUR LIST PRICE	
<input type="checkbox"/> Asteroids (c)	\$ 44.95	33.00
<input type="checkbox"/> Star Raiders (c)	49.95	38.00
<input type="checkbox"/> Frogger (d)	34.95	25.00
<input type="checkbox"/> Bug Attack (t, d)	29.95	21.00
<input type="checkbox"/> Raster Blaster (d)	29.95	21.00
<input type="checkbox"/> Jawbreaker (d, t)	29.95	21.00
<input type="checkbox"/> Text Wizards (d)	99.95	75.00
<input type="checkbox"/> Apple Panic (d)	29.95	21.00
<input type="checkbox"/> Match Racers (d)	29.95	21.00
<input type="checkbox"/> Invasion Orion (d, t)	24.95	18.00
<input type="checkbox"/> Visicalc (d)	250.00	195.00
<input type="checkbox"/> Jawbreaker (d, t)	29.95	21.00
<input type="checkbox"/> Survival/Adventure (t)	24.95	18.00
<input type="checkbox"/> Shattered Alliance (d)	39.95	29.00
<input type="checkbox"/> Star Warrior (d)	39.95	29.00

TRS-80®	YOUR LIST PRICE	
<input type="checkbox"/> Allen Armada (t)	\$ 14.95	11.00
<input type="checkbox"/> Space Rocks (t)	19.95	16.00
<input type="checkbox"/> Star Scout (d)	20.95	17.00
<input type="checkbox"/> Lunar Lander (d)	20.95	17.00
<input type="checkbox"/> Eliminator (d)	19.95	16.00
<input type="checkbox"/> Missile Attack (t)	14.95	11.00
<input type="checkbox"/> Planetoids "Asteroids" (t)	14.95	11.00
<input type="checkbox"/> Crush, Crumble & Chomp (d)	29.95	22.00
<input type="checkbox"/> Rescue at Rigel	29.95	22.00
<input type="checkbox"/> Morloc's Tower (t)	19.95	16.00
<input type="checkbox"/> Invasion Orion (t)	24.95	18.00
<input type="checkbox"/> Computer Stocks and Bonds (t)	16.00	12.00
<input type="checkbox"/> Super Nova (d)	19.95	16.00
<input type="checkbox"/> Defense Command (t)	15.95	12.00
<input type="checkbox"/> Galactic Revolution (t)	14.95	11.00

CP/M®	YOUR LIST PRICE	
<input type="checkbox"/> dBase II	\$700.00	525.00
<input type="checkbox"/> Condor III	995.00	717.00
<input type="checkbox"/> Quick Screen	149.00	124.00
<input type="checkbox"/> Wordstar	495.00	307.00
<input type="checkbox"/> CalcStar	295.00	180.00
<input type="checkbox"/> Basic 80	350.00	249.00
<input type="checkbox"/> CP/M, TRS-80 Mod II	185.00	178.00
<input type="checkbox"/> SuperCalc	295.00	212.00
<input type="checkbox"/> Spellstar	250.00	150.00
<input type="checkbox"/> Text Writer III	125.00	100.00
<input type="checkbox"/> Statpak	495.00	357.00
<input type="checkbox"/> BSTAM	200.00	145.00

SPECIALS	
<input type="checkbox"/> Zenith Green Screen Monitor	\$120.00
<input type="checkbox"/> Verbatim 5 1/4 inch disks	26.00 Box of 10
<input type="checkbox"/> Atari Joysticks	8.00 each

D = Disk T = Cassette C = Cartridge

MANY MORE PROGRAMS AVAILABLE  
WRITE OR CALL FOR FREE CATALOG

Include System Requirements With Order



Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_  
State \_\_\_\_\_ Zip \_\_\_\_\_

Payment Enclosed  C.O.D. Add \$5.00

Visa  Mastercard

# \_\_\_\_\_ Exp. Date \_\_\_\_\_

Signature \_\_\_\_\_

Phone orders accepted 4 p.m. - 7 p.m. EST

MI Residents add 4% Tax

Add \$2.00 Shipping

**STRÖM**   
Systems, Inc.

P.O. Box 197  
Plymouth, MI 48170  
(313) 455-8022

## MTG TECHNICAL SALES

### ATARI SPECIAL OF THE MONTH

ATARI 800 w 48K  
810 DISK DRIVE  
850 INTERFACE  
EPSON MX-80 OR  
C. ITOH 8510  
PRINTER & CABLE  
REG. **\$1957**  
NOW **\$1849**



ATARI  
800  
\$679



ATARI  
400  
\$329



**PASCAL AVAILABLE**  
REQUIRES 2 810  
DISK DRIVES  
**\$42**

ATARI 800 16K w 48K	679
ATARI 400 16K 810 DISK DRIVE	789
410 PROG REC	329
850 INTERFACE	449
820 IMPCT PRINT	84
822 THERM PRINT	189
825 80 CL PRINT	264
830 MODEM	264
16K RAM MODULE	629
32K RAM MODULE	134
48K RAM MODULE	84
	125
	249

M'SOFT BASIC	69
AXLON RAMDISK	429
VISICALC	159
ATARI WORD PRO	119
PER FINN MNGMT	59
ASSEMBLER/ED.	47
STAR RAIDERS	42
CAVERNS OF MARS	32
PAC-MAN (CART)	35



NOW YOU'RE TALKING.


TYPE-N-TALK™

**\$329**

CALL TOLL FREE  
1-800-343-0854  
In MA (617) 969-1790



Z-89 w48K	2075
with 5 1/4 DISK DRIVE	2295
Z-90 w 64K	2295
with 5 1/4 DISK DRIVE	2549
Z-47 8" DUAL DISK DRIVE	2995
SUPERCALC	225



OUR LOW PRICE **\$249**

DATASETTE	67
1540 DISK	525
EXPANSION MODULE	145
1515 PRINTER	345
8K MEMORY	52
SUPER EXPANDER	59
PROGRAMMER'S AID	52
VIC AVENGER	25
INTRO TO BASIC	21

CALL FOR VIC-20  
SOFTWARE  
DISCOUNT PRICES

### MTG Technical Sales

281 Needham St., Newton, MA 02164  
Out Of State 800-343-0854 - In MA 617-969-1790

Do not send cash. Personal checks take 2 weeks to clear. Add 4% for MasterCard and VISA. 20% deposit required for COD. UPS charges added. We cannot ship to P.O. Box. All prices subject to change without notice. Delivery subject to availability. In-store prices may vary. Not responsible for typographical errors.

**IN STOCK ITEMS SHIPPED WITHIN 48 HOURS**

WE CARRY A COMPLETE LINE OF MICROCOMPUTER AND VIDEO EQUIPMENT AND ACCESSORIES — CALL FOR PRICES —



the month's data is input, the data is saved via subroutine on the Budget II Data Tape which is included. The data can be re-loaded from the Data Tape at any later time for review or update. Budget II can display each month's data in dollar amounts, percentages and color bargraph. In addition to the 12 months, Budget II can display the total year amounts and the monthly average of the months with data entered.

Following are the routines available from the Menu of Budget II:

1. **INPUT NEW DATA:** Allows input of new budget data of each of the 12 months in 16 budget categories.
2. **LOAD DATA TAPE:** allows the loading of budget data from the Budget II Data Tape.
3. **CREATE NEW DATA TAPE:** allows the saving of budget data on the Budget II Data Tape after inputting NEW DATA from 1 above.
4. **VIEW DATA:** allows the display of the selected month's budget data in dollar amounts, percentages and color bargraph for the 16 budget categories.
5. **PRINT (YEAR) BUDGET:** Using an optional printer, provides printed copy of each month, total year and average month budget data.

Budget II can be used each month to add the amounts of that month's budget data and can be saved over again on the Data Tape. At the completion of the year, a new year can be saved on a new Data Tape allowing multiple years' files to be maintained.

Budget II requires the VIC-20, VIC-1530 Datasette and the VIC-1110 8K Memory Expander. Budget II including documentation and Budget II Data Tape sells for \$9.95.

VIC FILE is a multi-purpose cassette based file system for

VIC. Commands include LOAD, SAVE, PRINT, ADD, CHANGE, SORT, DELETE, and more.

Expands to available memory automatically. Allows printer option. Includes manual and data cassette. Requires minimum of 3K expansion with your VIC computer. \$9.95.


WAS RECORD, an Amateur Radio program, maintains your Worked All States record for HAM Radio with a need/worked/confirmed status and the call of the station worked for each state. Summary of worked and confirmed totals and printed routine. Requires a VIC and 3K memory expander and is available on cassette tape for \$6.95.

*RAK Electronics  
P.O. Box 1585  
Orange Park, FL 32073*

## Plug In BCD For Apple And PET Computers

Ocean Instrumentation Consultants announces a low cost, general purpose, BCD interface module for Apple II and Commodore computers. Designed for the research laboratory requirement, this unit provides an instant interface to most O.E.M. lab instruments from digital voltmeters to mass spectrometers. In operation, up to eight digits of BCD plus status information, such as sign, "off scale," etc., may be directly entered as a BASIC variable. At present, applications include use with ORION 701A and CORNING 112 pH meters, HIAC particle counters, and MICROMASS mass spectrometer. The standard package comes with interface cable, user specified plug and diskette containing machine language subroutines and a demonstration program. The input is expandable to 16 digits and the unit may also be purchased with user

specific software, tailored for special needs. \$250.

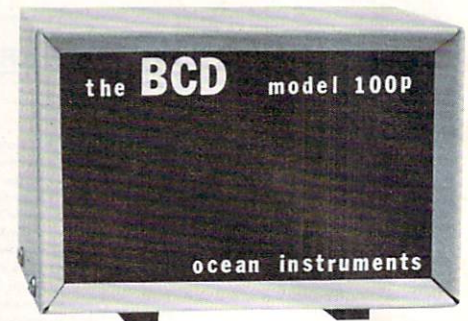

*Ocean Instrumentation Consultants  
586 Kingstown Road  
Peacedale, RI 02882*

## New Education Microcomputer Literature From Commodore

A new informational brochure is available from Commodore Business Machines Limited, Scarborough, Ontario to maximize the understanding of Commodore microcomputer capabilities in the educational field.

The brochure, entitled "The Educational Experience," covers all aspects of Commodore products as they apply to education. Included are descriptions of the four Commodore product lines, available education grants, educational software capabilities and other features. The service records are also described, as well as the intelligent peripherals, the full product line compatibility, the local support in the form of materials and dealers, and the networking capability of Commodore equipment.

For further information:


*Ian Kennedy  
Market Support Manager  
Commodore Business Machines  
Limited  
3370 Pharmacy Avenue  
Agincourt, Ontario  
M1W 2K4  
(416)499-4292*



# SOFTWARE STREET

PRESENTS

# Loco-Motion

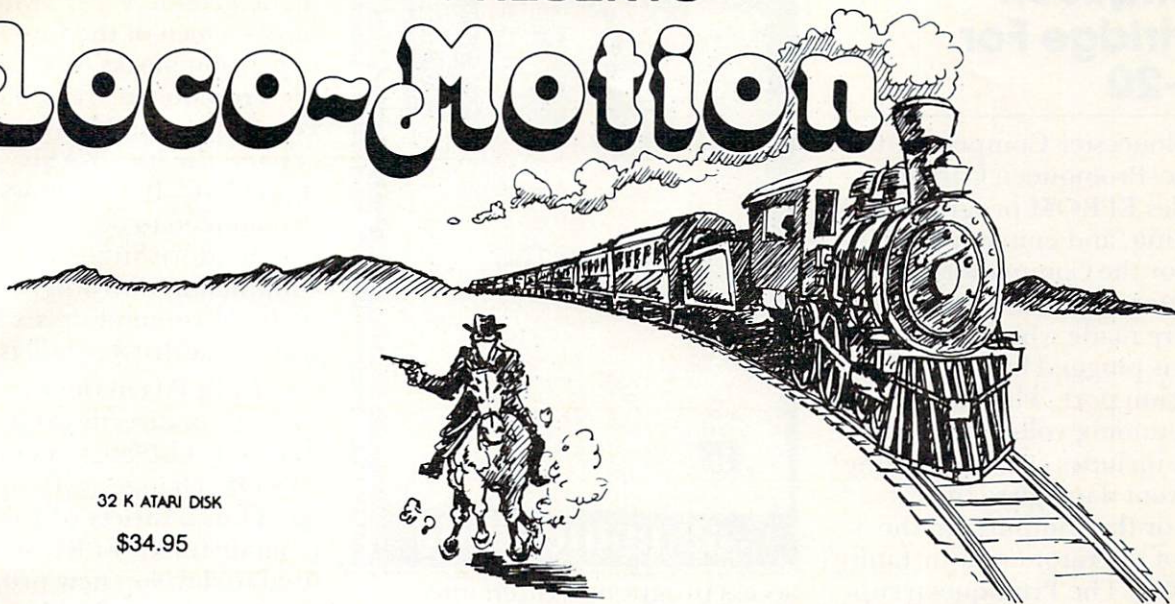

32 K ATARI DISK

\$34.95



800 Computer 16K .....	\$639.00
410 Recorder .....	\$79.00
850 Intf. Mod .....	\$159.00
830 Modem .....	\$149.00

### Special Software Packages

The Entertainer .....	\$84.00
Star Raiders, Missile Command, and Joysticks.	
The Programmer .....	\$54.00
Basic Programming language, Self teaching guide to Basic and Basic reference manual	
The Educator .....	\$115.00
410 Recorder, Basic programming language, and States and Capitals.	

### TOP SELLING PROGRAMS

Missile Command .....	\$33.96
Asteroids .....	\$33.96
Invitation to Prog. 2 .....	\$21.21
Invitation to Prog. 3 .....	\$21.21
Assembler/Editor .....	\$48.96
Jaw Breaker .....	\$25.95
Cranston Manor .....	\$24.95
Dodge Racer .....	\$19.95
Star Raiders .....	\$39.96
Sammy the Sea Serpent .....	\$14.95
Krazy Shootout .....	\$35.95
Space Invaders .....	\$35.95



810 Disk Drive .....

\$429.00

Prices subject to change

THE ABOVE PRICES ARE FOR PRE-PAID ORDERS.

We also feature tremendous savings from:

Atari  
Atari Program Exchange  
Adventure International  
Crystal  
P.D.I.  
L.J.K.  
Dynacomp  
Quality Software  
Avalon Hill  
Epyx  
Computer Consultants  
Synapse  
Datasoft  
United Software  
On-Line  
O.S.S.  
Software Street

Software Street is your mail order ATARI discount center.

Shipping costs:  
Software - minimum \$2.00  
Hardware - prices will vary (please call)



Call or write for your  
FREE catalog.

Software Street  
3392 Clipper Dr.  
Chino, CA 91710  
(714) 591-3061



ATARI IS A REGISTERED TRADEMARK



## Promqueen Cartridge For VIC-20

The Gloucester Computer Bus Co. Inc. Promqueen Cartridge provides EPROM programming, operating, and emulating capability for the Commodore VIC-20 computer. All necessary connections are made when the Promqueen is plugged into the VIC's expansion port. The internal programming voltage power supply includes current limiting to prevent damage to the cartridge or the computer in the event of operator error or faulty EPROMs. The Promqueen supports 2716, 2732A and 2732 EPROMs.

The Promqueen contains four kilobytes of RAM for testing programs before burning them on EPROM. A MIMIC switch permits an external computer to



access programs written into Promqueen RAM. In MIMIC mode a jumper cable connects between the Promqueen zero insertion force socket and the socket in the external computer for which an EPROM is desired. This feature allows use of a VIC

with Promqueen as a development system. A DIP switch determines which of the four VIC expansion blocks is occupied by the Promqueen. This allows the Promqueen RAM to be used to expand the user BASIC memory of the VIC. It also allows the Promqueen to be used in the Commodore Super Expander in conjunction with other cartridges, such as Commodore's VICMON, without address conflicts.

EPROMs in the ZIF socket can be run directly on the VIC. A ZIF socket isolate switch permits EPROM changes with the VIC on. Thus a variety of routines from different EPROMs can be used to develop new programs in the Promqueen RAM.

The Promqueen has a reset button for recovery from crashes, eliminating the need to store programs before testing them.

A toggle switch sets the Promqueen for either 2716 or

## 64K RAM for ATARI

<b>ATARI 400®</b>	32K BOARD	\$149.00
	64K BOARD (factory installed).	\$289.00
<b>ATARI 800®</b>	32K BOARD	\$149.00
	64K BOARD (includes software).	\$399.00
	128K BOARD (includes software).	\$499.00

**Featuring:** Complete software compatibility.  
Gold-plated contacts for long life & dependability.  
90-Day warranty.

**The Memory Mill**  
P.O. Box 317 Dept. C  
Potter Valley, CA 92469  
Phone (707) 743-1666

**Repair of the 400, 800.**

Custom Designed software & hardware development systems for 400, 800.  
Dealer inquiries welcome.  
FREE PRODUCT CATALOG, UPON REQUEST.

Visa  
Mastercard  
Accepted




**ECLECTIC SYSTEMS CORPORATION**  
**Order TOLL FREE 1-800-527-3135**



**P.O. Box 1166 16260 Midway Road**  
**Addison, TX 75001 (214) 661-1370**



**Authorized  Commodore service center**  
**Sales and Service of the complete line of Commodore products**  
**In a hurry? Check our modular exchange program**

**HARDWARE:**

CBM 8032 Computer, 80 Column	\$1065
CBM 8050 Disk Drive	1299
CBM 4032 Computer, 40 Column	965
CBM 4040 Disk Drive	965
CBM 4022 Printer	595
CBM VIC 20 Computer	259
CBM VIC 1515 Printer	349
CBM 8300P (DIABLO)	1799
CBM VS100 Cassette	65
PET to IEEE Cable	33
IEEE to IEEE Cable	39

**SOFTWARE:**

OZZ	289
Wordcraft 80	289
The Manager (Data Base)	240
Wordpro 5+	319
Wordpro 4+	299
VISIC ALC	169
MUMPS for Super PET	299
CMS Accounting System	call
Assembler Development Package	77
BASF Diskette, Box of 10	30

ANS MUMPS Programmer's Reference Manual	\$17.50
MUMPS Pocket Guide	2.00
Computer Programming in ANS MUMPS	17.50
RS232 Interface for Commodore VIC 20	39.95
EIO has: two serial asynchronous RS232 ports, two parallel ports with handshaking, one shift register, two 16 bit timers, and room for two optional buffer IC's.	188.00
EIO-C Alternate character generator ROM board for screen display allows you to display characters or graphics of your choice. Alternate characters are soft selectable. EIO board required. Call for price	
EIO-TX Terminal ROM for EIO firmware to turn your CBM into a communications terminal. Store and transmit from disk to remote host and terminal. EIO board required.	49.95
EIO-RS232 Cable for EIO board.	28.00

**BOOKS:**

Commodore Software Encyclopedia 2nd edition	9.95
The PET Revealed	19.95
Library of PET Subroutines	19.95
PET Interfacing	16.95
PET Basic	12.95
PET and IEEE 488 Buss	15.00

**OTHER:**

EPROM Burner for CBM "burns 2716, 2732 & 2532"	89.95
Software for EPROM Burner on CBM	15.95
D.C. Hayes Smart Modem	239.00

ESC-100 RS232 interface manual selector —switch select between device A, B, or C; switching 25 conductors. Requires no input power and uses receptacle type DB25S.	140.00
ESC-120 M43 TTY-EIA/CURRENT LOOP interface unit—converts TTL level signals from the M43 to EIA or 20ma outputs. Convert EIA or 20ma inputs back to TTL level signals for the M43. Single printed circuit mounts inside the M43. Comes with interface cable.	65.00
ESC-140 RS232 standard interface cable kit. Build your own cable.	
7 conductor	16.00
12 conductor	19.95
ESC-150 The Electronic Switch/Poller allows a single computer serial port to selectively communicate with an assortment of peripheral devices. As many as seven serial asynchronous and six parallel devices may be selected. This concept effectively creates a simplified multi-drop, polled environment. The computer maintains control of the network and may	

seize any of the peripherals by transmitting a simple escape sequence to the "ESC-150".	488.00
ESC-170 RICKETYMETER—Indispensable hand-held tool for troubleshooting, checkout and installation of RS232 type serial line communications systems.	69.95
ESC-180 RICKETYTRAP is a small hand-held device which when interposed in an EIA/RS232 line can monitor and trap on any specific ASCII, binary, or control character. The RICKETYTRAP can also monitor and trap on any specific range of characters bit selectable. This device can also check for type of parity being sent and proper framing. The RICKETYTRAP is switch selectable for 1 or 2 stop bits and can operate at speeds of 150 to 9600 baud.	Call for price
ESC-200 PREDITOR is a small micro-processor with ROM firmware, RAM, and 8 RS232 asynchronous serial input/output ports. The PREDITOR is available in either stand-alone, self-	

contained, or rack-mounted models. The PREDITOR can be programmed by firmware to function as a prompter and editor in a distributed processing network, transforming 4 dumb asynchronous terminals into 4 intelligent terminals communicating with 4 computer asynchronous input/output ports.	Call for price
ESC-861M The DATA CONCENTRATOR accepts data from a multitude of inputs—printers, CRTs, parallel ports, status lines, etc.—then transmits the composite (multiplexed) data stream down a high speed synchronous serial line to a remote DATA CONCENTRATOR. The remote DATA CONCENTRATOR separates (demuxes) the composite data into its original form to be transmitted to the computer ports. Alternately, multiple computer port data is multiplexed, transmitted down the high speed synchronous serial line, demuxed, and finally dispatched to the individual terminals.	850.00

Call for equipment not listed

**Order TOLL FREE 1+800-527-3135**

**10 AM to 4 PM CDT Monday through Friday**

Texas residents call 1+214-661-1370

VISA, MASTER CHARGE, MONEY ORDERS, AND C.O.D. "Certified Check" accepted.

Units in stock shipped within 24 hours, F.O.B. Dallas, Texas.

All equipment shipped with manufacturer's warranty.

Residents of Texas, Louisiana, Oklahoma City and Tulsa, Oklahoma must add applicable taxes.

Be sure to write to the address at the top of this ad for more information. Dealer inquiries welcome.



2732A EPROMs, changing the voltage as required. 2732s can be programmed after readjusting a pot.

A general purpose hex loader program on EPROM is included. The program loads into the VIC's memory, freeing the EPROM socket. The hex loader permits convenient loading of code for processors other than the VIC's 6502. It includes labels, block move, offset calculation, number conversion and more. It also runs the burn process, checks EPROM erasure, and verifies burns. Software for storing BASIC programs on EPROM is included. The user's manual includes step by step instructions as well as tabular summaries of the Keystroke command options.

The Promqueen cartridge costs \$169.50, plus shipping.


Gloucester Computer Bus Co. Inc.  
6 Brooks Road  
Gloucester, MA 01930  
(617)283-7719

## Career Planning Moves Into The Home


TSC, a Houghton Mifflin Company subsidiary, announced that 350 southern California households now have access to career planning and guidance information. The Guidance Information System (GIS), a computerized career data base maintained by TSC, is one of the services made available during a six-nine month Los Angeles Times Mirror Videotex experiment. Both two-way cable and telephone lines are delivering this information to television screens in the home.

Richard T. Bueschel, president of the New Hampshire-based educational and informational software company, explained that the computerized GIS database is already being used by over one million customers at 4000 institutions across the country. The service, which is updated and verified annually, permits subscribers to quickly identify and compare on the TV screen options that answer their individual vocational or academic needs and interests. The awesome information bank provides four major categories of information instantaneously:


1. The *Occupational Information* covers 875 occupations, with descriptions of jobs, educational requirements, training routes, wage levels, working conditions, and more. Additional informa-




**ATARI 800™**  
16K \$669  
32K \$749  
48K \$819




**ATARI**  
A Warner Communications Company



**commodore**  
**COMPUTER**  
**VIC-20** The friendly computer  
\$249



**ATARI 400™**  
16K \$319



**ATARI 810™**  
**Disk Drive**  
\$449

<b>Hardware</b>		<b>Games</b>	
410 Program Recorder .....	79	Chess .....	34 <sup>50</sup>
825 80 Column Printer .....	639	Pac Man ...	34 <sup>50</sup>
820 40 Column Printer .....	269	Centipede ..	34 <sup>50</sup>
830 Modem .....	155	Asteroids ..	34 <sup>50</sup>
850 Interface .....	159	Missile Command ..	34 <sup>50</sup>
16K RAM .....	79	Space Invaders .....	34 <sup>50</sup>
<b>Software</b>		Star Raiders .....	
Entertainer .....	79 <sup>00</sup>	Caverns of Mars ...	
Educator .....	119 <sup>00</sup>	31 <sup>50</sup>	
Apple Panic (for Atari) .....	disk 23 <sup>96</sup>	<b>Prices Are For Phone/Mail Order Only.</b>	
Raster Blaster .....	disk 23 <sup>96</sup>	No Sales Tax On Out of State	
Pool 1.5 .....	disk 27 <sup>96</sup>	Orders. <b>Ordering Information:</b>	
Zork I or II .....	disk 31 <sup>96</sup> ea.	We accept VISA/Mastercard, Cashier or	
Tumble Bugs .....	disk 23 <sup>96</sup>	Certified Check, Money Order, or Personal Check (Allow 14 days to clear). Add	
Mousekattack .....	disk 27 <sup>96</sup>	3% for Shipping, Handling & Insurance. Calif. Residents Add 6% Sales Tax,	
Golf .....	disk 31 <sup>96</sup>	Credit Card Orders Add 3% Surcharge. We Ship All Orders UPS. <b>Catalog \$1<sup>00</sup></b>	

SPORT 'N'  
SOUND  
ELECTRONICS

21999 Van Buren Street  
Grand Terrace, CA 92324  
(714) 783-0556



**Commodore**  
Check Our New  
Lowest Prices!



**PUBLICATIONS:**

- CBM User Guide . . . . . 7 95
- CBM Basic 4.0 Ref Manual . . . 9 95
- CBM Disk Manual . . . . . 7 95
- CBM Printer Manual . . . . . 7 95
- MOS Hardware Manual . . . . . 6 95
- MOS Programming Manual . . . . 6 95
- The PET Revealed . . . . . 19 95
- Library of PET Subroutines . . . . 19 95
- Commodore Software Encyclopedia . . . 9 95
- CBM Programmer's Reference Manual . . . 16 95

**CBM EQUIPMENT:**

- CBM 4016 CPU (40 Col. Screen, 16K RAM) . . . . . 790 00
- CBM 4032 CPU (40 Col. Screen, 32K RAM) . . . . . 990 00
- CBM 8032 CPU (80 Col. Screen, 32K RAM) . . . . . 1090 00
- CBM 8096 CPU (80 Col. Screen, 96K RAM) . . . . . 1590 00
- CBM Micro Mainframe (Super PET) . . . . . 1690 00
- CBM 2031 Single Disk Drive (170K per 5 1/4 Diskette) . . . 570 00
- CBM 4040 Dual Disk Drive (170K per 5 1/4 Diskette) . . . 990 00
- CBM 8050 Dual Disk Drive (1 Meg per 5 1/4 Diskette) . . . 1340 00
- CBM 4022 Tractor Feed Printer . . . . . 625 00
- CBM C2N Cassette Deck (New Style) . . . . . 65 00
- CBM CPU/IEEE Cable . . . . . 35 00
- CBM IEEE/IEEE Cable . . . . . 40 00
- 8023P Dot Matrix Printer (136 Col., 150 CPS) . . . . . 790 00
- Tally 8024-7 (7x7 Matrix) Printer . . . . . 1275 00
- Tally 8024-9 (7x9 Matrix) Printer . . . . . 1425 00
- 8300P Letter Quality Printer (40 CPS) . . . . . 1790 00

**VIC EQUIPMENT:**

- VIC 20 (Includes RF Modulator) . . . . . 255 00
- VIC Single Disk Drive (170K per 5 1/4 Diskette) . . . . . 470 00
- VIC Joystick . . . . . 9 95
- VIC Modem . . . . . 102 00
- VIC 8K Memory Expander . . . . . 59 95
- VIC Super Expander . . . . . 69 95
- VIC 3K Memory Expander . . . . . 39 95
- VIC 2 Player Game Paddles . . . . . 19 95
- VIC 1515 Graphic Printer . . . . . 325 00

**VIC SOFTWARE:**

- VT 106A Recreation Six Pack (Cassette) . . . . . 43 95  
Includes Car Chase, Blue Meanies,  
Space Math, Slither/Super Slither,  
Biorythm Capability.
- VT 107A Home Utility Six Pack (Cassette) . . . . . 43 95  
Includes Personal Finance I, Personal Finance II,  
VIC Typewriter, Expense Calendar,  
Loan & Mortgage Calculator, Home Inventory
- VIC 1901 Vic Super Alien (Cartridge)
- VIC 1904 Super Lander (Cartridge) . . . . . 29 95
- VIC 1908 Draw Poker (Cartridge) . . . . . 29 95
- AMOK (Cassette) . . . . . 18 95
- VIC Avengers (Cartridge) . . . . . 29 95
- Snakman (Cassette) . . . . . 18 95

**CBM SOFTWARE:**

- Wordcraft 80 Wordprocessor . . . . . 295 00
- Word pro 4+ Wordprocessor . . . . . 325 00
- OZZ Data Base System . . . . . 295 00
- Visicalc . . . . . 200 00
- Tax Preparation System . . . . . 590 00
- Dow Jones Portfolio . . . . . 115 00
- The Manager . . . . . 250 00

**COMING SOON:**

- More VIC Peripherals and Software
- CBM 8250 Dual Disk Drive
- Data Acquisition and Control Devices
- Ultimax
- Commodore 64
- More VIC Software: Golf,
- Omega Race, Wizard of War

All Items Insured  
COD - UPS  
Prepaid Orders Shipped Free  
In Stock Items Shipped Within 48 Hours  
MASTERCHARGE OR VISA ADD 3%  
GA. RESIDENTS ADD 4% SALES TAX

**"CALL ABOUT  
SUPPLIES"**

**MART**

PO Box 77286  
Atlanta, Ga. 30357

404-981-5939

Circle 14 on Reader Service Card

Watch For Our New "800" Number  
Call or Write For a Catalog  
• Complete Catalog  
• VIC Software Catalog

**ATARI\* SOFTWARE &  
HARDWARE**

at  
**DISCOUNT  
PRICES**  
from

**COMPUTER HOUSE**

	List Retail	OUR PRICE
<b>ADVENTURE INTERNATIONAL</b>		
ADVENTURES #1 THRU #12 EACH (T) . . . . .	19 95	15 95
LUNAR LANDER (T/D) . . . . .	14 95/19 95	11 95/15 95
REAR GUARD (T/D) . . . . .	19 95/24 95	15 95/19 95
STAR TREK 3.5 (T/D) . . . . .	19 95/24 95	15 95/19 95
<b>ARCADE PLUS</b>		
GHOST HUNTER (T/D) . . . . .	29 95/34 95	23 95/27 95
<b>ATARI</b>		
800 COMPUTER, 16K . . . . .	899 95	639 00
ASSEMBLER EDITOR (C) . . . . .	59 95	47 95
ASTEROIDS (C) . . . . .	44 95	35 95
MISSILE COMMAND (C) . . . . .	44 95	35 95
STAR RAIDERS (C) . . . . .	49 95	39 95
<b>ATARI PROGRAM EXCHANGE</b>		
CAVERNS OF MARS (T or D) . . . . .	29 95	25 45
EASTERN FRONT (1941) (T or D) . . . . .	29 95	25 45
<b>AUTOMATED SIMULATIONS</b>		
CRUSH, CRUMBLE & CHOMP (T or D) . . . . .	29 95	23 95
RICOCHET (T or D) . . . . .	19 95	15 95
<b>BUDGECO</b>		
RASTER BLASTER (D) . . . . .	29 95	23 95
<b>CAVALIER COMPUTER</b>		
BUG ATTACK (D) . . . . .	29 95	23 95
<b>CODE WORKS</b>		
IRIDIS #1 (T/D) . . . . .	9 95/12 95	7 95/10 35
IRIDIS #2 (T/D) . . . . .	15 95/18 95	12 75/15 15
<b>DATASOFT</b>		
LE STICK (JOYSTICK CONTROLLER) . . . . .	39 95	31 95
TEXT WIZARD (D) . . . . .	99 95	79 95
<b>GEBELLI</b>		
ANDROMEDA (D) . . . . .	39 95	31 95
MATCH RACER (D) . . . . .	29 95	23 95
<b>K-BYTE</b>		
K-RAZY SHOOT-OUT (C) . . . . .	49 95	39 95
<b>ON-LINE SYSTEMS</b>		
CROSSFIRE (T or D) . . . . .	29 95	23 95
JAWBREAKER (T or D) . . . . .	29 95	23 95
MOUSKATTACK (D) . . . . .	34 95	27 95
THE NEXT STEP (D) . . . . .	39 95	31 95
WIZARD & PRINCESS (D) . . . . .	32 95	26 35
<b>OPTIMIZED SYSTEMS SOFTWARE</b>		
BASIC A+ AND OS/A+ (D) . . . . .	150 00	120 00
<b>PERSONAL SOFTWARE</b>		
VISICALC (D) . . . . .	199 95	149 00
<b>QUALITY SOFTWARE</b>		
OS FORTH (D) . . . . .	79 95	63 95
<b>SPECTRUM COMPUTERS</b>		
GALACTIC CHASE (T/D) . . . . .	24 95/29 95	19 95/23 95
<b>SUB-LOGIC</b>		
ADVENTURE ON A BOAT (D) . . . . .	19 95	24 95
BLACK FOREST (D) . . . . .	19 95	24 95
GHOSTLY MANOR (D) . . . . .	19 95	24 95
<b>SYNAPSE</b>		
FILE MANAGER 800 (D) . . . . .	99 95	79 95
PROTECTOR (T/D) . . . . .	24 95/29 95	19 95/23 95

(C) ROM CARTRIDGE (D) DISKETTE (T) CASSETTE TAPE

REPRESENTING OVER 50 COMPANIES WITH 500+  
PROGRAMS AND HARDWARE

Write for a FREE catalog to:

**COMPUTER HOUSE**

P.O. Box 369, Dept. 10, Mammoth Lakes, CA 93546  
(714) 934-6538

Terms: FOR FAST DELIVERY, send certified checks, money orders or Visa or MasterCard number and expiration date. Personal checks require 3 weeks to clear. ADD \$1.50 for postage. Orders over \$100.00 we pay shipping. All foreign orders add \$10.00. CALIFORNIA residents add 6% tax. Prices subject to change.

\* ATARI is the trademark of Atari, Inc.



tion is also available for armed services occupations.

2. The *College Information* describes 3,300 two- and four-year colleges, universities and technical institutions in terms of over 500 characteristics, such as programs of study, location, enrollment, competitiveness.

3. The *Graduate and Professional School Information* lists over 1500 schools offering both doctoral and nondoctoral programs. Degree requirements, placement, financial aid, residence facilities, and costs are all described.

4. The *Financial Aids Information* file describes in detail national funding sources and such as foundations, business, the military, trade and labor organizations, and religious and charitable groups, in addition to federal programs.

TSC  
Box 683  
Hanover, NH 03755  
(603)448-3838

## The VIC Enters The World Of Radiocommunication

Computer World in the Netherlands developed an interface between the standard VIC-20 computer and a radiotransmitter or receiver. It's easy to use. You plug it in the back of the VIC, or, if you have an expansion unit, it can be put in the expansion unit. The 4K machine language software is in EPROM. On the card you find a Morse and RTTY converter and decoder. You only need the output from a loudspeaker or headphone. You can either transmit or receive RTTY or Morse signals. On RTTY you have all baudrates — i.e., 45,50,57,75,110,200 and 300 Baud. There are three programmable buffers, each of 150 characters. Five buffers are pre-programmed, with: Station description, CQ call, CW ID, Auto-start message. The user can call

each of these messages with the functions keys.


The Morsedecoder reads every message in Morse code between 67 to 60 words per minute.

The callsign of the user will be transmitted every 10 minutes in Morse code.

There is also a version for users who have an RTTY converter.

For more information contact:


Computer World  
Hilvertweg 99 - 1214 JB  
Hilversum, Holland  
31-35-12633

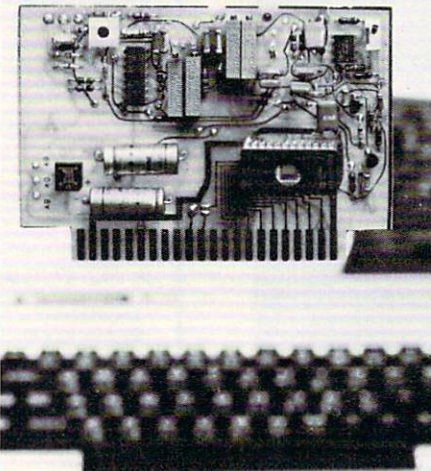

## VISICALC: Home And Office Companion

Authors David Castlewitz, Lawrence Chisauksy and Patricia Kronberg have compiled a compendium of VisiCalc models in *VISICALC: Home and Office Companion*.

Fifty ready-to-use VisiCalc models, complete with sample print-outs, descriptive narratives, and coordinate listings, are presented. Users enter their own data in place of the sample data, or substitute a label or list of entries, to tailor the models to their specific needs. Algorithms and modeling techniques provide the experienced user of VisiCalc

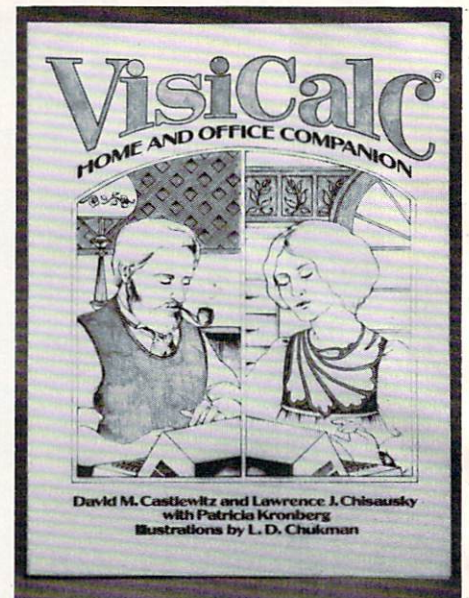

with the opportunity to custom-design new and useful models.

The models cover seven areas of application: Loans and Investments, General Business, Inventory Control, Advertising and Sales, Personnel and Departments, Personal Finance, and Household Aids. All models are designed to accommodate most computers and versions of VisiCalc. The models can be entered on SuperCalc, too.

To place an order, contact the Book Order Dept., (415)548-2805.

VISICALC:  
*Home and Office Companion*  
Osborne/McGraw Hill  
\$15.99 paperback; 182 pages

*New Product releases are selected from submissions for reasons of timeliness, available space, and general interest to our readers. We regret that we are unable to select all new product submissions for publication. Readers should be aware that we present here some edited version of material submitted by vendors and are unable to vouch for its accuracy at time of publication.*



# Lyc0 Computer Marketing & Consultants

At Lyc0 Computers we offer our expert services to help our customers make their first computer purchase, schools establish a computer program, or evaluate multiterminal systems.

717-435-5197



A Warner Communications Company  
© 1981, ATARI, INC

## ATARI HARDWARE

<b>ATARI 800 16K</b> .....	<b>\$665.00</b>
<b>ATARI 400 16K</b> .....	<b>\$329.00</b>
810 DISK DRIVE .....	\$455.00
410 CASSETTE RECORDER .....	\$ 75.00
850 INTERFACE .....	\$164.00
830 PHONE MODEM .....	\$159.00
825 PRINTER .....	\$585.00

## PROGRAMMING SOFTWARE

CX4101	INVITATION TO PROG 1 .....	\$21.00
CX4106	INVITATION TO PROG 2 .....	\$ 24.00
CX4117	INVITATION TO PROG 3 .....	\$ 24.00
CX8126	MICROSOFT BASIC .....	\$ 69.00
CXL4002	ATARI BASIC CART .....	\$ 45.00
CX405	PILOT EDUCATOR .....	\$109.00
CX4018	PILOT HOME .....	\$ 65.00
CXL4003	ASSEMBLER EDITOR .....	\$ 45.00
CXL4015	TELELINK .....	\$ 24.00

## ENTERTAINMENT & EDUCATION SOFTWARE

CXL4012	MISSILE COMMAND .....	\$ 35.00
CXL4013	ASTEROIDS .....	\$ 35.00
CXL4011	STAR RAIDERS .....	\$ 37.00
CXL4006	SUPER BREAKOUT .....	\$ 35.00
CXL4009	CHESS .....	\$ 35.00
CXL4004	BASKETBALL .....	\$ 30.00
CXL4005	VIDEO EASEL .....	\$ 30.00
CX4015	BLACKJACK .....	\$ 13.00
CX4107	BIORHYTHM .....	\$ 13.00
CXL4008	SPACE INVADERS ROM .....	\$ 35.00
CXL4022	PACMAN .....	\$ 35.00
CX8130	CAVERNS OF MARS .....	\$ 33.00
	STATES & CAPITALS .....	\$ 12.00
CX4114	EUROPEAN COUNTRIES .....	\$ 13.00
CX4108	HANGMAN .....	\$ 13.00
CX4102	KINGDOM .....	\$ 13.00
CX4121	ENERGY CZAR .....	\$ 13.00
CX4123	SCRAM .....	\$ 19.00
CX4119	FRENCH .....	\$ 45.00
CX4125	SPANISH .....	\$ 45.00
CXL4007	MUSIC COMPOSER .....	\$ 45.00
CX4110	TOUCH TYPING .....	\$ 19.00
CX4103	STATISTICS .....	\$ 19.00
CX404	WORD PROCESSOR .....	\$129.00
CX406	PERSONAL FINANCE .....	\$ 62.00
CX40	JOYSTICKS .....	\$ 18.00
CX853	16K RAM .....	\$ 85.00

**JULY  
SPECIAL**

**32K MEMORY BOARDS** · · · \$ **99.00**  
for ATARI 400 & 800 with 1 year warranty!!

**ATARI 800 16K** ..... **\$665.00**  
**ATARI 400 16K** ..... **\$329.00**

**16K MEMORY BOARDS** for vic-20 ..... **\$ 99.00**

## THIRD PARTY SOFTWARE

for atari 800 or 400

### AUTOMATED SIMULATION:

Invasion Orion .....	\$ 22.00
Rescue at Regal .....	\$ 24.00
Crush, Crumble, & Chomp .....	\$ 24.00
Star Warrior .....	\$ 35.00

### ATARI PROGRAM EXCHANGE:

Eastern Front .....	\$ 25.50
My First Alphabet .....	\$ 25.50

**K BYTE: K-RAZY SHOOT OUT** ..... \$ 35.00



**VIC-20** ..... **\$259.00**

VIC1010	EXPANSION MODULE .....	\$135.00
VIC1530	DATASSETTE .....	\$ 67.00
VIC1540	DISK DRIVE .....	\$499.00
VIC1515	PRINTER .....	\$355.00
VIC1210	3K RAM .....	\$ 35.00
VIC1110	8K RAM .....	\$ 52.00
VIC1211A	SUPER EXPANDER .....	\$ 53.00

## VIC-20 SOFTWARE

VIC1212	PROGRAMMER AID .....	\$ 45.00
VIC1213	VICMON .....	\$ 45.00
VIC1906	SUPER ALIEN .....	\$ 19.00
VIC1914	ADVENTURE LAND ADVENTURE .....	\$ 3500
VIC1915	PRIVATE COVE ADVENTURE .....	\$35.00
VIC1916	MISSION IMPOSSIBLE .....	\$ 35.00
VIC1917	THE COUNT ADVENTURE .....	\$ 35.00
VIC1919	SARGON II CHESS .....	\$ 35.00

## THIRD PARTY SOFTWARE

ALIEN BLITZ .....	\$ 21.00
SIMON .....	\$ 10.00
SATELLITES & METEORITES .....	\$ 21.00
KOSMIC KAMIKAZE .....	\$ 21.00
AMOK .....	\$ 21.00
SUPER HANGMAN .....	\$ 16.00
SPIDERS OF MARS .....	\$45.00

To Help evaluate your needs or  
If you wish to make a purchase

**CALL US AT (717) 435-5197**

**LYCO COMPUTERS**

P.O. Box 10

COGAN STATION, PA 17728



# Advertisers Index

AB Computers	44,45,137	Magic Carpet	115,184
ASAP Computer Products, Inc.	101	The Memory Mill	202
Aardvark	79	Micro Computer Service Center	187
Abacus Software	151	Micro-Ed, Inc.	77
Advanced Computing Enterprises	111	Micro Printer Marketing	21
Adventure International	23	Micro World Electronix, Inc.	145
Albany Typewriter & Computer	164	Micromail	183
The Alien Group	125	Micromint, Inc.	95
Amplify, Inc.	149	The Microperipheral Corporation	111
Anthro-Digital Software	137	Microsoft	4
Apogee Software	33	Microspec Ltd.	155
Arma Design Group	152	Mideastern Software	172
Artworx	85	Midwest Micro Associates	115
Atari, Inc.	7	Mosaic Electronics, Inc.	19
Automated Simulations, Inc.	73	New England Electronics Company	36,37
Batteries Included	133	Nudmehi Software	111
Better Solutions	149	Nüfekop	139
The Bit Bucket	110	Olympic Sales Company	195
Brøderbund Software	167	On Line Software	139
Byte Microsystems Corp.	190	Optimized Data Systems	96
Byte-A-Bit Computing Co.	173	Optimized Systems Software, Inc.	51
C-Mart	205	P. R. Software	141
CFI	119	P.R.I.C.E.	193
CMS Software Systems	2,3	Pacific Exchanges	20,26,62,86
Canadian Micro Distributors	29,31	Percom Data Company, Inc.	IFC
Comm*Data Systems, Inc.	114	Peripherals Unlimited	32
Commodore Business Machines	BC	Philadelphia Computer Discount	161
CompuServe	38	Precision Technology, Inc.	115
COMPUTE! Books	157	Pretzelland Software	143
COMPUTE! Books Programming The PET/CBM	134,135	Professional Software Inc.	1,9
COMPUTE! Publications	41	Program Design, Inc.	69,167
Computer Age Software	87	The Program Store	70,71
Computer House	205	Protecto Enterprises	163
Computer Mail Order	82,83,197	Quantum Data, Inc.	113
Computer Outlet	192	Questar International Inc.	117
ComputerMat	79	Quality Software	105
The Computer Works	155	RAR-TECH	185
Computertime, Inc.	43	RC Electronics Inc.	25
Comquest	43	Random Access Computers	147
Cosmic Computers Unlimited	197	Random Access Microwave	127
Creative Software	16	Renaissance Technology Corporation	39
DTC Software	115	Royal Software	169
Dataview Ltd.	53	SJB Distributors, Inc.	103
Delta Software Co.	158	Santa Cruz Educational Software	63
Don't Ask Computer Software	91	Sheridan College	65
Dream Print Homes, Inc.	91	Skyles Electric Works	61,158
Dunham Software and Consulting Co.	167	Small System Engineering	35
Dynacomp, Inc.	47,48,49	The Software Connection	129
ECX Company	158	Software Galore	38
Eastern House Software	195	Software Street	201
Eclectic Systems Corp.	99,203	Solidus International Corp.	59
The English Software Company	129	Sport 'N Sound Electronics	204
French Silk	145	Starbound Software	33
Gloucester Computer Bus Co.	147	Strategic Simulations Inc.	13
HW Electronics	107	Ström Systems Inc.	199
High Country Microsystems	127	subLogic Communications Corp.	67
Human Engineered Software	131	Sunrise Electronics	185
Hypertech	139	Sunrise Software	25
ICS Micro Wholesale	193	Swiftly Software, Inc.	153
IDSI	17	Synapse Software	15,26
Inhome Software	171	T.H.E.S.I.S.	65
Intec Peripherals Corp.	167	TSASA	147
Interlink, Inc.	38	Tara Computer Products	197
Jini Micro-Systems Inc.	11	Taylor-made Software	147
Krell Software Corp.	65	Telegames	191
Leading Edge	IBC	University Microfilms	158,171
London Software	173	VERVAN Software	129
Lycos Computer Marketing & Consultants	207	Victory Software Inc.	145
MMG Micro Software	164	Vixel, The Code Works	149
MTG Technical Sales	199	Voicetek	39
MW Software	185	Wunderware	145
Madison Computer	155		



# COMPUTE!

For Fastest Service,  
Call Our **Toll-Free**  
US Order Line  
**800-345-8112**  
In Pennsylvania call 800-662-2444

My Computer is:

- PET  Apple  Atari  OSI  
 Other \_\_\_\_\_  Don't yet have one...

- \$20.00 One Year US Subscription  
 \$36.00 Two Year US Subscription  
 \$54.00 Three Year US Subscription
- (Readers outside of the US, please see our foreign readers subscription card or inquire for rates).

Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

- Payment Enclosed  
 MasterCard  VISA  
 American Express

Account No. \_\_\_\_\_ Expires \_\_\_\_\_ / \_\_\_\_\_

7 8 9 10 11 12

## COMPUTE! Books

Quan.	Title	Price	S/H	Total
	The Beginner's Guide to Buying A Personal Computer	\$ 3.95 + \$1.00*		
	COMPUTE!'s First Book of Atari	12.95 + 2.00*		
	Inside Atari DOS	19.95 + 2.00*		
	COMPUTE!'s First Book of PET/CBM	12.95 + 2.00*		
	Programming the PET/CBM	24.95 + 3.00**		
	Every Kid's First Book of Robots and Computers	4.95 + 1.00*		
	COMPUTE!'s First Book of VIC	12.95 + 2.00*		

\*\$4.00 / \*\*\$9.00 For air mail outside US.

For Fastest Service  
Call Our **TOLL FREE**  
US Order Line  
**800-334-8068**  
In NC call 919-275-9809

All orders must be prepaid (money order, check, or charge). All payments must be in US funds. NC residents add 4% sales tax.  
 Payment enclosed  
 Please charge my:  
 VISA  MC  Am. Express  
 Acc't No. \_\_\_\_\_  
 Expires \_\_\_\_\_ / \_\_\_\_\_

Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Allow 4-5 weeks for delivery.

# COMPUTE!

# Foreign Readers

Subscription rates outside the US:

- \$25.00 Canada FI=2  
 \$38.00 Europe/Air Delivery FI=3  
 \$48.00 Middle East, North Africa, Central America/Air Mail FI=5  
 \$88.00 South America, South Africa, Australasia/Air Mail FI=7  
 \$25.00 International Surface Mail (lengthy, unreliable delivery) FI=4,6,8

Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 City \_\_\_\_\_ Postal Code \_\_\_\_\_  
 Country \_\_\_\_\_

Payment must accompany this card.  
 Payment in US Funds drawn on a US Bank; International Money Order; or charge card:  VISA  MasterCard  American Express  
 Account No. \_\_\_\_\_ Expires \_\_\_\_\_ / \_\_\_\_\_

7 8 9 10 11 12

## The Editor's Feedback:

- Computer:  PET  ATARI  APPLE  VIC-20  OSI  OTHER \_\_\_\_\_
- Are you a **COMPUTE!** Subscriber?  Yes  No I would like to see:
- More  Fewer Specific applications programs.  More  Fewer Games.  
 More  Fewer BASIC programs.  More  Fewer Reviews of game software.  
 More  Fewer Machine language programs.  More  Fewer Reviews of business software.  
 More  Fewer Tutorials.  More  Fewer Reviews of educational software.  
 More  Fewer Educational articles.  More  Fewer Detailed explanations of programs.  More  Fewer Reviews of hardware.

What do you like best about **COMPUTE!**?

What do you like least?

7 8 9 10 11 12



Place  
Stamp  
Here

**COMPUTE! Magazine**  
Post Office Box 5406  
Greensboro, NC 27403

Place  
Stamp  
Here

**COMPUTE! Magazine**  
Post Office Box 5406  
Greensboro, NC 27403



**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 236 HOLMES, PA

POSTAGE WILL BE PAID BY ADDRESSEE

**COMPUTE! Magazine**  
P.O. Box 636  
Holmes, PA 19043




**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 2312 GREENSBORO, NC


POSTAGE WILL BE PAID BY ADDRESSEE

**COMPUTE! Books**  
Post Office Box 5406  
Greensboro, NC 27403

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

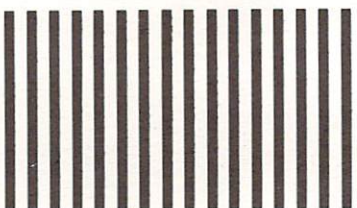


NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

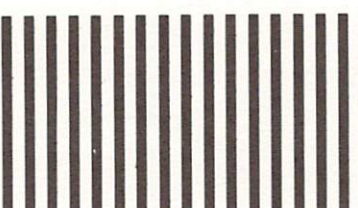



# SAVE 6 INCHES, 10 POUNDS, AND \$800.

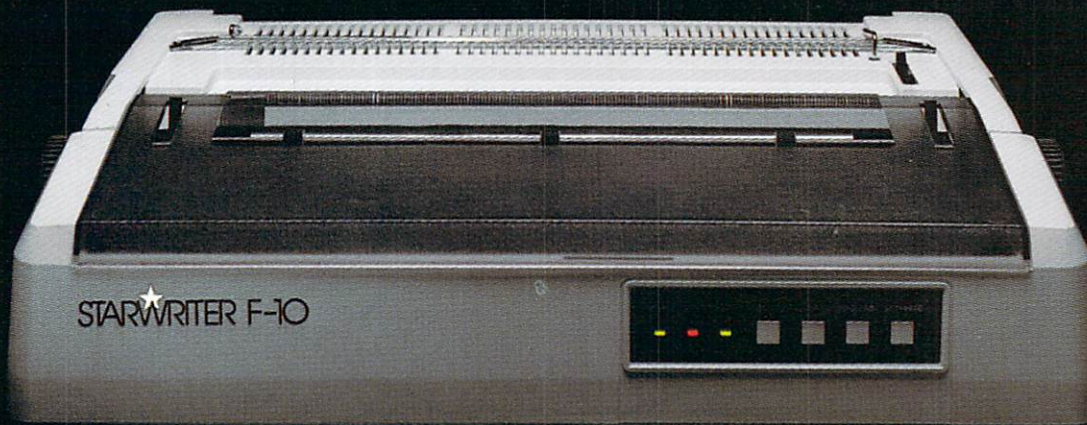

On the new, slicked-up, trimmed-down Starwriter F-10.

It's C. Itoh's latest generation of letter-quality printers.

It cranks out flawless copy at 40 cps; and its full 15" carriage lets it double in brass for both letter processing and business applications. You can plug it into almost any micro on the market (serial or parallel) simply by plugging it in. And then make it keep on trucking with inexpensive, easily available Diablo com-

patible daisy wheels and ribbons.

In its serial mode, it can print just about anything (including boldface, underlines, subscripts and superscripts), and snap the carriage back to start the next line in less than a second. In its line mode, it prints in both directions, for even faster throughput.

(While making about as much noise as a cat walking on Kleenex.)

It's a nice, portable 30 pounds—about 10 pounds

lighter than the Starwriters before it. And it stands exactly as tall (or precisely as small) as a dollar bill.

Speaking of which:


Incredibly, the Starwriter F-10 sells for about the same preposterously low price as its predecessors. Which is to say, about \$800 less than a lot of other printers that don't even come close to measuring up. Or even better...

Measuring down.

*Distributed Exclusively by Leading Edge Products, Inc., 225 Turnpike Street, Canton, Massachusetts 02021. Call: toll-free 1-800-343-6833; or in Massachusetts call collect (617) 828-8150. Telex 951-624.*

**LEADING  
EDGE.**



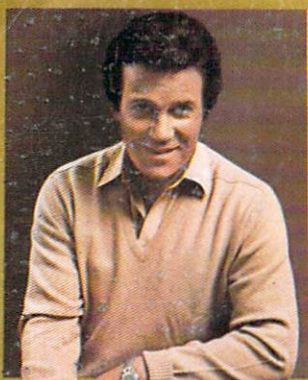


# COMMODORE VIC-20®


## “THE WONDER COMPUTER OF THE 1980s. UNDER \$300.”

—WILLIAM SHATNER

“The best computer value in the world today. The only computer you’ll need for years to come.”

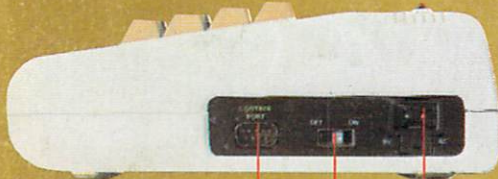

JOYSTICK PADDLE LIGHTPEN  
ON/OFF SWITCH  
POWER PACK

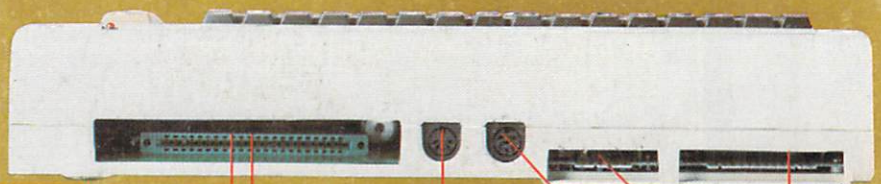

PLUG-IN PROGRAMS  
3K, 8K/16K MEMORY EXPANSION  
EXPANSION MODULE  
RF MODULATOR  
TELEVISION OR MONITOR  
VIDEO CABLE  
SINGLE DISK DRIVE  
PRINTER  
COMMODORE DATACASSETTE  
MODEM FOR TELEPHONE AND TELECOMPUTING

### VIC-20® VS. OTHER HOME COMPUTERS

Product Features	Commodore VIC-20	Atari® 400™	TI® 99/4A	TRS-80® Color Computer
Price*	\$299.95	\$399.00	\$454.00	\$399.00
Maximum RAM Memory	32K	16K	48K	32K
Keyboard Style	Full-Size Typewriter Style	Flat Plastic Membrane	Full-Size Typewriter Style	Calculator Style
Number of Keys	66	57	48	53
Programmable Function Keys	4	0	0	0
Graphic Symbols On Keyboard	62	0	0	0
Displayable Characters	512	256	192	256
Microprocessor	6502	6502	TMS9900	6809
Accessible Machine Language	YES	YES	YES	YES
Upper/Lower Case Characters	YES	YES	YES	NO
Operates with all Peripherals (Disk, Printer and Modem)	YES	NO	YES	YES
Full Screen Editor	YES	YES	YES	NO
Microsoft Basic	Standard	N/A	N/A	\$ 99.00
Telephone Modem	\$110.00	\$399.95	\$450.00	\$154.95



Read the chart and see why COMPUTE! Magazine<sup>1</sup> calls the VIC-20 computer “an astounding machine for the price.” Why BYTE<sup>2</sup> raves: “...the VIC-20 computer unit is unexcelled as a low-cost consumer computer.” Why Popular Mechanics<sup>3</sup> says “...for the price of around \$300, it’s the only game in town that is more than just a game.” And why ON COMPUTING INC.<sup>4</sup> exclaims: “What is inside is an electronic marvel... if it sounds as if I’m in love with my new possession, I am.”

The wonder computer of the 1980s. The VIC-20 from Commodore, world’s leading manufacturer of a full range of desktop computers. See the VIC-20 at your local Commodore dealer and selected department stores.

1 April '81 issue    2 May '81 issue    3 November '81 issue    4 Fall '81 issue

\*Manufacturer’s suggested retail price Mar. 1, 1982



Commodore Consumer Products Division  
487 Devon Park Drive, Wayne, PA 19087  
Canadian Residents: Commodore Computer Systems  
3370 Pharmacy Ave., Agincourt, Ont., Canada, M1W 2K4

Please send me more information on the VIC-20.

Name \_\_\_\_\_  
Address \_\_\_\_\_  
City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_  
Phone \_\_\_\_\_